




REV	DATE	BY	DESCRIPTION
1	2012.05.30	wang	
2	2012.08.17	wang	

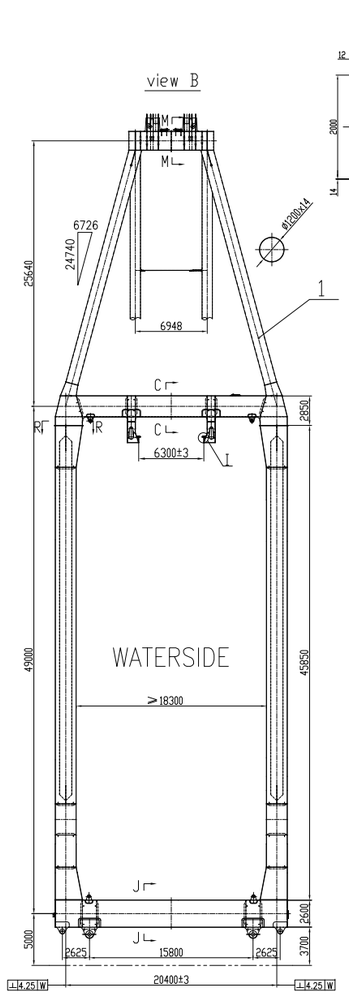


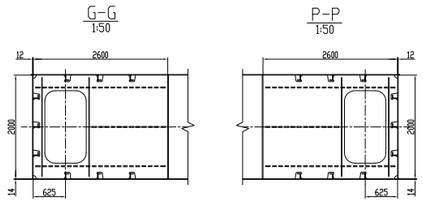


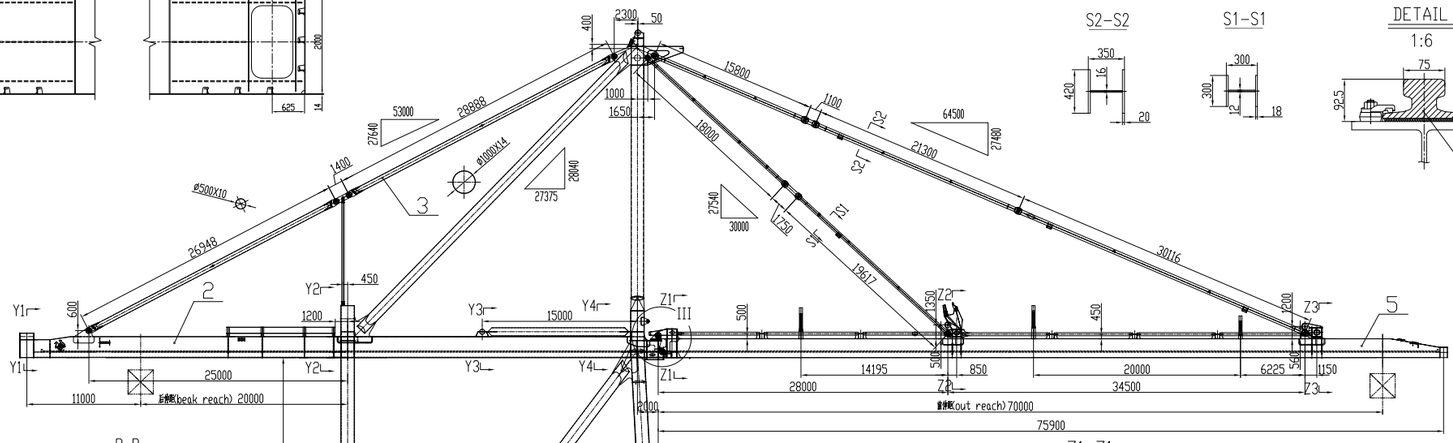


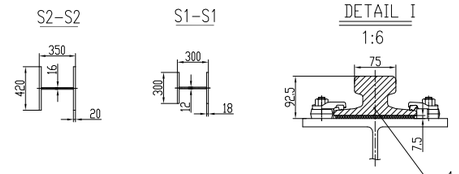


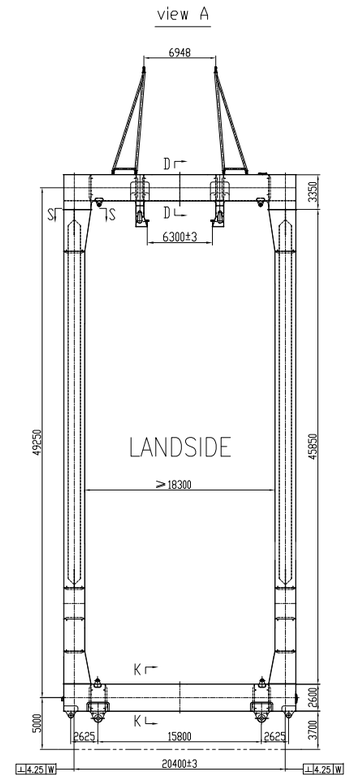





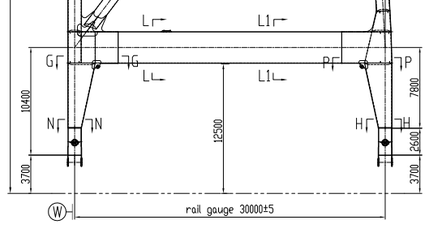


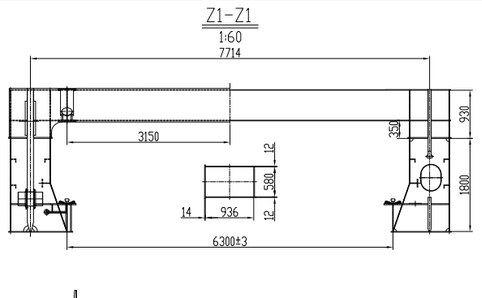


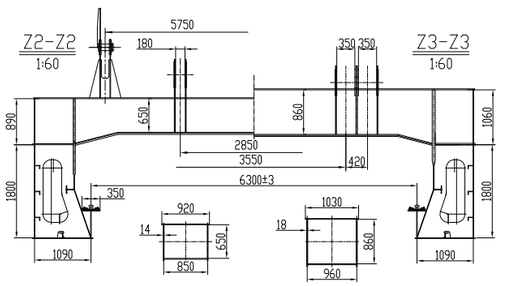


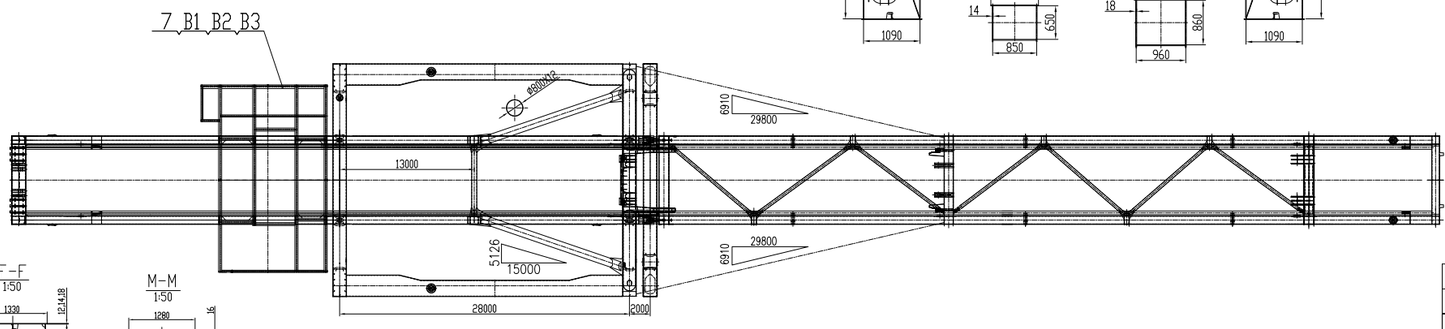




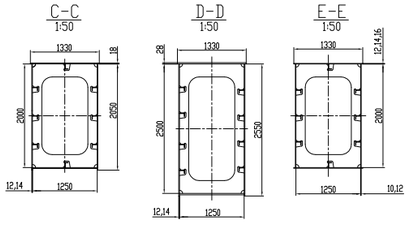

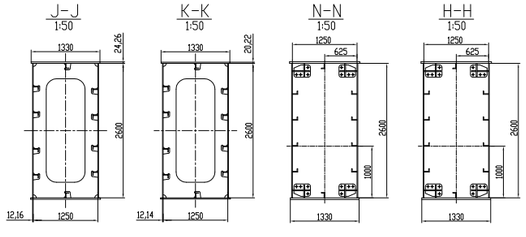

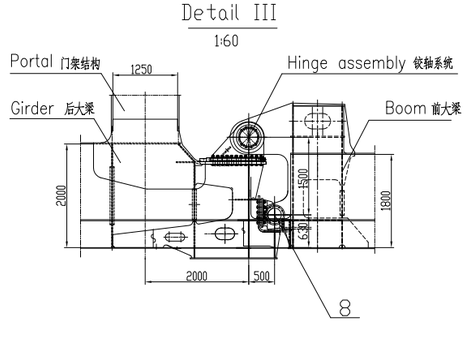

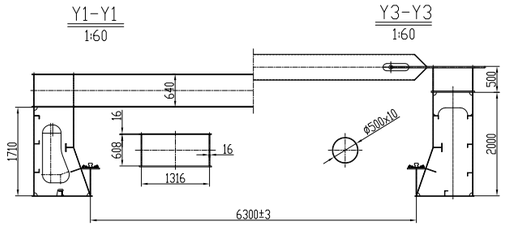


B3	GB1230-2006	Washer 30	45	96	0.0754	7.2384	达克罗 Dacro
B2	GB1229-2006	Nut M30	10H	48	0.374	17.952	达克罗 Dacro
B1	GB1228-2006	Bolt M30X120	10.9S	48	1.17	56.16	达克罗 Dacro
9	J526A0111	整机电缆槽托架支撑布置	Asembly	1	100	100	CRANE CABLE TRAY BRACKET LAYOUT
8	ZM1-011122-00(J526A)	铰轴系统	Asembly	1	3771	3771	Hinge assembly
7	J526A0107	机房底盘	Asembly	1	37500	37500	Machinery frame
6							
5	J526A0105	前大梁	Asembly	1	153013	153013	Boom
4	J526A0104	小车轨道	Asembly	1	17918	17918	Trolley rail
3	J526A0103	拉杆系统	Asembly	1	61885	61885	Stay Bar system
2	J526A0102	后大梁	Asembly	1	126000	126000	Girder
1	J526A0101	门框结构	Asembly	1	485757	485757	Frame
NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	each WEIGHT	total WEIGHT	NOTE

PROJECT: SriLanka CICT 12 STS Cranes			DESIGN STAGE:		SCALE: 1:300
ITEM NAME: 钢结构总布置图 structure general arrangement			DRAW NO: J526A0100(1/2)		PROJ.
ZPMC	DSGN		TRACE	APP.	
	DRAW		CHCK	Q'TY/SET	1
	CHCK		VER.	SET/CRANE	886500kg


REV	DATE	BY	DESCRIPTION
1	2012.05.30	wang	
2	2012.08.17	wang	

Y4-Y4
1:60


Y2-Y2
1:60

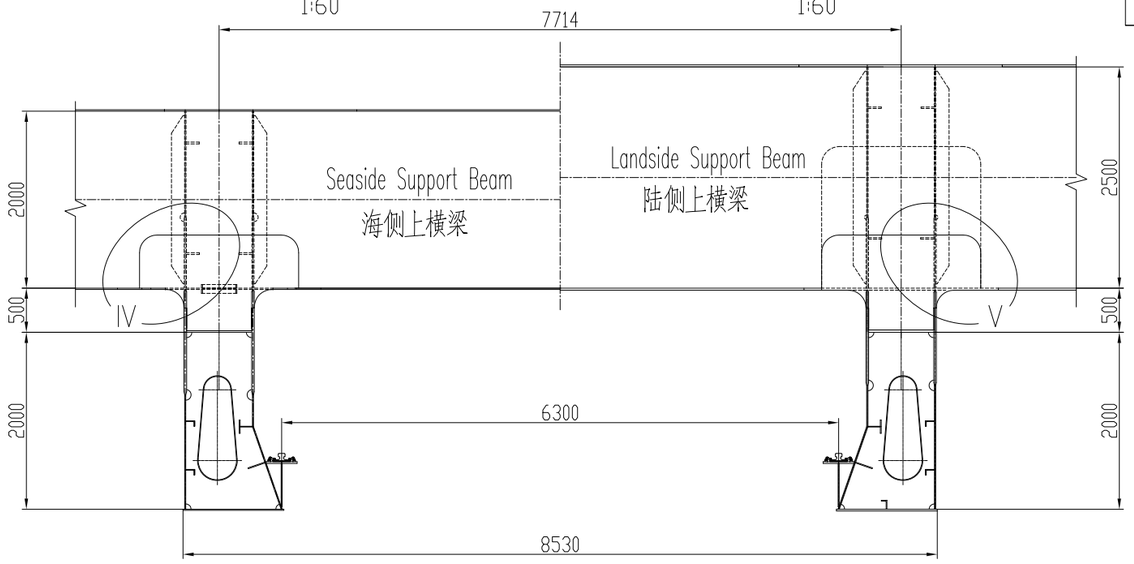


Detail IV
1:30

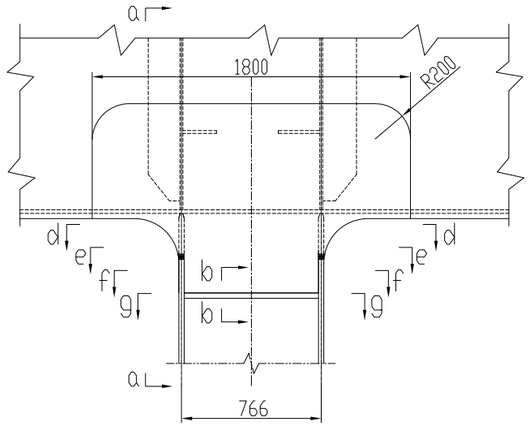


a-a
1:30

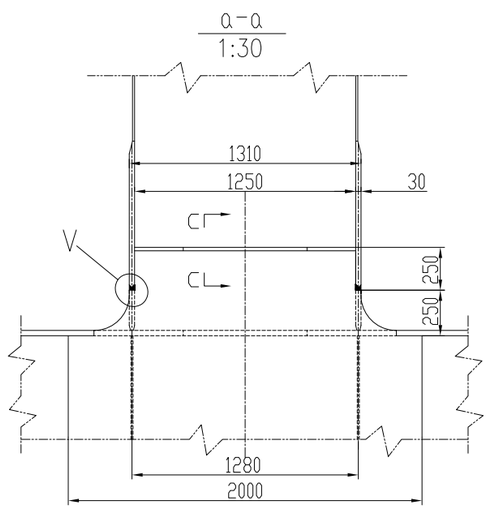


Detail V
1:30

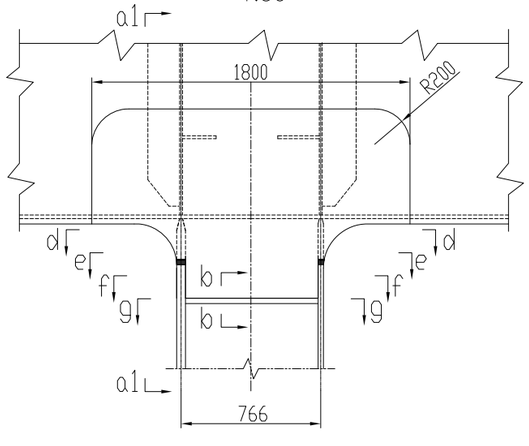


a1-a1
1:30

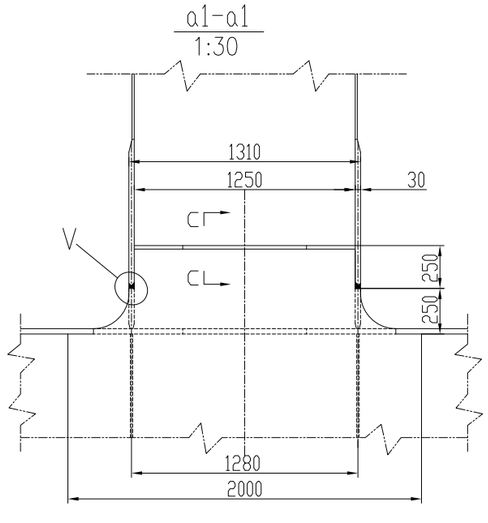


DETAIL VI
1:4




d-d




e-e




f-f




g-g



b-b

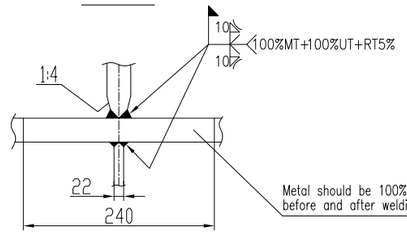

c-c




NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	each / total WEIGHT	NOTE
PROJECT: SriLanka CICT 12 STS Cranes			DESIGN STAGE:		SCALE: 1:300	
ITEM NAME: 钢结构总布置图 structure general arrangement			DRAW NO: J526A0100(2/2)		PROJ.	


ZPMC							
	DSGN		TRACE		APP.		
	DRAW		CHCK		Q'TY/SET	1	
	CHCK		VER.		SET/CRANE	886500kg	


REV	DATE	BY	DESCRIPTION
1	2012.05.31	wang	
2	2012.08.17	wang	


The Comparison Table of Welding Symbols


AWS	ZPMC

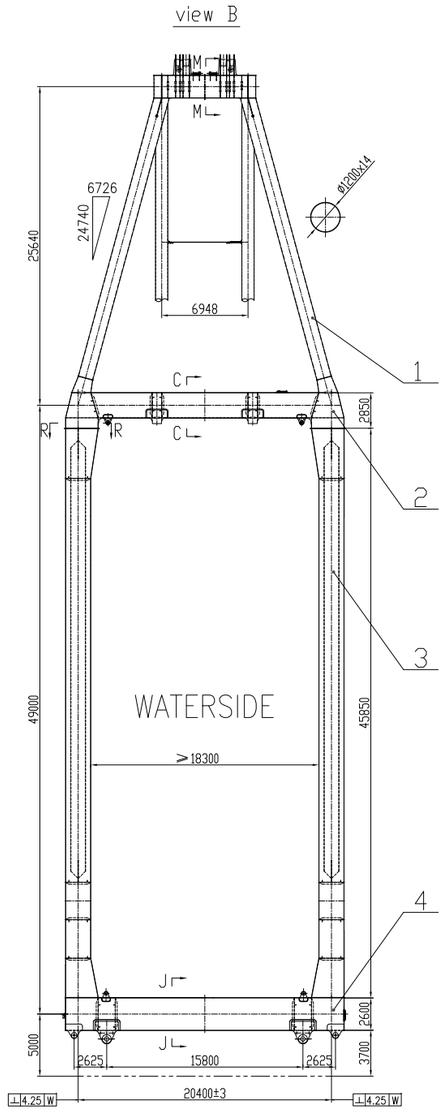


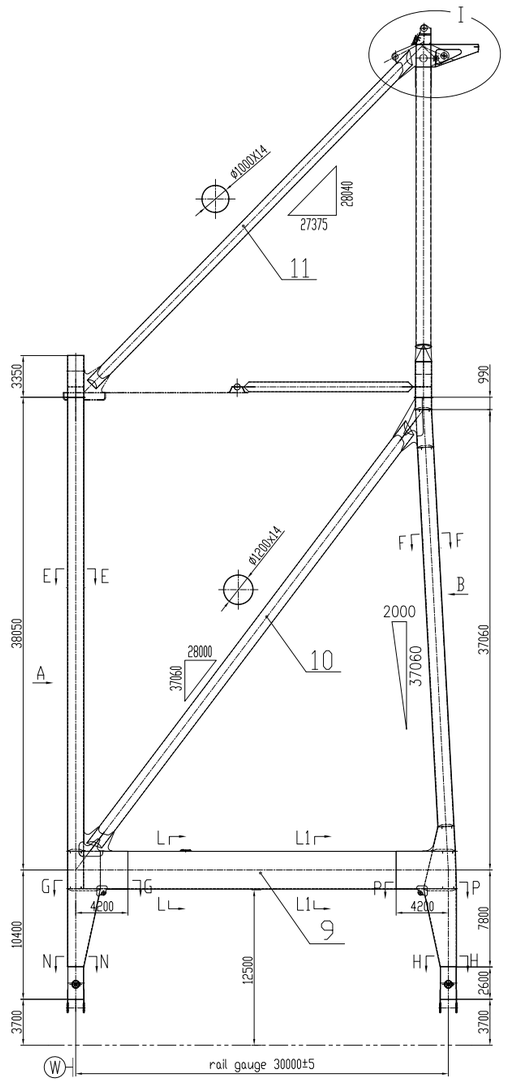


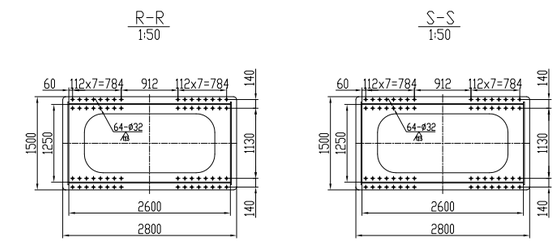

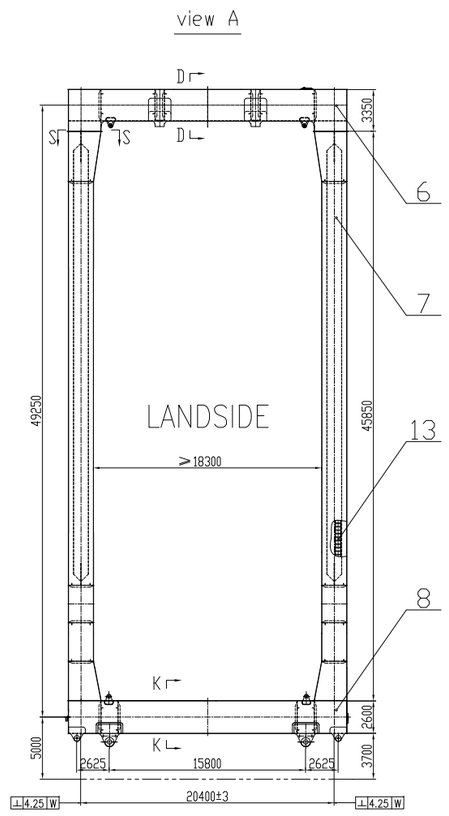

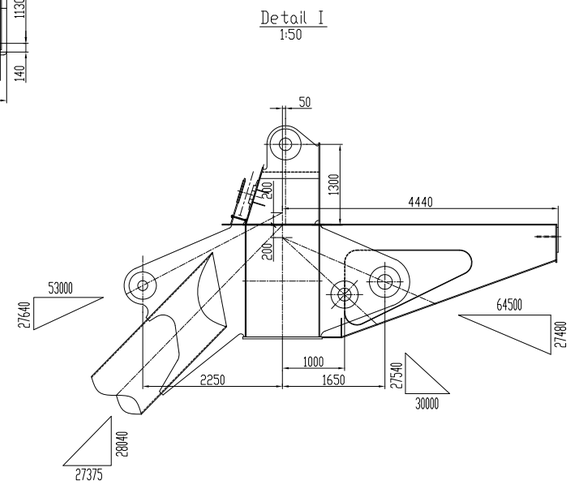







技术要求

1. 焊条采用E5015;自动焊丝采用H10Mn2,焊剂采用HJ330.
2. 所有外露的气割边缘切割截面光洁度均要达到优级或磨平.
3. 腹板与翼板焊接尽量采用自动焊,手工补焊,坡口按标准标定.
4. 未注明焊缝按同类焊缝施焊,未注贴角焊缝高度取被连接的薄板厚度的0.7倍.
5. 所有焊缝100%目测检验; 未注明的按AWS D1.1标准检验.
6. 所有的螺栓孔均应与相关件配钻.
7. 凡有厚薄板对接都应有不大于1:4的斜坡.
8. 明细表中尺寸仅供备料参考,准确尺寸放样定.





门框内斜拉索和吊耳布置图

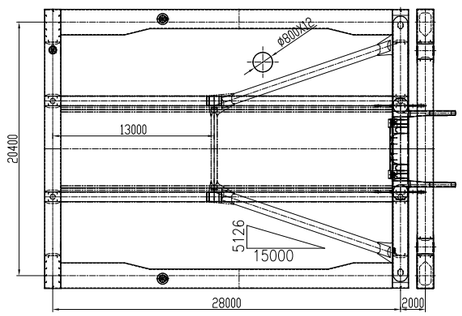



Technology Requirement


1.The welding rods should be E5015. The welding wire of automatic welding is H10Mn2, the welding flux HJ330.
2.The finished of the cut section of the outside bare gas cutting edge should be up to high grade or flattening milled.
3.Automatic welding should be adopted as far as possible in the case of the groove should be marked according to the standard.
4.The unmarked seams refer to the same sort. The height of the unmarked filler weld is 0.7 the thickness of the thin sheet.
5.All welded should be 100% VT. Those that are not indicated in the drawing should be inspected according to AWS D1.1
6.All the bolt holes should be drilled together with the relevant components.
7.Butt weld with different plate thickness should make no than 1:4 chamfer.
8.The size in the subsidiary list is for reference of prepareing the feed only. The accurate size should be determined when lofting.





























NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	each WEIGHT	total WEIGHT	NOTE
13	J526A010113	门框直梯	Weld	1	5323	5323	Ladder
12							
11	J526A010111	后撑管	Weld	1	25943	25943	Fixed tie links
10	J526A010110	门框撑杆系统	Weld	1	43391	43391	Frame brace system
9	J526A010109	门框联系横梁	Weld	2	19030	38060	Link beam
8	J526A010108	陆侧下横梁	Weld	1	36305	36305	Sill beams of L.S.
7	J526A010107	陆侧立柱	Weld	2	47170	94340	Landside legs
6	J526A010106	陆侧上横梁	Weld	1	33552	33552	Landside portal
5							
4	J526A010104	海侧下横梁	Weld	1	38868	38868	Sill beams of W.S.
3	J526A010103	海侧立柱	Weld	2	50250	100500	Seaside legs
2	J526A010102	海侧上横梁	Weld	1	29069	29069	Upper beam of W.S.
1	J526A010101	海侧梯形架	Weld	1	40406	40406	Waterside pylon

PROJECT: SriLanka CICT 12 STS Cranes		DESIGN STAGE:			SCALE:	1:250
ITEM NAME: Frame arrangement 门架结构		DRAW NO: J526A010100			PROJ.	
ZPMC	DSGN	TRACE		APP.	Assembly	
	DRAW	CHCK		SET/CRANE	1	
	CHCK	VER.		WEIGHT	485757kg	

REV	DATE	BY	DESCRIPTION
01	2012.6.1	TY	
02	2012.8.17	TY	

Detail I
1:8

X
1:30

X1–X1
1:30

B–B
1:30

Detail II
1:8

View Z
1:2.5

M–M
1:15

E–E
1:30

IV部放大
1:7.5

T1–T1

M1:15

A–A

A1–A1
1:15

A2–A2
1:15

M1:7.5

H6
1:15
共6处

H1–H1
1:15

H5
1:20
仅内侧一个,共2处

H–H
1:15

H2–H2
1:15

a–a
1:5

View a1
1:5

S–S
1:10

View H3
1:15

ITEM 41
1:15

ITEM 38
1:15

ITEM 42
1:7.5

B1

H4–H4
1:3

Item 69
1:3

Item 70
1:3

Item 71
1:3


NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	each	total	NOTE
					WEIGHT		


PROJECT: SriLanka CICT 12 STS Cranes
DESIGN STAGE:
SCALE: 1:60
ITEM NAME: 海侧梯形架 Seaside A frame
DRAW NO: J526A010101
PROJ.


ZPMC


DSGN		TRACE		APP.	
DRAW		CHCK		Q'TY/SET	40406kg
CHCK		VER.		SET/CRANE	1


REV	DATE	BY	DESCRIPTION
01	2012.6.1	TY	
02	2012.8.17	TY	

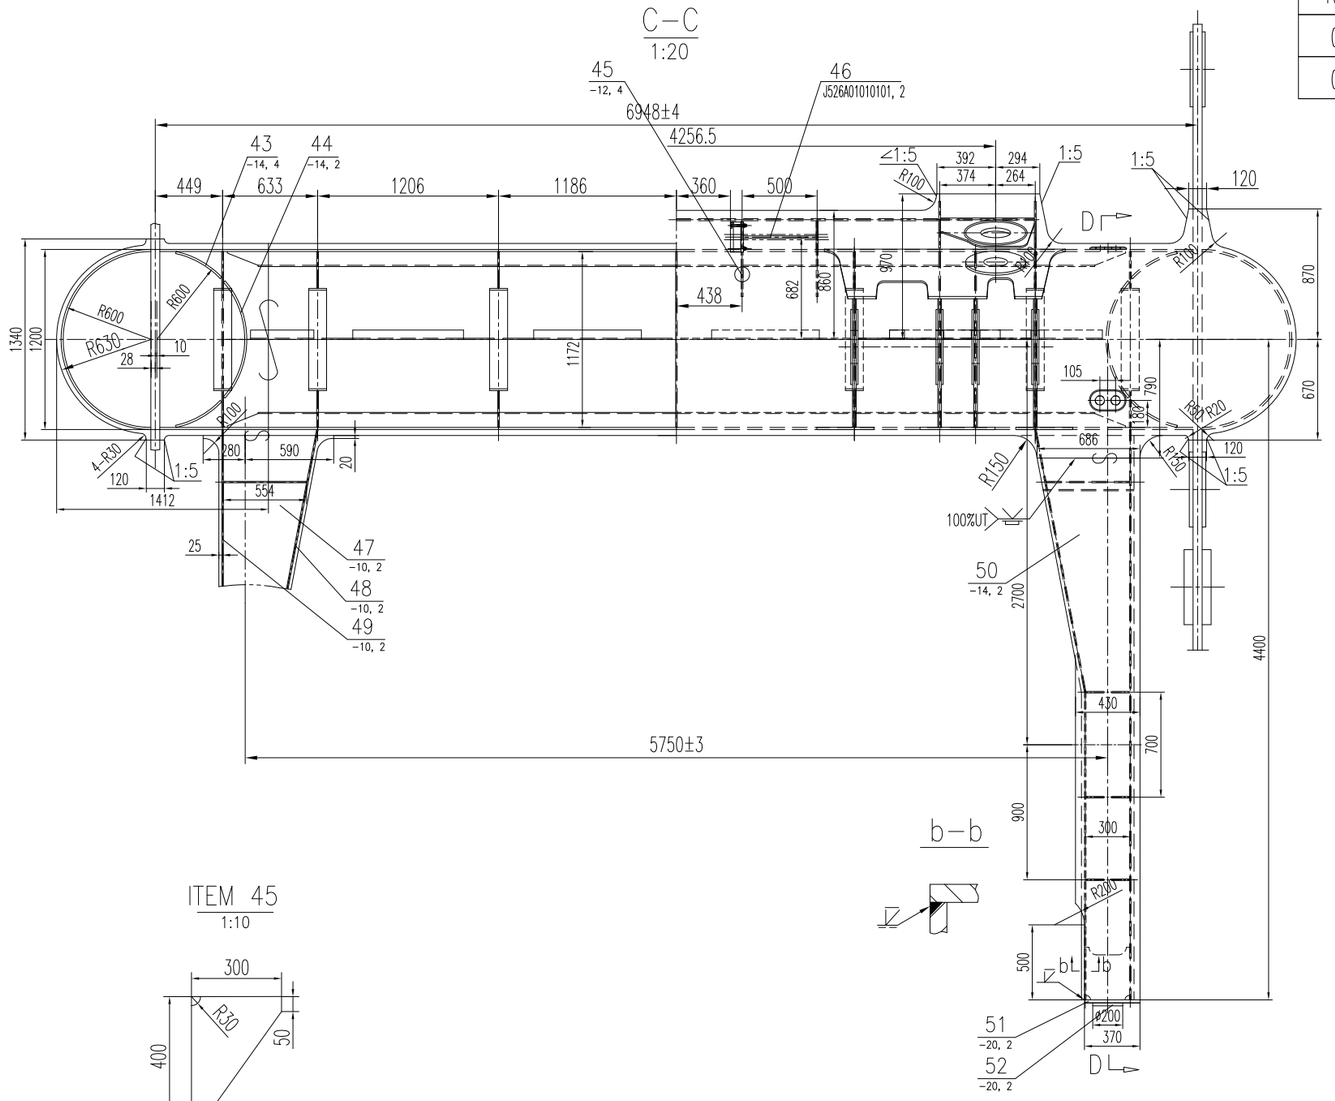

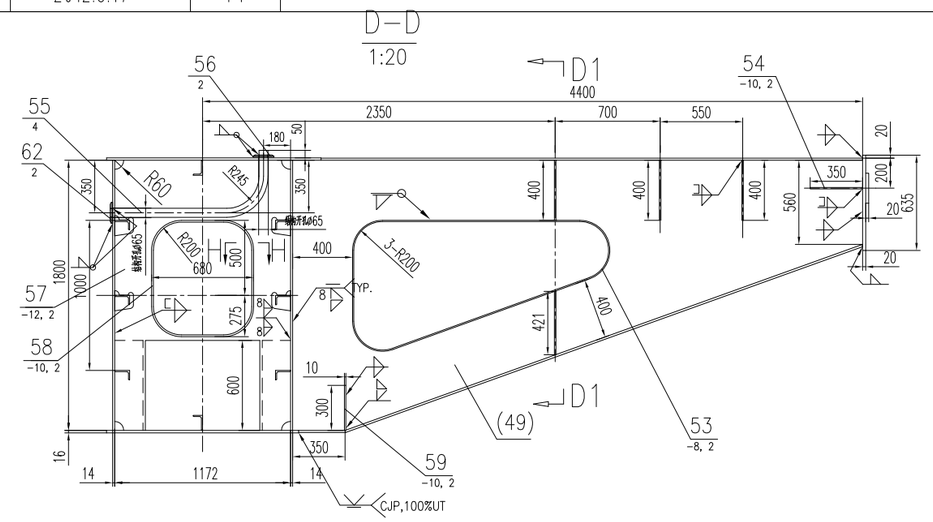

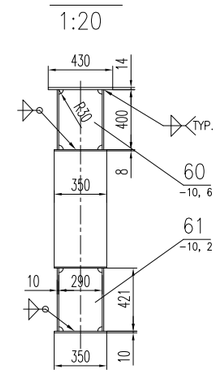





技术条件

1.母材为Q345B和Q345B相焊时,焊条采用E5015,
其余采用E4315.自动焊丝采用H10Mn2,焊剂采用HJ330.
2.所有外露的气割边缘切割截面光洁度均要达到优级或磨平.
3.腹板与翼板焊接尽量采用自动焊,手工补焊,坡口按标准标定.
4.未注明焊缝按同类焊缝施焊,未注贴角焊缝高度取被连接的薄板厚度的0.7倍.
5.所有焊缝100%目测检验;图中未注明的均按AWS标准进行制造及检验;
6.明细表中尺寸仅供备料参考,准确尺寸放样定,凡有厚薄板对接都应有不大于1:4的斜坡口.
7.所有的螺栓孔均应与相关件配钻.
8.密闭结构件待拼装后做气密性试验.
9.钢结构主体的对接板处:100%UT+5%RT

Technical Condition

1.When welding Q345B with Q345B, welding rods are E5015,other E4315.
The welding wire of automatic welding is H10Mn2, the welding flux HJ330.
2.The smooth finish of all appearance face of gas cutting must be excellent,
grind those flat.
3.When welding wing plates,
automatic welding should be used as far as practicable and slopes refer to standard.
4.The unmarked seams refer to the same sort.
The height of the unmarked filler weld is 0.7 thickness of the thin sheet.
5.All welded should be 100% VT.Where not indicated, the checking and testing of the welds to be as per AWS or factory general technology requirements for welds structures.
6.Dimensions shown on the list are for reference only,The welded plate must have slope 1:4
7.All bolt holes should be matching-drilled with parts concerned.
8.The sealed structure shall be made air tight test.
9.Butt weld of main structure:100%UT+5%RT

The Comparison Table of Welding Symbols

AWS	ZPMC

Minimum Fillet Weld Size	
Base Metal Thickness T(mm)	Minimum Size of Fillet Weld(mm)
T≤6.4	3
6.4<T≤12.7	5
12.7<T≤20.0	6
20.0<T	8

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	each	total	NOTE
					WEIGHT		

PROJECT: SriLanka CICT 12 STS Cranes
DESIGN STAGE:
SCALE: 1:40
ITEM NAME: 海侧梯形架 Seaside A frame
DRAW NO: J526A010101
PROJ.

ZPMC							
	DSGN			TRACE		APP.	
	DRAW			CHCK		Q'TY/SET	40406kg
	CHCK			VER.		SET/CRANE	1

明 细 表
SUBSIDIARY LIST

*The quantity and weight of this list is to one set
*此表为一套的数量和重量

设计：
校对：

1 set/crane, 40405 kg/set, 40405 kg/crane

PROJECT NAME or CODE: Srilanka CICT 12 STS Cranes				SUB-PART NAME: 海侧梯形架		SUB DRAW NO: J526A010101	
序号 NO.	图号或标准 SUB-NO. or STDD	名称 NAME	规格或型号 SIZE & STYLE	材料 MTRL	每套数量 Q'TY/SET	单重 PIECE WGHT	总重 TOTAL WGHT
1			— 14× 1859 ×1800	Q345B	2	367.7	735.4
2			L100×63×8 — 366	Q235	2	3.6	7.2
3			L100×63×8 — 363	Q235	2	3.6	7.2
4			L100×63×8 — 2550	ST52-3	1	25.2	25.2
5			L100×63×8 — 5988	ST52-3	2	59.1	118.2
6			L100×63×8 — 3338	ST52-3	1	33.0	33
7			— 14× 1800 ×6888	Q345B	2	1362.6	2725.2
8			— 16× 1760 ×8264	Q345B	1	1469.9	1469.9
9			— 12× 210 ×3496.5	Q345B	1	69.2	69.2
10			— 12× 224 ×400	Q345B	4	8.4	33.6
11			— 16× 1280 ×5440	Q345B	1	874.6	874.6
12			— 30× 1340 ×1412	Q345B	2	384.6	769.2
13			— 40× 1280 ×1620	A709-50-2	2	480.5	961
14			Φ1200×14 — 23485	Q345B	2	9616.6	19233.2
15			— 12× 80 ×1820	Q345B	1	13.7	13.7
16			— 14× 210 ×488	Q345B	2	11.3	22.6
17			— 10× 1172 ×1800	Q345B	1	98.0	98
18			SP200-40	Q345B	4	0.5	2
19			L100×63×8 — 1144	Q235	2	11.3	22.6
20			— 8× 120 ×3016	Q345B	4	22.7	90.8
21			— 6× Φ1172	Q235	2	50.8	101.6
22			— 12× 1172 ×900	Q345B	4	67.7	270.8
23	FCM		— 20×Φ440/Φ160	Q345B	4	20.7	82.8
24	FCM		— 60× 2734 ×4600	A709-50-2	2	2926.0	5852
25	FCM		— 25×Φ440/Φ208	Q345B	4	23.2	92.8
26	FCM		— 60×Φ500/Φ238	A709-50-2	4	71.5	286
27			— 8× 216 ×911	Q345B	2	12.4	24.8
28			— 16× 500 ×1259	Q345B	2	48.2	96.4

明 细 表
SUBSIDIARY LIST

*The quantity and weight of this list is to one set
*此表为一套的数量和重量

设计：
校对：

1 set/crane, 40405 kg/set, 40405 kg/crane

PROJECT NAME or CODE: Srilanka CICT 12 STS Cranes				SUB-PART NAME: 海侧梯形架		SUB DRAW NO: J526A010101	
序号 NO.	图号或标准 SUB-NO. or STDD	名称 NAME	规格或型号 SIZE & STYLE	材料 MTRL	每套数量 Q'TY/SET	单重 PIECE WGHT	总重 TOTAL WGHT
29			— 16× 380 ×1259	Q345B	4	25.8	103.2
30			— 10× 200 ×386	Q345B	4	6.1	24.4
31			— 16× 950 ×1606	Q345B	2	157.1	314.2
32	FCM		— 12×Φ500/Φ180	Q345B	4	16.1	64.4
33	FCM		— 24× 900 ×959	Q345B	2	119.4	238.8
32a	FCM		— 12×Φ500/Φ200	Q345B	12	15.5	186
33a	FCM		— 24× 900 ×959	Q345B	6	119.4	716.4
34			— 12× 684 ×1170	Q345B	8	68.5	548
35			— 12× 1172 ×1800	Q345B	4	136.8	547.2
36			— 14× 210 ×586	Q345B	2	13.5	27
37			— 12× 335 ×400	Q345B	4	12.6	50.4
38			— 12× 338 ×571	Q345B	2	8.1	16.2
39			— 16× 626 ×764	Q345B	2	47.9	95.8
40			— 10× Φ380/Φ190	Q345B	4	6.7	26.8
41			— 12× 338 ×582	Q345B	2	8.2	16.4
42			— 50×Φ400/Φ140	A709-50-2	2	43.3	86.6
43			— 14× 354 ×600	Q345B	4	23.3	93.2
44			— 14× 850 ×600	Q345B	2	56.0	112
45			— 12× 300 ×400	Q345B	4	9.6	38.4
46	J526A01010101		梯形架俯仰断绳保护装置	Assembly	2	38.1	76.2
47			— 10× 870 ×3975	Q345B	2	133.2	266.4
48			— 10× 1800 ×3831	Q345B	2	285.0	570
49			— 10× 1800 ×3800	Q345B	2	284.8	569.6
50			— 14× 686 ×3610	Q345B	2	193.8	387.6
51			— 20× 370 ×635	Q345B	2	36.9	73.8
52			— 20× Φ200	Q345B	2	4.9	9.8
53			— 8× 605 ×4416	Q345B	2	134.2	268.48
54			— 10× 290 ×350	Q345B	2	8.0	16
55			2x2"NPT电气穿线管-1320	电气通用材料	4		

明 细 表
SUBSIDIARY LIST

*The quantity and weight of this list is to one set
*此表为一套的数量和重量

设计：
校对：

1 set/crane, 40405 kg/set, 40405 kg/crane

PROJECT NAME or CODE: Srilanka CICT 12 STS Cranes				SUB-PART NAME: 海侧梯形架		SUB DRAW NO: J526A010101	
序号 NO.	图号或标准 SUB-NO. or STDD	名称 NAME	规格或型号 SIZE & STYLE	材料 MTRL	每套数量 Q'TY/SET	单重 PIECE WGHT	总重 TOTAL WGHT
56	DTK-0202-Φ63		2孔重磅板<2>	电气通用材料	2	2.7	5.46
57			— 12× 1172 ×1800	Q345B	2	151.2	302.4
58			— 10× 120 ×2566	Q345B	2	24.2	48.4
59			— 10× 300 ×554	Q345B	2	13.0	26
60			— 10× 290 ×400	Q345B	6	9.1	54.6
61			— 10× 290 ×421	Q345B	2	9.6	19.2
62	DTK-0201-G200		2孔重磅板	电气通用材料	2	2.7	5.46
63			L100×63×8 — 571	Q235	2	5.6	11.2
64			L100×63×8 — 336	Q235	2	3.3	6.6
65			L100×63×8 — 178	Q235	2	1.8	3.6
66			L100×63×8 — 506	Q235	2	5.0	10
67			L100×63×8 — 1125	Q235	4	11.1	44.4
68			L100×63×8 — 6838	ST52-3	3	67.5	202.5
69			— 20× Φ40/Φ22	Q345B	4	0.1	0.4
70			— 20× Φ40/Φ22	Q345B	4	0.1	0.4
71			Φ20 — 246	Q235	4	0.6	2.4
72							
B1	GB/T 91-2000		Pin 开口销 6.3×50	不锈钢	4	0.0	0.04

REV	DATE	BY	DESCRIPTION
1	2012.05.30	hong	
2	2012.08.17	hong	

The Comparison Table of Welding Symbols

AWS	ZPMC

Minimum Fillet Weld Size	
Base Metal Thickness T(mm)	Minimum Size of Fillet Weld(mm)
T<6.4	3
6.4<T<12.7	5
12.7<T<20.0	6
20.0<T	8

A—A

B—B 1:20

C—C 1:20

D—D 1:20

E—E 1:20

H—H 1:20

G—G

Detail II 1:8

Detail III 1:8

P—P

Q—Q 1:10

R—R 1:20

Item 47,48 1:20

Item 48,51 1:20

ITEM 7,25 1:8

G1—G1

VIEW N

VIEW P

P1—P1

P2—P2

P3—P3

P5—P5

P4—P4

ITEM 40 1:8

VIEW K

Zoom W 1:10

ITEM 49 1:20

Item 15

Detail X

ITEM 28,29,37,34 1:2.5

ITEM 33 1:20

M—M

b1—b1 b2—b2

b3—b3 b4—a4

技 术 要 求

1. 焊条采用E5015;自动焊丝采用H10Mn2,焊剂采用HJ330.
2. 所有外露的气割边缘切割截面光洁度均要达到优级或磨平.
3. 腹板与翼板焊接尽量采用自动焊,手工补焊,坡口按标准标定.
4. 未注明焊缝按同类焊缝施焊,未注贴角焊缝高度取被连接的薄板厚度的0.7倍.
5. 所有焊缝100%目测检验; 未注明的按AWS标准检验.
6. 所有的螺栓孔均应与相关件配钻.
7. 凡有厚薄板对接都应有不大于1:4的斜坡.
8. 明细表中尺寸仅供备料参考,准确尺寸放样定.

Technology Requirement

1.The welding rods should be E5015. The welding wire of automatic welding is H10Mn2, the welding flux HJ330.
2.The finished of the cut section of the outside bare gas cutting edge should be up to high grade or flattening milled.
3.Automatic welding should be adopted as far as possible in the case of the groove should be marked according to the standard.
4.The unmarked seams refer to the same sort. The height of the unmarked filler weld is 0.7 the thickness of the thin sheet.
5.All welded should be 100% VT. Those that are not indicated in the drawing should be inspected according to AWS.
6.All the bolt holes should be drilled together with the relevant components.
7.Butt weld with different plate thickness should make no than 1:4 chamfer.
8.The size in the subsidiary list is for reference of prepareing the feed only. The accurate size should be determined when lofting.

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	each / total WEIGHT	NOTE
PROJECT: Sri Lanka CICT 12 STS Cranes			DESIGN STAGE:		SCALE: 1:40	
ITEM NAME: seaside upper beam 海侧上横梁			DRAW NO: J526A010102			PROJ.
ZPMC	DSGN		TRACE		APP.	Assembly
	DRAW		CHCK		Q'TY/SET	29069kg
	CHCK		VER.		SET/CRANE	1

*The quantity and weight of this list is to one set　　设计：　　日期：
*此表为一套的数量和重量　　校对：　　日期：

1 set/crane,　　29069 kg/set,　　29069 kg/crane

PROJECT NAME or CODE: Sri Lanka CICT 12 STS Cranes			SUB-PART NAME: 海侧上横梁		SUB DRAW NO: J526A010102	
序号 NO.	图号或标准 SUB-NO.or STDD	名称与规格 NAME & SIZE	材料或型号 MTRL or STYLE	每套数量 Q'TY/SET	单重 PIECE WGHT	总重 TOTAL WGHT
1		－18×5400×1330	Q345B	1	1014.8	1014.8
2	FCM,"Z"	－18×1750×1330	Q345B	2	328.9	657.8
3		－18×6300×1330	Q345B	1	1184	1184.0
3a		－18×6300×1330	Q345B	1	1112.1	1112.1
4	FCM	－18×2100×1250	Q345B	2	370.9	741.8
5	FCM,"Z"	－18×2300×1250	Q345B	2	406.2	812.4
6	FCM	－18×5400×1250	Q345B	1	953.8	953.8
7	DTZ-1102-180		电气仓库提供	1	2	2.0
8	J526A01010201	圆接方筒体	Weldment 焊接件	2	983.1	1966.2
9		L125×80×8－2658	ST52-3	1	29.2	29.2
10		L100×63×8－4726	ST52-3	4	44.2	177.0
11		L125×80×8－4284	ST52-3	2	49.6	99.1
12		L125×80×8－700	ST52-3	2	4.6	9.2
13		L125×80×8－6876	ST52-3	2	82.1	164.2
14	CMHP4	冲压人孔盖4	组件	1	20	20.0
15		－28×Φ950/Φ570	Q345B	1	100	100.0
16	FCM	－30×1800×1180	Q345B	4	415.4	1661.6
17		－12×5000×2050	Q345B	2	965.6	1931.2
18		－14×8700×2850	Q345B	4	1991.3	7885.2
19		L100×63×8－751	ST52-3	16	5.0	79.8
20		L125×80×8－751	ST52-3	4	5.2	20.9
21		L100×63×8－1900	ST52-3	8	16.3	130.7
22		L100×63×8－1668	ST52-3	4	14.0	56.2
23		L125×80×8－1960	ST52-3	2	20.4	40.8
24		L100×63×8－1558	ST52-3	4	13.0	51.8

*The quantity and weight of this list is to one set　　设计：　　日期：
*此表为一套的数量和重量　　校对：　　日期：

1 set/crane,　　29069 kg/set,　　29069 kg/crane

PROJECT NAME or CODE: Sri Lanka CICT 12 STS Cranes			SUB-PART NAME: 海侧上横梁		SUB DRAW NO: J526A010102	
序号 NO.	图号或标准 SUB-NO.or STDD	名称与规格 NAME & SIZE	材料或型号 MTRL or STYLE	每套数量 Q'TY/SET	单重 PIECE WGHT	总重 TOTAL WGHT
25	DTK-1101-180		电气仓库提供	1	2	2.0
26		－18×826×1330	Q345B	2	155.2	310.4
27		－18×2085×1250	Q345B	2	284.2	568.3
28		－16×1985×150	Q345B	4	37.4	149.6
29		－16×1150×150	Q345B	4	21.7	86.8
30		－16×1250×800	Q345B	4	89.4	357.5
31	FCM	－22×1250×1200	Q345B	4	186.0	744.0
32		－10×100×1294	Q345B	2	10.2	20.4
33		－16×1900×150	Q345B	8	35.8	286.4
34		－16×1150×150	Q345B	8	21.7	173.6
35		－10×2000×1250	Q345B	7	115.6	809.4
36	J526A01010202	直梯	焊接件	1	40	40.0
37		－16×1150×150	Q345B	2	21.7	43.4
38		－18×2912×1330	Q345B	2	547.2	1094.4
39		L100×63×8－6876	ST52-3	6	63.7	382.2
40	DTK-0401-G200		电气仓库提供	1	3	3.0
41		L125×80×8－4875	ST52-3	1	58.8	58.8
42		L100×63×8－4576	ST52-3	4	42.8	171.0
43		L100×63×8－4412	ST52-3	4	41.1	164.6
44		L125×80×8－1637	ST52-3	1	16.3	16.3
45		－6XΦ400	Q235	1	5.9	5.9
46		L100×63×8－700	ST52-3	12	4.5	53.8
47		－24×800×830	Q345B	2	85.7	171.4
48		－20×Φ300/Φ130	Q345B	8	9	72.0
49		－30×1900×1216	Q345B	2	330.8	661.6
50		－24×800×830	Q345B	2	84.1	168.1

*The quantity and weight of this list is to one set
*此表为一套的数量和重量

设计：　　日期：

校对：　　日期：

1 set/crane,　　29069 kg/set,　　29069 kg/crane

PROJECT NAME or CODE: Sri Lanka CICT 12 STS Cranes			SUB-PART NAME: 海侧上横梁		SUB DRAW NO: J526A010102	
序号 NO.	图号或标准 SUB-NO. or STDD	名称与规格 NAME & SIZE	材料或型号 MTRL or STYLE	每套数量 Q'TY/SET	单重 PIECE WGHT	总重 TOTAL WGHT
51		－10×100×1557	Q345B	2	12.2	24.4
52	FCM	－24×4100×1250	Q345B	2	763.8	1527.7

REV	DATE	BY	DESCRIPTION
1	2012.05.30	hong	

技术要求

1. 焊条采用E5015。
2. 圆接方筒体由4个部分拼接。
3. 放样图上细实线表示弯折处，长度见表格。
4. 除拼缝处加强筋外，其他均焊在折弯线上。
5. 所有外露的气割边缘的切割面光洁度要达到优级或磨平。
6. 图中未注明的均按AWS D1.1标准。
7. 明细表尺寸仅供备料参考，准确尺寸放样定。


Technology Requirement

1. The welding rods should be E5015.
2. There are four parts matching on the circularity connecting square shell.
3. On the set-out detail that fine line means bend,the length check table.
4. Except edge joint need reinforcing, the others weld on the bend.
5. The gas cut edge should be finished to the superior grade or milled flattening.
6. The weld that are not marked in the drawing should be made and inspected according to the AWS D1.1.
7. The size in the subsidiary list is for reference of prepareing the feed only. The accurate size should be determined when lofting.


Minimum Fillet Weld Size	
Base Metal Thickness T(mm)	Minimum Size of Fillet Weld(mm)
T≤6.4	3
6.4<T≤12.7	5
12.7<T≤20	6
20<T	8

The Comparison Table of Welding Symbols

AWS	ZPMC

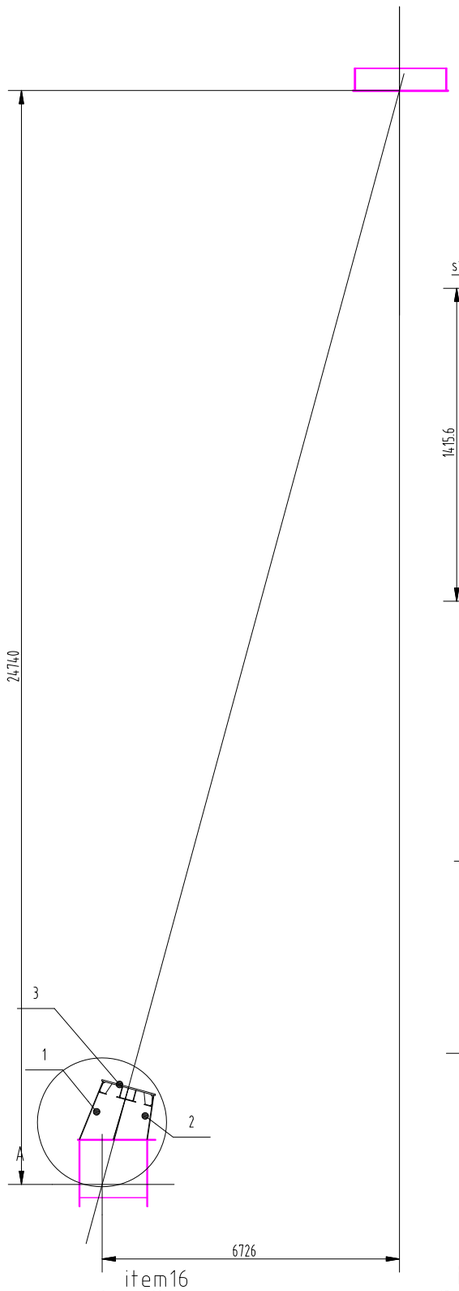


件1放样
1:20 以内径为基准
the standard of inner diametor

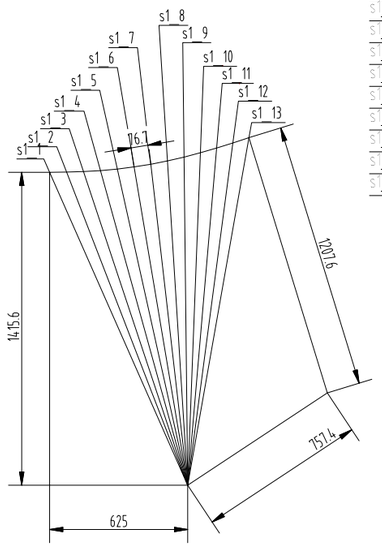


s1_1	1547.4
s1_2	1518.7
s1_3	1495.0
s1_4	1477.0
s1_5	1465.2
s1_6	1460.0
s1_7	1461.5
s1_8	1469.6
s1_9	1484.2
s1_10	1504.8
s1_11	1530.8
s1_12	1561.5
s1_13	1596.1


件2 放样
1:20 以内径为基准
the standard of inner diametor

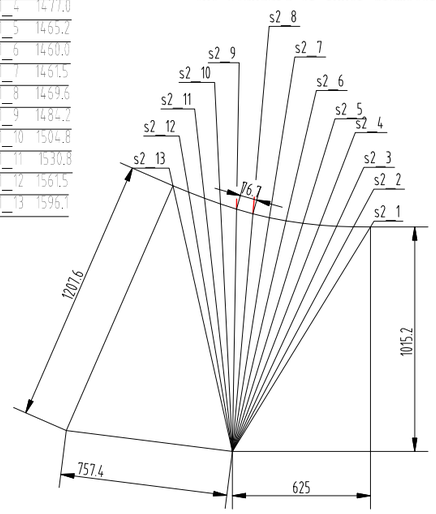


s2_1	1192.1
s2_2	1154.4
s2_3	1122.4
s2_4	1097.2
s2_5	1079.7
s2_6	1070.6
s2_7	1070.3
s2_8	1078.6
s2_9	1095.7
s2_10	1120.4
s2_11	1152.0
s2_12	1189.3
s2_13	1231.4

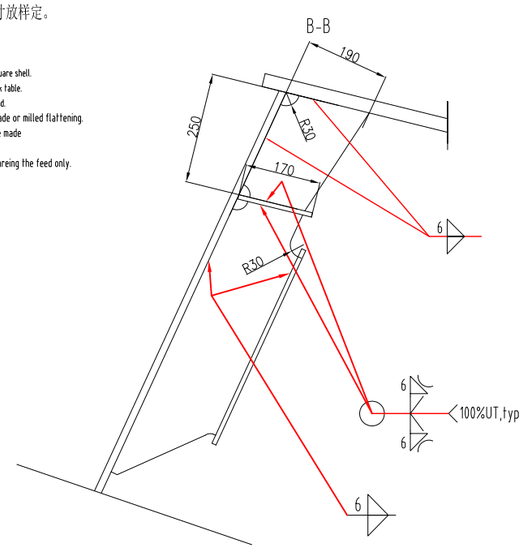


A1
1:30

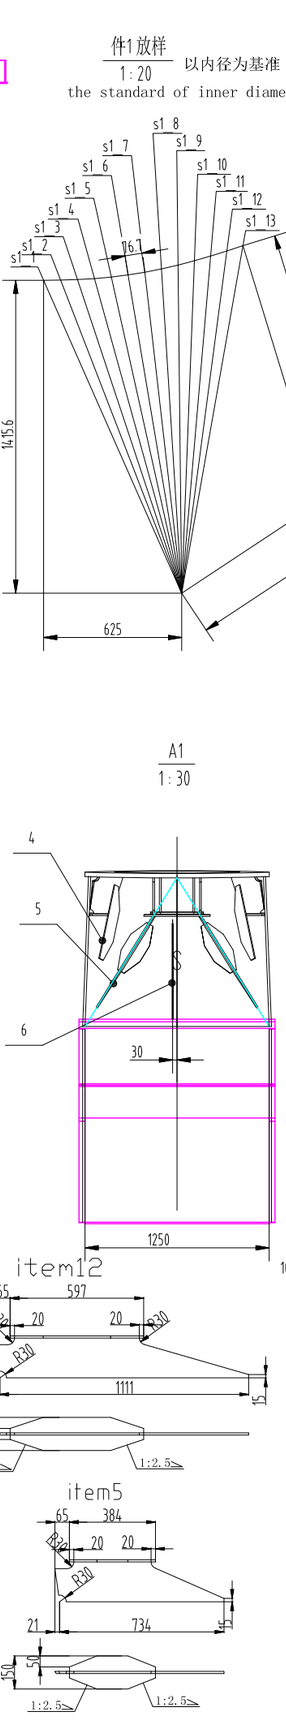


A
1:30 N

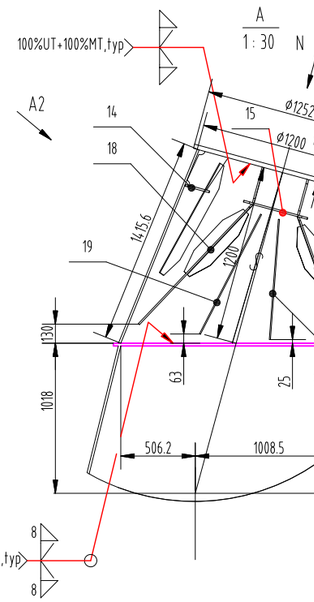


A2
1:30

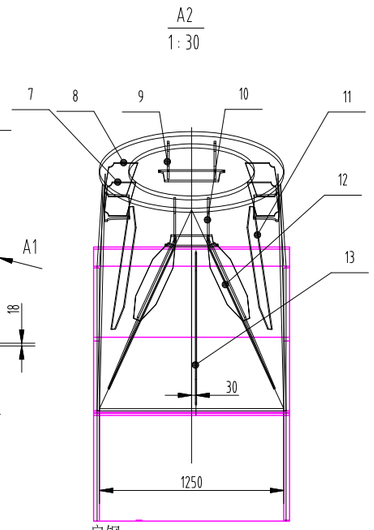


扁钢
1:10

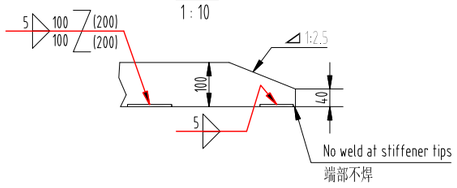


item16



item12




item18




item5


N
1:30




件14，15，17
1:10




件 9
1:10




件 8
1:10



件 10
1:10



件 7
1:10



序号	图号或代号	版本	图名及描述	材料	数量	单重	总重	备注
20	GB704-80		扁钢 100×8 l=819	Q345-B	2	4.58	9.2	
19	GB704-80		扁钢 100×8 l=954	Q345-B	2	5.11	10.2	
18	自制		T钢 190×150×10×10 l=1125	Q345-B	2	17.66	35.3	
17	GB/T709-88		钢板 12 F=170×449.2	Q345-B	1	6.18	6.2	
16	自制		T钢 190×150×10×10 l=782	Q345-B	2	12.15	24.3	
15	GB/T709-88		钢板 12 F=170×448.7	Q345-B	2	6.17	12.3	
14	GB/T709-88		钢板 12 F=170×359.4	Q345-B	1	4.74	4.7	
13	GB704-80		扁钢 100×8 l=1074	Q345-B	1	6.18	6.2	
12	自制		T钢 190×150×10×10 l=1131	Q345-B	2	17.64	35.3	
11	GB704-80		扁钢 100×8 l=856	Q345-B	2	4.81	9.6	
10	GB/T709-88		钢板 12 F=233.6×250	Q345-B	2	3.9	7.8	
9	GB/T709-88		钢板 12 F=245.1×250	Q345-B	2	3.92	7.8	
8	GB/T709-88		钢板 12 F=213.7×250	Q345-B	2	3.89	7.8	
7	GB/T709-88		钢板 12 F=229.1×250	Q345-B	2	3.88	7.8	
6	GB704-80		扁钢 100×8 l=676	Q345-B	1	3.68	3.7	
5	自制		T钢 190×150×10×10 l=755	Q345-B	2	11.29	22.6	
4	GB704-80		扁钢 100×8 l=528	Q345-B	2	2.75	5.5	
3	GB/T709-88		钢板 30 F=φ1252/852	Q345-B	1	155.66	155.7	
2	GB/T709-88		钢板 14 F=1201.7×1376.4	Q345-B	2	135.95	271.9	
1	GB/T709-88		钢板 14 F=1256.9×1571.9	Q345-B	2	169.62	339.2	


NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	each WEIGHT	total WEIGHT	NOTE
PROJECT:			DESIGN STAGE:		SCALE:		
ITEM NAME:	圆接方筒体 column		DRAW NO:	J526A01010201			
ZPMC	DSGN		TRACE		APP.		
	DRAW		CHCK		Q'TY/SET	2	
	CHCK		VER.		TOTAL WEIGHT	983.1kg	

REV	DATE	BY	DESCRIPTION
1	2012.05.31	yang	
2	2012.08.17	yang	

The Comparison Table of Welding Symbols

AWS	ZPMC

Minimum Fillet Weld Size	
Base Metal Thickness (mm)	Minimum Size of Fillet Weld(mm)
T≤6.4	3
6.4<T≤12.7	5
12.7<T≤19.0	6
19.0<T	8

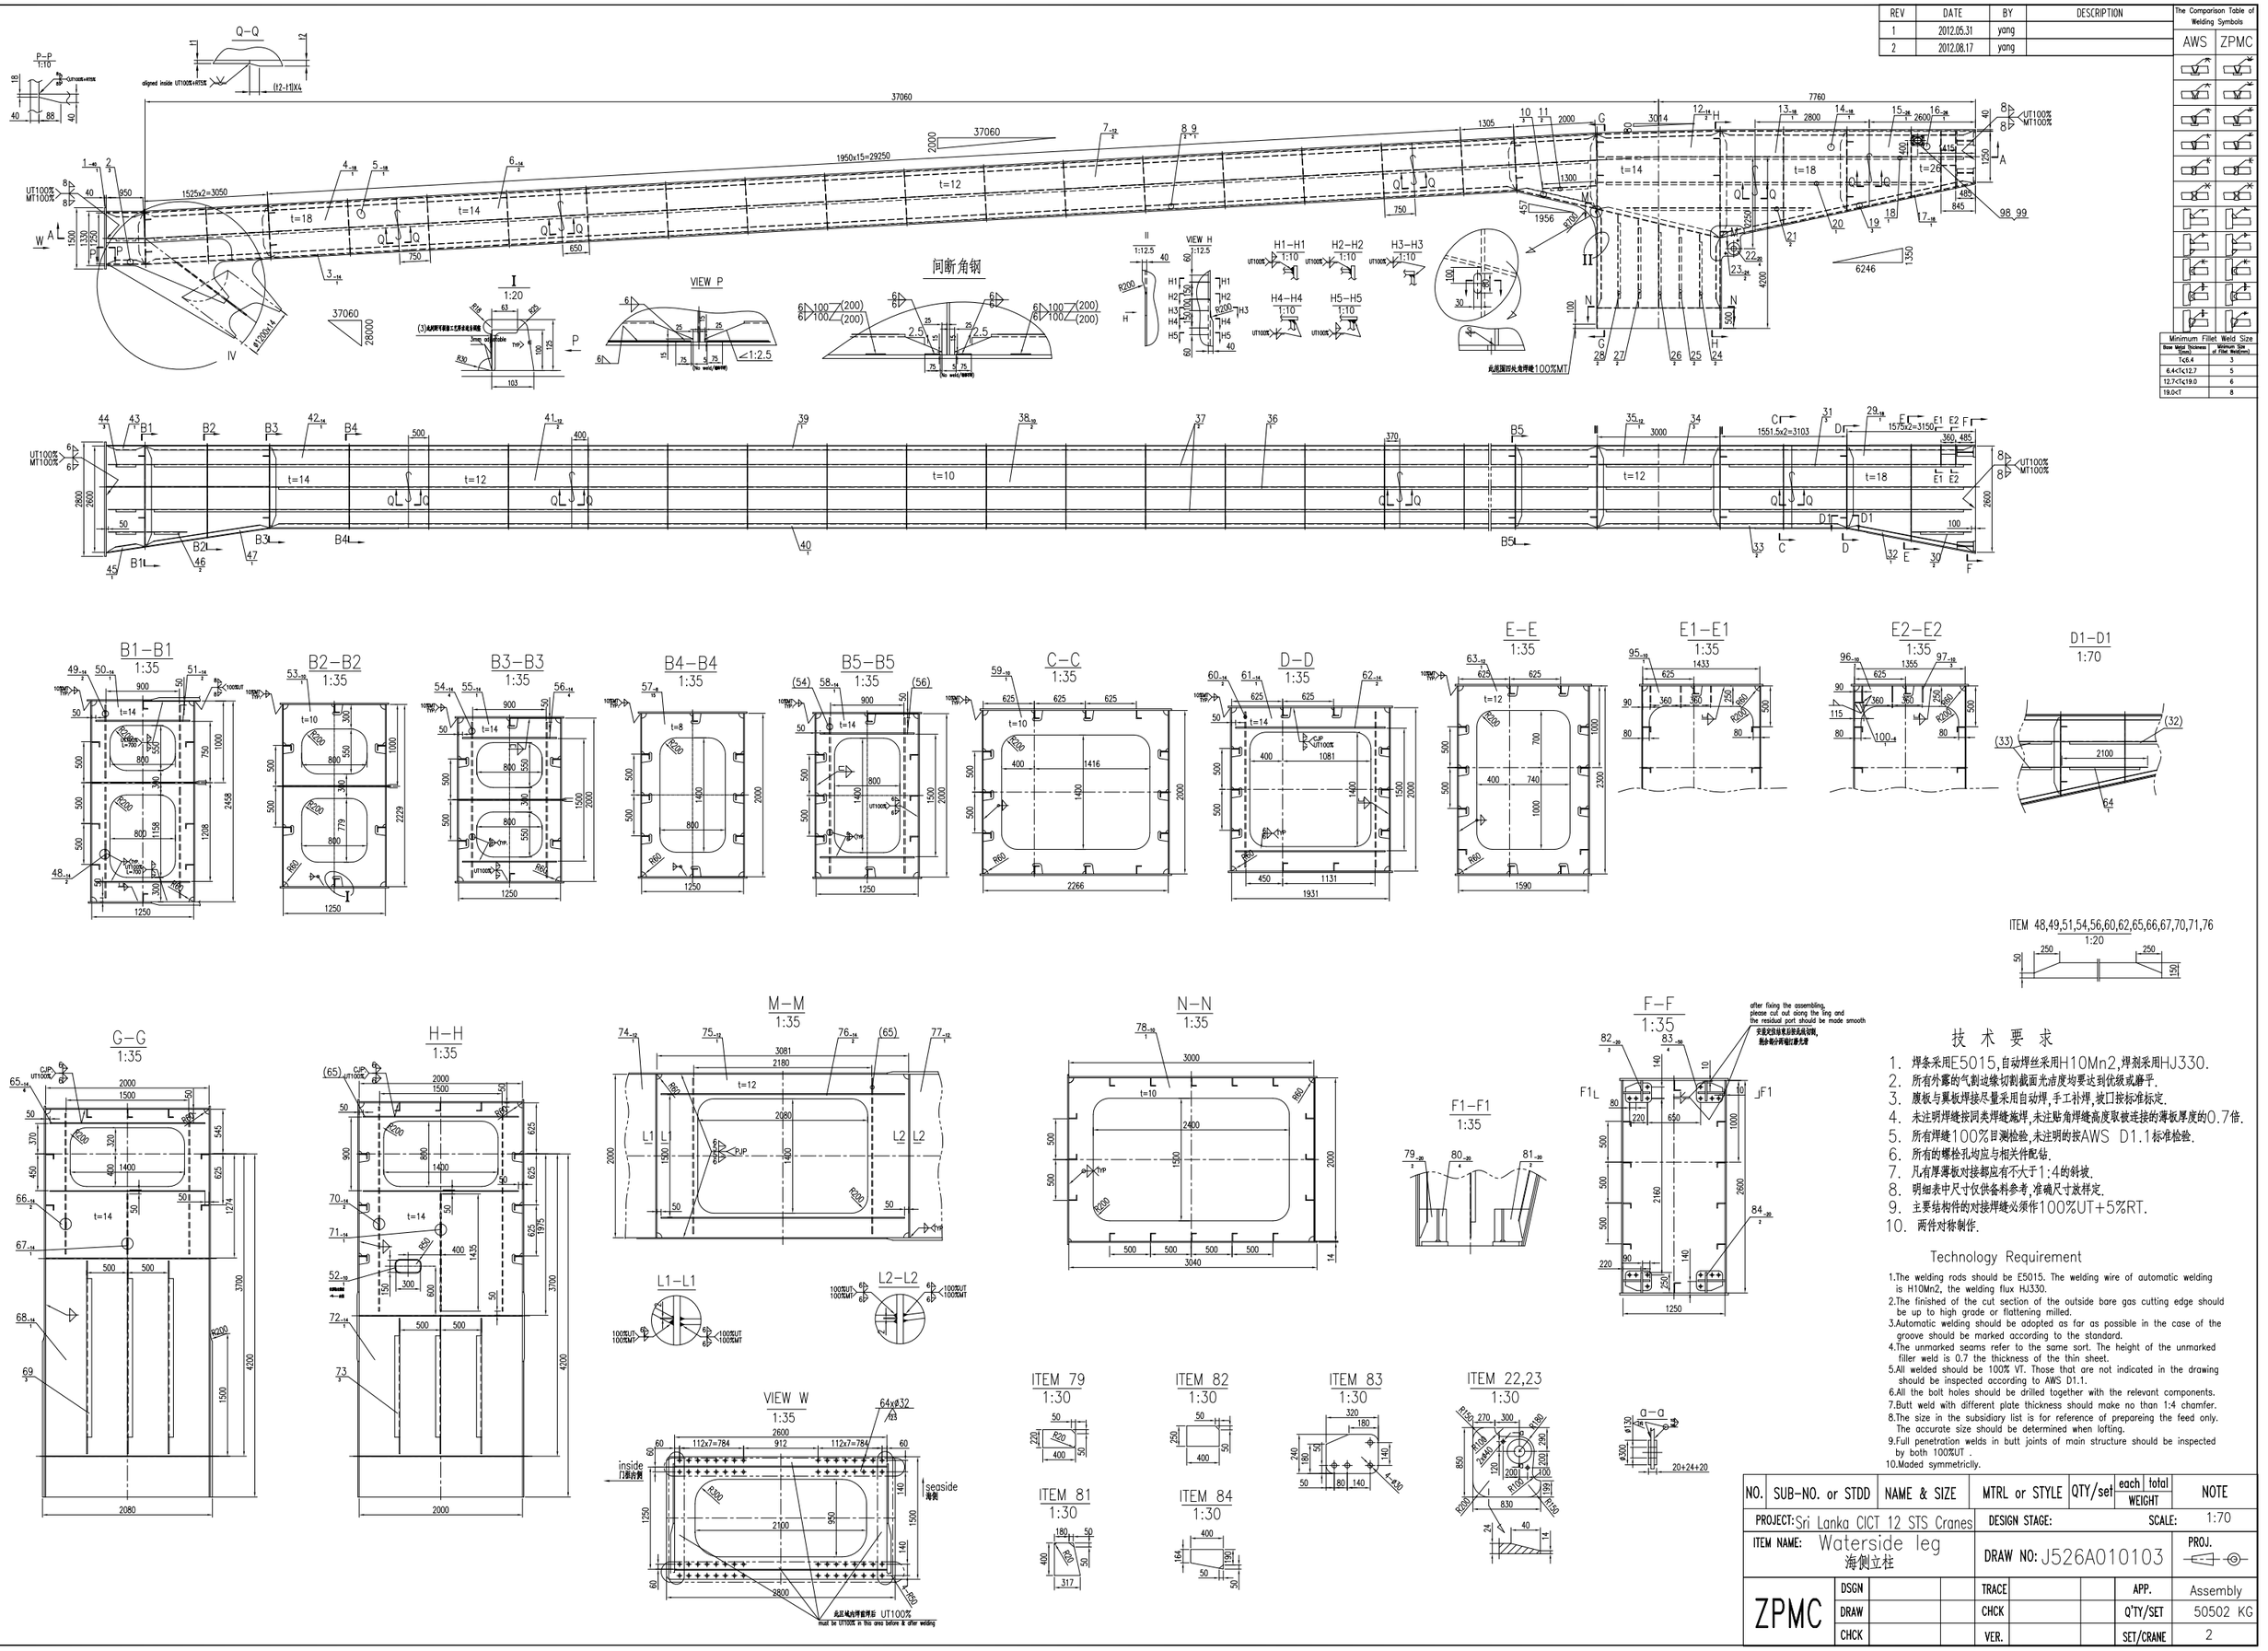

技术要求

1. 焊条采用E5015,自动焊丝采用H10Mn2,焊剂采用HJ330.
2. 所有外露的气割边缘切割截面光洁度均要达到优级或磨平.
3. 腹板与翼板焊接尽量采用自动焊,手工补焊,坡口按标准标定.
4. 未注明焊缝按同类焊缝施焊,未注贴角焊缝高度取被连接的薄板厚度的0.7倍.
5. 所有焊缝100%目测检验,未注明的按AWS D1.1标准检验.
6. 所有的螺栓孔均应与相关件配钻.
7. 凡有厚薄板对接都应有不大于1:4的斜拔.
8. 明细表中尺寸仅供备料参考,准确尺寸放样定.
9. 主要结构件的对接焊缝必须作100%UT+5%RT.
10. 两件对称制作.

Technology Requirement


1. The welding rods should be E5015. The welding wire of automatic welding is H10Mn2, the welding flux HJ330.
2. The finished of the cut section of the outside bare gas cutting edge should be up to high grade or flattening milled.
3. Automatic welding should be adopted as far as possible in the case of the groove should be marked according to the standard.
4. The unmarked seams refer to the same sort. The height of the unmarked filler weld is 0.7 the thickness of the thin sheet.
5. All welded should be 100% VT. Those that are not indicated in the drawing should be inspected according to AWS D1.1.
6. All the bolt holes should be drilled together with the relevant components.
7. Butt weld with different plate thickness should make no than 1:4 chamfer.
8. The size in the subsidiary list is for reference of prepareing the feed only. The accurate size should be determined when lofting.
9. Full penetration welds in butt joints of main structure should be inspected by both 100%UT .
10. Maded symmetricly.

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	each / total WEIGHT	NOTE
PROJECT: Sri Lanka CICT 12 STS Cranes			DESIGN STAGE:		SCALE: 1:70	
ITEM NAME: Waterside leg 海侧立柱			DRAW NO: J526A010103			PROJ.
ZPMC	DSGN		TRACE		APP.	Assembly
	DRAW		CHCK		Q'TY/SET	50502 KG
	CHCK		VER.		SET/CRANE	2


ITEM 48,49,51,54,56,60,62,65,66,67,70,71,76

REV	DATE	BY	DESCRIPTION
1	2012.05.31	yang	
2	2012.08.17	yang	


IV

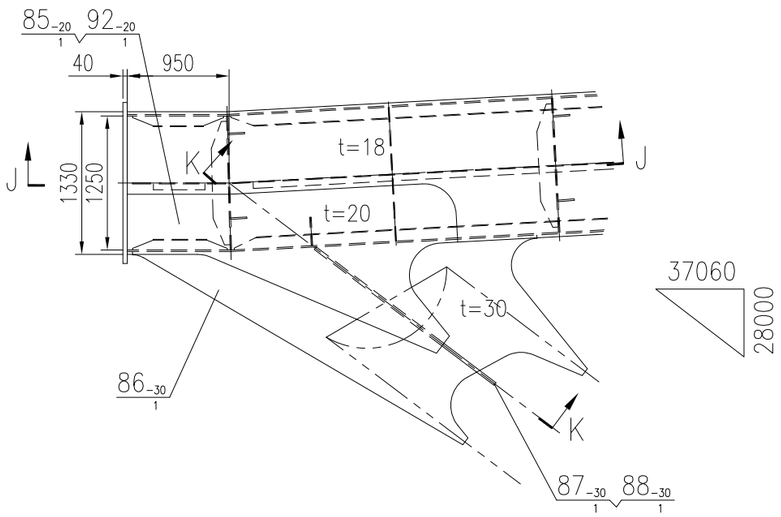


J1–J1

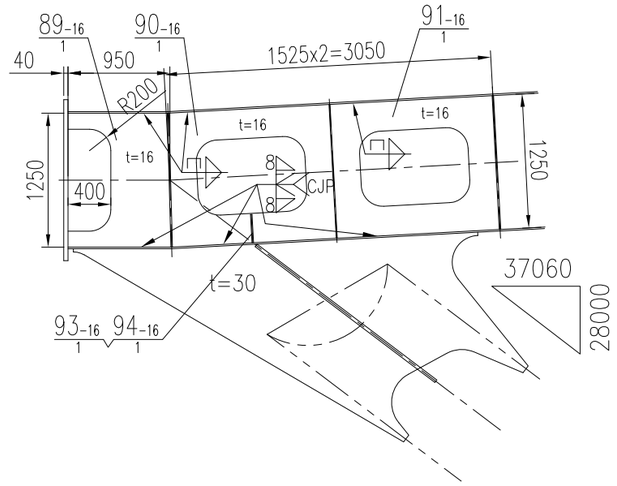


ITEM 85
1:40

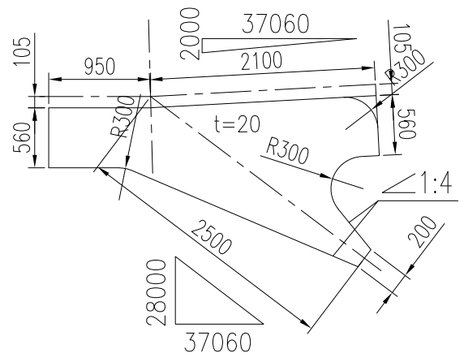


ITEM 92
1:40

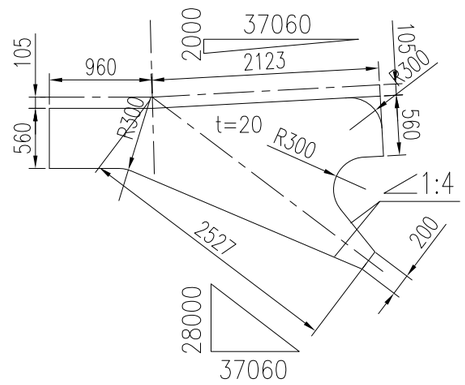


ITEM 88
1:40

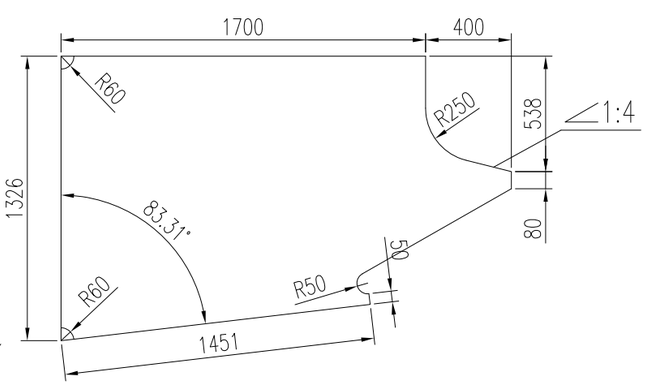


J–J

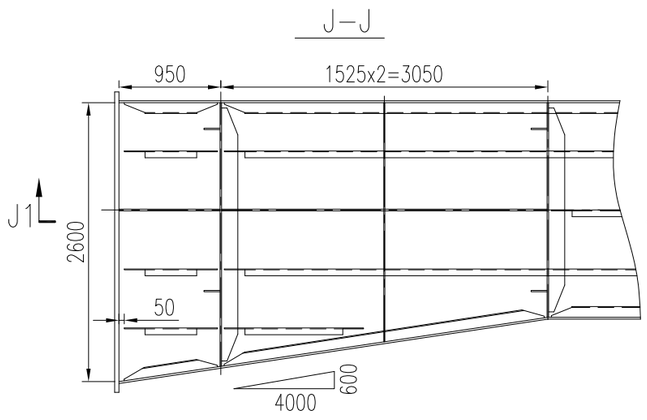


K–K

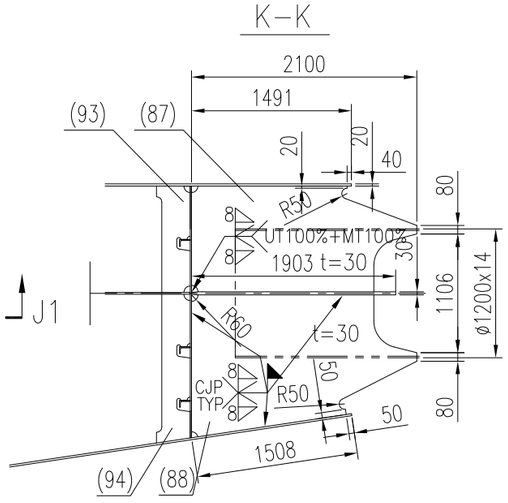


ITEM 86
1:40

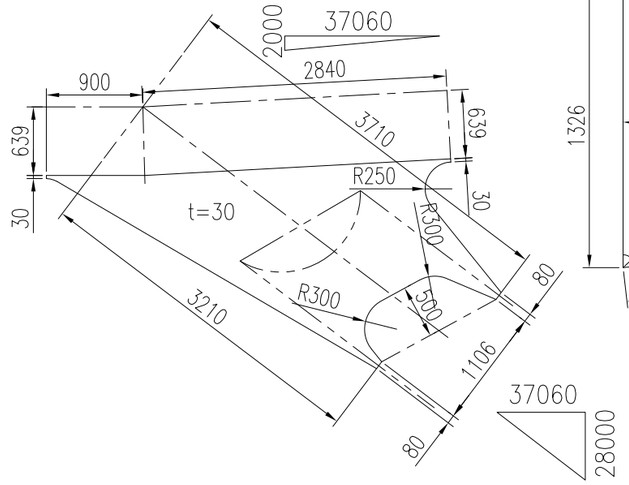


ITEM 89
1:40




ITEM 90
1:40




ITEM 91
1:40



ITEM 93
1:40



ITEM 94
1:40

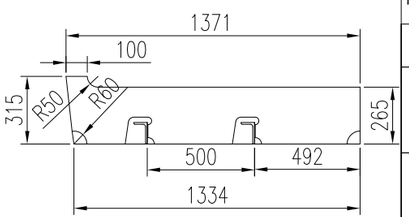

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	each / total WEIGHT	NOTE
PROJECT: Sri Lanka CICT 12 STS Cranes			DESIGN STAGE:		SCALE: 1:40	
ITEM NAME: 海侧立柱 Waterside legs			DRAW NO: J526A010103(2/2)		PROJ.	

ZPMC							
	DSGN			TRACE		APP.	Ass.
	DRAW			CHCK		Q'TY/SET	50502 kg
	CHCK			VER.		SET/CRANE	2

SUBSIDIARY LIST

* The quantity and weight of this list is to one set

2 set/crane, 50502 kg/set, 101003 kg/crane

SUB NO.

PAGE: 1/5

PROJECT NAME or CODE:	SUB-PART NAME:	SUB DRAW NO:
Sri Lanka CICT 12 STS Cranes	海侧立柱 Waterside Legs	J526A010103

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	Q'TY/SET	PIECE WGHT	TOTAL WGHT
1		-40X1500X2600	A709-50-2	1	680	680
2		L100x63x8-885	ST52-3	3	6.3	18.9
3		-14x2600x7434	Q345B	1	1765	1765
4		-18x1549x7177	Q345B	1	1169	1169
5		-18x1549x7195	Q345B	1	1175	1175
6		-14x1330x4000	Q345B	2	585	1169
7		-12x1330x20900	Q345B	2	2618	5236
8		L100x63x8-33558	ST52-3	2	329	658
9		L100x63x8-30491	ST52-3	1	298	298
10		L100x63x8-1952	ST52-3	3	16.8	50.5
11		L100x63x8-1300	ST52-3	2	10.4	20.8
12		-14x4865x8401	Q345B	2	2579	5158
13		-18x2498x2800	Q345B	1	868	868
14		-18x2498x2757	Q345B	1	855	855
15		-26x1893x2600	Q345B	1	855	855
16		-26x1893x2700	Q345B	1	888	888
17		-18x2600x4600	Q345B	1	1433	1433
18		L100x63x8-9135	ST52-3	1	87.8	87.8
19		L100x63x8-6265	ST52-3	3	59.4	178.3
20		L100x63x8-8200	ST52-3	1	78.5	78.5
21		L100x63x8-4500	ST52-3	2	42	84
22		-20xø300/ø130	Q345B	4	9	36

ZPMC	DSGN		TECH		MTRL	
	CHCK		STDD		CHCK	

SUBSIDIARY LIST

* The quantity and weight of this list is to one set

2 set/crane, 49547 kg/set, 99094 kg/crane

SUB NO.

PAGE: 2/5

PROJECT NAME or CODE:	SUB-PART NAME:	SUB DRAW NO:
Sri Lanka CICT 12 STS Cranes	海侧立柱 Waterside Legs	J526A010103

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	Q'TY/SET	PIECE WGHT	TOTAL WGHT
23		-24x830x850	Q345B	2	105	210
24		L100X63X8-1770	ST52-3	2	15	30
25		L100X63X8-1887	ST52-3	2	16.2	32.4
26		L100X63X8-2004	ST52-3	2	17.3	34.6
27		L100X63X8-2121	ST52-3	2	18.5	37
28		L100X63X8-2238	ST52-3	2	19.7	39.4
29		-18x2600x4500	Q345B	1	1405	1405
30		L100x63x8-1445	ST52-3	2	11.8	23.6
31		L100x63x8-6121	ST52-3	3	58	174
32		L100x63x8-3075	ST52-3	1	27.9	27.9
33		L100x63x8-6053	ST52-3	2	57.3	114.6
34		L100x63x8-2951	ST52-3	3	26.7	80.1
35		-12x2000x9693	Q345B	1	1826	1826
36		L100x63x8-32524	ST52-3	1	318.7	318.7
37		L100x63x8-35558	ST52-3	2	348.7	697.4
38		-10x2000x20270	Q345B	2	3810	7620
39		L100x63x8-35541	ST52-3	1	348.5	348.5
40		L100x63x8-32491	ST52-3	1	318.4	318.4
41		-12X2000X4000	Q345B	2	753.6	1507
42		-14X2600X7366	Q345B	1	1751	1751
43		L100X63X8-868	ST52-3	1	6.1	6.1
44		L100X63X8-851	ST52-3	3	6	18

ZPMC	DSGN		TECH		MTRL	
	CHCK		STDD		CHCK	

SUBSIDIARY LIST

* The quantity and weight of this list is to one set

2 set/crane, 49547 kg/set, 99094 kg/crane

SUB NO.

PAGE: 3/5

PROJECT NAME or CODE:	SUB-PART NAME:	SUB DRAW NO:
Sri Lanka CICT 12 STS Cranes	海侧立柱 Waterside Legs	J526A010103

	NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	Q'TY/SET	PIECE WGHT	TOTAL WGHT	
1	45		L100X63X8-879	ST52-3	1	6.2	6.2	1
2	46		L100X63X8-1000	ST52-3	2	7.4	14.8	2
3	47		L100X63X8-3020	ST52-3	1	27.4	27.4	3
4	48		-14X150X1350	Q345B	2	22	44	4
5	49		-14X150X892	Q345B	2	14	28	5
6	50		-14X1250X2458	Q345B	1	188	188	6
7	51		-14X150X1150	Q345B	2	18.5	37	7
8	52		-10X10X845	Q345B	1	1	1	8
9	53		-10X1250X2229	Q345B	1	133	133	9
10	54		-14X150X1900	Q345B	4	30	120	10
11	55		-14X1250X2000	Q345B	1	178	178	11
12	56		-14X150X1150	Q345B	4	18.5	74	12
13	57		-8X1250X2000	Q345B	15	88.6	1329	13
14	58		-14X1250X2000	Q345B	1	155	155	14
15	59		-10X2000X2266	Q345B	1	158	158	15
16	60		-14x150x1900	Q345B	2	30	60	16
17	61		-14x1931x2000	Q345B	1	200	200	17
18	62		-14x150x1831	Q345B	2	29	58	18
19	63		-12X1590X2300	Q345B	1	137	137	19
20	64		L100X63X8-2100	ST52-3	1	18.3	18.3	20
21	65		-14x150x1900	Q345B	6	30	180	21
22	66		-14x150x1719	Q345B	2	28	56	22

ZPMC	DSGN		TECH		MTRL	
	CHCK		STDD		CHCK	

SUBSIDIARY LIST

* The quantity and weight of this list is to one set

2 set/crane, 49547 kg/set, 99094 kg/crane

SUB NO.

PAGE: 4/5

PROJECT NAME or CODE:	SUB-PART NAME:	SUB DRAW NO:
Sri Lanka CICT 12 STS Cranes	海侧立柱 Waterside Legs	J526A010103

	NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	Q'TY/SET	PIECE WGHT	TOTAL WGHT	
1	67		-14x150x734	Q345B	1	11.8	11.8	1
2	68		-14X2080X4745	Q345B	1	924	924	2
3	69		L100X63X8-2359	ST52-3	3	20.8	62.5	3
4	70		-14x150x2500	Q345B	2	40	80	4
5	71		-14x150x1435	Q345B	1	23	23	5
6	72		-14X2000X4825	Q345B	1	937	937	6
7	73		L100X63X8-1658	ST52-3	3	13.9	41.8	7
8	74		-12x2000x4894	Q345B	1	922	922	8
9	75		-12x2000x3081	Q345B	1	306	306	9
10	76		-14x150x2981	Q345B	2	49	98	10
11	77		-12x2000x1790	Q345B	1	337	337	11
12	78		-10X2000X3000	Q345B	1	189	189	12
13	79		-20X220X400	Q345B	2	13.5	27	13
14	80		-20X90X400	Q345B	4	5.65	22.6	14
15	81		-20X400X317	Q345B	2	15	30	15
16	82		-20X250X400	Q345B	2	15.5	31	16
17	83		-50X240X320	A709-50-2	4	110	440	17
18	84		-20X240X400	Q345B	2	12.4	24.8	18
19	85		-20X1581X3083	Q345B	1	423	423	19
20	86		-30X1955X4292	Q345B	1	900	900	20
21	87		-30X985X2100	Q345B	1	403	403	21
22	88		-30X1331X2100	Q345B	1	490	490	22

ZPMC	DSGN		TECH		MTRL	
	CHCK		STDD		CHCK	

SUBSIDIARY LIST

* The quantity and weight of this list is to one set

2 set/crane, 49547 kg/set, 99094 kg/crane

SUB NO.	
PAGE:	5/5

PROJECT NAME or CODE:	SUB-PART NAME:	SUB DRAW NO:
Sri Lanka CICT 12 STS Cranes	海侧立柱 Waterside Legs	J526A010103

	NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	Q'TY/SET	PIECE WGHT	TOTAL WGHT	
1	89		−16x960x1250	Q345B	1	101	101	1
2	90		−16x1250x1530	Q345B	1	140	140	2
3	91		−16x1250x1513	Q345B	1	138	138	3
4	92		−20X1603X3116	Q345B	1	423	423	4
5	93		−16x315x992	Q345B	1	33	33	5
6	94		−16x315x1371	Q345B	1	45	45	6
7	95	仅面海左侧立柱有	−10x500x1433	Q345B	1	28	28	7
8	96	仅面海左侧立柱有	−10x500x1355	Q345B	1	26	26	8
9	97	仅面海左侧立柱有	−10x200x350	Q345B	3	5.5	16.5	9
10	98	仅面海左侧立柱有	DTZ−1102−180		1			10
11	99	仅面海左侧立柱有	DTK−1101−180		1			11
12	100	仅面海左侧立柱有	−6x115x350	Q345B	1		1.9	12
13								13
14								14
15								15
16								16
17								17
18								18
19								19
20								20
21								21
22								22

ZPMC	DSGN			TECH			MTRL		
	CHCK			STDD			CHCK		

REV	DATE	BY	DESCRIPTION
1	2013.10.30		
2	2013.10.17		

The Comparison Table of Welding Symbols

AWS	ZPMC

Minimum Fillet Weld Size

Base Metal Thickness T(mm)	Minimum Size of Fillet Weld(mm)
T<6.4	3
6.4<T≤12.7	5
12.7<T≤20	6
20<T	8

Technology Requirement

1. The welding rods should be E5015. Automatic weld wire should be F10Mn2, and the welding fulx HJ330.
2. The weld seam which is not marked should be welded according to the same kind of weld, the height of filler weld is 0.7 time to the thickness of thinner plate.
3. Automatic welding should be adopted as far as possible, followed by further manual repair welding. The groove should be made according to the standard.
4. The gas cut edge should be finished to the superior grade or milled flattening.
5. The weld that are not marked in the drawing should be made and inspected according to the AWS D1.1-2006.
6. All the bolt holes should be drilled together with the relevant components.
7. The size in the subsidiary list is for reference of prepareing the feed only. The accurate size should be determined when lofting.
8. The maximum slope of different thickness should make no than 1:2.5 chamfer.
9. Full penetration welds in butt joints of main structure should be inspected by both 100%UT.

技术要求

1. 焊条采用E5015，自动焊丝采用H10Mn2，焊剂采用HJ330；
2. 未注明焊缝按同类焊缝施焊，未注明贴角焊缝高度取最连接的薄板厚度的0.7倍；
3. 腹板与翼板焊接只量采用自动焊，手工补焊，坡口按AWS规定；
4. 所有外露的气割边缘，切割断面九点度均要达到仿底或磨平；
5. 图中未注明的均按AWS D1.1-2006规范制造与检验；
6. 所有的螺栓孔均应与相关件配钻；
7. 明细表中尺寸供参考，准确尺寸放样定；
8. 凡有薄板对接部应有不大于1：2.5的斜坡；
9. 主要结构件的对接焊缝必须做100%UT；

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	each	total	NOTE
					WEIGHT		

PROJECT: Sri Lanka CICT 12 STS Cranes　DESIGN STAGE:　SCALE: 1:60

ITEM NAME: Sill Beam of W.S. 海侧下横梁　DRAW NO: J526A010104　PROJ.

ZPMC	DSGN			TRACE		APP.	Assembly
	DRAW			CHCK		Q'TY/SET	38868KG
	CHCK			VER.		SET/CRANE	1

明 细 表
SUBSIDIARY LIST

*The quantity and weight of this list is to one set
*此表为一套的数量和重量
1 set/crane, 38868 kg/set, 38868kg/crane

设计:
日期:
校对:
日期:

PROJECT NAME or CODE: Sri Lanka CICT 12 STS Cranes			SUB-PART NAME: Seaside sill beam 海侧下横梁		SUB DRAW NO: J526A010104	
序号 NO.	图号或标准 SUB-NO. or STDD	名称与规格 NAME & SIZE	材料或型号 MTRL or STYLE	每套数量 Q'TY/SET	单重 PIECE WGHT	总重 TOTAL WGHT
1	FCM, Z	-40×1400×2810	A709-50-2	2	747.1	1494.2
2		-16×2600×5700	Q345B	4	1747.1	6988.4
3		-12×2600×11000	Q345B	2	2694.1	5388.2
4		-26×4450×1330	Q345B	2	1208	2416.0
5		-24×8000×1330	Q345B	2	2004.6	4009.2
6		-26×7240×1330	Q345B	2	1965.3	3930.6
7		-50×1975×2150	Q345B	4	1093.4	4373.8
8		-34×⌀720/⌀360	Q345B	8	84.4	675.2
9		L125×80×8-17098	St52-3	1	211.5	211.5
10		L100×63×8-17098	St52-3	6	166.4	998.4
11		L100×63×8-14358	St52-3	2	139.8	279.6
12		L125×80×8-20826	St52-3	1	257.7	257.7
13		L125×80×8-2500	St52-3	13	30.9	401.7
14		L125×80×8-2000	St52-3	4	24.7	98.8
15		L125×80×8-825	St52-3	1	10.2	10.2
16		-26×800×1330	Q345B	2	211.2	422.4
17	J526A01010401	Air Hole通气孔	Assembly	1	14.4	14.4
18	CMHP4(外协)	Man Hole Cover 人孔盖	Assembly	1	20	20.0
19		-20×1800×1330	Q345B	1	340.9	340.9
20		-20×1800×1330	Q345B	1	375.9	375.9
21		-20×⌀950/⌀570	Q345B	2	71.2	142.4
22		L125×80×8-650	St52-3	1	8	8.0
23		-50×1390×1170	A709-50-2	2	432.8	865.6
24		-25×460×440	Q345B	4	28.88	115.5
25		-26×1000×1250	Q345B	2	212.1	424.2
26		-14×2500×150	Q345B	12	35.8	429.6
27		-14×1150×150	Q345B	12	13.57	162.8
28		-20×1600×1250	Q345B	2	183.1	366.2
29		-16×2600×1250	Q345B	2	277.85	555.7
30		-10×2600×1250	Q345B	4	128.24	513.0

明 细 表
SUBSIDIARY LIST

*The quantity and weight of this list is to one set
*此表为一套的数量和重量
1 set/crane, 38868 kg/set, 38868kg/crane

设计:
日期:
校对:
日期:

PROJECT NAME or CODE: Sri Lanka CICT 12 STS Cranes			SUB-PART NAME: Seaside sill beam 海侧下横梁		SUB DRAW NO: J526A010104	
序号 NO.	图号或标准 SUB-NO. or STDD	名称与规格 NAME & SIZE	材料或型号 MTRL or STYLE	每套数量 Q'TY/SET	单重 PIECE WGHT	总重 TOTAL WGHT
31		-16×2600×1250	Q345B	2	277.85	555.7
32		-24×1250×700	Q345B	2	164.9	329.8
33		-20×100×500	Q345B	8	7.9	63.2
34		L125×80×8-688	St52-3	2	8.5	17.0
35	J526A01010402	下横梁横向绑扎抗剪板	Weld	2	676	1352
36		-24×700×830	Q345B	2	84.36	168.7
37		-20×⌀300/⌀130	Q345B	4	8.85	35.4
38	DTK-1101-180	重磅圈		4	10	40.0
39	DTZ-1103-180	法兰		4	4	16.0
40	DTK-1101-280	重磅圈		1		
41	DTK-0101-G300	重磅板		1		
42						
43						
44						
45						
46						
47						
48						
49						
50						
51						
52						
53						
54						
55						
56						
57						
58						
59						
58						

REV	DATE	BY	DESCRIPTION
1	2012.05.30	hong	
2	2012.08.17	hong	

15000(此区域按E－E截面要求制作)

this area should be made according to E-E

20400±5

DETAIL III 1:20

A－A

B－B 1:20

C－C 1:20

D－D 1:20

S－S

E－E 1:20

F－F 1:20

H－H 1:20

Detail I 1:8

M－M 1:20

ITEM 33 1:20

ITEM 36 1:20

ITEM 23 1:20

ITEM 7,26,31 1:20

ITEM 8 1:20

II 1:10

面板开孔尺寸

Man-hole size

ITEM 35 1:20

ITEM 24 1:20

Item 37,38 1:20

R－R 1:20

VIEW P

P1－P1 P2－P2 P3－P3 P4－P4 P5－P5

Metal of item 22must be UT100% in this area before weld & after

在此范围内件22号材焊接前后必须UT100%

Metal of item 21must be UT100% in this area before weld & after

在此范围内件21号材焊接前后必须UT100%

此区域隔板焊缝按K2要求制造打磨

Smooth after welding,the welds should be welding accroding to K2.

左右舷海塔耳板都在面海海侧

the left and right side of the plate 37,38 both facing the sea is close to the seaside

just at the right side facing the sea

(3)此间距可依据工艺要求适当调整

3 adjustable

Watersides 海侧

Technology Requirement

1. The welding rods should be E5015. The welding wire of automatic welding is H10Mn2, the welding flux HJ330.
2. The finished of the cut section of the outside bare gas cutting edge should be up to high grade or flattening milled.
3. Automatic welding should be adopted as far as possible in the case of the groove should be marked according to the standard.
4. The unmarked seams refer to the same sort. The height of the unmarked filler weld is 0.7 the thickness of the thin sheet.
5. All welded should be 100% VT. Those that are not indicated in the drawing should be inspected according to AWS.
6. All the bolt holes should be drilled together with the relevant components.
7. Butt weld with different plate thickness should make no than 1:4 chamfer.
8. The size in the subsidiary list is for reference of prepareing the feed only. The accurate size should be determined when lofting.

技 术 要 求

1. 焊条采用E5015;自动焊丝采用H10Mn2,焊剂采用HJ330.
2. 所有外露的气割边缘切割截面光洁度均要达到优级或磨平.
3. 腹板与翼板焊接尽量采用自动焊,手工补焊,坡口按标准标定.
4. 未注明焊缝按同类焊缝施焊,未注贴角焊缝高度取被连接的薄板厚度的0.7倍.
5. 所有焊缝100%目测检验; 未注明的按AWS标准检验.
6. 所有的螺栓孔均应与相关件配钻.
7. 凡有厚薄板对接都应有不大于1:4的斜坡.
8. 明细表中尺寸仅供备料参考,准确尺寸放样定.

The Comparison Table of Welding Symbols

AWS	ZPMC

Minimum Fillet Weld Size

Base Metal Thickness	Minimum Size of Fillet Weld(mm)
T<6.4	3
6.4<T<12.7	5
12.7<T<20.0	6
T>20.0	8

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	each WEIGHT	total WEIGHT	NOTE
PROJECT: Sri Lanka CICT 12 STS Cranes			DESIGN STAGE:			SCALE: 1:40	
ITEM NAME: landside upper beam (陆侧上横梁)			DRAW NO: J526A010106			PROJ.	
ZPMC	DSGN		TRACE		APP.	Assembly	
	DRAW		CHCK		Q'TY/SET	33552kg	
	CHCK		VER.		SET/CRANE	1	

*The quantity and weight of this list is to one set
*此表为一套的数量和重量

设计：
校对：

1 set/crane, 33552 kg/set, 33552 kg/crane

PROJECT NAME or CODE: Sri Lanka CICT 12 STS Cranes													SUB-PART NAME: 陆侧上横梁		SUB DRAW NO: J526A010106	
序号 NO.	图号或标准 SUB-NO. or STDD	名称 NAME	规格或型号 SIZE & STYLE										材料 MTRL	每套数量 Q'TY/SET	单重 PIECE WGHT	总重 TOTAL WGHT
1			—	14	×	3350	×	8700					Q345B	2	2307.7	4615.3
2	FCM		—	30	×	1800	×	2274					Q345B	2	860.5	1721.0
3			—	12	×	2550	×	5000					Q345B	2	1201.1	2402.1
4			L100×63×8				—	6876					ST52-3	8	65.5	523.8
5			—	10	×	100	×	1294					Q345B	2	10.2	20.3
6			—6XΦ400										Q235	1	5.9	5.9
7			—	16	×	150	×	1150					Q345B	12	21.7	260.0
8			—	16	×	150	×	2400					Q345B	8	45.2	361.7
9			—	8	×	1250	×	450					Q345B	2	26.2	52.4
10	FCM		—	30	×	1224	×	1800					Q345B	2	415.4	830.8
11			—	14	×	3350	×	8700					Q345B	2	2514.7	5029.4
12			L100×63×8				—	2425					ST52-3	18	21.5	387.3
13			—	16	×	1330	×	3350					Q345B	2	559.6	1119.2
14			L100×63×8				—	694					ST52-3	16	4.4	70.8
15			L100×63×8				—	747					ST52-3	20	4.9	98.9
16	FCM		—	28	×	1330	×	6800					Q345B	1+1	1987.9	3975.8
17			L100×63×8				—	4283					ST52-3	16	39.9	637.9
18	FCM"Z"		—	28	×	1330	×	1750					Q345B	2	511.6	1023.2
19			—	28	×	1330	×	5400					Q345B	1	1578.6	1578.6
20	FCM		—	28	×	1250	×	5400					Q345B	1	1483.7	1483.7
21	FCM"Z"		—	28	×	1250	×	2300					Q345B	2	631.9	1263.9
22			—	28	×	1250	×	6200					Q345B	2	1340.6	2681.3
23	DTK-1101-180												电气仓库提供	1	3.0	3.0
24	DTK-1101-580												电气仓库提供	2	2.0	4.0
25			—	18	×	1250	×	2500					Q345B	2	311.0	622.0
26			—	16	×	150	×	2400					Q345B	4	45.2	180.9
27			—	18	×	822	×	1330					Q345B	2	150.0	300.0
28			—	16	×	1250	×	1050					Q345B	2	125.9	251.9
29	FCM		—	22	×	1250	×	1450					Q345B	2	186.9	373.9

*The quantity and weight of this list is to one set
*此表为一套的数量和重量

设计：
校对：

1 set/crane, 33552 kg/set, 33552 kg/crane


PROJECT NAME or CODE: Sri Lanka CICT 12 STS Cranes													SUB-PART NAME: 陆侧上横梁		SUB DRAW NO: J526A010106	
序号 NO.	图号或标准 SUB-NO. or STDD	名称 NAME	规格或型号 SIZE & STYLE										材料 MTRL	每套数量 Q'TY/SET	单重 PIECE WGHT	总重 TOTAL WGHT
30			—	10	×	1250	×	2500					Q345B	7	132.9	930.6
31			—	20	×	150	×	1150					Q345B	2	27.1	54.2
32	CMHP4		冲压人孔盖Man cover4										焊接件welded	1	20.0	20.0
33			—	28	×	Φ950	×	Φ570					Q345B	2	99.0	198.0
34	J526A01010601		直梯 Ladder										焊接件welded	1	48.0	48.0
35	DTZ-1101-580												电气仓库提供	2	3.0	6.0
36	DTZ-1101-180												电气仓库提供	1	2.0	2.0
37			—	24	×	800	×	830					Q345B	2	171.4	342.8
38			—	20	×	Φ300	×	Φ130					Q345B	4	18.0	72.0


REV	DATE	BY	DESCRIPTION
1	2012.05.31	yang	
2	2012.08.17	yang	


The Comparison Table of Welding Symbols


AWS	ZPMC
	
	
	
	
	
	
	
	
	
	
	
	
	


Minimum Fillet Weld Size	
Base Metal Thickness (mm)	Minimum Size of Fillet Weld(mm)
T≤6.4	3
6.4<T≤12.7	5
12.7<T≤19.0	6
19.0<T	8

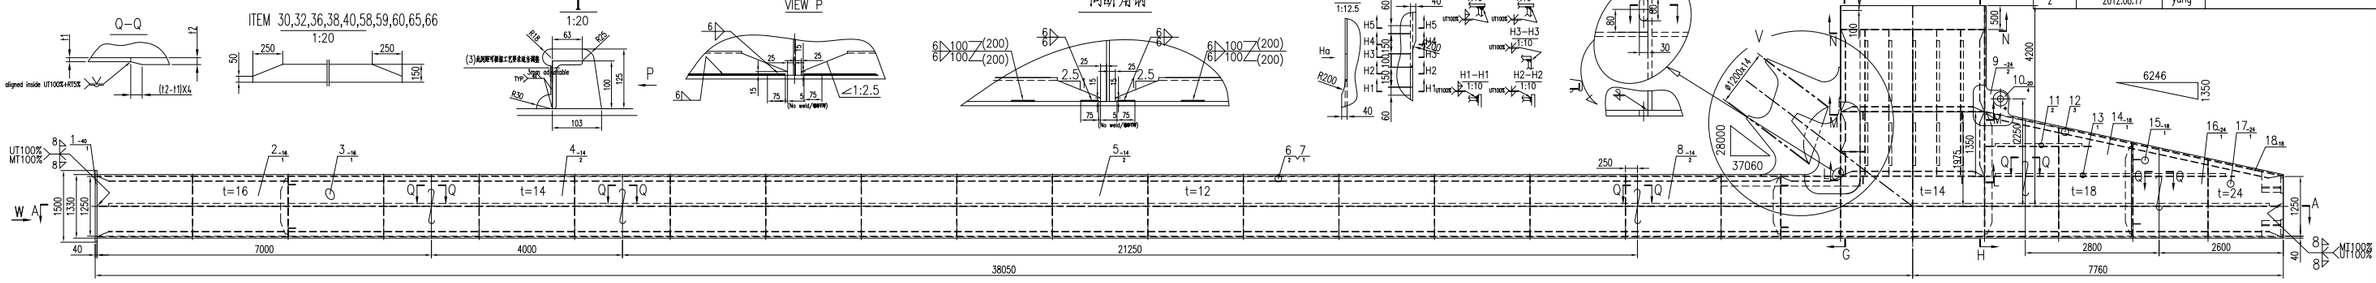


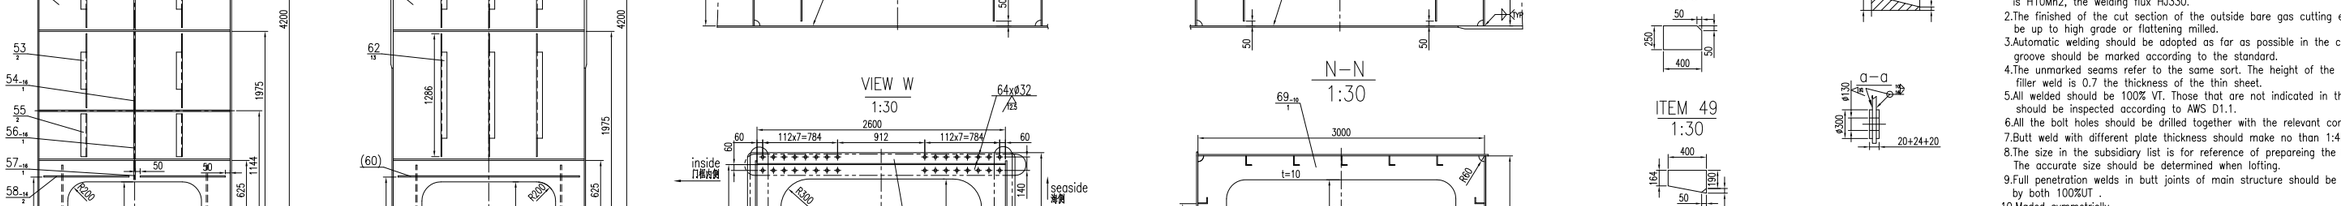


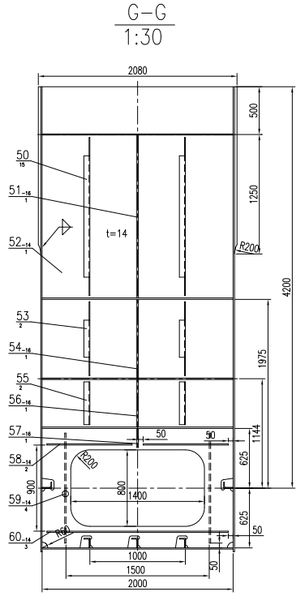


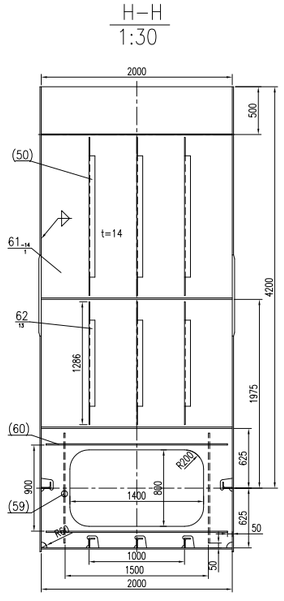


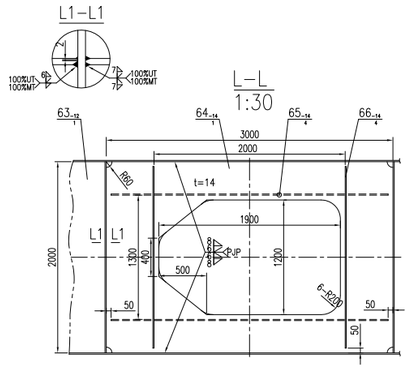


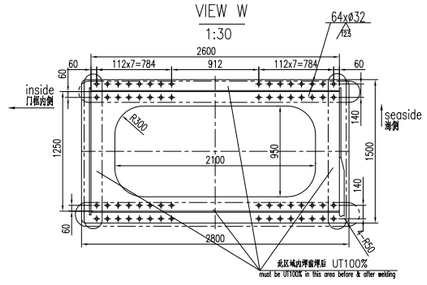

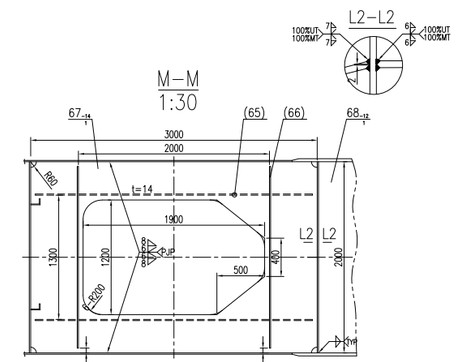







技术要求

1. 焊条采用E5015,自动焊丝采用H10Mn2,焊剂采用HJ330.
2. 所有外露的气割边缘切割截面光洁度均要达到仿级或磨平.
3. 腹板与翼板焊接尽量采用自动焊,手工补焊,坡口按标准标定.
4. 未注明焊缝按同类焊缝施焊,未注贴角焊缝高度取板连接的薄板厚度的0.7倍.
5. 所有焊缝100%目测检验,未注明的按AWS D1.1标准检验.
6. 所有的螺栓孔均应与相关件配钻.
7. 凡有厚薄板对接都应有不大于1:4的斜拔.
8. 明细表中尺寸仅供备料参考,准确尺寸放样定.
9. 主要结构件的对接焊缝必须作100%UT+5%RT.
10. 两件对称制作.


Technology Requirement

1.The welding rods should be E5015. The welding wire of automatic welding is H10Mn2, the welding flux HJ330.
2.The finished of the cut section of the outside bare gas cutting edge should be up to high grade or flattening milled.
3.Automatic welding should be adopted as far as possible in the case of the groove should be marked according to the standard.
4.The unmarked seams refer to the same sort. The height of the unmarked filler weld is 0.7 the thickness of the thin sheet.
5.All welded should be 100% VT. Those that are not indicated in the drawing should be inspected according to AWS D1.1.
6.All the bolt holes should be drilled together with the relevant components.
7.Butt weld with different plate thickness should make no than 1:4 chamfer.
8.The size in the subsidiary list is for reference of preparing the feed only. The accurate size should be determined when lofting.
9.Full penetration welds in butt joints of main structure should be inspected by both 100%UT .
10.Maded symmetrically.


NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	each / total WEIGHT	NOTE
PROJECT: Sri Lanka CICT 12 STS Cranes			DESIGN STAGE:		SCALE:	1:60
ITEM NAME: Landside leg 陆侧立柱			DRAW NO: J526A010107(1/2)			PROJ.
ZPMC	DSGN		TRACE		APP.	Assembly
	DRAW		CHCK		Q'TY/SET	47327KG
	CHCK		VER.		SET/CRANE	2

REV	DATE	BY	DESCRIPTION
1	2012.05.31	yang	
2	2012.08.17	yang	


V

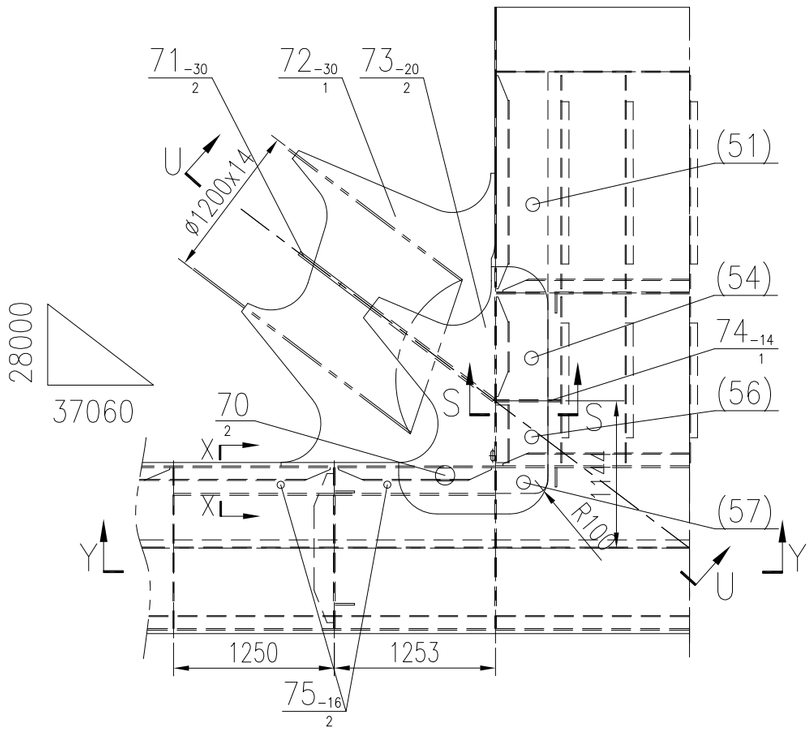


U–U
1:40

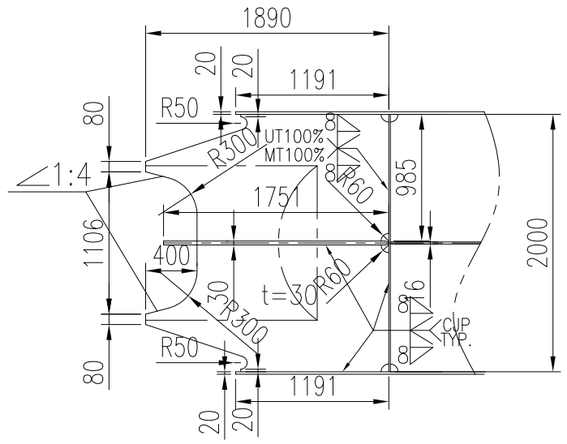


Y–Y
1:40

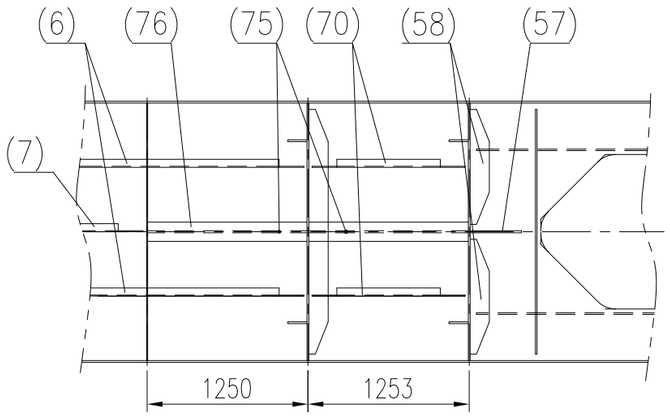


ITEM 72
1:40

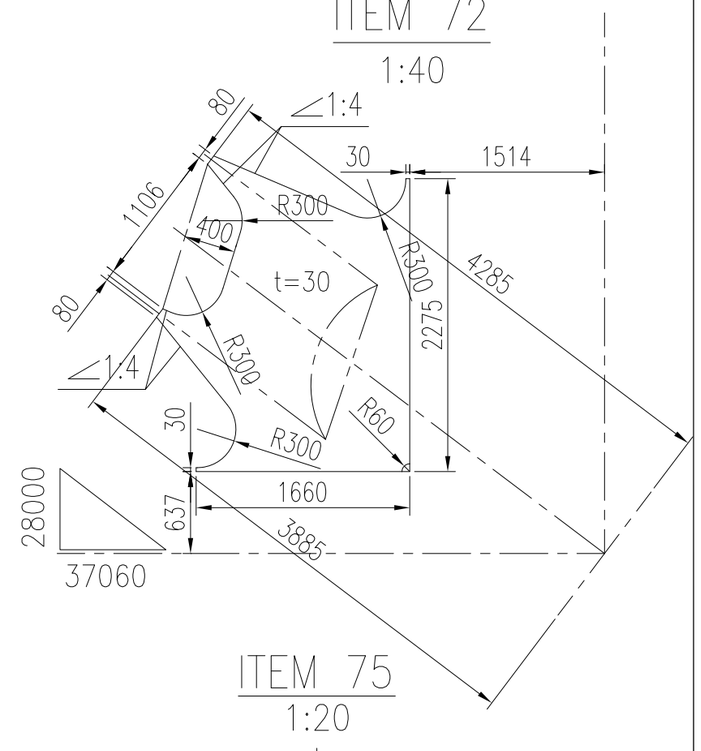


ITEM 75
1:20




ITEM 51,54,56
1:20

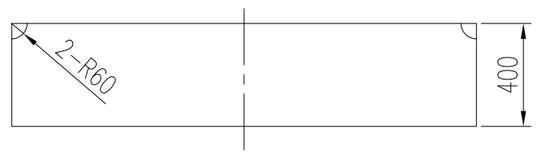


ITEM 73
1:40

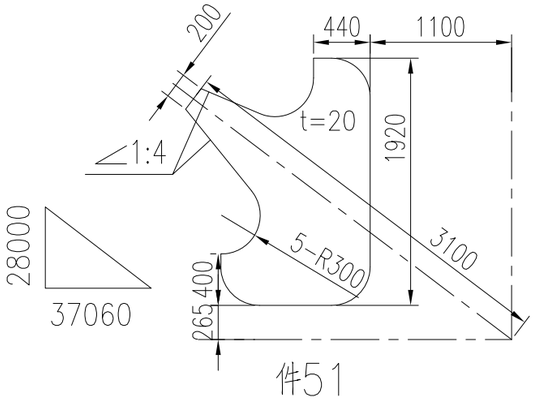


S–S

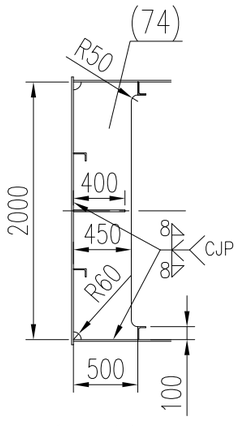


X–X



件51



ITEM 57
1:20



NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	each / total WEIGHT	NOTE
PROJECT: Sri Lanka CICT 12 STS Cranes			DESIGN STAGE:		SCALE: 1:40	
ITEM NAME: 陆侧立柱 Landside legs			DRAW NO:J526A010107(2/2)		PROJ.	

ZPMC								
	DSGN			TRACE			APP.	Assembly
	DRAW			CHCK			Q'TY/SET	47327KG
	CHCK			VER.			SET/CRANE	2

SUBSIDIARY LIST

* The quantity and weight of this list is to one set

2 set/crane, 47405 kg/set, 94810 kg/crane

SUB NO.	
PAGE:	1/4

PROJECT NAME or CODE:	SUB-PART NAME:	SUB DRAW NO:
Sri Lanka CICT 12 STS Cranes	陆侧立柱 landside Legs	J526A010107

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	Q'TY/SET	PIECE WGHT	TOTAL WGHT
1		-40X1500X2600	A709-50-2	1	680	680
2		-16x1330x7000	Q345B	1	1169	1169
3		-16x1330x7045	Q345B	1	1177	1177
4		-14x1330x4000	Q345B	2	585	1169
5		-12x1330x21250	Q345B	2	2662	5324
6		L100x63x8-35168	ST52-3	2	345	690
7		L100x63x8-33921	ST52-3	1	332.5	665
8		-14x4865x8120	Q345B	2	2399	4798
9		-24x830x850	Q345B	2	105	210
10		-20xø300/ø130	Q345B	4	9	36
11		L100x63x8-2200	ST52-3	2	19.3	38.6
12		L100x63x8-6265	ST52-3	3	59.4	118.8
13		L100x63x8-5200	ST52-3	1	48.9	48.9
14		-18x2498x2800	Q345B	1	868	868
15		-18x2498x2757	Q345B	1	855	855
16		-24x1893x2600	Q345B	1	789	789
17		-24x1893x2700	Q345B	1	820	820
18		-18x2600x4600	Q345B	1	1433	1433
19		L100x63x8-1445	ST52-3	2	11.8	23.6
20		L100x63x8-3075	ST52-3	1	27.9	27.9
21		-18x2600x4500	Q345B	1	1405	1405
22		L100x63x8-38556	ST52-3	1	378.3	378.3

ZPMC	DSGN		TECH		MTRL	
	CHCK		STDD		CHCK	

SUBSIDIARY LIST

* The quantity and weight of this list is to one set

2 set/crane, 47405 kg/set, 94810 kg/crane

SUB NO.	
PAGE:	2/4

PROJECT NAME or CODE:	SUB-PART NAME:	SUB DRAW NO:
Sri Lanka CICT 12 STS Cranes	陆侧立柱 landside Legs	J526A010107

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	Q'TY/SET	PIECE WGHT	TOTAL WGHT
23		L100x63x8-43770	ST52-3	4	349.3	1397
24		-12x2000x9600	Q345B	1	1808	1808
25		-10x2000x22670	Q345B	2	3559	7118
26		-12x2600x9000	Q345B	2	1808	3617
27		L100X63X8-3963	ST52-3	1	36.7	36.7
28		L100X63X8-1920	ST52-3	2	17	34
29		-10X1250X2300	Q345B	1	118	118
30		-14X150X1900	Q345B	3	30	90
31		-14X1250X2000	Q345B	1	155	155
32		-14X150X1150	Q345B	4	18.5	74
33		-8X1250X2000	Q345B	14	88.6	1240
34		-8X1250X2000	Q345B	1	88.6	88.6
35		-14X1250X2000	Q345B	1	155	155
36		-14X150X893	Q345B	2	14.7	29.4
37		-10X2000X2266	Q345B	1	158	158
38		-14x150x1900	Q345B	2	30	60
39		-14x1931x2000	Q345B	1	200	200
40		-14x150x1831	Q345B	2	29	58
41		-12X1590X2300	Q345B	1	137	137
42		L100X63X8-3039	ST52-3	1	27.6	27.6
43		L100X63X8-2100	ST52-3	1	18.3	18.3
44		-20X220X400	Q345B	2	13.5	27

ZPMC	DSGN		TECH		MTRL	
	CHCK		STDD		CHCK	

SUBSIDIARY LIST

* The quantity and weight of this list is to one set

2 set/crane, 47405 kg/set, 94810 kg/crane

SUB NO.

PAGE: 3/4

PROJECT NAME or CODE:	SUB-PART NAME:	SUB DRAW NO:
Sri Lanka CICT 12 STS Cranes	陆侧立柱 landside Legs	J526A010107

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	Q'TY/SET	PIECE WGHT	TOTAL WGHT
45		−20X90X400	Q345B	4	5.65	22.6
46		−20X400X317	Q345B	2	15	30
47		−20X250X400	Q345B	2	15.5	31
48		−50X240X320	A709−50−2	4	110	440
49		−20X240X400	Q345B	2	12.4	24.8
50		L100X63X8−1656	ST52−3	15	13.9	208.5
51		−16x400x1706	Q345B	1	85	85
52		−14x2080x4825	Q345B	1	942	942
53		L100X63X8−774	ST52−3	2	5.2	10.4
54		−16x400x824	Q345B	1	41	41
55		L100X63X8−448	ST52−3	2	2	4
56		−16x400x498	Q345B	1	25	25
57		−16x200x400	Q345B	1	10	10
58		−14x150x892	Q345B	2	14	28
59		−14x150x1150	Q345B	4	18.5	74
60		−14x150x1900	Q345B	3	30	90
61		−14x2000x4825	Q345B	1	940	940
62		L100X63X8−1286	ST52−3	13	10.2	133.2
63		−12x2000x4826	Q345B	1	909	909
64		−14x2000x3000	Q345B	1	433	433
65		−14x150x2900	Q345B	4	46	184
66		−14x150x1900	Q345B	4	30	120

ZPMC	DSGN		TECH		MTRL	
	CHCK		STDD		CHCK	

SUBSIDIARY LIST

* The quantity and weight of this list is to one set

2 set/crane, 47405 kg/set, 94810 kg/crane

SUB NO.

PAGE: 4/4

PROJECT NAME or CODE:	SUB-PART NAME:	SUB DRAW NO:
Sri Lanka CICT 12 STS Cranes	陆侧立柱 landside Legs	J526A010107

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	Q'TY/SET	PIECE WGHT	TOTAL WGHT
67		−14x2000x3000	Q345B	1	433	433
68		−12x2000x1790	Q345B	1	337	337
69		−10X2000X3000	Q345B	1	189	189
70		L100X63X8−1189	ST52−3	2	9.3	18.6
71		−30x985x1890	Q345B	2	351	703
72		−30x1967x2451	Q345B	1	763	763
73		−20x1569x1920	Q345B	2	283	566
74		−14x500x2000	Q345B	1	99	99
75		−16x200x1239	Q345B	2	31	62
76		−16x150x1239	Q345B	2	23	46
77						
78						
79						
80						

ZPMC	DSGN		TECH		MTRL	
	CHCK		STDD		CHCK	

REV	DATE	BY	DESCRIPTION
01	2012.10.20		
02	2012.10.27		

The Comparison Table of Welding Symbols

AWS	ZPMC

Minimum Fillet Weld Size

Base Metal Thickness T(mm)	Minimum Size of Fillet Weld(mm)
T<6.4	3
6.4<T≤12.7	5
12.7<T≤20	6
20<T	8

Landside

B-B 1:20 | C-C 1:20 | D-D 1:20 | E-E 1:20 | F-F 1:20 | A向 | H向 1:20 | G 1:20 | DETAIL V | P-P | Q-Q | II 1:7.5 | III 1:20 | 件 23,24 1:20 | 件 21 1:20 | 件 26,27 1:20 | 件 36,37 1:20 | 件 7,8 | IV | VIEW K | K1-K1 | K2-K2 | K3-K3 | K4-K4 | K5-K5 | K6-K6 | K7-K7

Technology Requirement

1. The welding rods should be E5015. Automatic weld wire should be F10Mn2, and the welding fulx HJ330.
2. The weld seam which is not marked should be welded according to the same kind of weld, the height of filler weld is 0.7 time to the thickness of thinner plate.
3. Automatic welding should be adopted as far as possible, followed by further manual repair welding. The groove should be made according to the standard.
4. The gas cut edge should be finished to the superior grade or milled flattening.
5. The weld that are not marked in the drawing should be made and inspected according to the AWS D1.1-2006.
6. All the bolt holes should be drilled together with the relevant components.
7. The size in the subsidiary list is for reference of prepareing the feed only. The accurate size should be determined when lofting.
8. The maximum slope of different thickness should make no than 1:2.5 chamfer.
9. Full penetration welds in butt joints of main structure should be inspected by both 100%UT.

技术要求

1. 焊条采用E5015，自动焊丝采用H10Mn2，焊剂采用HJ330；
2. 未注明焊缝按同类焊缝施焊，未注明贴角焊缝高度取被连接的薄板厚度的0.7倍；
3. 腹板与翼板焊接只量采用自动焊，手工补焊，坡口按AWS规定；
4. 所有外露的气割边缘，切割断面无由度均要达到仿就或磨平；
5. 图中未注明的均按AWS D1.1-2006规范制造与检验；
6. 所有的螺栓孔均应与相关件配钻；
7. 明细表中尺寸供参考，准确尺寸放样定；
8. 凡有薄板对接相应有不大于1：2.5的斜坡；
9. 主要结构件的对接焊缝必须做100%UT；

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	each	total	NOTE
					WEIGHT		

PROJECT: Sri Lanka CICT 12 STS Cranes
DESIGN STAGE: SCALE: 1:60
ITEM NAME: Sill Beam of L.S. 陆侧下横梁
DRAW NO: J526A010108 PROJ.

	DSGN			TRACE			APP.	Assembly
ZPMC	DRAW			CHCK			Q'TY/SET	36305KG
	CHCK			VER.			SET/CRANE	1

明 细 表
SUBSIDIARY LIST

*The quantity and weight of this list is to one set
*此表为一套的数量和重量
1 set/crane, 36305 kg/set, 36305kg/crane

设计：
日期：
校对：
日期：

PROJECT NAME or CODE: Sri Lanka CICT 12 STS Cranes			SUB-PART NAME: Landside sill beam 陆侧下横梁		SUB DRAW NO: J526A010108	
序号 NO.	图号或标准 SUB-NO. or STDD	名称与规格 NAME & SIZE	材料或型号 MTRL or STYLE	每套数量 Q'TY/SET	单重 PIECE WGHT	总重 TOTAL WGHT
1	FCM, Z	-40×1400×2810	A709-50-2	2	747.1	1494.2
2		-14×2600×5700	Q345B	4	1528.7	6114.8
3		-12×2600×11000	Q345B	2	2694.1	5388.2
4		-22×4450×1330	Q345B	2	1022.1	2044.2
5		-20×8000×1330	Q345B	2	1670.5	3341.0
6		-22×7240×1330	Q345B	2	1663	3326.0
7		-50×1975×2150	Q345B	4	1093.4	4373.8
8		-34×⌀720/⌀360	Q345B	8	84.4	675.2
9		L125×80×8-17098	St52-3	1	211.5	211.5
10		L100×63×8-17098	St52-3	6	166.4	998.4
11		L100×63×8-14358	St52-3	2	139.8	279.6
12		L125×80×8-20826	St52-3	1	257.7	257.7
13		L125×80×8-2500	St52-3	13	30.9	401.7
14		L125×80×8-2000	St52-3	4	24.7	98.8
15		L125×80×8-825	St52-3	1	10.2	10.2
16		-24×800×1330	Q345B	2	211.2	422.4
17	J526A01010401	Air Hole通气孔	Assembly	1	14.4	14.4
18	CMHP4(外协)	Man Hole Cover 人孔盖	Assembly	1	20	20.0
19		-20×1800×1330	Q345B	1	340.9	340.9
20		-20×1800×1330	Q345B	1	375.9	375.9
21		-20×⌀950/⌀570	Q345B	2	71.2	142.4
22		L125×80×8-650	St52-3	1	8	8.0
23		-50×1390×1170	A709-50-2	2	432.8	865.6
24		-15×460×440	Q345B	4	17.8	71.2
25		-24×1000×1250	Q345B	2	212.1	424.2
26		-14×2500×150	Q345B	12	35.8	429.6
27		-14×1150×150	Q345B	12	13.57	162.8
28		-20×1600×1250	Q345B	2	183.1	366.2
29		-16×2600×1250	Q345B	2	277.85	555.7


明 细 表
SUBSIDIARY LIST


*The quantity and weight of this list is to one set
*此表为一套的数量和重量
1 set/crane, 36305 kg/set, 36305kg/crane


设计：
日期：
校对：
日期：

PROJECT NAME or CODE: Sri Lanka CICT 12 STS Cranes			SUB-PART NAME: Landside sill beam 陆侧下横梁		SUB DRAW NO: J526A010108	
序号 NO.	图号或标准 SUB-NO. or STDD	名称与规格 NAME & SIZE	材料或型号 MTRL or STYLE	每套数量 Q'TY/SET	单重 PIECE WGHT	总重 TOTAL WGHT
30		-10×2600×1250	Q345B	4	128.24	513.0
31		-16×2600×1250	Q345B	2	277.85	555.7
32		-24×1250×700	Q345B	2	164.9	329.8
33		-20×100×500	Q345B	8	7.9	63.2
34		L125×80×8-688	St52-3	2	8.5	17.0
35	J526A01010402	下横梁横向绑扎抗剪板	Weld	2	676	1352
36		-24×700×830	Q345B	2	84.36	168.7
37		-20×⌀300/⌀130	Q345B	4	8.85	35.4
38	DTK-1101-180	重磅圈		4	10	40.0
39	DTZ-1103-180	法兰		4	4	16.0
40	DTK-1101-280	重磅圈		4		
41						
42						
43						
44						
45						
46						
47						
48						
49						
50						
51						
52						
53						
54						
55						
56						
57						

revision no.	sub. no.	description	date	signature
02			2012.03.25	yang

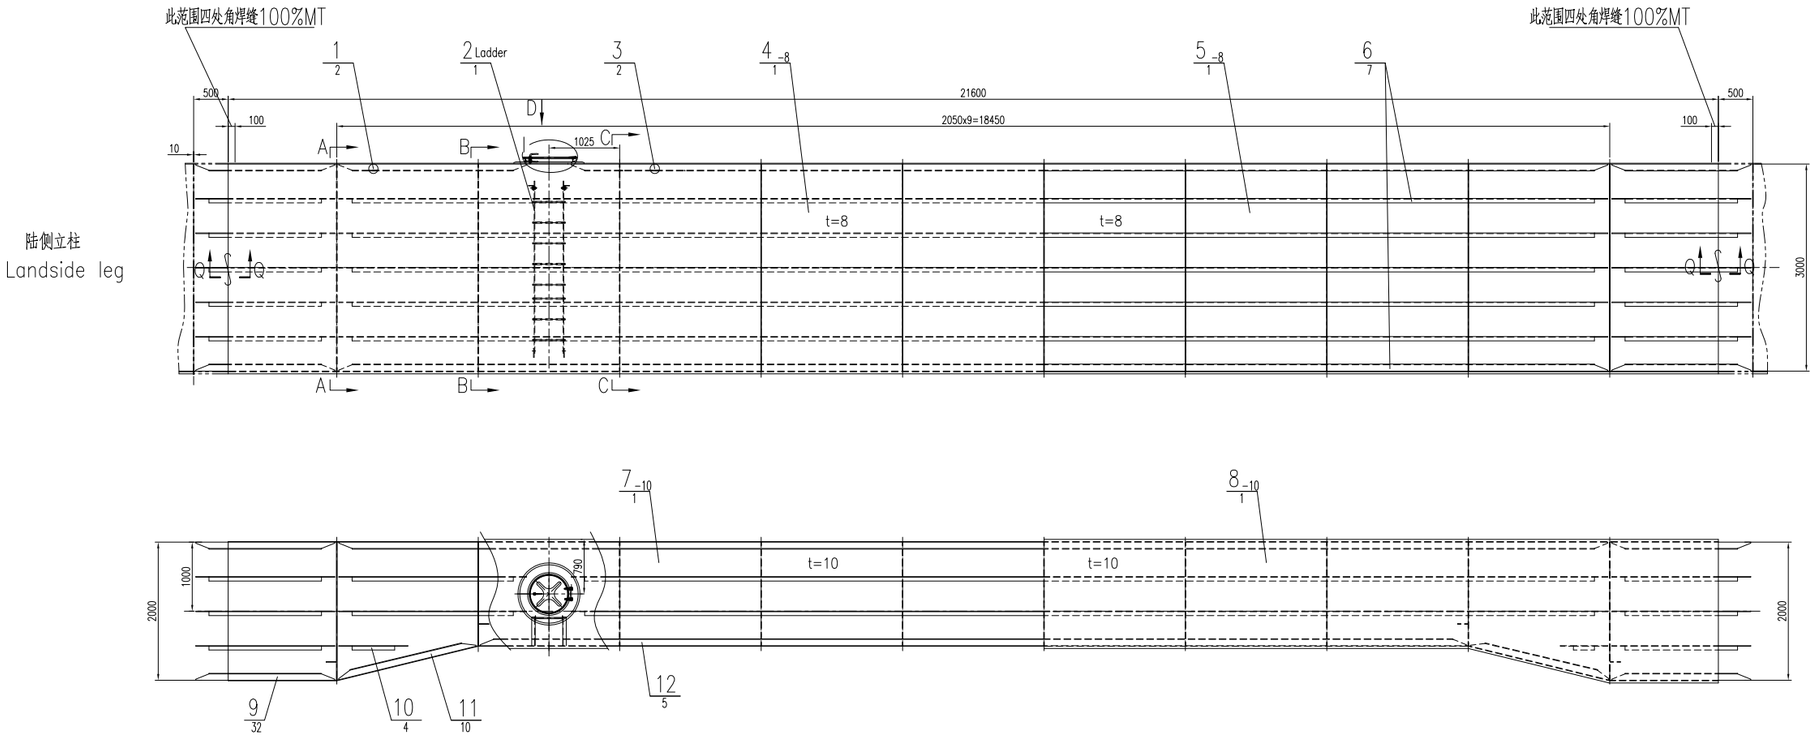






The Comparison Table of Welding Symbols


AWS	ZPMC


Minimum Fillet Weld Size	
Base Metal Thickness T(mm)	Minimum Size of Fillet Weld(mm)
T≤6.4	3
6.4<T≤12.7	5
12.7<T≤20.0	6
20.0<T	8


View D
去件17,18(Remove item17,18)




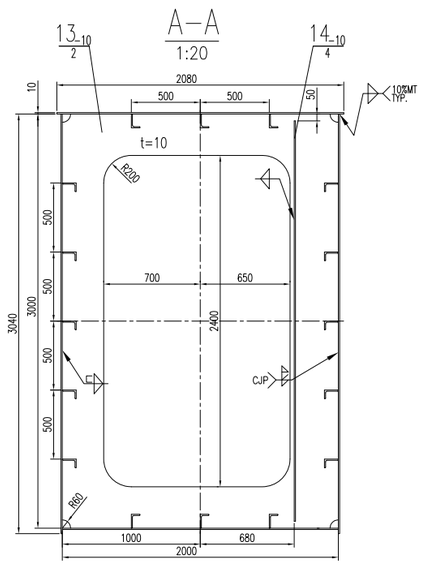

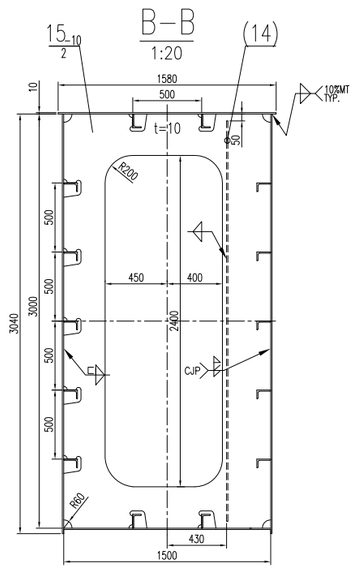

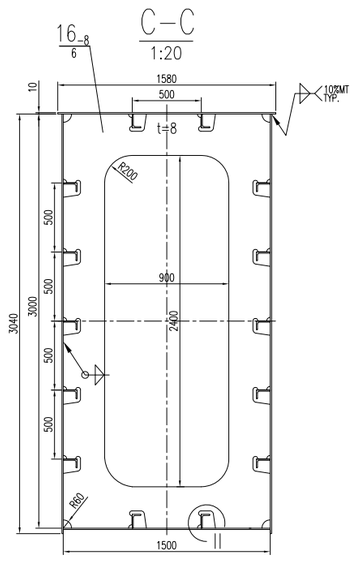








技 术 要 求

1. 焊条采用E5015;自动焊丝采用H10Mn2,焊剂采用HJ330.
2. 所有外露的气割边缘切割截面光洁度均要达到优级或磨平.
3. 腹板与翼板焊接尽量采用自动焊,手工补焊,坡口按标准标定.
4. 未注明焊缝按同类焊缝施焊.
5. 所有焊缝100%目测检验;未注明的按AWS D1.1标准检验.
6. 所有的螺栓孔均应与相关件配钻.
7. 明细表中尺寸仅供备料参考,准确尺寸放样定,凡有厚薄板对接都应有不大于1:4的斜坡.
8. 对称制作.





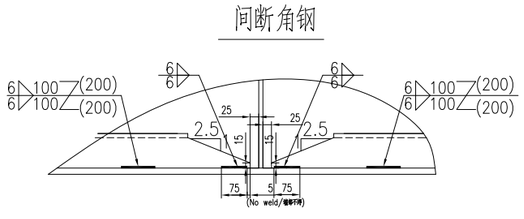

Technology Requirement

1.The welding rods should be E5015. The welding wire of automatic welding is H10Mn2, the welding flux HJ330.
2.The finished of the cut section of the outside bare gas cutting edge should be up to high grade or flattening milled.
3.Automatic welding should be adopted as far as possible in the case of the belly plate and the wing plate, followed by further manual repair welding. The groove should be marked according to the standard.
4.The unmarked seams refer to the same sort.
5.All welded should be 100% VT. Those that are not indicated in the drawing should be inspected according to AWS D1.1
6.All the bolt holes should be drilled together with the relevant components.
7.The size in the subsidiary list is for reference of prepareing the feed only. The accurate size should be determined when lofting.
Butt weld with different plate thickness should make no than 1:4 chamfer.
8.Maded symmetricly.


NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	each WEIGHT	total WEIGHT	NOTE
18	CMHP4	冲压人孔(外盖) Cover	组件 Component	1	20	20	
17		-20X⌀570/⌀950	A709-50-2	1	70	70	
16		-8X1500X3000	A709-50-2	6	175	1050	
15		-10X1500X3000	A709-50-2	2	219	438	
14		-10X150X2900	A709-50-2	4	33	132	
13		-10X1800X3000	A709-50-2	2	242	484	
12		L100X63X8-14290	ST52-3	5	138.7	693	
11		L100X63X8-2050	ST52-3	10	17.8	178	
10		L100X63X8-1000	ST52-3	4	7.4	29.6	
9		L100X63X8-2015	ST52-3	32	17.4	558	
8		-10X1880X21600	A709-50-2	1	2785	2785	
7		-10X1800X21600	A709-50-2	1	2649	2649	
6		L100X63X8-18390	ST52-3	7	179	1254	
5		-8X3040X21600	A709-50-2	1	4123	4123	
4		-8X3040X21720	A709-50-2	1	4146	4146	
3		L100X63X8-15020	ST52-3	2	146	292	
2	J526A01010901	横梁直梯 Ladder	焊接件	1	39	39	
1		L100X63X8-4795	ST52-3	2	45	90	

PROJECT: Sri Lanka CICT 12 STS Cranes DESIGN STAGE: SCALE: 1:40

ITEM NAME: Horizontal Beam 门框联系横梁

DRAW NO: J526A01010109

ZPMC								
	DSGN			TRACE			APP.	Assembly
	DRAW			CHCK			Q'TY/SET	19030kg
	CHCK			VER.			SET/CRANE	2 set

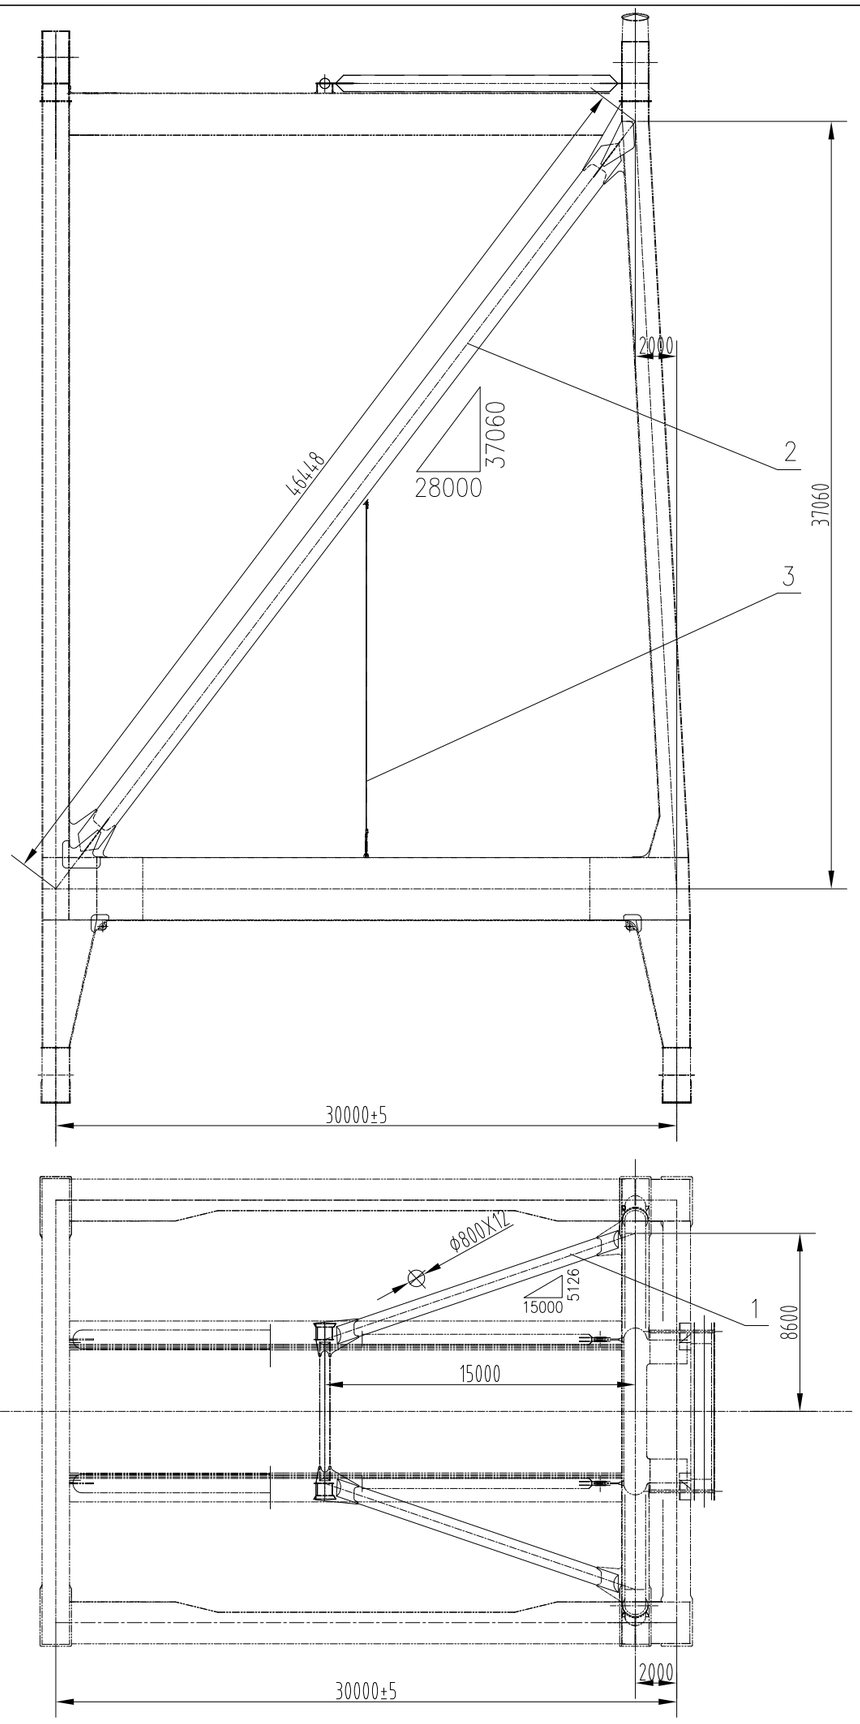

REV	DATE	BY	DESCRIPTION
1	2012.05.30	hong	
2	2012.08.17	hong	

技 术 要 求

1. 焊条采用E5015;
2. 所有外露的气割边缘切割截面光洁度均要达到优级或磨平;
3. 腹板与翼板焊接尽量采用自动焊,手工补焊,坡口近标准标定;
4. 未注明焊缝按同类焊缝施焊,未注贴角焊缝高度取被连接薄板厚度的0.7倍:
5. 图中未注明的均按AWS D1.1标准进行制造及检验;

Technology Requirement

2.The finished of the cut section of the outside bare gas cutting edge should be up to high grade or

3.Automatic welding should be adopted as far as possible in the case of the belly plate and the wing plate, followed by further manual repair welding. The groove should be marked according to the standard.

4.The weld seam which is not indicated should be welded according to the same kind of weld seam.where fillet which is not show,use minimum weld size per AWS.

5.Those that are not indicated in the drawing should be made and inspected according to the AWS standard or the Factory General Technology Requirement on Weld Structure.

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	WEIGHT each	WEIGHT total	NOTE
3	J526A01011003	Rope for windbreak 防风撑拉索	weldment	2	41.6	83.2	
2	J526A01011002	Fixed tie link 门框斜撑	weldment	2	17895	35790	
1	J526A01011001	top upper Links 后大梁顶面斜撑	weldment	2	3759	7518	


PROJECT: Sri Lanka CICT 12 STS Cranes　　DESIGN STAGE:　　SCALE: 1:200


ITEM NAME: Frame brace system 门框撑杆系统　　DRAW NO: J526A010110　　PROJ.


ZPMC


DSGN		TRACE		APP.	
DRAW		CHCK		Q'TY/SET	43391.2Kg
CHCK		VER.		SET/CRANE	1


REV	DATE	BY	DESCRIPTION
1	2012.05.30	hong	
2	2012.08.17	hong	

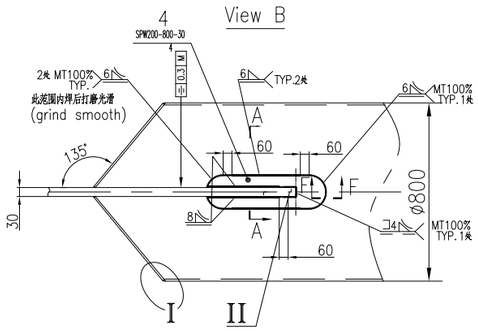










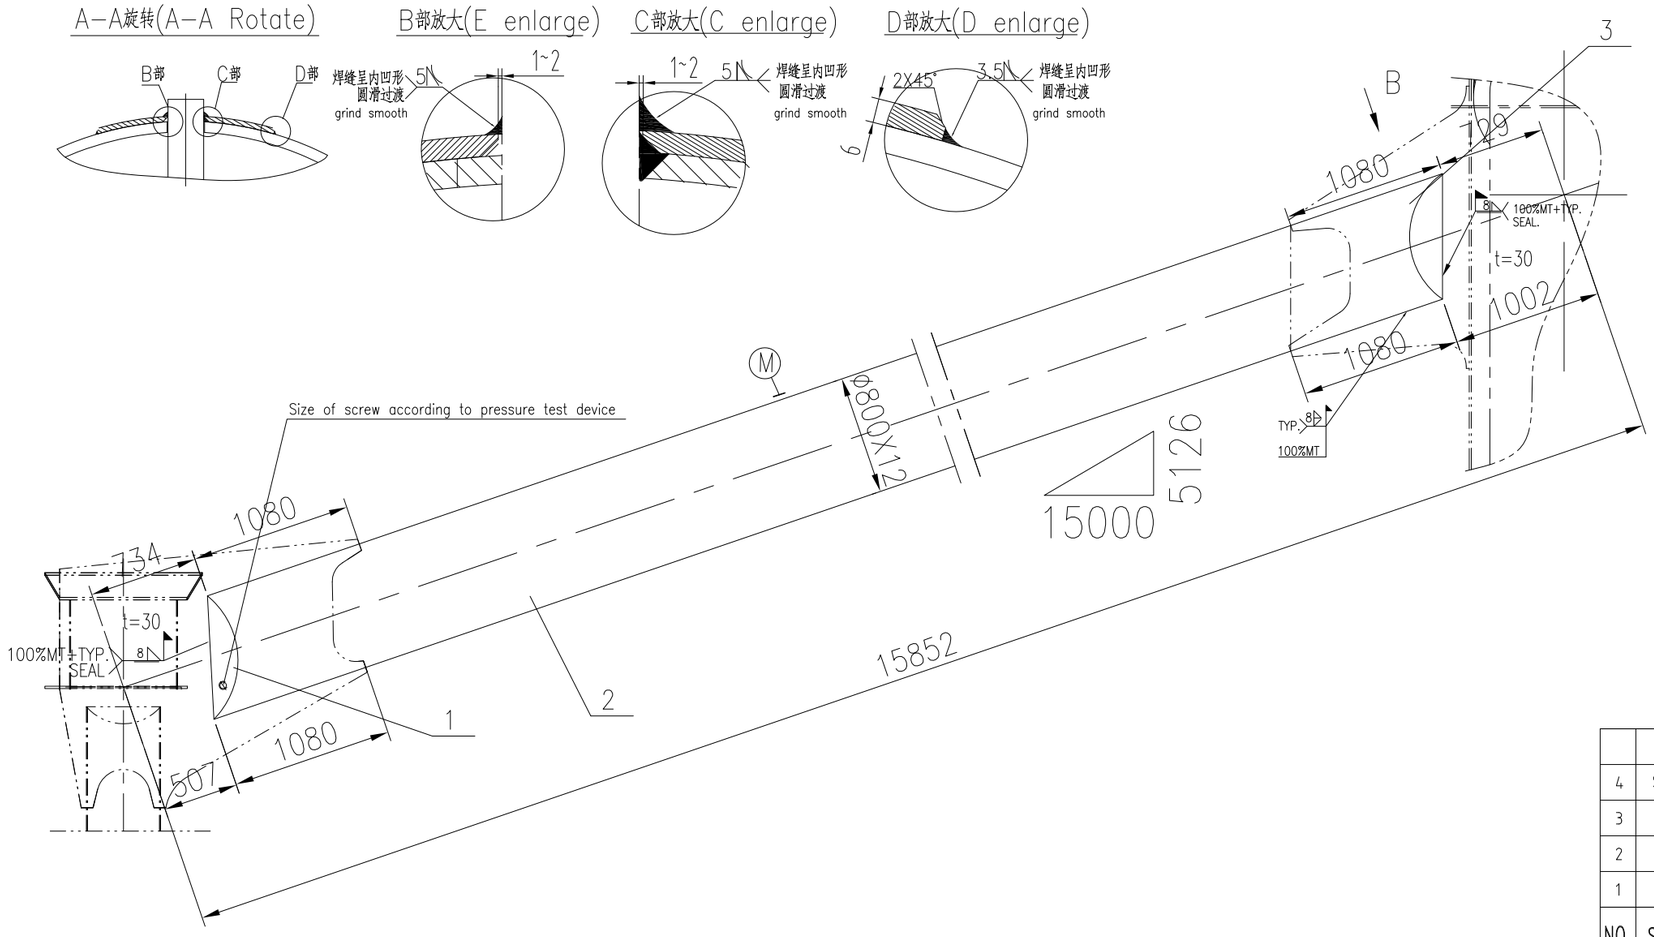

技 术 要 求

1. 焊条采用E5015;
2. 所有外露的气割边缘切割截面光洁度均要达到优级或磨平;
3. 未注明焊缝按同类焊缝施焊,未注贴角焊缝高度取0.7倍的被连接的薄板厚度;
4. 图中未注明的均按AWS D1.1标准进行制造及检验;
5. 所有焊缝100%目测检验,验收标准:AWS D1.1;
6. 明细表中尺寸仅供备料参考,准确尺寸放样定;
7. 结构件待拼装后做气密性试验.

Technology Requirement

1.The welding rods should be E5015.
2.The finish of flame cuts to be smooth otherwise to be milled.
3.The welds not specified on the drawing to be welded and prepared as per AWS.
4.Where not indicated,the checking and testing of the welds to be as per AWS or factory general technology requirements for welded structures.
5.All welds to be 100% VT-(Criteria -AWS D1.1).
6.Dimensions shown in the bill of material are for reference only, the exact dimensions should be determined when lofting.
7. The sealed structure shall be made air tight test.

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	each	total	NOTE
					WEIGHT		
4	SPW200-800-30	seal plate 封板	Q345B	4	45	180	
3		-10X532x845	Q345B	2	30	60	
2		ø800X12-14616	Q345B	1	3460	3460	
1		-10X532x832	Q345B	2	29.5	59	


PROJECT: Sri Lanka CICT 12 STS Cranes | DESIGN STAGE: | SCALE: 1:30

ITEM NAME: top upper Links 后大梁顶面斜撑 | DRAW NO: J526A01011001 | PROJ.


ZPMC								
	DSGN			TRACE			APP.	Assembly
	DRAW			CHCK			Q'TY/SET	3759 Kg
	CHCK			VER.			SET/CRANE	2 Set


REV	DATE	BY	DESCRIPTION
1	2012.05.30	hong	
2	2012.08.17	hong	


Minimum Fillet Weld Size	
Base Metal Thickness T(mm)	Minimum Size of Fillet Weld(mm)
T≤6.4	3
6.4<T≤12.7	5
12.7<T≤19.0	6
19.0<T	8

The Comparison Table of Welding Symbols	
AWS	ZPMC
	

VIEW A

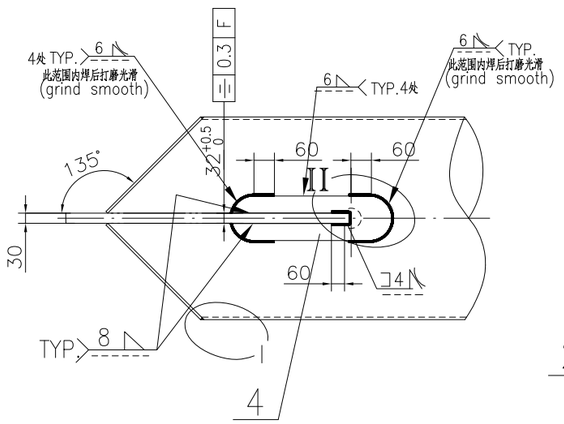


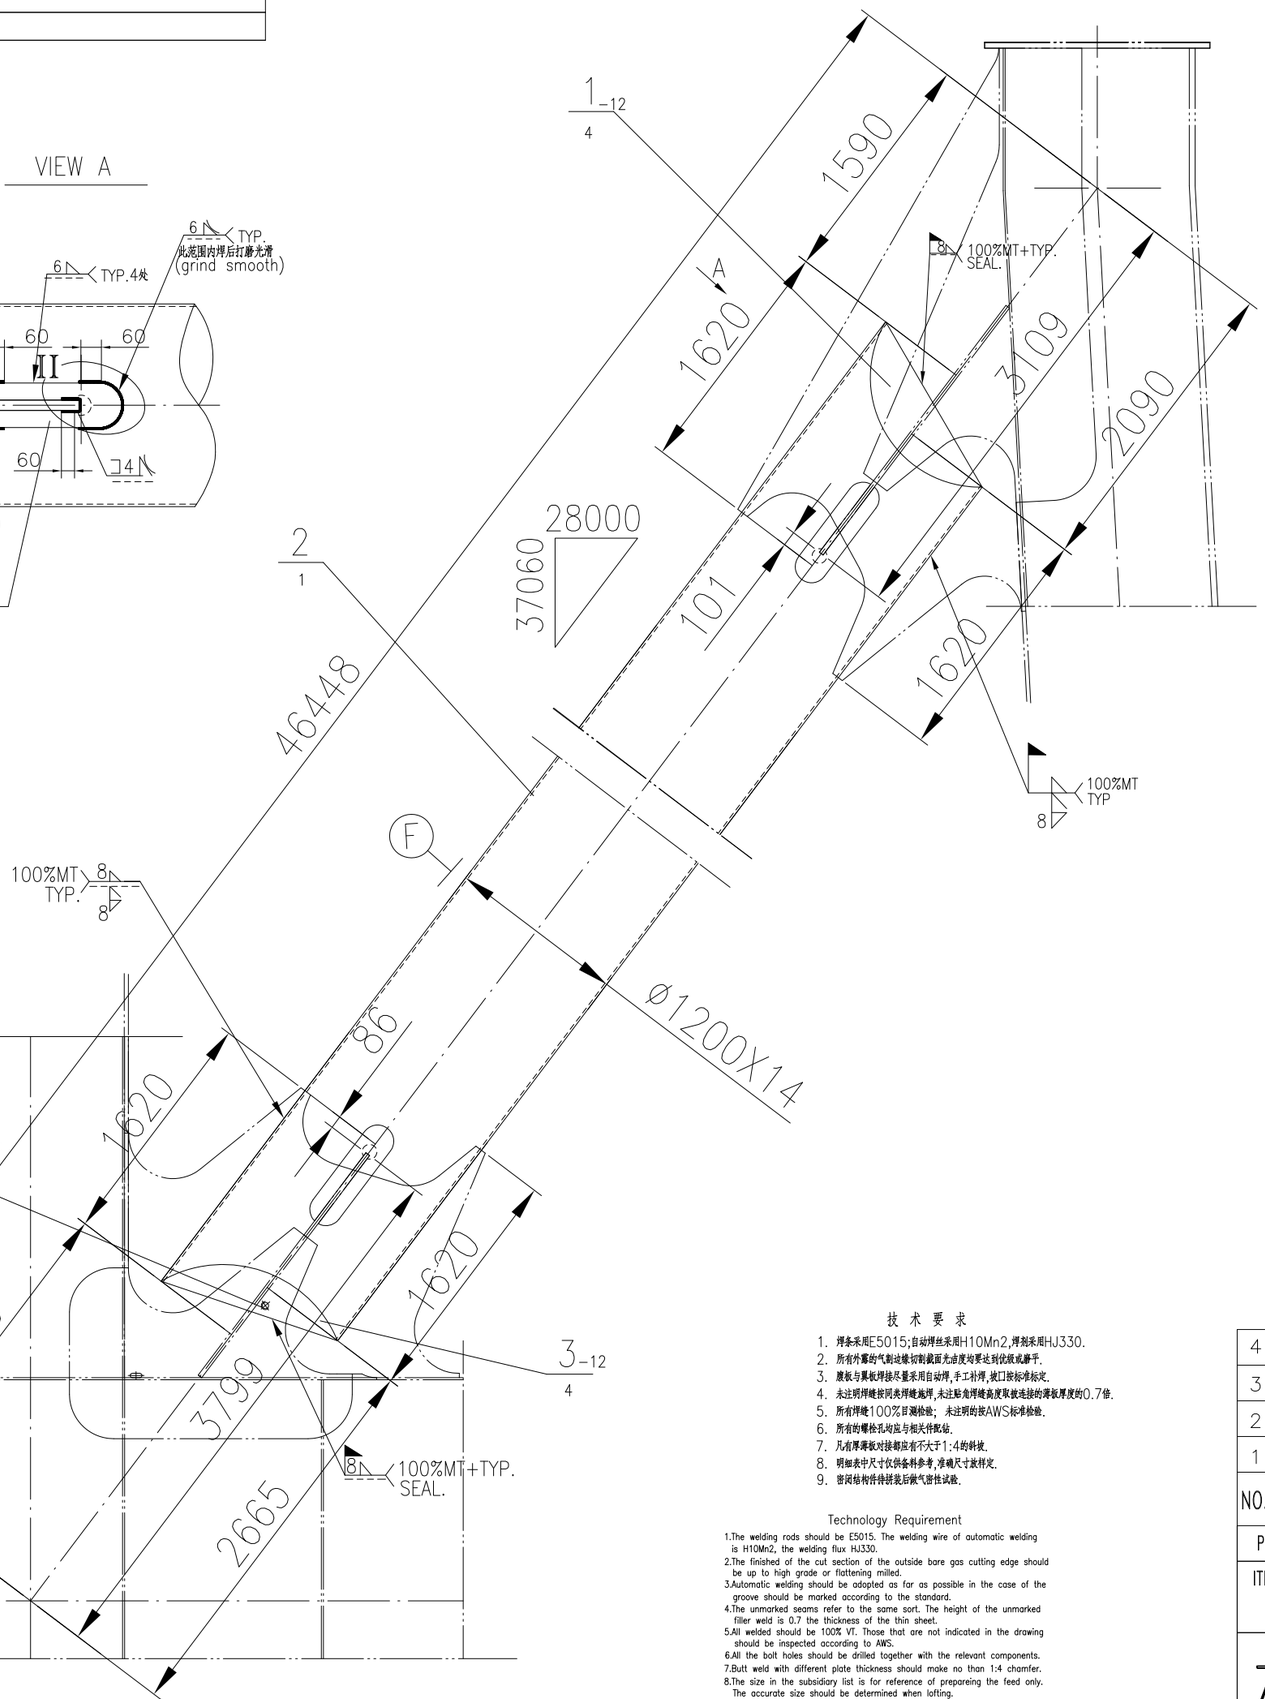



II(去件4,item 4 removed)

B-B

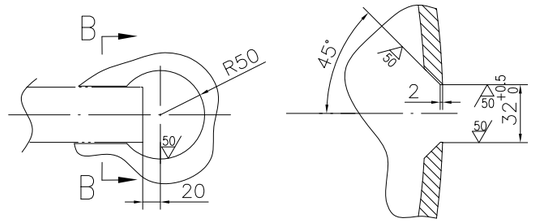

技 术 要 求

1. 焊条采用E5015;自动焊丝采用H10Mn2,焊剂采用HJ330.
2. 所有外露的气割边缘切割截面光洁度均要达到优级或磨平.
3. 腹板与翼板焊接尽量采用自动焊,手工补焊,坡口按标准标定.
4. 未注明焊缝按同类焊缝施焊,未注贴角焊缝高度取被连接的薄板厚度的0.7倍.
5. 所有焊缝100%目测检验; 未注明的按AWS标准检验.
6. 所有的螺栓孔均应与相关件配钻.
7. 凡省厚薄板对接都应有不大于1:4的斜坡.
8. 明细表中尺寸仅供备料参考,准确尺寸放样定.
9. 密闭结构待供货装后做气密性试验.


Technology Requirement


1.The welding rods should be E5015. The welding wire of automatic welding is H10Mn2, the welding flux HJ330.
2.The finished of the cut section of the outside bare gas cutting edge should be up to high grade or flattening milled.
3.Automatic welding should be adopted as far as possible in the case of the groove should be marked according to the standard.
4.The unmarked seams refer to the same sort. The height of the unmarked filler weld is 0.7 the thickness of the thin sheet.
5.All welded should be 100% VT. Those that are not indicated in the drawing should be inspected according to AWS.
6.All the bolt holes should be drilled together with the relevant components.
7.Butt weld with different plate thickness should make no than 1:4 chamfer.
8.The size in the subsidiary list is for reference of prepareing the feed only. The accurate size should be determined when lofting.
9.The sealed structure shall be made air tight test.


NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	each WEIGHT	total WEIGHT	NOTE
4		SPW220a-1200-30	Q345B	8	16.6	132.8	
3		-12x813x584	Q345B	4	22	44	
2		ø1200x14-42593	Q345B	1	17646	17646	
1		-12x813x320	Q345B	4	18	72	


PROJECT: Sri Lanka CICT 12 STS Cranes			DESIGN STAGE:		SCALE:	1:20
ITEM NAME: Fixed Tie Links 门框斜撑			DRAW NO: J526A01011002		PROJ.	
ZPMC	DSGN		TRACE		APP.	Assembly
	DRAW		CHCK		Q'TY/SET	17894.8 Kg
	CHCK		VER.		SET/CRANE	2


REV	DATE	BY	DESCRIPTION
1	2012.05.30	hong	
2	2012.08.17	hong	

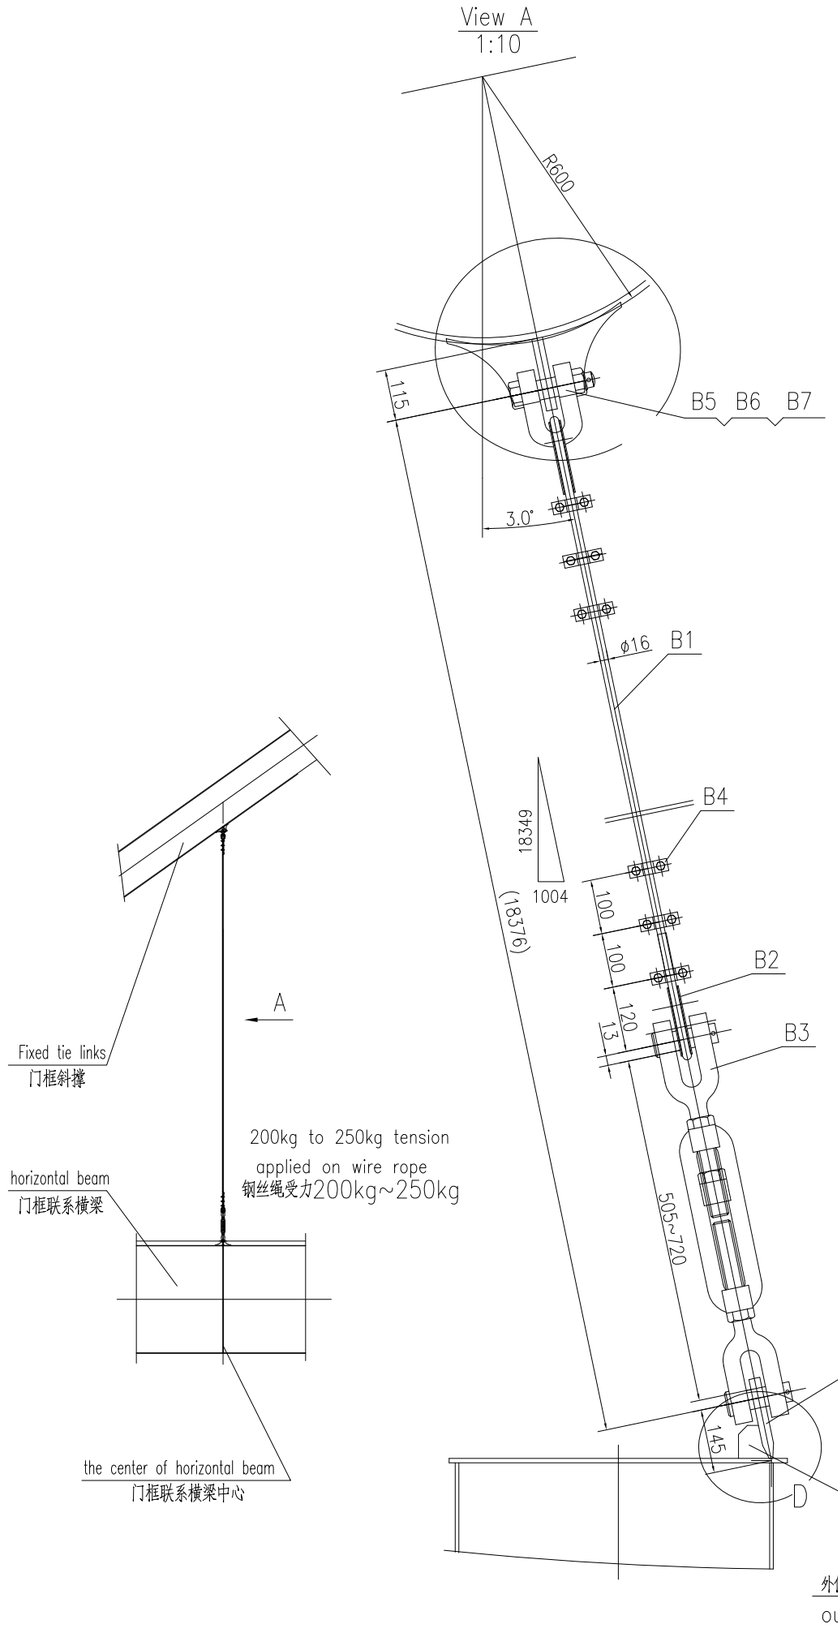


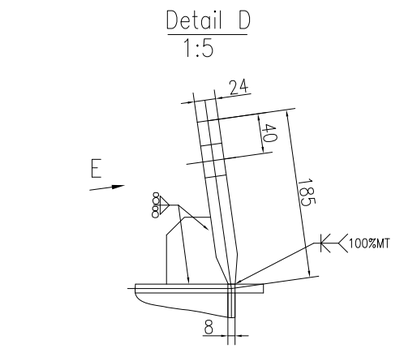

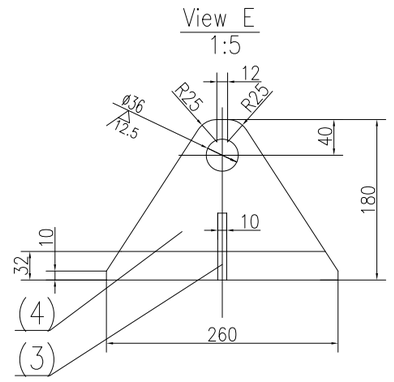

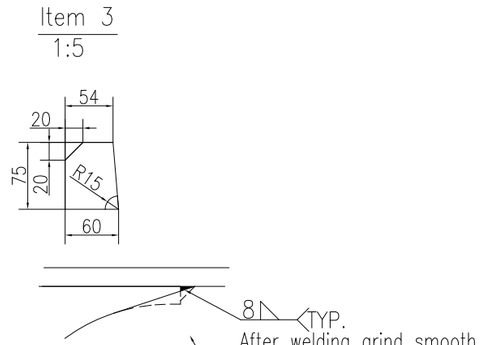

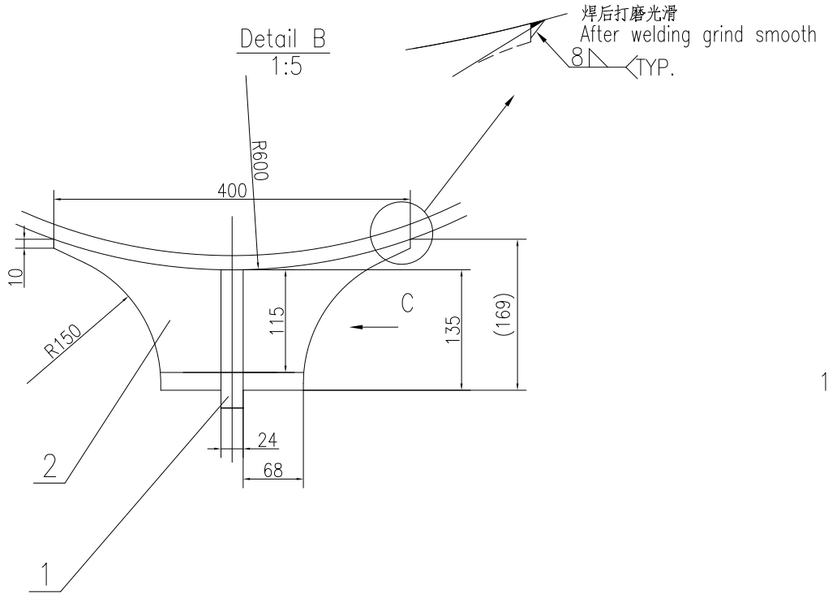

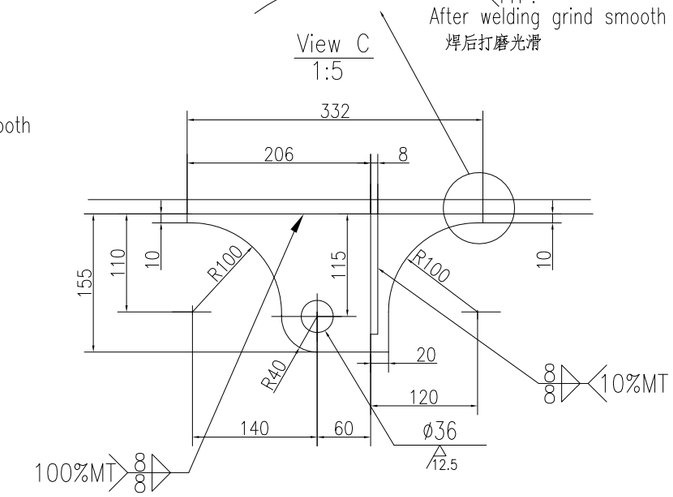

注:

1.安装时先将件B3处于最长状态,待钢丝绳固定好后,收紧B3使钢丝绳张紧.钢丝绳预拉力为~200Kg.
2.钢丝绳的破断拉力为16吨,螺旋扣的许用拉力为3.5吨,破断拉力为12吨.

Note:

1.when assembling, B3 is in the longest condition. After clamping rope, rope is tensioned through adjusting B3. The pretightening force for wire rope is ~200Kg.
2.Breaking load of the wire rope is 16t.

Allowable force of the screw rig is 3.5t.
Breaking load of the screw rig is 12t.

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	WEIGHT each	WEIGHT total	NOTE
B7	GB/T6178-1986	螺母 Nut M30		1	0.256	0.256	热浸锌Hot Galv.
B6	GB/T91-2000	销 Pin 4x45		1	0.01	0.01	不锈钢Sta.Stl.
B5	JB8112-1999	卸扣 M-DX4		1	2	2	热浸锌Hot Galv.
B4	GB/T5976-1986	绳夹 Rope clip 16KTH		6	0.4	2.4	热浸锌Hot Galv.
B3	CB/T3818-1999	螺旋扣 Screw rig KUUD24-M		1	5.8	5.8	热浸锌Hot Galv.
B2	GB/T33-1999	套环 WT16		2	0.5	1	热浸锌Hot Galv.
B1	GB1102-74	钢丝绳 Wire rope 6W(19)-16-1700-II		~18m	18	18	热浸锌Hot Galv.
4		-24x180x260		1	5.3	5.3	Q345B
3		-10x60x75		1	0.3	0.3	Q345B
2		-8x188x169		2	1.2	2.4	Q345B
1		-24x155x332		1	5.0	5.0	Q345B

PROJECT: Sri Lanka CICT 12 STS Cranes				DESIGN STAGE:			SCALE:	1:100	
ITEM NAME: Rope for windbreak 抗风振拉索				DRAW NO: J526A01011003			PROJ.		
ZPMC	DSGN			TRACE			APP.	Assembly	
	DRAW			CHCK			Q'TY/SET	41.6kg	
	CHCK			VER.			SET/CRANE	2	

REV	DATE	BY	DESCRIPTION
1	2012.05.30	hong	
2	2012.08.17	hong	

4

VIEW B

2处MT100% TYP. 此范围内焊后打磨光滑 (grind smooth)

6 TYP. 2处

60 60 135° 12 60

IN

MT100% TYP. 1处

4N

60

62+0.5 0

2处TYP. 8

6 2处TYP.MT100%

此范围内焊后打磨光滑 (grind smooth)

0.3 F

E-E

62+0.5 0

2 25 45°-5°

25 45°-5°

14

Detail I

TYP. SEAL 5 14 12 Ø120

30 E

25

E

Detail III

(去件4 item 4 removed)

1

5

100%MT TYP. 8

B

1100

1500

8 100%MT+TYP. SEAL.

1800

2

(FCM)

39187

1500

6

F

Ø1000X14

P

6 10%MT TYP.

27375 28040

D-D

Detail II

(去件3 item 3 removed)

D 20 D

Ø100

25

52+0.5 0

2 25 45°-5°

12 45°-5°

14

View P

6 焊后打磨 (grind smooth)

7

Minimum Fillet Weld Size

Base Metal Thickness T(mm)	Minimum Size of Fillet Weld(mm)
T≤6.4	3
6.4<T≤12.7	5
12.7<T≤19.0	6
19.0<T	8

技 术 要 求

1. 焊条采用E5015;自动焊丝采用H10Mn2,焊剂采用HJ330.
2. 所有外露的气割边缘切割截面光洁度均要达到优级或磨平.
3. 腹板与翼板焊接尽量采用自动焊,手工补焊,坡口按标准标定.
4. 未注明焊缝按同类焊缝施焊,未注贴角焊缝高度取被连接的薄板厚度的0.7倍.
5. 所有焊缝100%目测检验; 未注明的按AWS标准检验.
6. 所有的螺栓孔均应与相关件配钻.
7. 凡有厚薄板对接都应有不大于1:4的斜拔.
8. 明细表中尺寸仅供备料参考,准确尺寸放样定.
9. 密闭结构件待拼装后做气密性试验.

Technology Requirement

1.The welding rods should be E5015. The welding wire of automatic welding is H10Mn2, the welding flux HJ330.
2.The finished of the cut section of the outside bare gas cutting edge should be up to high grade or flattening milled.
3.Automatic welding should be adopted as far as possible in the case of the groove should be marked according to the standard.
4.The unmarked seams refer to the same sort. The height of the unmarked filler weld is 0.7 the thickness of the thin sheet.
5.All welded should be 100% VT. Those that are not indicated in the drawing should be inspected according to AWS.
6.All the bolt holes should be drilled together with the relevant components.
7.Butt weld with different plate thickness should make no than 1:4 chamfer.
8.The size in the subsidiary list is for reference of prepareing the feed only. The accurate size should be determined when lofting.
9.The sealed structure shall be made air tight test.

The Comparison Table of Welding Symbols

AWS	ZPMC

1

950 950 1500 19594

A

螺孔尺寸根据气密试验装置确定

Size of screw according to pressure test device

VIEW A

100%MT 2处TYP. 6 此范围内焊后打磨光滑 (grind smooth)

0.3 F

6 TYP. 2处

6 TYP.1处 MT100% 此范围内焊后打磨光滑 (grind smooth)

135° 12 52+0.5 0 60 60

II

50 TYP. 8

60 4N 100%MT

3

ITEM 6

R40 Ø36 R100 100

R25 350

IV

焊后打磨光滑

After welding grind smooth

8 TYP.

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	each	total	NOTE
					WEIGHT		

PROJECT: Sri Lanka CICT 12 STS Cranes

DESIGN STAGE: SCALE: 1:20

ITEM NAME: seaside A frame brace 海侧梯形架拉杆

DRAW NO: J526A010111 PROJ.

ZPMC

DSGN			TRACE			APP.	Welded
DRAW			CHCK			Q'TY/SET	25943kg
CHCK			VER.			TOTAL WEIGHT	1

明 细 表
SUBSIDIARY LIST


*The quantity and weight of this list is to one set
*此表为一套的数量和重量

设计： 日期：

校对： 日期：

1 set/crane, 25943 kg/set, 25943 kg/crane

PROJECT NAME or CODE: SliLanka CICT 12 STS Cranes			SUB-PART NAME: 海侧梯形架拉杆		SUB DRAW NO: J526A010111	
序号 NO.	图号或标准 SUB-NO.or STDD	名称与规格 NAME & SIZE	材料或型号 MTRL or STYLE	每套数量 Q'TY/SET	单重 PIECE WGHT	总重 TOTAL WGHT
1		— 12 × 657 × 1000	Q345B	4	65.0	260.0
2	FCM	Φ1000X14 — 37137	Q345B	2	12642.0	25284.0
3		SPW220a-1000-50	Q345B	4	16.6	66.4
4		SPW250a-1000-60	Q345B	4	23.6	94.4
5		— 12 × 657 × 1221	Q345B	4	52.0	208.0
6		— 20 × 140 × 350	Q345B	2	6.0	12.0
7	J526A01011101	海侧梯形架拉索	部件|Ass.	1	18.0	18.0

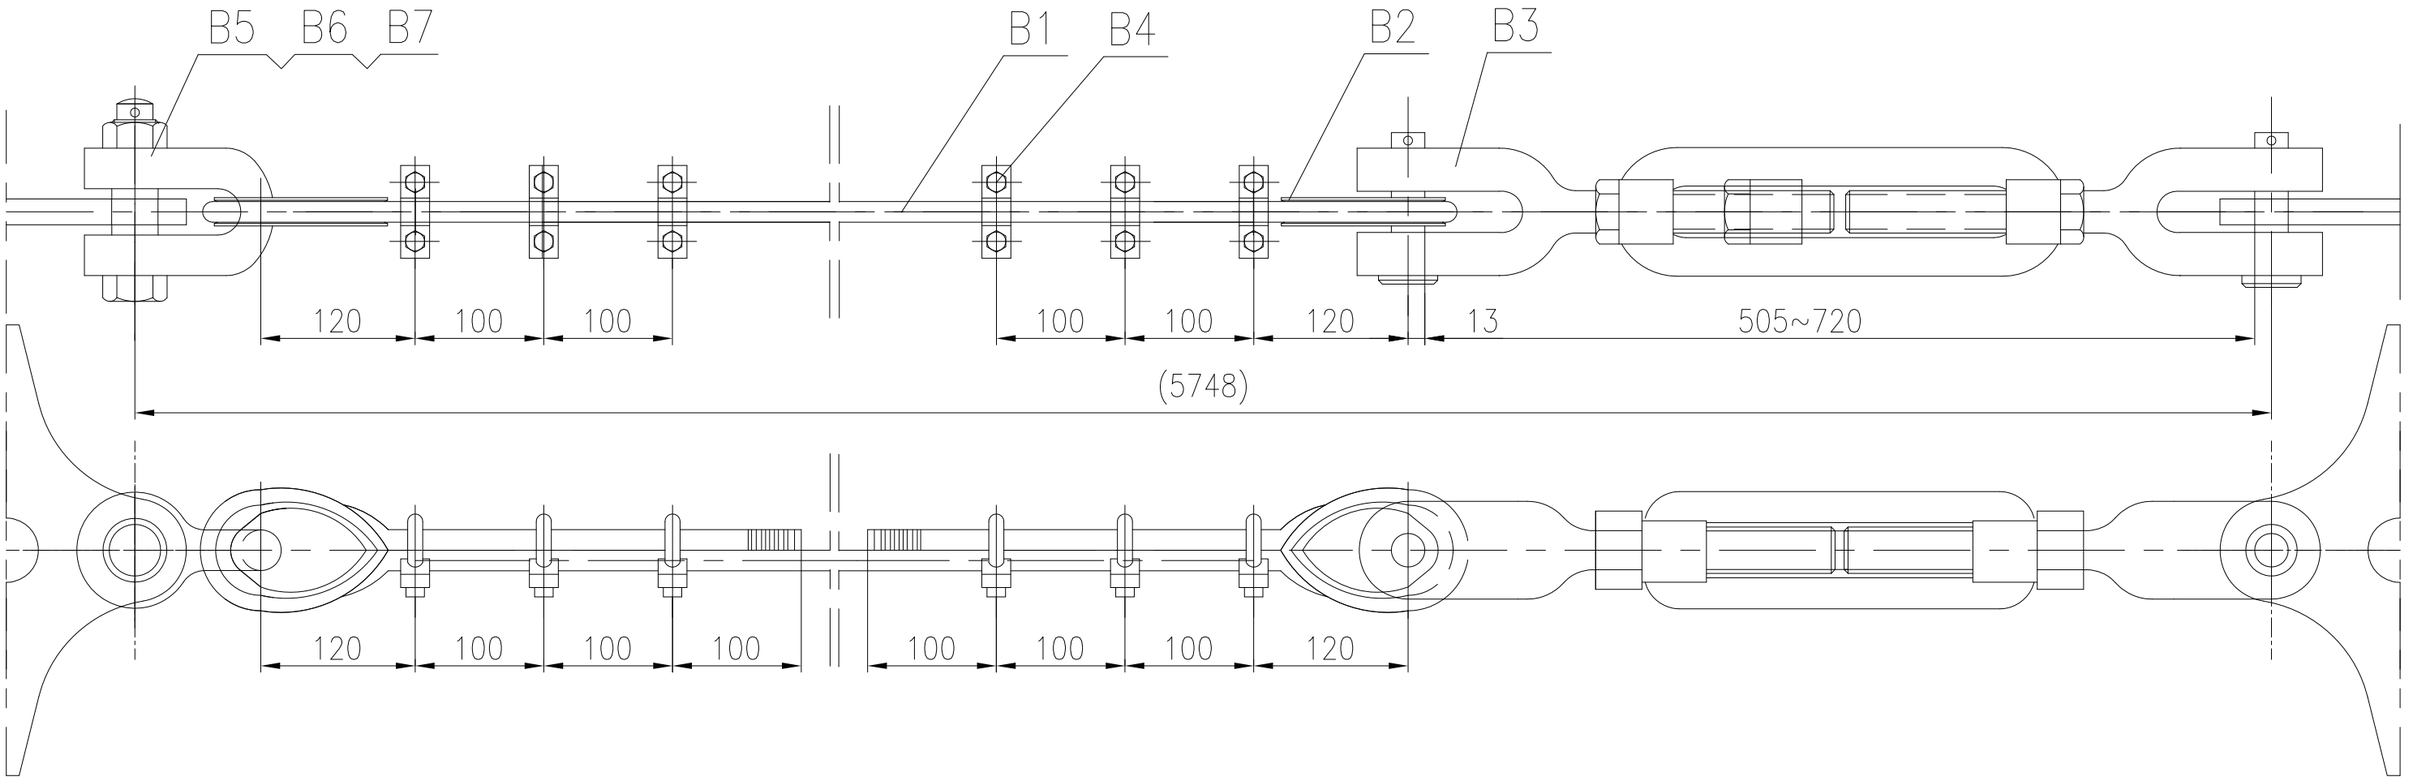

B8						
B7	GB/T6178-1986	螺母 Nut M30	1	0.256	0.256	热浸锌Hot Galv.
B6	GB/T91-2000	销 Pin 4x45	1	0.01	0.01	不锈钢 Sta.Stl.
B5	JB8112-1999	卸扣 M-DX4	1	2	2	热浸锌Hot Galv.
B4	GB/T5976-1986	绳夹 Rope clip 16KTH	6	0.4	2.4	热浸锌Hot Galv.
B3	CB/T3818-1999	螺旋扣 Screw rig KUUD24-M	1	5.8	5.8	热浸锌Hot Galv.
B2	CB/T33-1999	套环 WT16	2	0.5	1	热浸锌Hot Galv.
B1	GB1102-74	钢丝绳 Wire rope 6W(19)-16-1700-II	~6m	6	6	热浸锌Hot Galv.
NO.	SUB-NO. or STDD	NAME & SIZE	QTY/set	WEIGHT each	WEIGHT total	NOTE

注:
1.安装时先将件B3处于最长状态,待钢丝绳固定好后,收紧B3使钢丝绳张紧.钢丝绳预拉力为~150Kg. (钢丝绳中间下垂~75mm)
2.钢丝绳的破断拉力为16吨,螺旋扣的许用拉力为3.5吨,破断拉力为12吨.

note:
1.when assembling, B3 is in the longest condition. After clamping rope, rope is tensioned through adjusting B3. The pretightening force for wire rope is ~150Kg. (SAG~75mm)
2.Breaking load of the wire rope is 16t. Allowable force of the screw rig is 3.5t. Breaking load of the screw rig is 12t.

描述及日期/Description & Date

工号/JOB NO. ZP12-1873

项目名称/PROJECT SliLanka CICT 12 STS Cranes

设计/DSGN	校对/CHKD	审核/EXAM	审定/APPD	图幅/FORMAT
日期/DATE	日期/DATE	日期/DATE	日期/DATE	A3

材料/MAT

比例/SCALE 1:5

单重/WEI (Kg) 18

图名/DRAWING NAME 抗风振拉索 Wire for Pipe Dampening

修改标志/Sign

ZPMC 上海振华重工集团

图号/DRAWING NO. J526A01011101

版本/REV


页号/PAGE


REV	DATE	BY	DESCRIPTION
1	2012.05.15	Liu	
2	2012.08.17	Liu	


The Comparison Table of Welding Symbols

AWS	ZPMC
	
	
	
	
	
	
	
	
	
	
	

Minimum Fillet Weld Size	
Base Metal Thickness (mm)	Minimum Size of Fillet Weld(mm)
T<6.4	3
6.4<T<12.7	5
12.7<T≤20.0	6
20.0<T	8

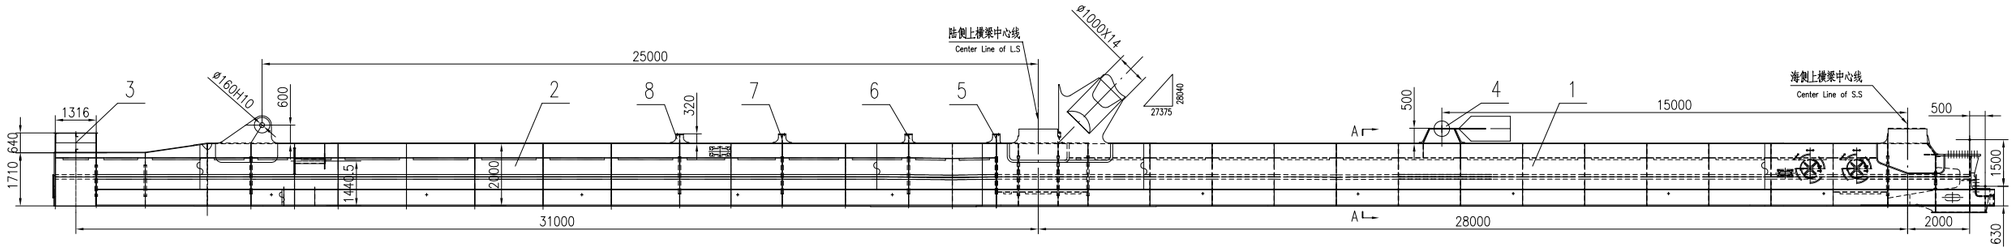

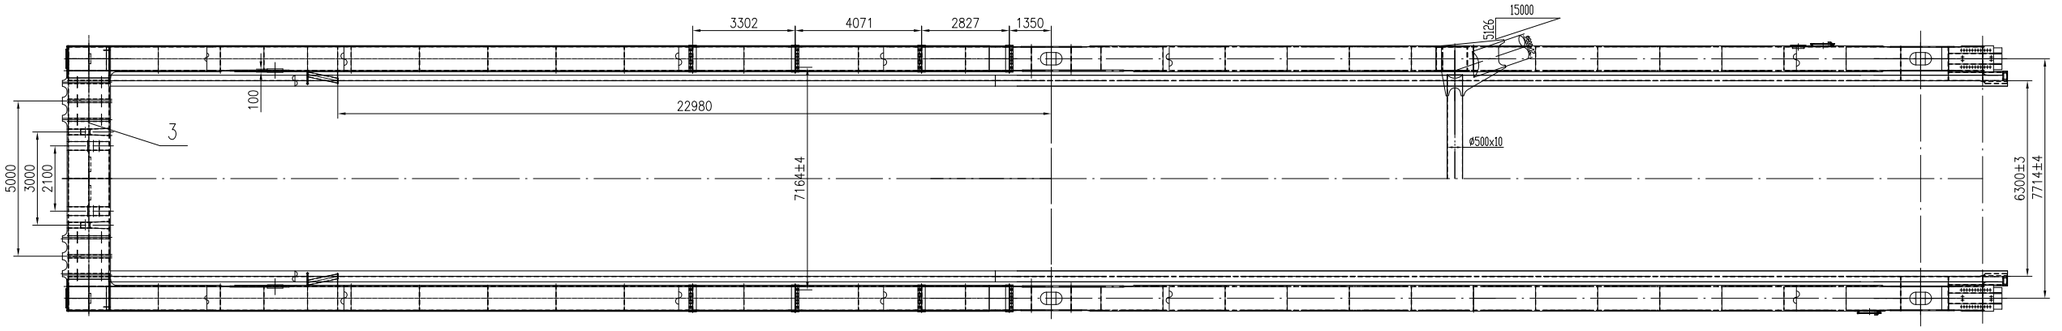

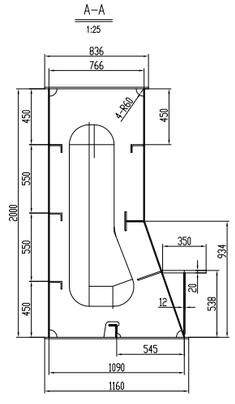

技术要求

1. 所有附件必须在冲砂前焊接在大梁上.
   All attachements shall weld before blasting.
2. 所有附件在大梁上的定位尺寸及安装要求应以相应零件图为准.
   Attachements's assembling requirement shall according to each sub–drawing.
3. 拖令支架在面海右侧.
   The electric chain support fixed in rightside toward seaside
4. 尾部联系梁需整体制作.
   The end beam should be made integerally.
5. 大梁分段只为制图方便,制作时是否分段由工艺定.
   The girder discerption in segments is used for drawing only, Whether it is discerpted in manufacture devided by manufacture technics.

NO.	SUB–NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	WEIGHT each	WEIGHT total	NOTE
8	J526A010208	底盘支座4 Girder Support	4 组 件/weld	2	103	206	
7	J526A010207	底盘支座3 Girder Support	3 组 件/weld	2	103	206	
6	J526A010206	底盘支座2 Girder Support	2 组 件/weld	2	95	190	
5	J526A010205	底盘支座1 Girder Support	1 组 件/weld	2	95	190	
4	J526A010204	联系横梁2 Cross Beam 2	组 件/weld	1	2280	2280	
3	J526A010203	尾部联系横梁 End Beam	组 件/weld	1	5007	5007	
2	J526A010202	后大梁梁体局段 Girder	组 件/weld	2	25380	50760	****make symmetrically
1	J526A010201	后大梁梁体首段 Girder	组 件/weld	2	33319	66638	****make symmetrically

PROJECT: Sri Lanka CICT 12 STS Cranes DESIGN STAGE: SCALE: 1:100

ITEM NAME: Girder 后大梁

DRAW NO: J526A0102 PROJ.

ZPMC							
DSGN			TRACE			APP.	焊接件 welder
DRAW			CHCK			SET/CRANE	1
CHCK			VER.			WEIGHT	125477kg

REV	DATE	BY	DESCRIPTION
1	2012.05.15	Liu	
2	2012.08.17	Liu	

The Comparison Table of Welding Symbols

AWS	ZPMC

Minimum Fillet Weld Size

Item Thickness of Thicker Part Joined	Minimum Size of Fillet Weld
T≤6.4	3
6.4<T≤12.7	5
12.7<T≤20.0	6
20.0<T	8

VI 1:10

上横梁 Support Beam

UT100% t=ø1000X14

27375 28040

2500 only left

1000 only right

上铰中心 Center of Upper Hinge

下铰中心 Center of Lower Hinge

0.4

Z

Y

View Y

Metal of Item 25 must be UT100% in this area before weld & after 在此范围内件25焊缝焊接前后必须UT100%

Metal of Item 28must be UT100% in this area before weld & after 在此范围内件28焊缝焊接前后必须UT100%

t=26 FCM,Z

t=24

t=22

t=20 FCM 'Z'

32600

15600

4600

3800

2000

1800

300

2500

1280

4680

Z-Z

2000 3800 4600 15600 6800

2000x12=24000

710 1280 960 1760 640 900 1100 800

t=16 FCM

t=12 FCM

t=22

t=14

1245

VII 1:10

VIII 1:15

5 (No weld/留空不焊)

A1-A1 1:10

A3-A3 1:12

MN 向 1:30

A2-A2 1:30 注:仅厦海右侧有 Note: only on left of seaside

A4-A4 1:30

A5-A5 1:30

A7-A7 1:25

A8-A8 1:15

A9-A9 1:30 外侧 outside

A2'-A2' 1:30 注:仅厦海右侧有 Note: only on right of seaside

I 1:10

G-G 1:25

II 1:2

III 1:10

IV 1:10

f-f 1:5

View K1 1:30

ITEM 36 1:30

J-J 1:10

View B1 海侧 Waterside 陆侧上横梁中心线 Center Line of Landside Portal

ITEM 46,47 1:12.5

ITEM 9 1:30

对接焊缝剖口示意 Detail of butt weld

t=(t1-t2)X4 UT100% TYP.

a1-a1 a2-a2 a3-a3 a4-a4 a5-a5

技术要求

1. 焊条采用E5015;自动焊丝采用H10Mn2,焊剂采用HJ330.
2. 所有外露的气割边缘切割截面光洁度均要达到优级或磨平.
3. 腹板与翼板焊接尽量采用自动焊,手工补焊,坡口按标准标定.
4. 未注明焊缝按同类焊缝施焊,未注贴角焊缝高度取就连接的薄板厚度的0.7倍.
5. 所有焊缝100%目测检验; 未注明的按AWS D1.1标准检验.
6. 所有的螺栓孔均应与相关件配钻.
7. 凡有厚薄板对接都应有不大于1:4的.
8. 钢结表中尺寸仅供备料参考,准确尺寸放样定.
9. 两件对容制作(附件36,37).

Technology Requirement

1.The welding rods should be E5015. The welding wire of automatic welding is H10Mn2, the welding flux HJ330.
2.The finished of the cut section of the outside bare gas cutting edge should be up to high grade or flattening milled.
3.Automatic welding should be adopted as far as possible in the case of the groove should be marked according to the standard.
4.The unmarked seams refer to the same sort. The height of the unmarked filler weld is 0.7 the thickness of the thin sheet.
5.All welded should be 100% VT. Those that are not indicated in the drawing should be inspected according to AWS D1.1.
6.All the bolt holes should be drilled together with the relevant components.
7.Butt weld with different plate thickness should make no than 1:4 chamfer.
8.The size in the subsidiary list is for reference of preparering the feed only. The accurate size should be determined when lofting.
9.Maded symmetricly (except item36?37).

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	each	total	NOTE
					WEIGHT		

PROJECT: Sri Lanka CICT 12 STS Cranes DESIGN STAGE: SCALE: 1:60

ITEM NAME: Girder 后大梁梁体前段

DRAW NO: J526A010201 PROJ.

ZPMC	DSGN			TRACE			APP.	焊接件 welder
	DRAW			CHCK			SET/CRANE	2
	CHCK			VER.			WEIGHT	33319kg

明 细 表
SUBSIDIARY LIST

设计：
校对：

*此表为一套的数量和重量

2 set/crane, 33319 kg/set, 66638 kg/crane

PROJECT NAME or CODE: Sri Lanka CICT 12 STS Cranes				SUB-PART NAME: 后大梁前段 Girder	SUB DRAW NO: J526A010201	
序号 NO.	图号或标准 SUB-NO. or STDD	名称与规格 NAME & SIZE	材料或型号 MTRL or STYLE	每套数量 Q'TY/SET	单重 PIECE WGHT	总重 TOTAL WGHT
1	J526A01020101	后大梁铰点段Girder tip	weld	1	4113.0	4113.0
2		— 24 × 836 × 4600	Q345B	1	724.5	724.5
3		L100×63×8 — 1346	Q235A	2	10.8	21.7
4		— 12 × 2055 × 7400	Q345B	1	1106.7	1106.7
5		— 12 × 2000 × 6650	Q345B	1	1039.1	1039.1
6		L100×63×8 — 1942	Q235A	47	16.7	786.2
7		— 10 × 2055 × 20000	Q345B	1	3226.4	3226.4
8		— 10 × 2000 × 20000	Q345B	1	3140.0	3140.0
9	FCM	— 50 × 2712 × 3732	A709-50-2	1	2087.0	2087.0
10		— 16 × 2055 × 5200	Q345B	1	1055.8	1055.8
11		— 16 × 2000 × 5200	Q345B	1	1155.5	1155.5
12		T150×12×138×10 — 697	Q345B	1	17.4	17.4
13	焊接T型钢 T steel	T350×20×510×12 — 32600	Q345B	1	3296.1	3296.1
14		L100×63×8 — 647	Q235A	2	3.9	7.9
15		T150×12×138×10 — 1264	Q345B	1	31.6	31.6
16		L100×63×8 — 1214	Q235A	2	9.5	19.1
17		L100×63×8 — 544	Q235A	1	2.9	2.9
18		T150×12×138×10 — 946	Q345B	1	23.6	23.6
19		L100×63×8 — 1146	Q235A	1	8.9	8.9
20		T150×12×138×10 — 1992	Q345B	11	49.7	547.0
21		L100×63×8 — 1698	Q235A	2	14.3	28.6
22		T150×12×138×10 — 1748	Q345B	1	43.6	43.6
23		T150×12×138×10 — 1521	Q345B	1	38.0	38.0
24		T150×12×138×10 — 1081	Q345B	1	27.0	27.0
25	FCM'Z'	— 26 × 836 × 5800	Q345B	1	932.0	932.0
26		— 22 × 836 × 15600	Q345B	1	2252.3	2252.3
27	FCM	— 16 × 1160 × 4600	Q345B	1	670.2	670.2
28	FCM'Z'	— 20 × 836 × 4680	Q345B	1	572.7	572.7

ZPMC

明 细 表
SUBSIDIARY LIST

设计：
校对：

*此表为一套的数量和重量

2 set/crane, 33319 kg/set, 66638 kg/crane

PROJECT NAME or CODE: Sri Lanka CICT 12 STS Cranes				SUB-PART NAME: 后大梁前段 Girder	SUB DRAW NO: J526A010201	
序号 NO.	图号或标准 SUB-NO. or STDD	名称与规格 NAME & SIZE	材料或型号 MTRL or STYLE	每套数量 Q'TY/SET	单重 PIECE WGHT	总重 TOTAL WGHT
30	FCM	— 12 × 1160 × 15600	Q345B	1	1704.6	1704.6
31		— 14 × 1245 × 6800	Q345B	1	866.9	866.9
32		L100×63×8 — 58955	ST52-3	1	579.7	579.7
33	钢管PIPE	Φ30 × 2.5 — 288	stainsteel不锈钢	6	0.40	2.4
34	面海左侧	DTK-1101-380		1	7.0	7.0
35	面海左侧	DTZ-1105-380		1	3.0	3.0
36		— 20 × Φ900 / Φ570	Q345B	1	67.0	67.0
37	外协 CMHP4	人孔盖4 Man hole 4	assembly	1	20.0	20.0
38		— 8 × 1080 × 2000	Q345B	12	71.0	852.0
39		— 12 × 1080 × 2000	Q345B	1	110.0	110.0
40		— 10 × 80 × 2685	Q345B	3	16.9	50.6
41	FCM	— 22 × 750 × 850	Q345B	2	89.1	178.2
42	FCM	— 30 × 1072 × 2000	Q345B	1	427.0	427.0
43		— 16 × 1080 × 1150	Q345B	2	88.2	176.4
44	钢管PIPE	Φ30 × 2.5 — 100	stainsteel不锈钢	1	0.35	0.4
45		— 12 × 200 × 200	Q345B	30	2.0	59.2
46	圆钢bar	Φ20 - 364	20	2	0.6	1.2
47		— 6 × Φ40	Q235A	4	0.1	0.2
48		L100×63×8 — 896	Q235A	2	6.4	12.8
49		T150×12×138×10 — 1990	Q345B	1	49.7	49.7
51		— 8 × 450 × 756	Q345B	1	14.2	14.2

REV	DATE	BY	DESCRIPTION
1	2012.05.15	Liu	
2	2012.08.17	Liu	

海侧门框中心线 Center Line of S.S

上铰中心 Center of Upper Hinge

下铰中心 Center of Lower Hinge

A1 A2 A3 A4 C1 C2 C3 V Z1 Z2 Z3 Z4

VIEW A
1:25

A1-A1
1:25

A2-A2
1:25

A3-A3
1:25

DETAIL V
1:25

下铰中心 Center of Lower Hinge

C1-C1
1:25

VIEW E
1:10

R1-R1
1:12.5

R2-R2
1:12.5

R3-R3
1:12.5

R4-R4
1:12.5

R5-R5
1:12.5

C2-C2
1:25

R6-R6
1:12.5

R7-R7
1:12.5

C3-C3
1:25

ITEM 32
1:12.5

ITEM 35
1:12.5

ITEM 36
1:12.5

ITEM 37
1:12.5

ITEM 38
1:12.5

ITEM 39
1:12.5

I
1:10

ITEM 41
1:12.5

ITEM 12
1:12.5

ITEM 14
1:12.5

ITEM 29
1:12.5

DETAIL Z1
1:5

DETAIL Z2
1:5

DETAIL Z3

DETAIL Z4

b1–b1 b2–b2 b3–b3 b4–b4

K-K
1:10

View b5
1:5

II
1:2

III
1:10

IV
1:10

J-J
1:10

ITEM 2, 3, 4
1:25

ITEM 1
1:25

Technology Requirement

1. The welding rods should be E5015. The welding wire of automatic welding is H10Mn2, the welding flux HJ330.
2. The finished of the cut section of the outside bare gas cutting edge should be up to high grade or flattening milled.
3. Automatic welding should be adopted as far as possible in the case of the belly plate and the wing plate, followed by further manual repair welding. The groove should be marked according to the standard.
4. The unmarked seams refer to the same sort. The height of the unmarked filler weld is 0.7 the thickness of the thin sheet.
5. All welded should be 100% VT. Those that are not indicated in the drawing should be inspected according to AWSD1.1.2006
6. All the bolt holes should be drilled together with the relevant components.
7. The size in the subsidiary list is for reference of prepareing the feed only. The accurate size should be determined when lofting. Butt weld with different plate thickness should make no than 1:4 chamfer.
8. Thickness of item 36 should be adjusted by the clearance between bevels. Item 35 should be welded at last.

技 术 要 求

1. 焊条采用E5015;自动焊丝采用H10Mn2,焊剂采用HJ330.
2. 所有外露的气割边缘切割截面光洁度均要达到优级或磨平.
3. 腹板与翼板焊接尽量采用自动焊,手工补焊,坡口按标准标定.
4. 未注明焊缝按同类焊缝施焊,未注贴角焊缝高度取被连接的薄板厚度的0.7倍.
5. 所有焊缝100%目测检验; 未注明的按AWSD1.1.2006标准检验.
6. 所有的螺栓孔均应与相关件配钻.
7. 明细表中尺寸仅供备料参考,准确尺寸放样定,凡有厚薄板对接部应有不大于1:4的斜坡.
8. 大梁铰点调整到位后,通过调整件36厚度,使前后大梁支座间隙控制在0.1~0.2mm,并保证件35和件36顶紧后部结构后,拧紧螺栓,试板大梁几次,没问题后,件35后面及侧面各焊一条焊缝固定.

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	each WEIGHT	total WEIGHT	NOTE
PROJECT: Sri Lanka CICT 12 STS Cranes		DESIGN STAGE:		SCALE: 1:50			
ITEM NAME: 后大梁铰点段 Head Girder		DRAW NO: J526A01020101		PROJ.			
ZPMC	DSGN		TRACE		APP.		
	DRAW		CHCK		SET/CRANE	2	
	CHCK		VER.		WEIGHT	4113Kg	

明 细 表
SUBSIDIARY LIST

*The quantity and weight of this list is for one set

*此表为一套的数量和重量

设计：

4113 kg/set, 2 set/crane, 8226 kg/crane

校对：

PROJECT NAME or CODE: Sri Lanka CICT 12 STS Cranes			SUB-PART NAME: Head Girder 后大梁铰点段				SUB DRAW NO: J526A01020101
序号 NO.	图号或标准 SUB-NO.or STDD	名称 NAME	规格或型号 SIZE & STYLE	材料 MTRL	每套数量 Q'TY/SET	单重 PIECE WGHT	总重 TOTAL WGHT
1	FCM		-30×1452×2200	Q345B	2	576.3	1152.6
2			-20×420×600	Q345B	2	36.7	73.4
3			-32×1157×1810	Q345B	2	337.4	674.8
4			-16×774×2080	Q345B	2	124.6	249.2
5			-22×186×324	Q345B	1	10.5	10.5
6			-20×372×1790	Q345B	1	104.5	104.5
7			-16×186×308	Q345B	1	7.2	7.2
8			-16×308×500	Q345B	1	19.3	19.3
9			-24×350×736	Q345B	1	41.6	41.6
10			-50×836×1439	A709-50-2	1	472.2	472.2
11			-6×Φ180	Q345B	2	1.2	2.4
12			-20×250×308	Q345B	1	9.7	9.7
13			-20×177×308	Q345B	1	8.6	8.6
14			-30×700×1070	Q345B	1	176.4	176.4
15			-12×526×1081	Q345B	1	53.6	53.6
16			-12×177×1081	Q345B	1	12.9	12.9
17			-16×1078×1610	Q345B	1	171.4	171.4
18			-10×80×1460	Q345B	1	9.2	9.2
19			T150×12×138×10-1081	Q345B	1	24.6	24.6
20	FCM		-22×1078×2078	Q345B	1	269.3	269.3
21			L100×63×8-742	Q235	2	7.3	14.7
22			L100×63×8-1031	Q235	2	7.7	15.5
23	FCM		-22×754×850	Q345B	1	83.4	83.4
24			T150×12×138×10-1521	Q345B	1	35.6	35.6
25			-16×1078×1150	Q345B	1	87.1	87.1
26			-10×80×2980	Q345B	1	18.7	18.7
27			L100×63×8-1471	Q235	2	12.1	24.2
28			-16×150×250	Q345B	1	3.2	3.2

附件4

明 细 表
SUBSIDIARY LIST

PAGE: 第 / 页

*The quantity and weight of this list is for one set

*此表为一套的数量和重量

设计：

4113 kg/set, 2 set/crane, 8226 kg/crane

校对：

PROJECT NAME or CODE: Sri Lanka CICT 12 STS Cranes			SUB-PART NAME: Head Girder 后大梁铰点段				SUB DRAW NO: J526A01020101
序号 NO.	图号或标准 SUB-NO.or STDD	名称 NAME	规格或型号 SIZE & STYLE	材料 MTRL	每套数量 Q'TY/SET	单重 PIECE WGHT	总重 TOTAL WGHT
29			-60×150×200	Q345B	1	14.1	14.1
30			-12×177×642	Q345B	1	5.7	5.7
31			-6×Φ120	Q345B	1	0.4	0.4
32			-12×526×792	Q345B	1	32.7	32.7
33			-10×45×518	Q345B	1	1.8	1.8
34			-12×286×297	Q345B	1	8.0	8.0
35			-33.5×150×328	Q345B	1	23.0	23.0
36			-5×150×328	Q345B	1	3.8	3.8
37			-30×328×500	Q345B	1	34.7	34.7
38			-12×167×191	Q345B	1	3.0	3.0
39			-12×158×199	Q345B	1	3.1	3.1
40			-16×518×692	Q345B	1	45.8	45.8
41			-30×518×900	Q345B	1	105.3	105.3
42			-12×200×200	Q345B	3	2.0	6.0
B1	GB/T70.1-2000	内六角圆柱头螺钉	M14X30	达克罗	4		

REV	DATE	BY	DESCRIPTION
1	2012.05.15	Liu	
2	2012.08.17	Liu	

The Comparison Table of Welding Symbols

AWS	ZPMC

Minimum Fillet Weld Size	
Base Metal Thickness of the Thicker Part Joined	Minimum Size
T≤6.4	3
6.4<T≤12.7	5
12.7<T≤20.0	6
20.0<T	8

DETAIL XII

J–J 1:10

ITEM 68,69 1:15

A1–A1 1:10

A7'–A7' 1:30

View Y

Z–Z

VIEW C1 1:30

大梁尾部封板开孔
1:30 hole of item 62

IV 1:10

A2–A2 1:30

A3–A3 1:30

View R 1:30

ITEM 46 1:30

f–f 1:5

ITEM 53 1:30

A5–A5 1:30

A6–A6 1:30

A7–A7 1:30

A9–A9 1:30

VII

View Z 1:10

VIII 1:15

III 1:10

对接焊缝剖口示意
Detail of butt weld

A4–A4 1:30

仅面海左侧有
exist in left toward seaside only

View Q1 1:30

T–T 1:15

T350X20X510X12:

T	b	C
10	-0.6	4.6
12	-1.7	7.6
16	-3.8	13.7

T350X14X510X10:

T	b	C
8	2.6	-1.4
10	1.5	1.7

A8–A8 1:30

ITEM 63 1:30

G–G 1:15

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	each WEIGHT	total WEIGHT	NOTE
PROJECT: Sri Lanka CICT 12 STS Cranes		DESIGN STAGE:		SCALE: 1:60			
ITEM NAME: Girder 后大梁梁体尾段		DRAW NO: J526A010202		PROJ.			
ZPMC	DSGN		TRACE		APP.	焊接件 welder	
	DRAW		CHCK		SET/CRANE	2	
	CHCK		VER.		WEIGHT	25380kg	

明 细 表
SUBSIDIARY LIST

设计：
校对：

*此表为一套的数量和重量

2 set/crane, 25377 kg/set, 50754 kg/crane

PROJECT NAME or CODE: Sri Lanka CICT 12 STS Cranes			SUB-PART NAME: 后大梁尾段 Girder		SUB DRAW NO: J526A010202	
序号 NO.	图号或标准 SUB-NO. or STDD	名称与规格 NAME & SIZE	材料或型号 MTRL or STYLE	每套数量 Q'TY/SET	单重 PIECE WGHT	总重 TOTAL WGHT
1		L100×63×8 — 1256	Q235A	4	10.0	39.8
2		— 8 × 1965 × 4700	Q345B	1	580.0	580.0
3		— 8 × 2020 × 4700	Q345B	1	596.2	596.2
4		L100×63×8 — 1520.0	Q235A	4	12.6	50.2
5	FCM	— 30 × Φ500 / Φ160	Q345B	2	41.5	83.0
6	FCM	— 40 × 1500 × 2000	A709-50-2	1	656.0	656.0
7		L100×63×8 — 1940	Q235A	4	16.7	66.8
8		L100×63×8 — 491	Q235A	1	2.4	2.4
9		L100×63×8 — 1344	Q235A	9	10.8	97.4
10		— 10 × 2000 × 21800	Q345B	1	3422.6	3422.6
11		— 10 × 2055 × 21800	Q345B	1	3516.7	3516.7
12		L100×63×8 — 2142	Q235A	16	18.7	299.2
13		L100×63×8 — 2137	Q235A	4	18.7	74.6
14		L100×63×8 — 1592	Q235A	8	13.3	106.2
15		L100×63×8 — 1976	Q235A	8	17.1	136.5
16		L100×63×8 — 1354	Q235A	8	10.9	87.4
17		— 16 × 2000 × 3400	Q345B	1	854.1	854.1
18		— 16 × 2055 × 3400	Q345B	1	877.6	877.6
19		T150×12×138×10 — 1306	Q345B	1	32.6	32.6
20		T150×12×138×10 — 1570	Q345B	1	39.2	39.2
21		T150×12×138×10 — 1990	Q345B	1	49.7	49.7
22		T150×12×138×10 — 1394	Q345B	3	34.8	104.4
23		T150×12×138×10 — 2192	Q345B	5	54.7	273.6
24		T150×12×138×10 — 1642	Q345B	2	41.0	82.0
25		T150×12×138×10 — 2027	Q345B	2	50.6	101.2
26		T150×12×138×10 — 1405	Q345B	2	35.1	70.1
27		— 14 × 1036 × 4516	Q345B	1	414.9	414.9
28	焊接T型钢	T350×20×510×12 — 22562	Q345B	1	2281.2	2281.2

明 细 表
SUBSIDIARY LIST

设计：
校对：

*此表为一套的数量和重量

2 set/crane, 25377 kg/set, 50754 kg/crane

PROJECT NAME or CODE: Sri Lanka CICT 12 STS Cranes			SUB-PART NAME: 后大梁尾段 Girder		SUB DRAW NO: J526A010202	
序号 NO.	图号或标准 SUB-NO. or STDD	名称与规格 NAME & SIZE	材料或型号 MTRL or STYLE	每套数量 Q'TY/SET	单重 PIECE WGHT	总重 TOTAL WGHT
29		— 26 × 836 × 10780	Q345B	1	1839.4	1839.4
30		— 24 × 836 × 6600	Q345B	1	1039.5	1039.5
31	FCM,Z	— 26 × 836 × 3400	Q345B	1	580.1	580.1
32		— 10 × 1160 × 4500	Q345B	1	409.8	409.8
33		— 12 × 1160 × 4420	Q345B	1	483.0	483.0
34	FCM	— 14 × 1160 × 17380	Q345B	1	2215.7	2215.7
35		— 22 × 1160 × 3400	Q345B	1	681.1	681.1
36		— 8 × 1080 × 2000	Q345B	8	71.0	568.0
37		— 18 × 700 × 758	Q345B	4	62.4	249.6
38		— 8 × 80 × 2890	Q345B	5	14.5	72.6
39		— 10 × 1080 × 1300	Q345B	4	61.2	245.0
40	面海左侧	DTZ-1104-560		1	4.2	4.2
41	FCM	— 24 × 836 × 4425	Q345B	1	696.9	696.9
42		Φ159 × 8 - 1010	20	1	30.1	30.1
43		— 20 × Φ160	Q345B	1	3.2	3.2
44		— 12 × 236 × 906	Q345B	1	11.8	11.8
45		— 12 × 200 × 958	Q345B	1	18.0	18.0
46		— 12 × 505 × 424	Q345B	1	11.0	11.0
47		— 10 × 770 × 756	Q345B	1	29.0	29.0
48		DTK-1101-280		3	7.0	21.0
49		DTZ-1102-280		1		
50		— 8 × 300 × 442	Q345B	2	5.0	10.1
51	焊接T型钢	T350×14×510×10 — 6000	Q345B	1	464.4	464.4
52		Φ42.3 × 4 - 1156	Q235A	1	4.8	4.8
53		— 12 × 350 × 220	Q345B	1	4.8	4.8
54		— 10 × 1080 × 2000	Q345B	2	88.8	177.5
55		— 12 × 300 × 750	Q345B	1	8.8	8.8

明 细 表
SUBSIDIARY LIST


设计：
校对：


*此表为一套的数量和重量


2 set/crane, 25377 kg/set, 50754 kg/crane


PROJECT NAME or CODE: Sri Lanka CICT 12 STS Cranes			SUB-PART NAME: 后大梁尾段 Girder		SUB DRAW NO: J526A010202	
序号 NO.	图号或标准 SUB-NO. or STDD	名称与规格 NAME & SIZE	材料或型号 MTRL or STYLE	每套数量 Q'TY/SET	单重 PIECE WGHT	总重 TOTAL WGHT
56		— 10 × 1080 × 2000	Q345B	1	95.0	95.0
57	钢管PIPE	Φ30 × 2.5 — 100	stainsteel不锈钢	1	0.35	0.4
58		— 10 × 1080 × 1710	Q345B	2	86.4	172.7
59		— 8 × 80 × 2546	Q345B	2	12.8	25.6
60						
61		— 12 × 200 × 200	Q345B	34	2.0	68.0
62		— 10 × 1080 × 1710	Q345B	1	113.6	113.6
63		— 10 × 173 × 497	Q345B	1	3.4	3.4
64	钢管PIPE	Φ30 × 2.5 — 288	stainsteel不锈钢	5	0.35	1.8
65						
66	CMHP3	人孔盖3 Man hole 3	外协	1	20.0	20.0
67						
68	圆钢bar	Φ20 - 364	stainsteel不锈钢	2	0.6	1.2
69		— 6 × Φ40	Q235A	4	0.1	0.2


REV	DATE	BY	DESCRIPTION
1	2012.05.30		
2	2012.08.17		

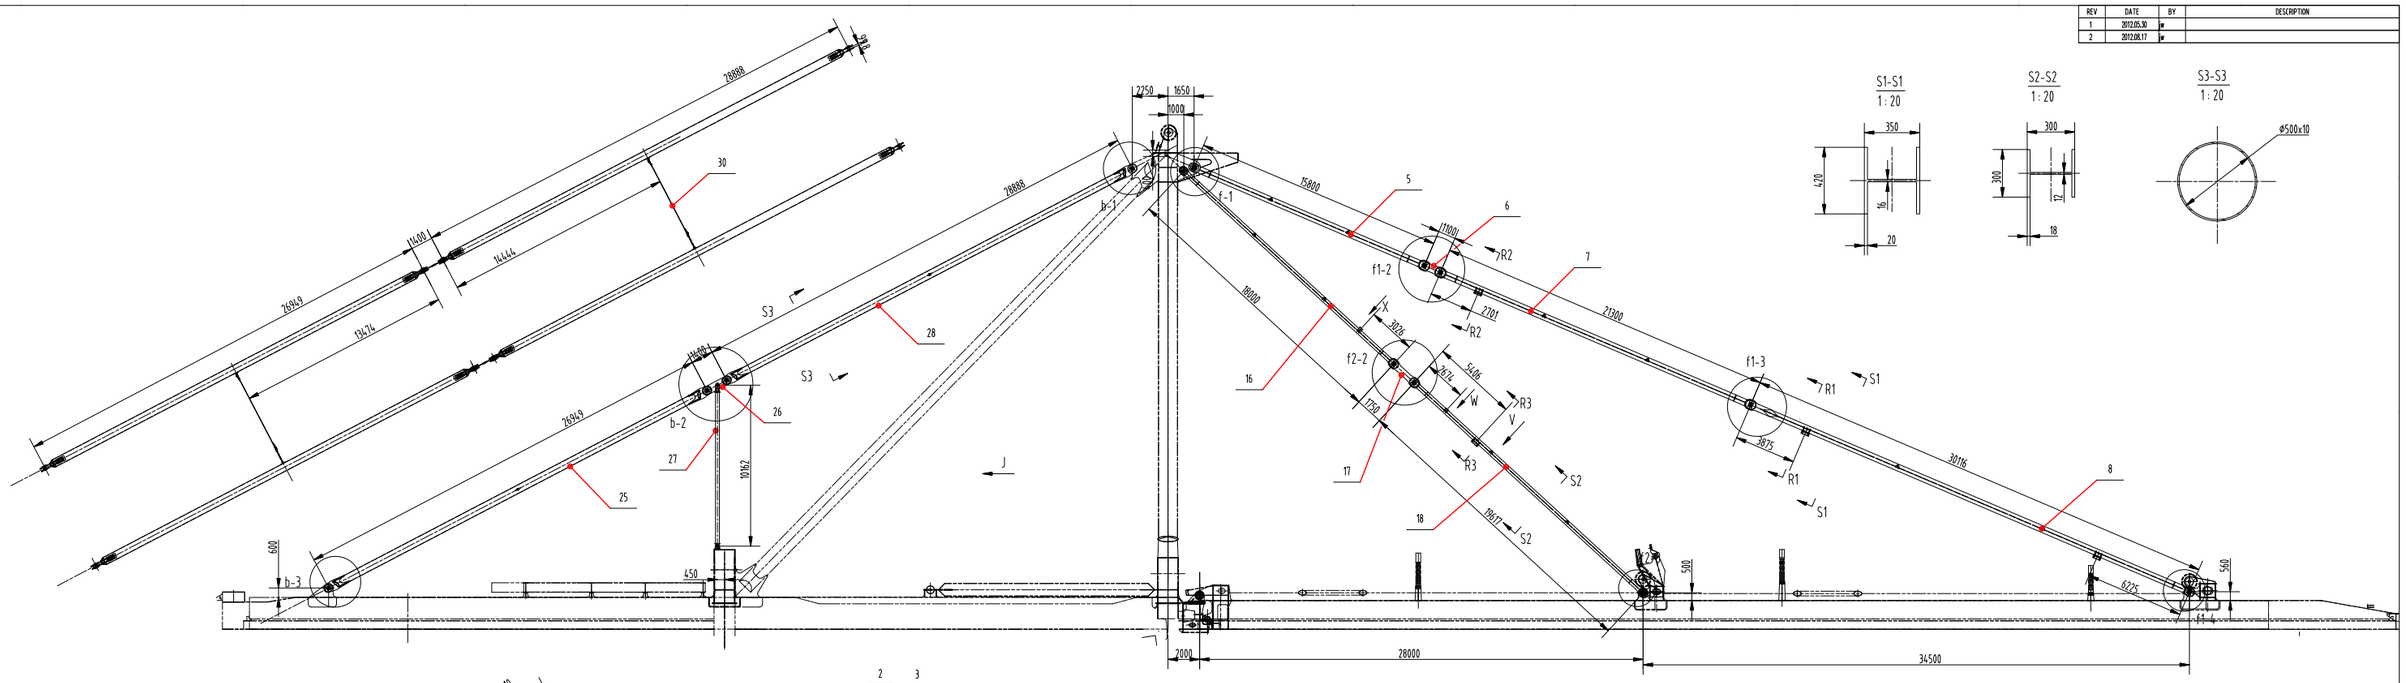


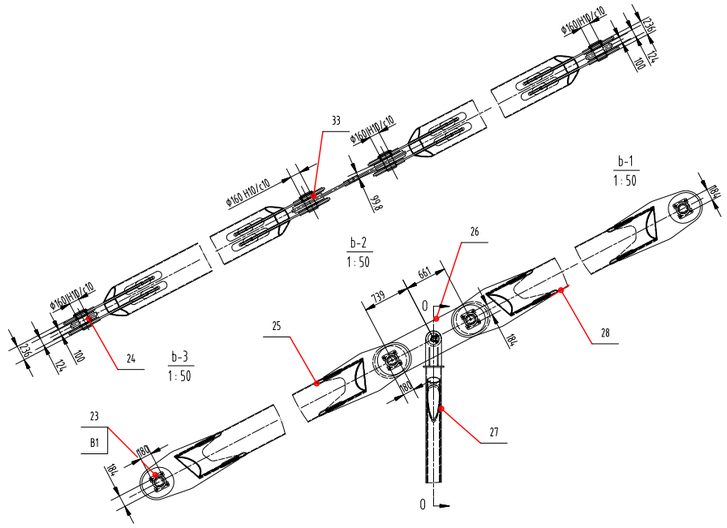


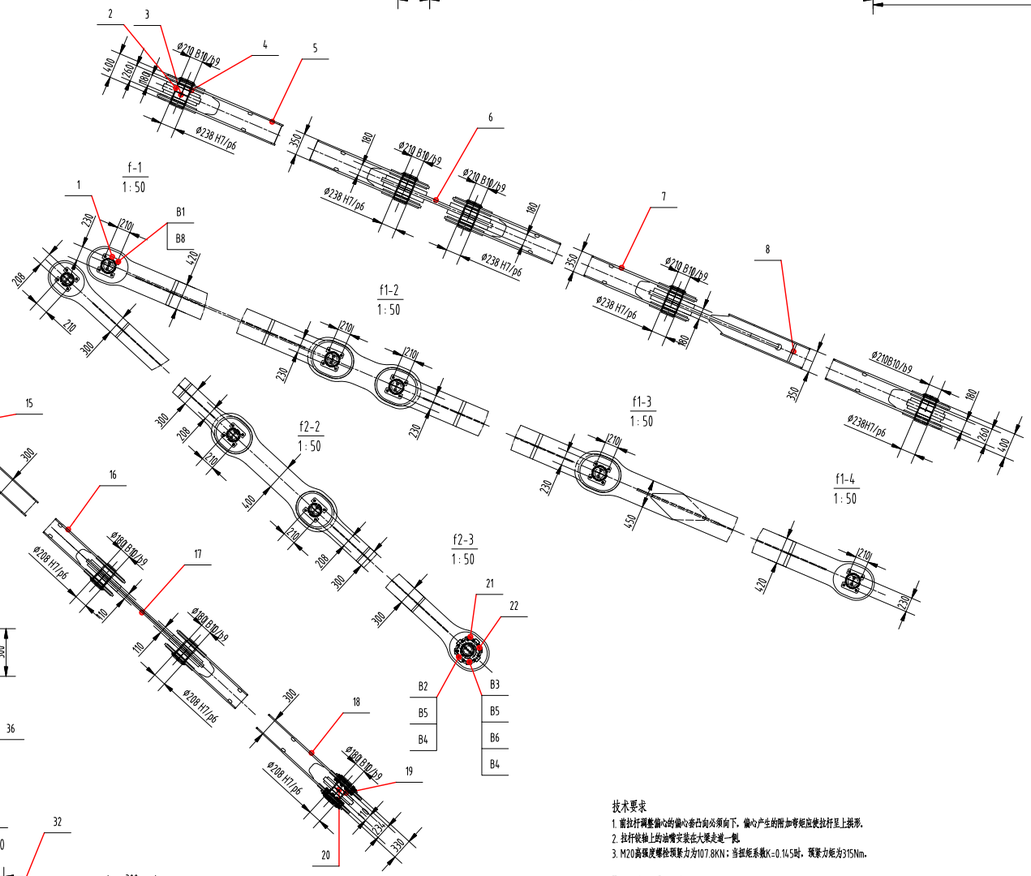























技术要求

1. 雷拉杆调整偏心的偏心套凸台必须向下，偏心产生的附加弯矩应使拉杆呈上挠形。
2. 拉杆铰轴上的油嘴安装在大梁走道一侧。
3. M20高强度螺栓预紧力为107.8KN；当扭矩系数K=0.145时，预紧力矩为315Nm。

Technical Requirement

1. The convex rim of eccentric sleeve for adjusting forestay must be downward and the resulted additional moment should make the forestay reveal humped up.
2. The grease fittings on the shafts of forestay should be installed on the walkway side of the boom.
3. The pre-tighten force of the M20 high-strength bolt is 107.8KN; If the torque coefficient of this batch of the high-strength bolt is 0.145, the pre-tighten moment is 315Nm.

序号	图号或代号	版本	图名及描述	材料	数量	单重	总重	备注
B8	GB4240-84		不锈钢丝 2.0 l=25000	0Cr18Ni9Ti	1	0.6	0.6	
B7	GB/T 1228-2006		螺栓 M20x70	8.8S	96	0.27	25.8	Dacro
B6	PT1/4"		油嘴 PT1/4" Grease fitting		18	0.1	0.1	
B5	GB/T 1229-2006		螺母 M20	8H	144	0.12	17.7	Dacro
B4	GB/T 1230-2006		垫圈 20	45	288	0.03	7.9	Dacro
B3	GB/T 1228-2006		螺栓 M20x120	10.9S	16	0.39	6.3	Dacro
B2	GB/T 1228-2006		螺栓 M20x105	8.8S	32	0.36	11.4	Dacro
B1	GB 32.1-88		螺栓 M20x45	8.8	96	0.18	17.4	Dacro
37	J526A-GS03		导向段03|Guiding Segment	焊接件	2	29.48	59	
36	J526A-GS02		导向段02|Guiding Segment	焊接件	2	32.3	64.6	
35	J526A-GS01		导向段01|Guiding Segment	焊接件	4	37.08	148.3	
34	J526A010334		挡块 2|Block	焊接件	2	17.82	71.3	
33	J526A010333		轴套|Shaft Sleeve	Q235	16	1.34	21.5	
32	J526A010332		挡块 1|Block	焊接件	2	17.82	34.6	
31	J526A010331		吊耳|Lug	焊接件	20	6.57	131.4	
30	J526A010330		拉索|Rope of Backstay	索件	2	18	36	
29	J526A010329		调整偏心套扳手|Wrench	Q235	1	21.09	21.1	
28	J526A010328		拉杆28888|Drawbar	焊接件	2	4111.25	8222.5	
27	J526A010327		支撑架|Backstay Support	焊接件	2	1129	2258	
26	J526A010326		拉板|Tie Plate	焊接件	2	466.15	932.3	
25	J526A010325		拉杆26948|Drawbar	焊接件	2	3876.84	7753.7	
24	J526A010324		轴φ160|Shaft	35CrMo	8	44.77	358.1	
23	J526A010323		卡轴板|Keep Plate	Q235	16	1.49	23.8	
22	J526A010322		卡轴板|Keep Plate	Q235	8	2.76	22.1	
21	J526A010321		调整偏心套|Eccentric Sleeve	35	4	27.06	108.2	
20	J526A010320		轴φ180|Shaft	35CrMo	2	84.86	169.7	
19	J526A010319		轴套|Shaft Sleeve	20	4	5.22	20.9	
18	J526A010318		拉杆19616|Drawbar	焊接件	2	2458.1	4916.2	
17	J526A010317		拉板|Tie Plate	焊接件	2	641.75	1283.5	
16	J526A010316		拉杆18000|Drawbar	焊接件	2	2269.74	4539.5	
15	J526A010315		铜基铸合金自润滑轴承|Bearing	铜+钢合金+固体润滑剂	8	7.3	58.4	
14	J526A010314		轴套|Shaft Sleeve	20	12	5.91	70.9	
13	J526A010313		轴φ180|Shaft	35CrMo	6	75.26	451.6	
8	J526A010308		拉杆30116|Drawbar	焊接件	2	5958.8	11917.6	
7	J526A010307		拉杆21300|Drawbar	焊接件	2	4161.47	8322.9	
6	J526A010306		拉板|Tie Plate	焊接件	2	933.26	1866.5	
5	J526A010305		拉杆15800|Drawbar	焊接件	2	3222.72	6445.4	
4	J526A010304		轴套|Shaft Sleeve	20	20	3.61	72.1	
3	J526A010303		轴φ210|Shaft	35CrMo	10	121.66	1216.6	
2	J526A010302		铜基铸合金自润滑轴承|Bearing	铜+钢合金+固体润滑剂	10	13.84	138.4	
1	J526A010301		卡轴板|Keep Plate	Q235	32	2.35	75.3	

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	each	total	NOTE
					WEIGHT		

PROJECT: Sri Lanka CICT 12 STS Cranes


DESIGN STAGE: SCALE: 1:60


ITEM NAME: Stay Bar System 拉杆系统


DRAW NO: J526A010300 PROJ.

ZPMC	DSGN		TRACE		APP.	Assembly	
	DRAW		CHCK		Q'TY/SET	61885KG	
	CHCK		VER.		SET/CRANE	1	

REV	DATE	BY	DESCRIPTION
1	2012.05.30	zhaoliang	
2	2012.08.17	zhaoliang	

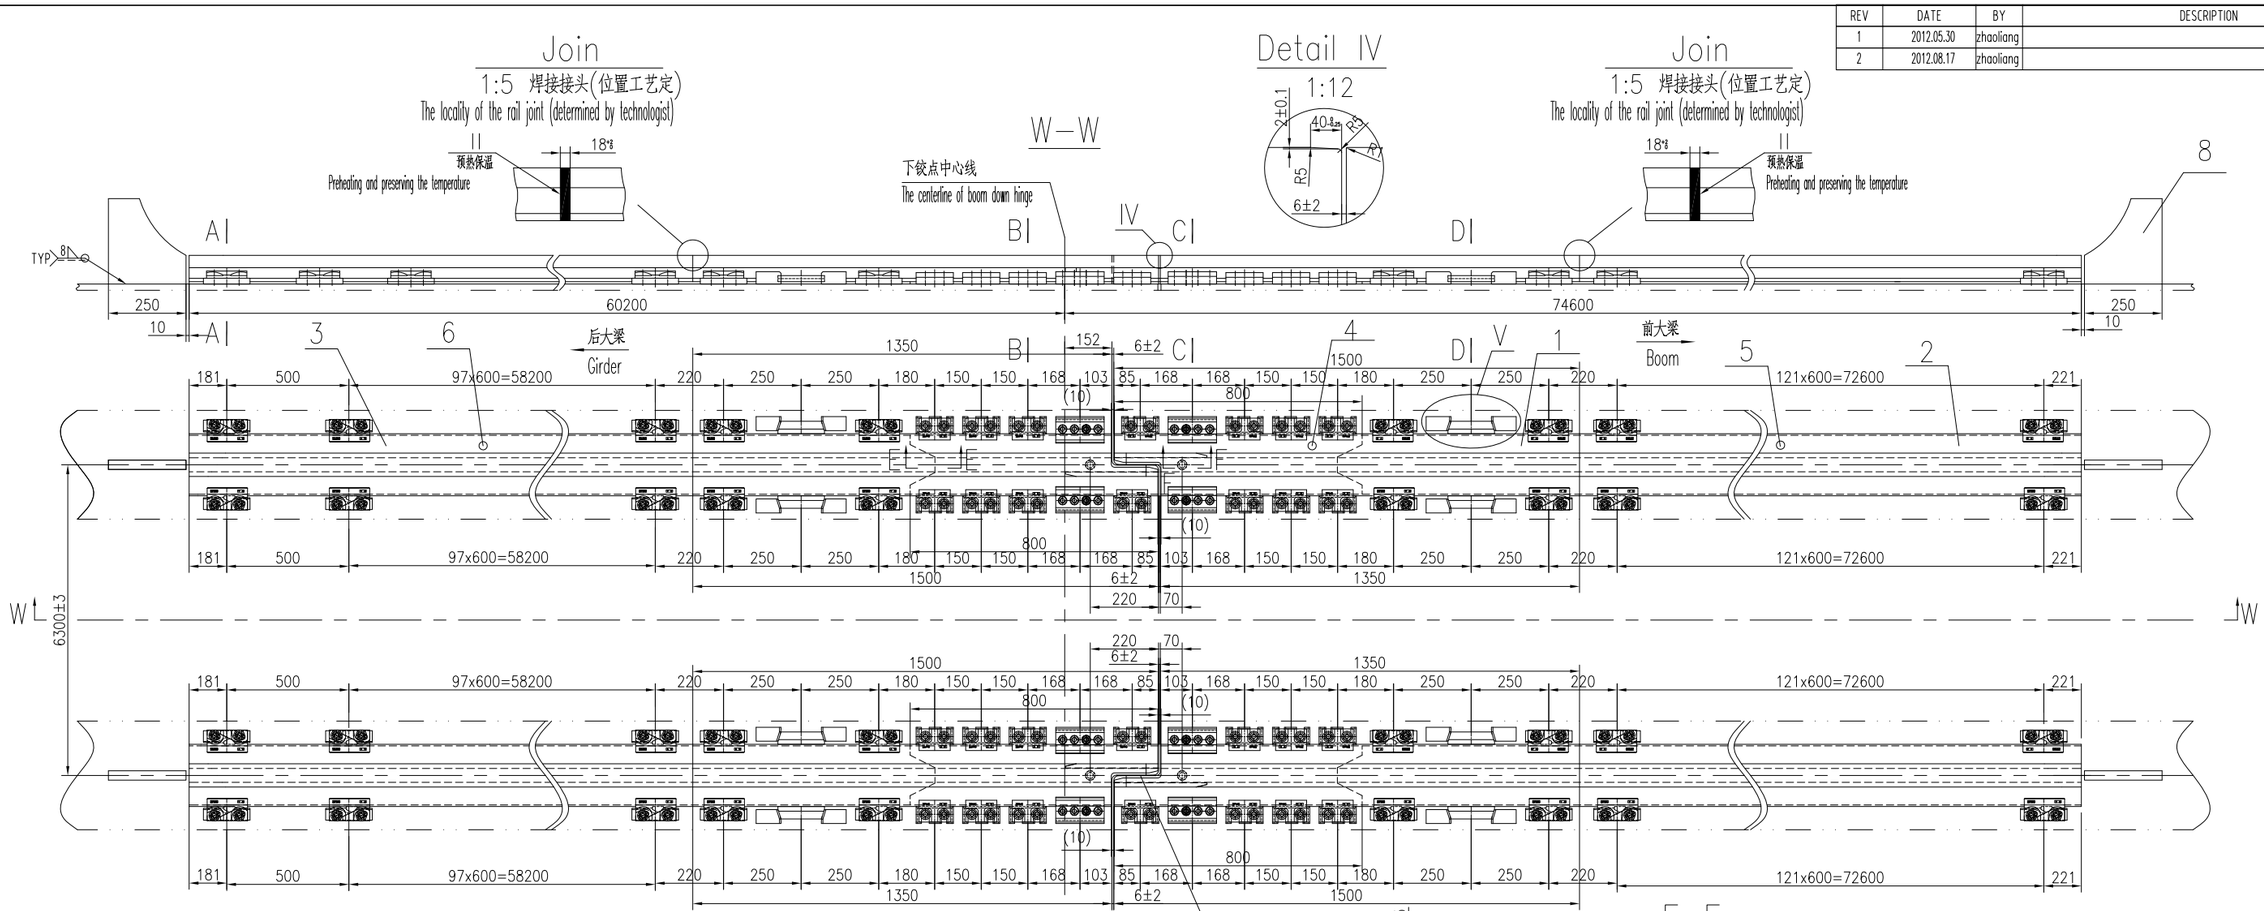

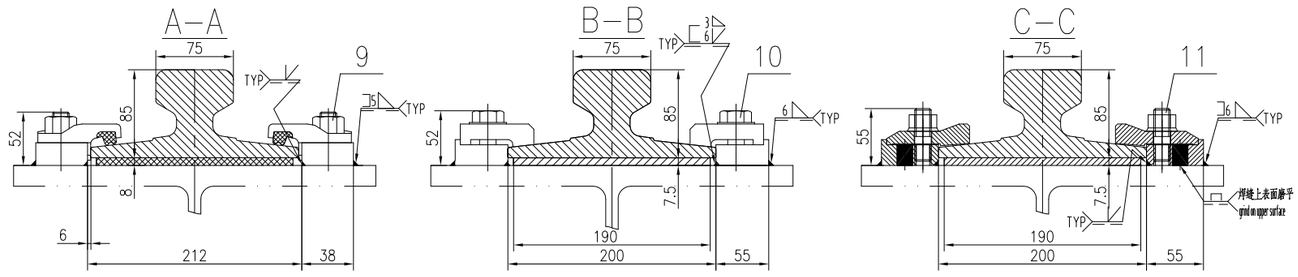

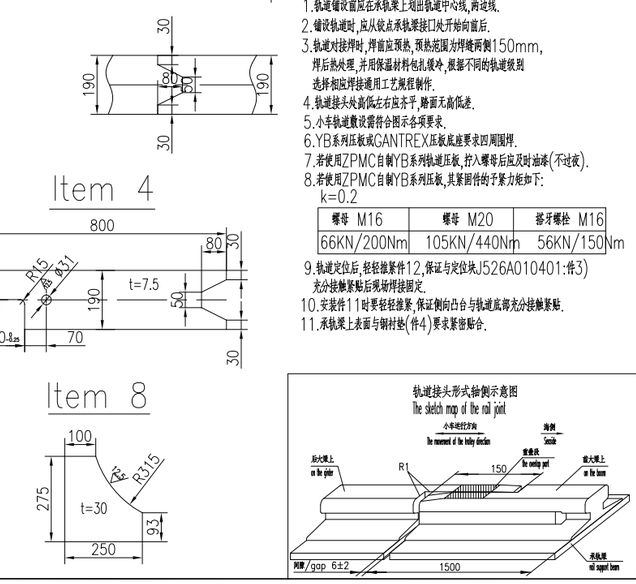

S±3 小车轨道中心距S与设计中心距的偏差≤±3mm.
The trolley rail centre distance must not differ from the nominal dimensions by more than ±3 mm.

在同一垂直于小车移动方向的平面上,左右轨道面的高低差不得超过轨道中心距的0.15%,最高不得超过10mm.
In a plane perpendicular to the travel direction of the trolley, the difference in height of two opposite points of the trolley track shall not exceed 0.15% of the trolley rail centre distance, with a maximum of 10mm.

每条轨道在水平面内允许横向偏差不超过10mm,
在2m测量长度内的每个点上的纵向轴线的弯曲度不超过±1mm.
The maximum permissible lateral deviation of each rail in a horizontal plane is ±10mm.
The curvature in the longitudinal axis at any point shall not exceed ±1mm in a length of 2 m.

前后大梁轨道接头间隙应为6±2mm.
轨道接头处高低左右应齐平,踏面无高低差.
The clearance of rail joint between girder rail and boom rail shall be 6±2mm.
Keep the sameness in height of rails at rail joint.

前后大梁轨道对中误差应≤0.5mm.
The centerlines difference of rails at the boom and the girder rail joint shall not exceed 0.5mm.

TECHNICAL REQUIREMENT

1.During rail track laying centre line and both side lines of the rails should be marked on the rail support girder first, then rails will be laid along these lines.
2.Rails should be laid starting from the boom hinge point, then extended towards both ends.
3.Prior to butt welding for the rail joint the area where welding is to be made must be preheated and the heating range is up to 150mm from the joint to both sides. Heat treatment after welding ,preserve heat and cool it slowly by wrapping with thermal blankets. According to level of rail, choice the relevant technics regulations to weld.
4.Clearance and misalignment of the rail sections at the boom hinge should keep the sameness in height , and be adjusted till the trolley smooth traverse.
5.Trolley rail assembly should meet with the requirements showed in the table.
6.The base of clip (YB-ZPMC or GANTREX) must be welded around.
7.Paint immediately after screwing the nut, if use YB clip made in ZPMC. Must do it in one day.
8.The tightening force or tightening torque of ZPMC clip is:
k=0.2

nut M16	nut M20	bolt M16
66KN/200Nm	105KN/440Nm	56KN/150Nm

9.Push the Item 12 against fix block (J526A010401: Item 3) slightly to ensure fully contact and then weld Item 12.
10.When fix Item 11, push it against bottom of rail slightly to ensure fully contact.
11.Keep the upupper surface of rail support beam fully contact with item 4.

技术要求

1.轨道铺设首应在承轨梁上划出轨道中心线,两边线.
2.铺设轨道时,应从铰点承轨梁接口处开始向首后.
3.轨道对接焊时,焊前应预热,预热范围为焊缝两侧150mm,
焊后热处理,并用保温材料包扎缓冷,根据不同的轨道级别
选择相应焊接通用工艺规程制作.
4.轨道接头处高低左右应齐平,踏面无高低差.
5.小车轨道敷设需符合图示各项要求.
6.YB系列压板或GANTREX压板底座要求四周围焊.
7.若使用ZPMC自制YB系列轨道压板,拧入螺母后应及时油漆(不过夜).
8.若使用ZPMC自制YB系列压板,其紧固件的予紧力矩如下:
k=0.2

螺母 M16	螺母 M20	带牙螺栓 M16
66KN/200Nm	105KN/440Nm	56KN/150Nm

9.轨道定位后,轻轻推紧件12,保证与定位块J526A010401:件3)
充分接触紧贴后现场焊接固定.
10.安装件11时要轻轻推紧,保证侧向凸台与轨道底部充分接触紧贴.
11.承轨梁上表面与钢衬垫(件4)要求紧密贴合.


NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	each WEIGHT	total WEIGHT	NOTE
12	J526A010402	定位块(Fix Block)	A709-50-2	16	1	16	
11	YB1313a-A75	压板组件(clip)	组合件 subassembly	8	4.1	32.8	ZPMC
10	YB55c-A75	压板组件(clip)	组合件 subassembly	28	1.5	42	ZPMC
9	YB33c-A75	压板组件(clip)	组合件 subassembly	900	2.2	1980	ZPMC
8		-30X250X275	Q345B	4	12	48	
7		-6Xø30/ø20	Q235	4	0.1	0.4	
6	ZGD190(轨道挡块rail pad)	-8X190X59782	rubber	2	130	260	见选型图J526A010403
5	ZGD190(轨道挡块rail pad)	-8X190X73722	rubber	2	160	320	见选型图J526A010403
4		-7.5X190X800	Q235	4	7.6	30.4	
3		A75-59002	90°斜板	2	3316	6632	
2		A75-72942	90°斜板	2	4098	8196	
1	J526A010401	短轨(short rail)	焊接件 welding	4	83	332	


PROJECT: Sri Lanka CICT 12 STS Cranes
DESIGN STAGE:
SCALE: 1:30
ITEM NAME: 小车轨道 Trolley rail
DRAW NO: J526A0104


ZPMC


DSGN			TRACE		APP.
DRAW			CHCK		Q'TY/SET 17918.4kg
CHCK			VER.		TOTAL WEIGHT 1


REV	DATE	BY	DESCRIPTION
1	2012.05.30	zhaoliang	
2	2012.08.17	zhaoliang	

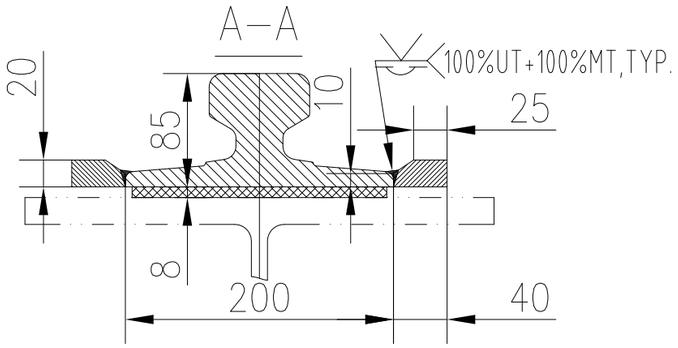

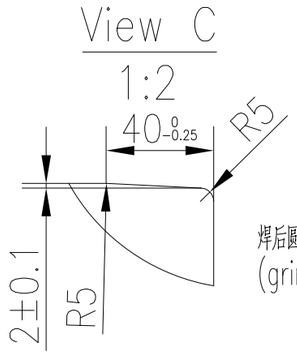


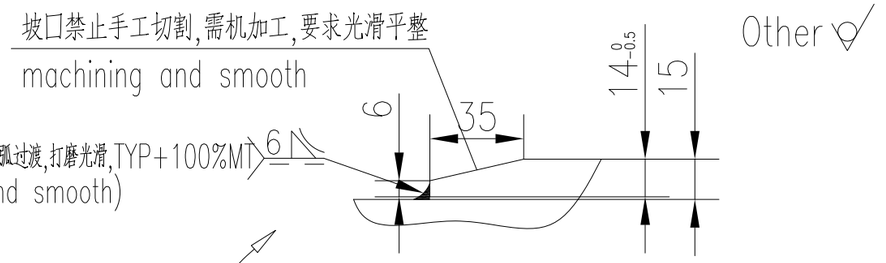


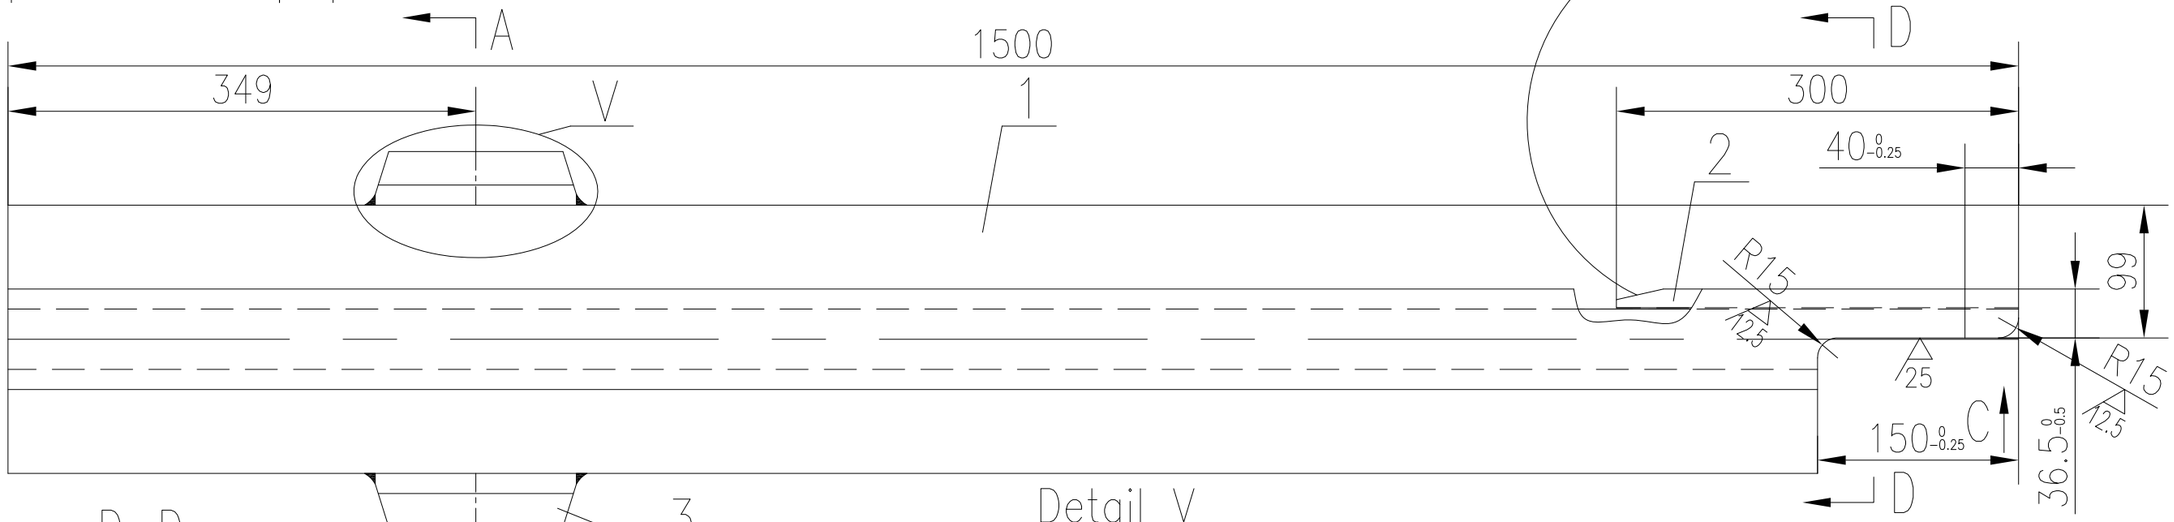

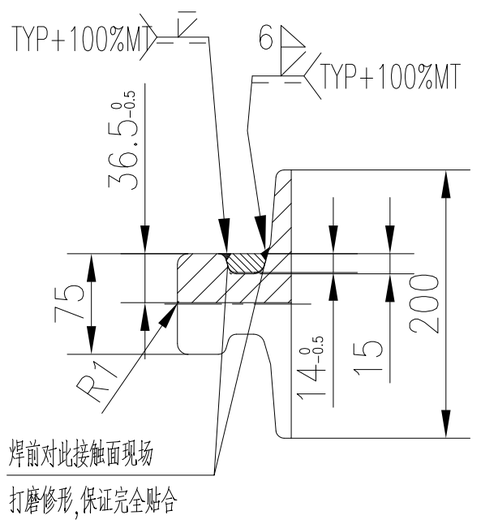

Ensure the inclined surfaces fully contact before welding, grinding if required.

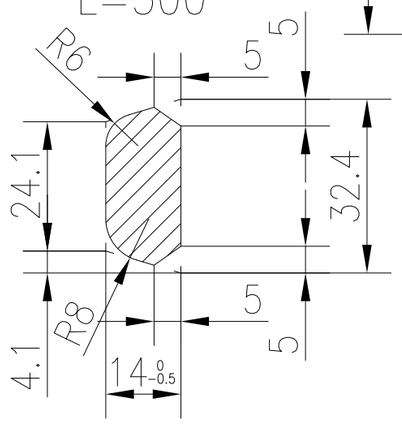

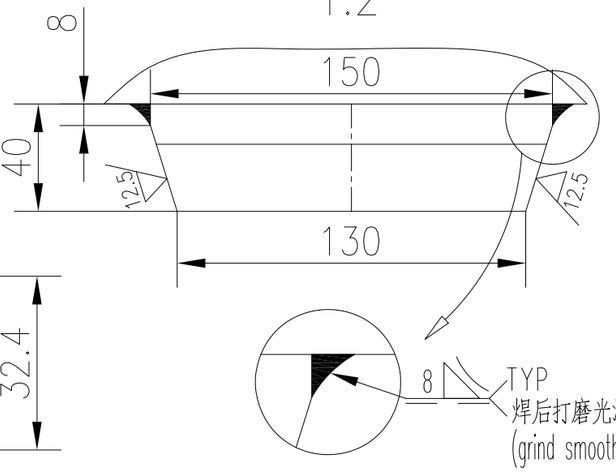

Technical Requirement

1. Machine end-section and strengthen block after welding them together.
2. When welding strength block(Item 2) and fix block (Item 3), this area should be preheated. Keep warm and cool slowly after welding. According to level of rail, choice the relevant technics regulations to weld.
3. Grind the rail sections at the boom hinge to the flat(the section plane area in the drawing) after assembling.
4. Made symmetrically.
5. Keep the inclined surfaces of item 2 fully contact with item 1 before welding.


技 术 要 求


1. 加强块焊好后再加工轨道端面.
2. 加强块(件2)和定位块(件3)与轨道(件1)焊接时,焊前应预热,焊后热处理,并保温冷却,根据不同的轨道级别选择相应焊接通用工艺规程制作.
3. 装配完成后,使用磨轨机将接口处磨平(示意图中剖面线部分).
4. 四件两两对称制作.
5. 加强块(件2)与轨道(件1)焊接时,需保证其上下斜面充分贴合.

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	Q'TY/SET	SET/CRANE		SCALE
3		-20X40X150	Q345B	2	0.9	1.8	
2		-14X30X300	Q345B	1	0.9	0.9	
1		A75-1500	90公斤级;90kg;	1	80	80	
1	J526A010401	短 轨(short rail)		83 kg	4		1:4


ZPMC	DRAW		TECH.		TRACE	
	CHCK		STDD		CHCK	

REV	DATE	BY	DESCRIPTION
1	2012.05.30	Liuyu	
2	2012.08.17	Liuyu	

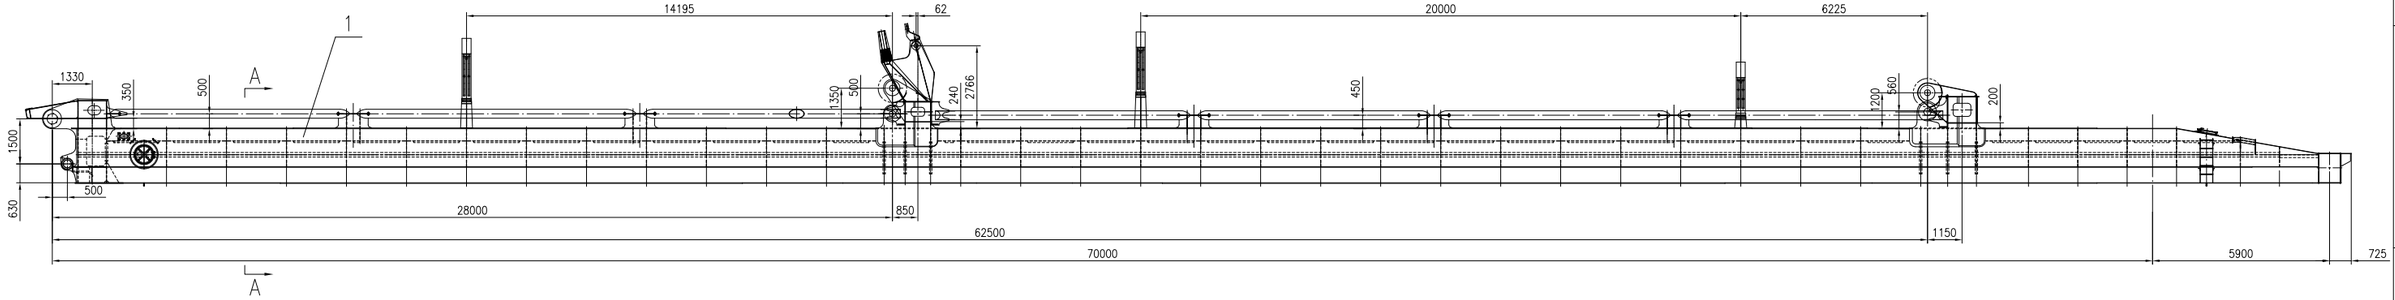

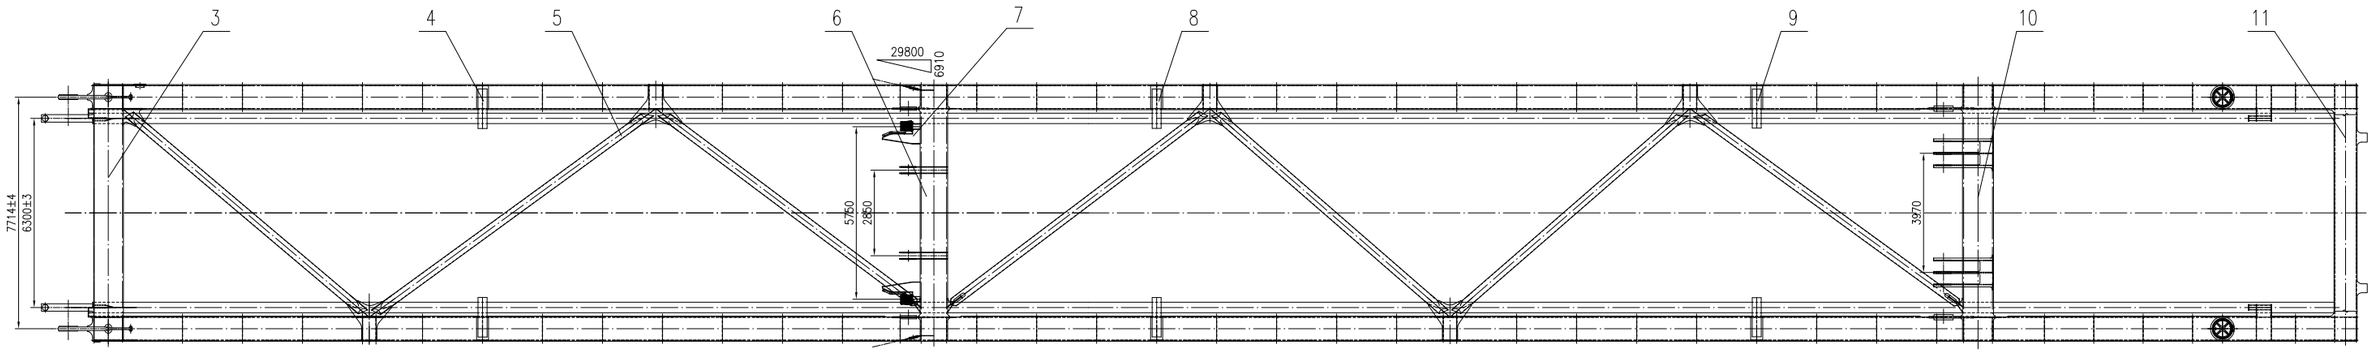

A–A

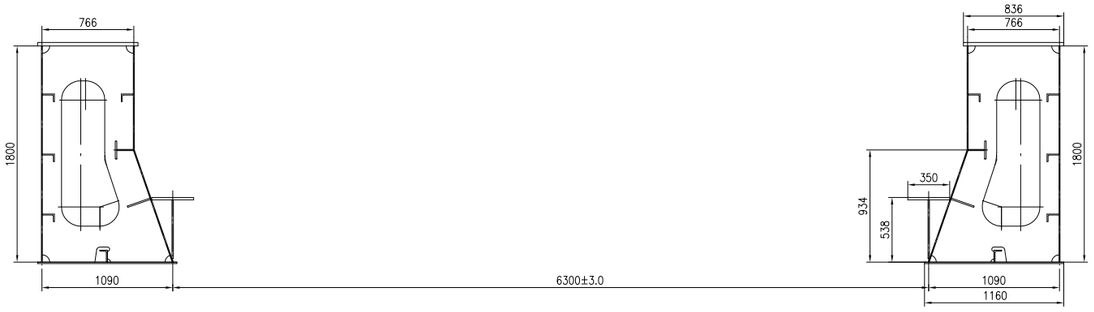

技术要求

1. 所有附件必须在冲砂前焊接在大梁上.
   All attachements shall weld before blasting.
2. 所有附件在大梁上的定位尺寸及安装要求应以相应零件图为准.
   Attachements's assembling requirement shall according to each sub-drawing.
3. 各联系梁需整体制作.
   The end beam should be made integerally.
4. 大梁分段只为制图方便,制作时是否分段由工艺定.
   The girder discerption in segments is used for drawing only, whether it is discerpted in manufacture devided by manufacture technics.

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	WEIGHT each	WEIGHT total	NOTE
11	J526A010511	联系梁梁4 Boom 4	组 件/weld	1	2510	2510	
10	J526A010510	联系梁梁3 Boom 3	组 件/weld	1	6512	6512	
9	J526A010509	导向架3 Forestay Guiding Support 3	组 件/weld	2	267	534	
8	J526A010508	导向架2 Forestay Guiding Support 2	组 件/weld	2	362	724	
7	J526A010507	安全拉板 Stowage support	组 件/weld	2	1000	2000	
6	J526A010506	联系梁梁2 Boom 2	组 件/weld	1	4302	4302	
5	J526A010505	水平桁架 Horizontal Truss	组 件/weld	1	6248	6248	
4	J526A010504	导向架1 Forestay Guiding Support 1	组 件/weld	2	346	692	
3	J526A010503	联系梁梁1 Boom 1	组 件/weld	1	3826	3826	
2							
1	J526A010501	臂大梁梁体 Boom	组 件/weld	1	125665	125665	


PROJECT: SriLanka CICT 12 STS Cranes
DESIGN STAGE: SCALE: 1:100
ITEM NAME: 臂大梁 Boom
DRAW NO: J526A0105
PROJ.

ZPMC


DSGN		TRACE		APP.	
DRAW		CHCK		Q'TY/SET	153013 kg
CHCK		VER.		SET/CRANE	1

REV	DATE	BY	DESCRIPTION
1	2012.05.30	Liuyu	
2	2012.08.17	Liuyu	


W–W

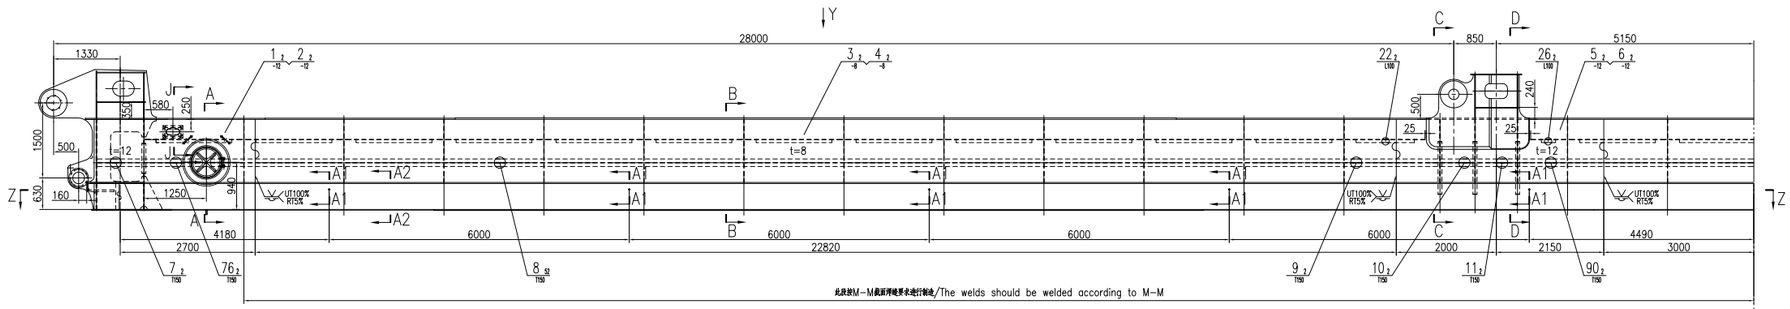


View Y

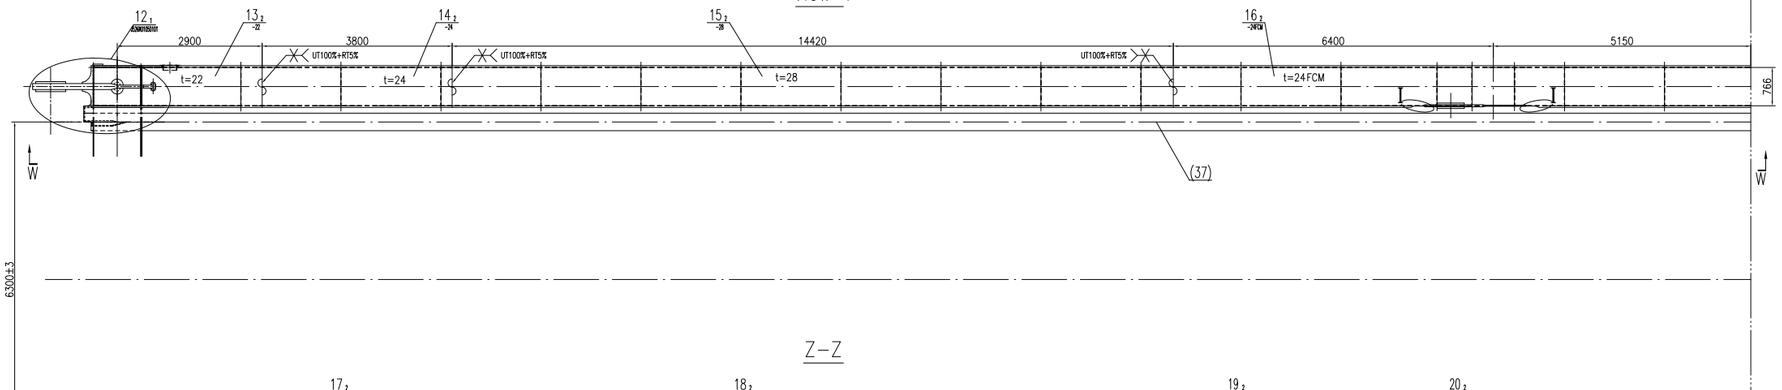


Z–Z

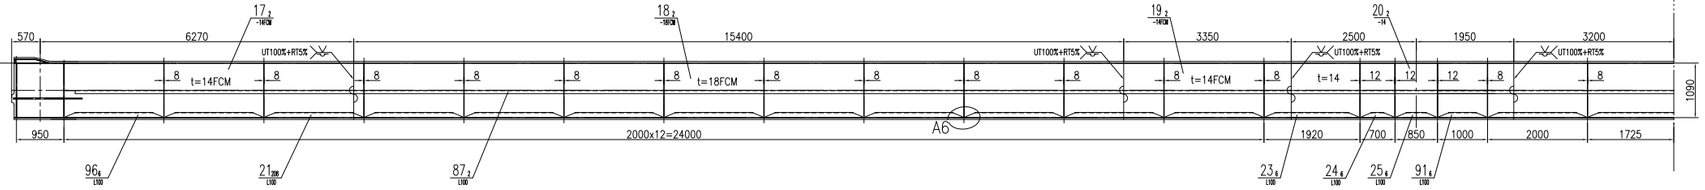


A1–A1
1:10



A2–A2
1:15




A3–A3
1:15




Detail Of stiffener welding
包板示意




A5–A5
1:15




Detail Of joint arrangement
对接焊缝倒口示意




Detail A6




I
1:10




a1–a1 a2–a2 a5–a5 a3–a3 a4–a4




II
1:10



III
1:10




IV
1:6




A7
(3)此处即可根据工艺要求进行调整


View A7



View A'
1:30




Item 27
1:30




废板开孔尺寸
opening on web




Item 85,86
1:15




A–A
1:30




B–B
1:30




C–C
1:30

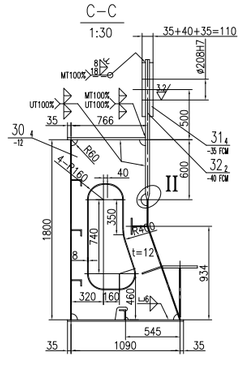


D–D
1:30





Item 31,32,35
1:30






J–J
1:12








PROJECT: Sri Lanka CICT 12 STS Cranes				DESIGN STAGE:		SCALE: 1:60	
ITEM NAME: 前大梁梁体 Boom				DRAW NO: J526A010501(1/2)			PROJ.
ZPMC	DSGN			TRACE		APP.	
	DRAW			CHCK		Q'TY/SET	125665 kg
	CHCK			VER.		SET/CRANE	1


REV	DATE	BY	DESCRIPTION
1	2012.05.30	Liuyu	
2	2012.08.17	Liuyu	

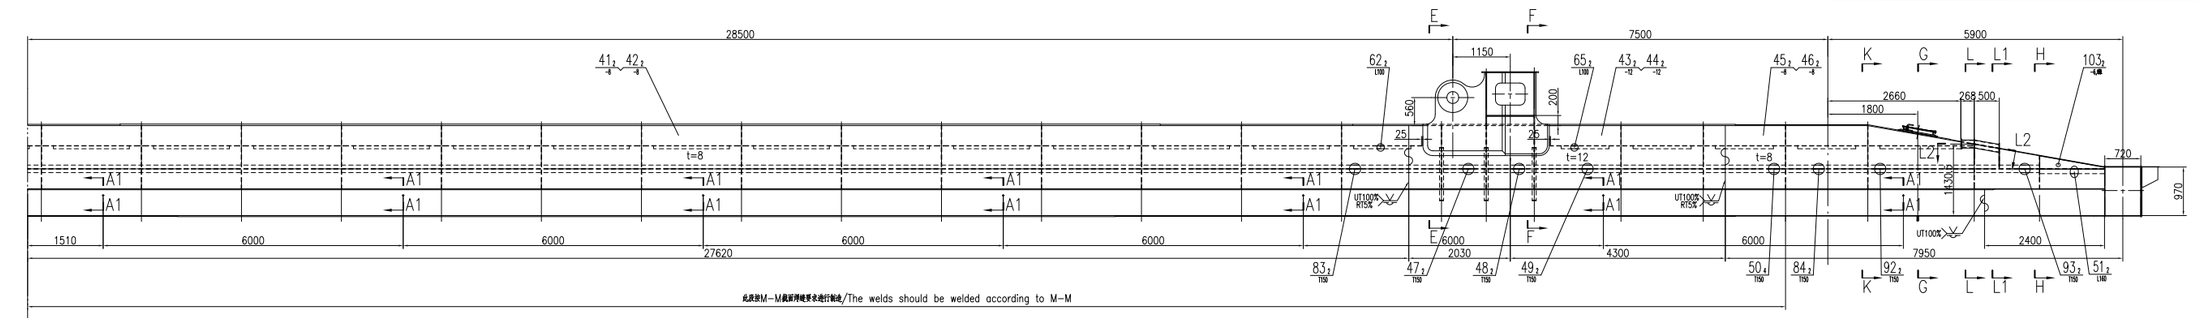


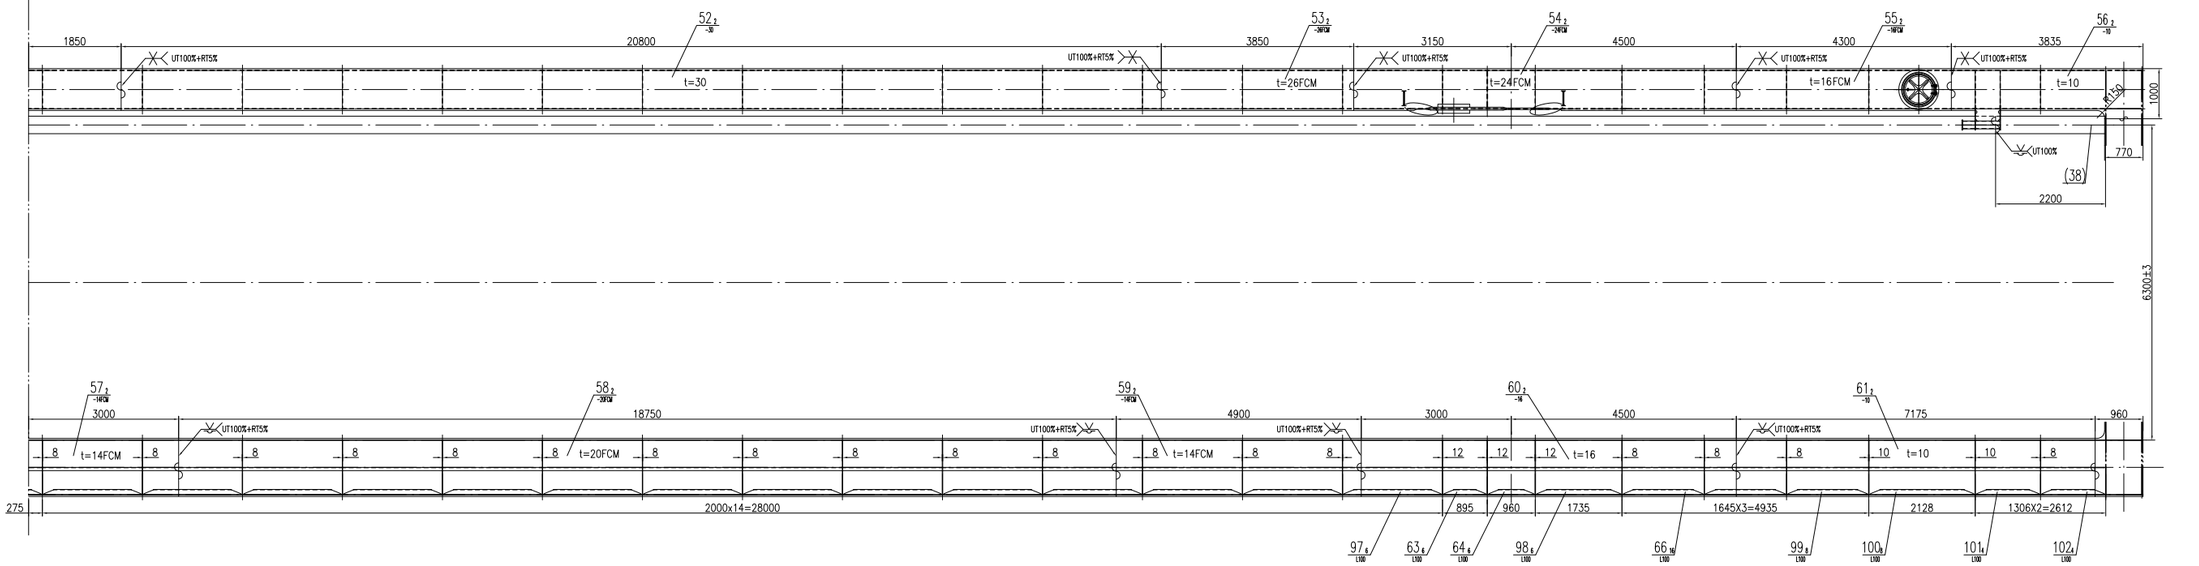




































技 术 要 求

1. 焊条采用E5015;自动焊丝采用H10Mn2,焊剂采用HJ330.
2. 所有外露的气割边缘切割截面光洁度均要达到仪表磨平.
3. 腹板与翼板焊接尽量采用自动焊,手工对焊,坡口按标准标定.
4. 未注明焊缝按同类焊缝施焊,未注贴角焊缝高度取被连接的薄板厚度的0.7倍.
5. 所有焊缝100%目测检验; 未注明的按AWS标准检验.
6. 所有的螺栓孔均应与相关件配钻.
7. 凡有厚薄板对接部应有不大于1:4的斜坡.
8. 明细表中尺寸仅供备料参考,准确尺寸放样定.

Technology Requirement

1. The welding rods should be E5015. The welding wire of automatic welding is H10Mn2, the welding flux HJ330.
2. The finished of the cut section of the outside bare gas cutting edge should be up to high grade or flattening milled.
3. Automatic welding should be adopted as far as possible in the case of the groove should be marked according to the standard.
4. The unmarked seams refer to the same sort. The height of the unmarked filler weld is 0.7 the thickness of the thin sheet.
5. All welded should be 100% VT. Those that are not indicated in the drawing should be inspected according to AWS.
6. All the bolt holes should be drilled together with the relevant components.
7. Butt weld with different plate thickness should make no than 1:4 chamfer.
8. The size in the subsidiary list is for reference of prepareing the feed only. The accurate size should be determined when lofting.

PROJECT: Sri Lanka CICT 12 STS Cranes				DESIGN STAGE:			SCALE: 1:60
ITEM NAME: 前大梁梁体 Boom				DRAW NO: J526A010501(2/2)			PROJ.
ZPMC	DSGN			TRACE		APP.	
	DRAW			CHCK		Q'TY/SET	125665 kg
	CHCK			VER.		SET/CRANE	1

明 细 表
SUBSIDIARY LIST

*The quantity and weight of this list is to one set
*此表为一套的数量和重量

设计：
校对：

1 set/crane, 125665 kg/set, 125665 kg/crane

PROJECT NAME or CODE: Sri Lanka CICT 12 STS Cranes				SUB-PART NAME: 前大梁梁体 Boom		SUB DRAW NO: J526A010501	
序号 NO.	图号或标准 SUB-NO. or STDD	名称 NAME	规格或型号 SIZE & STYLE	材料 MTRL	每套数量 Q'TY/SET	单重 PIECE WGHT	总重 TOTAL WGHT
1			— 12 × 1800 × 3220	Q345B	2	525.2	1050.4
2			— 12 × 1855 × 3370	Q345B	2	527.7	1055.5
3			— 8 × 1800 × 22820	Q345B	2	2579.6	5159.1
4			— 8 × 1855 × 22820	Q345B	2	2658.4	5316.8
5			— 12 × 1800 × 4150	Q345B	2	703.7	1407.3
6			— 12 × 1855 × 4150	Q345B	2	608.5	1216.9
7			T150×12×138×10 — 934	Q345B	2	23.3	46.6
8			T150×12×138×10 — 1992	Q345B	52	49.7	2585.8
9			T150×12×138×10 — 1910	Q345B	2	47.7	95.4
10			T150×12×138×10 — 688	Q345B	2	17.2	34.3
11			T150×12×138×10 — 838	Q345B	2	20.9	41.8
12	J526A01050101		铰点段 hinge seciton	welded	1	6677.0	6677.0
13			— 22 × 836 × 3595	Q345B	2	479.2	958.4
14			— 24 × 836 × 3800	Q345B	2	598.5	1197.0
15			— 28 × 836 × 14420	Q345B	2	2649.7	5299.4
16	FCM		— 24 × 836 × 13400	Q345B	2	2090.6	4181.2
17	FCM		— 14 × 1237 × 6840	Q345B	2	822.2	1644.4
18	FCM		— 18 × 1160 × 15400	Q345B	2	2524.2	5048.4
19	FCM		— 14 × 1160 × 3350	Q345B	2	427.1	854.1
20			— 14 × 1160 × 4450	Q345B	2	567.3	1134.6
21			L100×63×8 — 1942	Q235	208	16.7	3468.9
22			L100×63×8 — 1591	Q235	2	13.2	26.4
23			L100×63×8 — 1860	Q235	6	15.9	95.2
24			L100×63×8 — 638	Q235	6	3.8	22.8
25			L100×63×8 — 788	Q235	6	5.3	31.7
26			L100×63×8 — 706	Q235	2	4.5	8.9
27			— 20 × Φ950/Φ570	Q345B	2	71.0	142.0
28	外协 CMHP4		人孔盖4 Man hole 4	assembly	4	19.3	77.2
29			— 8 × 1082 × 1800	Q345B	62	66.4	4117.6
30			— 12 × 1078 × 1800	Q345B	4	104.7	418.8
31	FCM		— 35 × Φ540/Φ208	Q345B	4	53.6	214.4
32	FCM		— 40 × 1300 × 1490	A709-50-2	2	489.5	979.0

明 细 表
SUBSIDIARY LIST

*The quantity and weight of this list is to one set
*此表为一套的数量和重量

设计：
校对：

1 set/crane, 125665 kg/set, 125665 kg/crane

PROJECT NAME or CODE: Sri Lanka CICT 12 STS Cranes				SUB-PART NAME: 前大梁梁体 Boom		SUB DRAW NO: J526A010501	
序号 NO.	图号或标准 SUB-NO. or STDD	名称 NAME	规格或型号 SIZE & STYLE	材料 MTRL	每套数量 Q'TY/SET	单重 PIECE WGHT	总重 TOTAL WGHT
33			— 12 × 1078 × 1800	Q345B	2	104.7	209.4
34			— 8 × 80 × 2678	Q345B	12	13.5	161.5
35	FCM		— 20 × 765 × 1490	Q345B	2	136.5	272.9
36			Φ30×2.5 — 278	anti-rust不锈钢	24	0.5	12.0
37	焊接T型钢		T350×20×510×12 — 72675	Q345B	2	7304	14609
38	焊接T型钢		T350×12×510×8 — 2400	Q345B	2	146.4	292.8
39			— 12 × 200 × 200	Q345B	164	1.9	305.1
40			Φ30×2.5 — 100	anti-rust不锈钢	4	0.2	0.8
41			— 8 × 1800 × 30620	Q345B	2	3461.3	6922.6
42			— 8 × 1855 × 30620	Q345B	2	3567.0	7134.1
43			— 12 × 1800 × 6330	Q345B	2	1073.3	2146.6
44			— 12 × 1855 × 6330	Q345B	2	963.1	1926.2
45			— 8 × 1800 × 8335	Q345B	2	779.2	1558.3
46			— 8 × 1855 × 7585	Q345B	2	759.7	1519.4
47			T150×12×138×10 — 883	Q345B	2	22.0	44.1
48			T150×12×138×10 — 948	Q345B	2	23.7	47.3
49			T150×12×138×10 — 1725	Q345B	2	43.1	86.1
50			T150×12×138×10 — 1637	Q345B	4	40.9	163.5
51			L160×100×10 — 1297	Q235	2	25.8	51.5
52			— 30 × 836 × 20800	Q345B	2	4095.1	8190.1
53	FCM		— 26 × 836 × 3850	Q345B	2	656.9	1313.8
54	FCM		— 24 × 836 × 7650	Q345B	2	1176.4	2352.8
55	FCM		— 16 × 836 × 4324	Q345B	2	430.3	860.7
56			— 10 × 1045.5 × 3884	Q345B	2	275.0	550.1
57	FCM		— 14 × 1160 × 6200	Q345B	2	790.4	1580.8
58	FCM		— 20 × 1160 × 18750	Q345B	2	3414.8	6829.5
59	FCM		— 14 × 1160 × 4900	Q345B	2	624.7	1249.3
60			— 16 × 1160 × 7500	Q345B	2	1092.7	2185.4
61			— 10 × 1160 × 7175	Q345B	2	653.4	1306.7
62			L100×63×8 — 1571	Q235	2	13.0	26.0
63			L100×63×8 — 833	Q235	6	5.7	34.4

明 细 表
SUBSIDIARY LIST

*The quantity and weight of this list is to one set
*此表为一套的数量和重量

设计：
校对：

1 set/crane, 125665 kg/set, 125665 kg/crane

PROJECT NAME or CODE: Sri Lanka CICT 12 STS Cranes				SUB-PART NAME: 前大梁梁体 Boom		SUB DRAW NO: J526A010501	
序号 NO.	图号或标准 SUB-NO. or STDD	名称 NAME	规格或型号 SIZE & STYLE	材料 MTRL	每套数量 Q'TY/SET	单重 PIECE WGHT	总重 TOTAL WGHT
64			L100×63×8 — 898	Q235	6	6.4	38.2
65			L100×63×8 — 1381	Q235	2	11.1	22.3
66			L100×63×8 — 1587	Q235	16	13.2	210.7
67			— 12 × 1078 × 1800	Q345B	4	104.7	418.8
68	FCM		— 60 × Φ600/Φ238	A709-50-2	4	112.2	448.9
69	FCM		— 60 × 1650 × 1660	A709-50-2	2	1004.7	2009.4
70			— 12 × 1078 × 1800	Q345B	2	104.7	209.4
71	FCM		— 30 × 880 × 1660	Q345B	2	239.4	478.9
72			— 10 × 1082 × 1425	Q345B	2	69.5	139.0
73			— 28 × Φ800/Φ530	Q345B	2	62.0	124.0
74			— 8 × 1082 × 1195	Q345B	2	50.1	100.2
75			— 10 × 1082 × 1800	Q345B	2	83.0	166.0
76			T150×12×138×10 — 1988	Q345B	2	49.6	99.3
77			— 12 × 405 × 489	Q345B	2	7.6	15.2
78			— 10 × 758 × 398	Q345B	2	14.2	28.3
79			Φ159×8 — 242	20	2	7.2	14.4
80			— 12 × 455 × 489	Q345B	2	8.9	17.8
81			Φ159×8 — 523	20	2	15.6	31.2
82			— 20 × Φ200	Q345B	2	4.9	9.9
83			T150×12×138×10 — 1990	Q345B	2	49.7	99.4
84			T150×12×138×10 — 1636	Q345B	2	40.8	81.7
85			Φ20 — 364	Q235	4	0.9	3.6
86			— 6 × Φ40	Q235	8	0.1	0.8
87			L100×63×8 — 73672	ST52-3	2	725.0	1450.0
88	DTZ-1105-280		法兰框<5>	电气通用材料	1	2.8	2.8
89	DTK-1101-280		重型重磅圈	电气通用材料	1	5.6	5.6
90			T150×12×138×10 — 990	Q345B	2	24.7	49.4
91			L100×63×8 — 940	Q235	6	6.8	40.7
92			T150×12×138×10 — 2118	Q345B	2	52.9	105.7
93			T150×12×138×10 — 1297	Q345B	2	32.4	64.8
94			L100×63×8 — 930	Q235	2	6.7	13.4

明 细 表
SUBSIDIARY LIST


*The quantity and weight of this list is to one set
*此表为一套的数量和重量


设计：
校对：


1 set/crane, 125665 kg/set, 125665 kg/crane


PROJECT NAME or CODE: Sri Lanka CICT 12 STS Cranes				SUB-PART NAME: 前大梁梁体 Boom		SUB DRAW NO: J526A010501	
序号 NO.	图号或标准 SUB-NO. or STDD	名称 NAME	规格或型号 SIZE & STYLE	材料 MTRL	每套数量 Q'TY/SET	单重 PIECE WGHT	总重 TOTAL WGHT
95			L100×63×8 — 434	Q235	2	1.8	3.6
96			L100×63×8 — 1938	Q235	6	16.6	99.8
97			L100×63×8 — 1940	Q235	6	16.7	99.9
98			L100×63×8 — 1675	Q235	6	14.0	84.2
99			L100×63×8 — 1586	Q235	8	13.2	105.3
100			L100×63×8 — 2068	Q235	8	17.9	143.4
101			L100×63×8 — 1247	Q235	4	9.8	39.3
102			L100×63×8 — 1247	Q235	4	9.8	39.3


REV	DATE	BY	DESCRIPTION
1	2012.05.30	Liuyu	
2	2012.08.17	Liuyu	

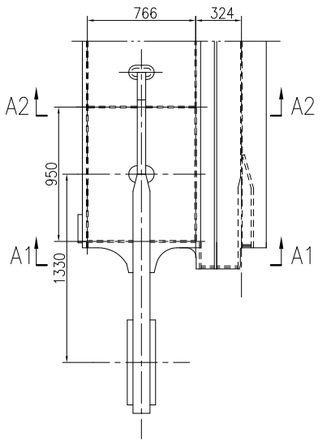


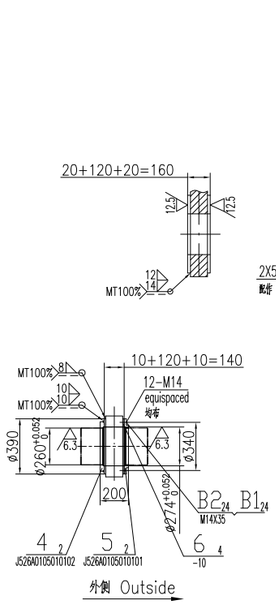





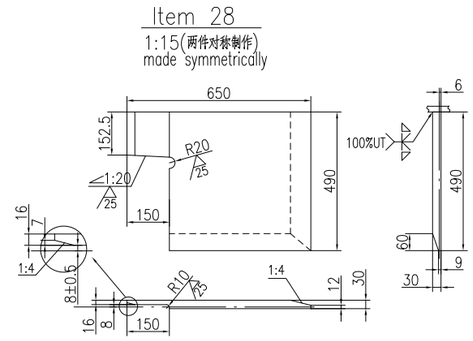











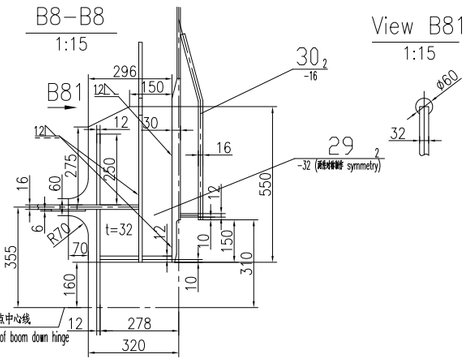


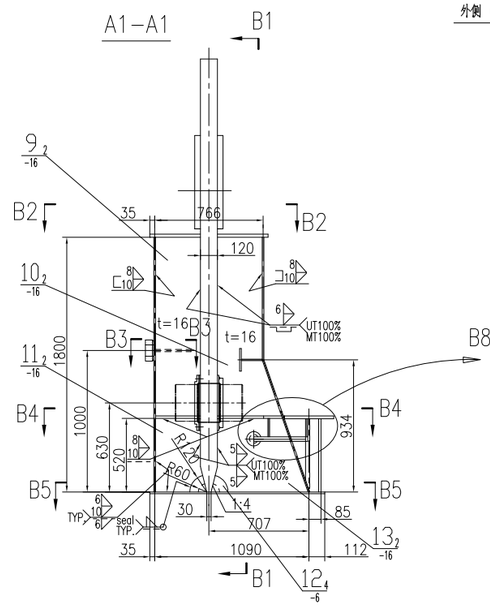


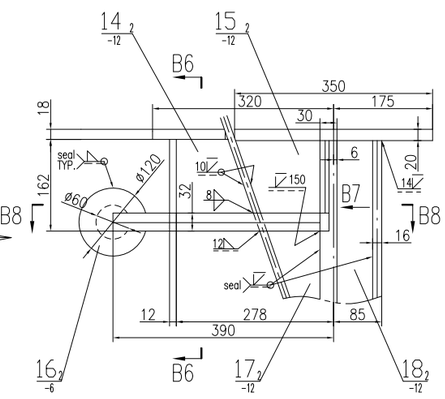


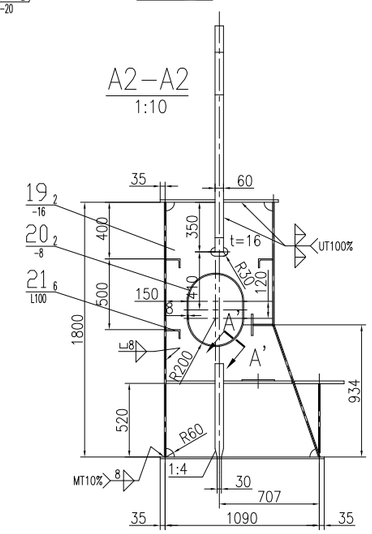


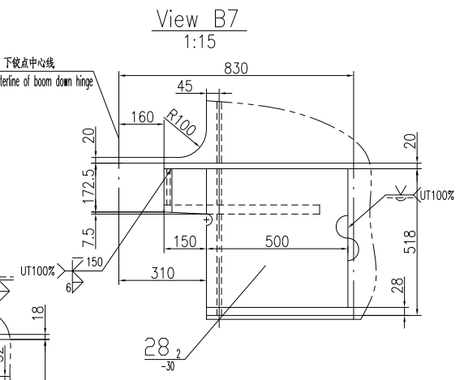


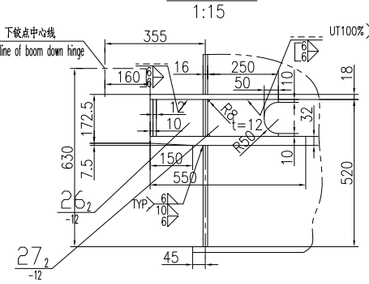

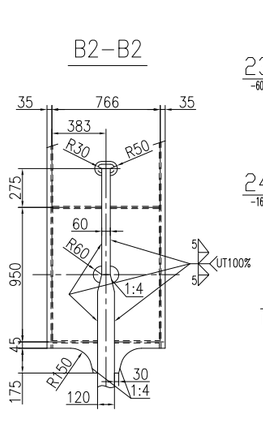

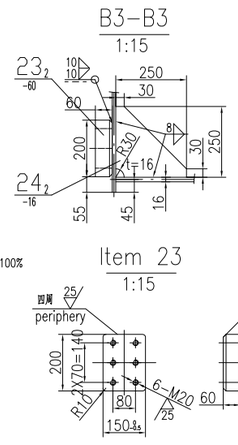

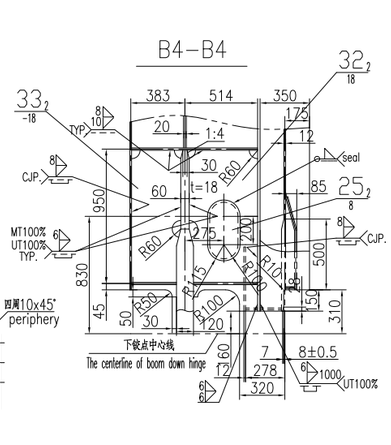

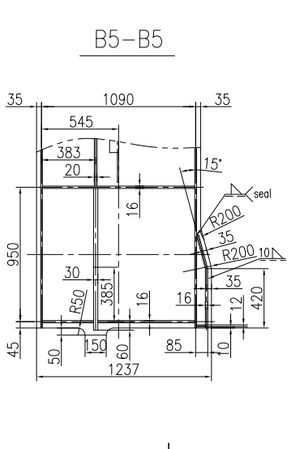

注:1.技术要求按照图纸J526A010501要求执行
2.角钢焊接要求按照图纸J526A010501要求执行

PROJECT: Sri Lanka CICT 12 STS Cranes				DESIGN STAGE:			SCALE: 1:30	
ITEM NAME: 铰点段 Hinge section				DRAW NO: J526A01050101			PROJ.	
ZPMC	DSGN			TRACE			APP.	
	DRAW			CHCK			Q'TY/SET	6677 kg
	CHCK			VER.			SET/CRANE	1

明 细 表
SUBSIDIARY LIST

*The quantity and weight of this list is to one set
*此表为一套的数量和重量

设计：
校对：

1 set/crane, 6677 kg/set, 6677 kg/crane

PROJECT NAME or CODE: Sri Lanka CICT 12 STS Cranes				SUB-PART NAME: 铰点段 Hinge section		SUB DRAW NO: J526A01050101	
序号 NO.	图号或标准 SUB-NO. or STDD	名称 NAME	规格或型号 SIZE & STYLE	材料 MTRL	每套数量 Q'TY/SET	单重 PIECE WGHT	总重 TOTAL WGHT
1			— 20 × Φ610/Φ348	Q345B	4	30.9	123.6
2	FCM		— 120 × 1660 × 2797	A709-50-2	2	2100.0	4200.0
3			— 60 × 750 × 1335	A709-50-2	2	326.3	652.6
4	J526A0105010102		盖2 Cover 2	Q345B	2	10.0	20.0
5	J526A0105010101		盖1 Cover 1	Q345B	2	10.0	20.0
6			— 10 × Φ390/Φ274	Q345B	4	4.7	18.8
7			— 60 × 557 × 660	A709-50-2	2	149.4	298.7
8			— 20 × 400 × 660	Q345B	2	22.6	45.1
9			— 16 × 317 × 1262	Q345B	2	50.2	100.5
10			— 16 × 454 × 1262	Q345B	2	53.6	107.1
11			— 16 × 362 × 520	Q345B	2	21.4	42.8
12			— 6 × 116 × 120	Q235	4	0.7	2.6
13			— 16 × 520 × 686	Q345B	2	37.9	75.8
14			— 12 × 130 × 136	Q345B	2	1.5	3.0
15			— 12 × 128 × 150	Q345B	2	1.8	3.6
16			— 6 × Φ120	Q235	2	0.5	1.0
17			— 12 × 95 × 271	Q345B	2	1.2	2.4
18			— 12 × 63 × 518	Q345B	2	3.1	6.1
19			— 16 × 1078 × 1800	Q345B	2	163.7	327.4
20			— 8 × 80 × 1472	Q345B	2	7.4	14.8
21			L100×63×8 — 884	Q235	6	6.2	37.4
22							
23			— 60 × 150 × 200	A709-50-2	2	14.1	28.2
24			— 16 × 250 × 250	Q345B	2	4.8	9.6
25			— 8 × 230 × 430	Q345B	2	6.2	12.4
26			— 12 × 130 × 187	Q345B	2	2.3	4.6
27			— 12 × 130 × 250	Q345B	2	3.0	6.0
28			— 30 × 490 × 650	Q345B	2	63.3	126.7
29			— 32 × 366 × 550	Q345B	2	45.0	90.0
30			— 16 × 518 × 664	Q345B	2	43.2	86.4

明 细 表
SUBSIDIARY LIST


*The quantity and weight of this list is to one set
*此表为一套的数量和重量


设计：
校对：


1 set/crane, 6677 kg/set, 6677 kg/crane


PROJECT NAME or CODE: Sri Lanka CICT 12 STS Cranes				SUB-PART NAME: 铰点段 Hinge section		SUB DRAW NO: J526A01050101	
序号 NO.	图号或标准 SUB-NO. or STDD	名称 NAME	规格或型号 SIZE & STYLE	材料 MTRL	每套数量 Q'TY/SET	单重 PIECE WGHT	总重 TOTAL WGHT
31			— 6 × 100 × 160	Q235	2	0.8	1.5
32			— 18 × 499 × 1137	Q345B	2	58.0	116.0
33			— 18 × 362 × 1037	Q345B	2	46.0	92.0
B1	GB/T955-1987	垫圈	Washer 14	达克罗 Darco	24		
B2	GB/T5783-2000	螺栓	Bolt M14×35	8.8级 达克罗 Darco	24		


REV	DATE	BY	DESCRIPTION
1	2012.05.30	Liuyu	
2	2012.08.17	Liuyu	

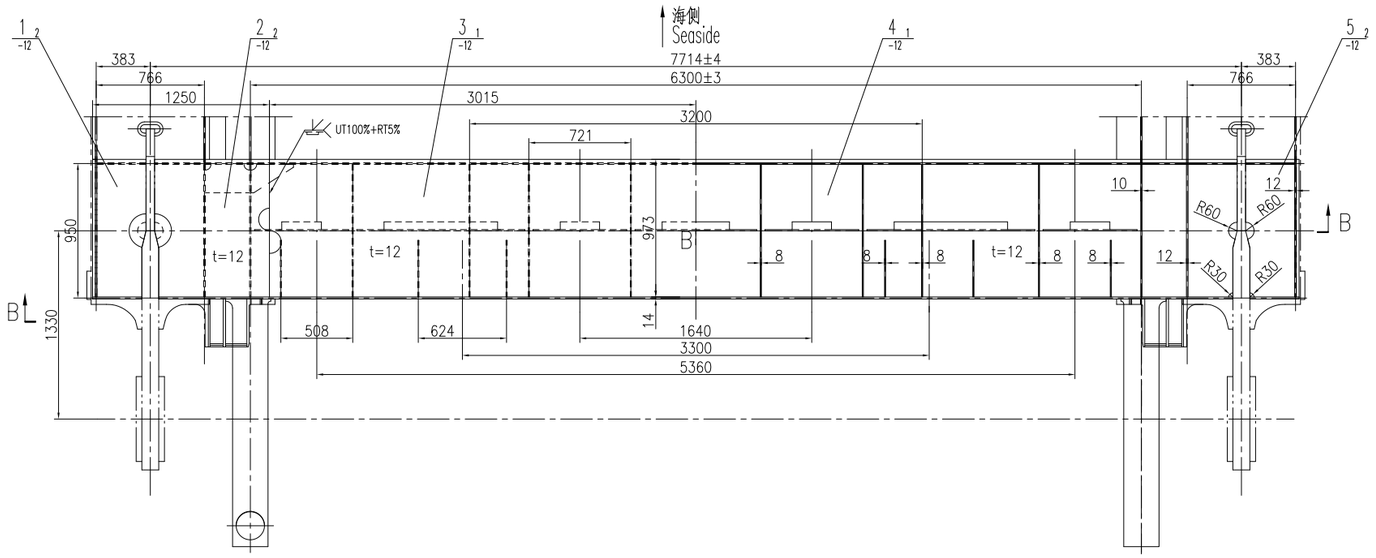


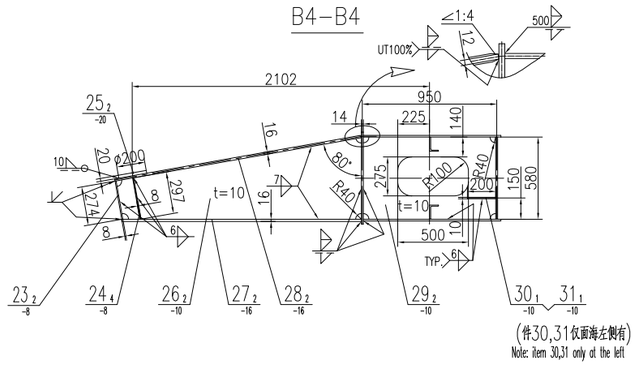





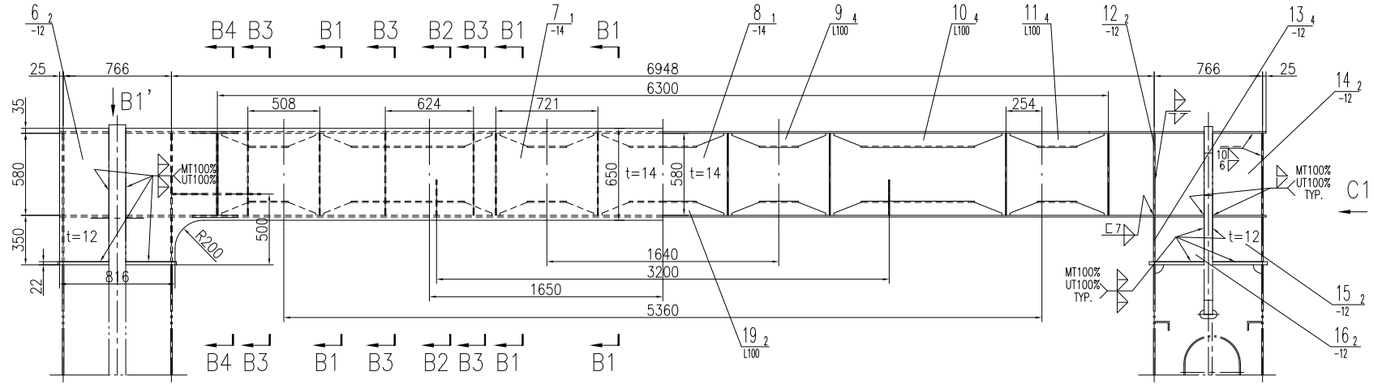





















注:1.技术要求按照图纸J526A010501要求执行
2.角钢焊接要求按照图纸J526A010501要求执行

PROJECT: Sri Lanka CICT 12 STS Cranes				DESIGN STAGE:		SCALE: 1:30	
ITEM NAME: 联系横梁 1 Boom 1				DRAW NO: J526A010503		PROJ.	
ZPMC	DSGN			TRACE		APP.	
	DRAW			CHCK		Q'TY/SET	3826 kg
	CHCK			VER.		SET/CRANE	1

明 细 表

SUBSIDIARY LIST


*The quantity and weight of this list is to one set
*此表为一套的数量和重量


设计：


校对：


1 set/crane, 3826 kg/set, 3826 kg/crane


PROJECT NAME or CODE: Sri Lanka CICT 12 STS Cranes				SUB-PART NAME: 联系横梁 1 Boom 1		SUB DRAW NO: J526A010503	
序号 NO.	图号或标准 SUB-NO. or STDD	名称 NAME	规格或型号 SIZE & STYLE	材料 MTRL	每套数量 Q'TY/SET	单重 PIECE WGHT	总重 TOTAL WGHT
1			— 12 × 378 × 974	Q345B	2	33.3	66.7
2			— 12 × 812 × 973	Q345B	2	73.1	146.2
3			— 12 × 973 × 6030	Q345B	1	552.7	552.7
4			— 12 × 973 × 7654	Q345B	1	698.9	698.9
5			— 12 × 378 × 974	Q345B	2	33.3	66.7
6			— 12 × 348 × 943	Q345B	2	30.9	61.8
7			— 14 × 943 × 7594	Q345B	1	572.9	572.9
8			— 14 × 580 × 7654	Q345B	1	487.9	487.9
9			L100×63×8 — 663	Q235	4	4.0	16.2
10			L100×63×8 — 1188	Q235	4	9.2	36.9
11			L100×63×8 — 665	Q235	4	4.1	16.3
12			— 12 × 580 × 936	Q345B	2	39.0	78.0
13			— 12 × 316 × 1074	Q345B	4	31.0	124.0
14			— 12 × 347 × 580	Q345B	2	19.0	37.9
15			— 12 × 347 × 316	Q345B	2	10.3	20.7
16			— 12 × 347 × 316	Q345B	2	10.3	20.7
17			— 8 × 580 × 936	Q345B	6	24.8	148.7
18			— 8 × 250 × 936	Q345B	2	16.8	33.5
19			L100×63×8 — 861	Q235	2	6.0	12.0
20			— 8 × 400 × 580	Q345B	6	12.9	77.6
21			— 6 × 120 × 240	Q235	4	1.5	6.0
22			— 12 × 580 × 974	Q345B	2	53.2	106.4
23			— 8 × 250 × 274	Q345B	2	4.3	8.6
24			— 8 × 105 × 297	Q345B	4	2.0	7.8
25			— 20 × Φ200	Q345B	2	4.9	9.8
26			— 10 × 580 × 1733	Q345B	2	57.4	114.8
27			— 16 × 320 × 1694	Q345B	2	54.2	108.4
28			— 16 × 320 × 1769	Q345B	2	56.5	113.1
29			— 10 × 580 × 936	Q345B	2	33.8	67.6
30			— 10 × 200 × 313	Q345B	1	4.9	4.9
31			— 10 × 200 × 300	Q345B	1	2.7	2.7

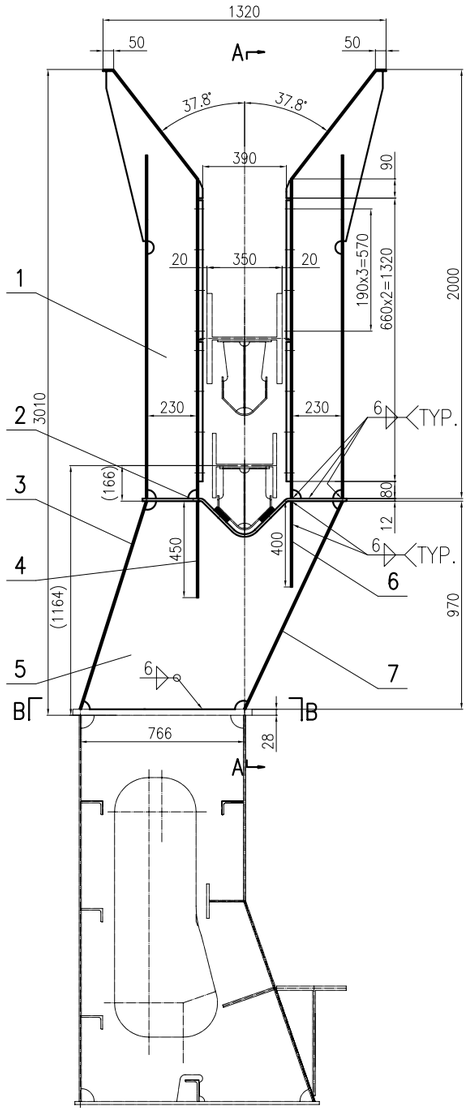


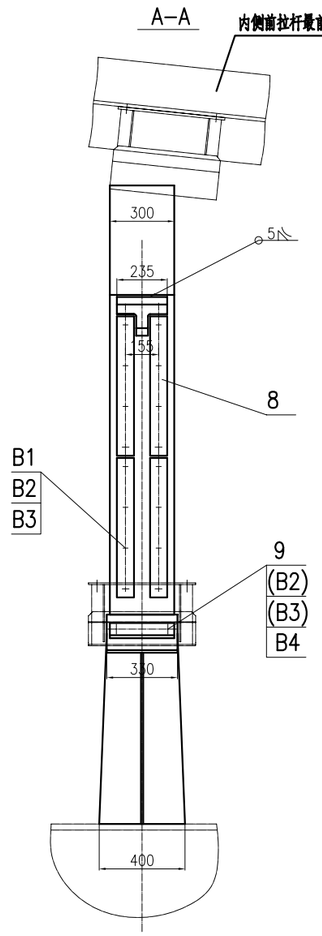


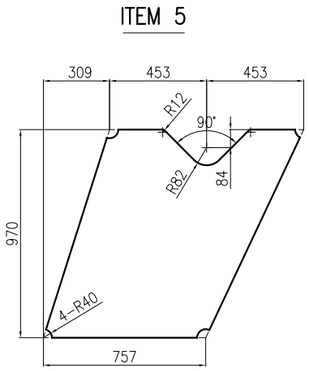


















技术要求
Technical Requirements

1. 焊条采用E4315;
   Welding rods should be E4315.
2. 焊缝须包角;
   Welding line should be wrap angle.
3. 对接焊缝打磨光滑.
   Welding line of butt joint should be grinded smoothly.
4. 在前大梁俯仰调试之前,导向架上的全部抗磨块都要安装到位.
   Slap block must be fixed before boom hoisting for test.
5. 未注明焊缝按双面角焊接施焊,焊脚高度为6mm.
   Unmarked weld is fillet welding by both sides and the height is 6mm.
6. 明细表中尺寸仅供备料参考,准确尺寸放样定.
   Dimensions shown on the drawing are prior to those shown in B.O.M. which are for reference only.

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	WEIGHT each	WEIGHT total	NOTE
B4	GB/T 70.2-2000	内六角螺钉M16X50	5.8级	4			达克罗 Dacro
B3	GB95-85	垫圈 16		36			达克罗 Dacro
B2	GB889-86	锁紧螺母 M16		36			达克罗 Dacro
B1	GB/T 70.2-2000	内六角螺钉M16X45	5.8级	32			达克罗 Dacro
9	FGS01A02	Slap block 抗磨块 2	UHMWPE 超高分子量聚乙烯	2	0.6	1.2	ZPMC 标准件
8	FGS01A01	Slap block 抗磨块 1	UHMWPE 超高分子量聚乙烯	8	1.05	8.4	ZPMC 标准件
7		-8x400x1069	Q235	1	20	20	
6		-8x146x400	Q235	2	3.5	7	
5		-8x970x1215	Q235	1	48	48	
4		-8x146x450	Q235	2	4.1	8.2	
3		-8x400x1016	Q235	1	19	19	
2		-12x330x1090	Q235	1	33.9	33.9	
1	J526A01050401	Support 支架 1	焊接件	2	100	200	


PROJECT: SliLanka CICT 12 STS Cranes
DESIGN STAGE:
SCALE: 1:30


ITEM NAME: 导向装置1
Forestay Guiding Support 1


DRAW NO: J526A010504


ZPMC


DSGN		TRACE		APP.	
DRAW		CHCK		SET/CRANE	2
CHCK		VER.		WEIGHT	346 kg

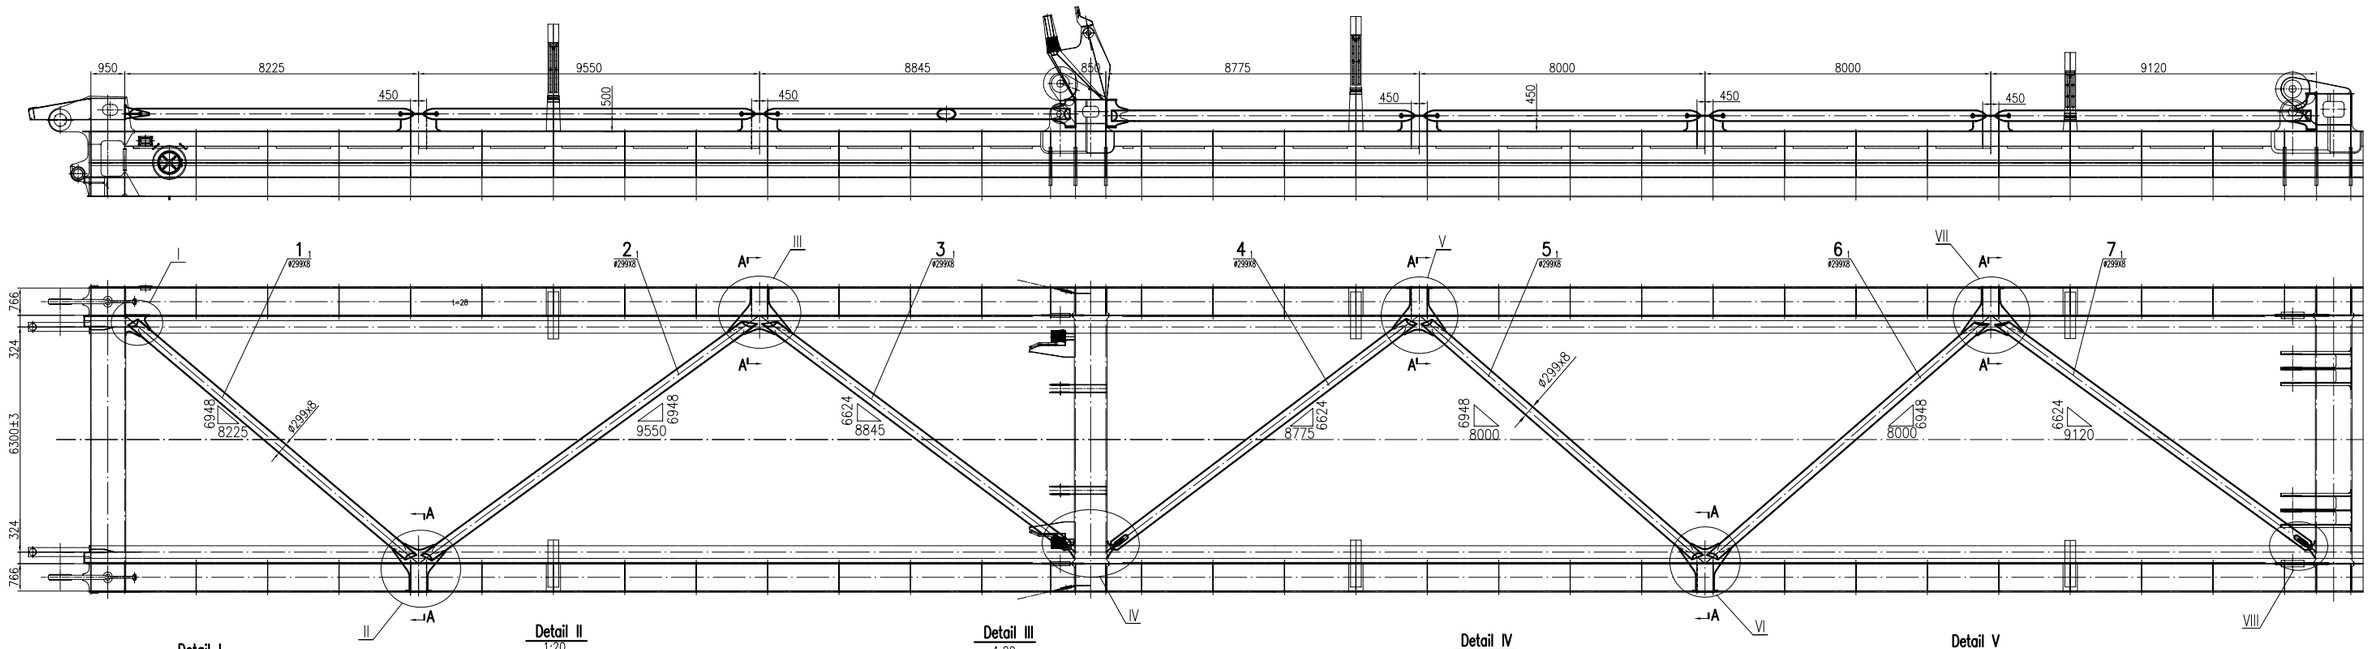


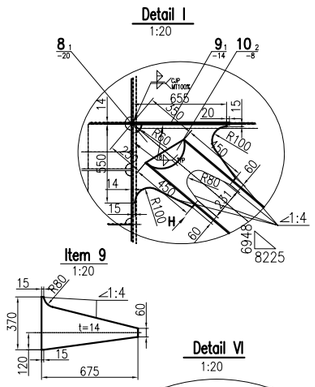


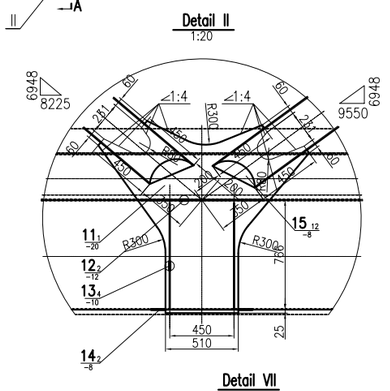


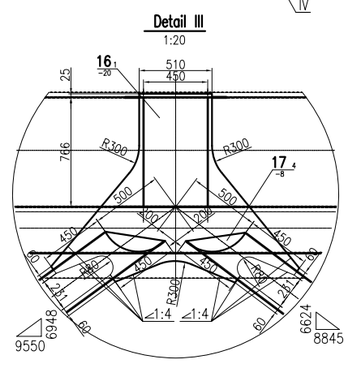


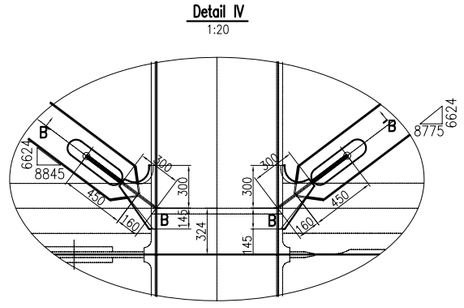


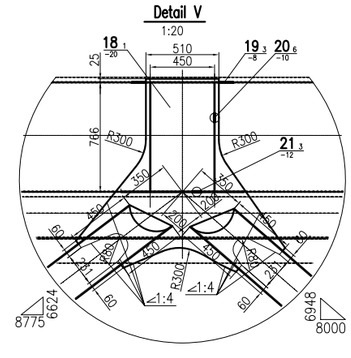


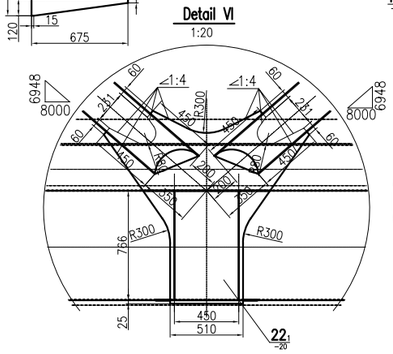



































A–A
1:20
25
766
8
20
12
t=10
8
TYP
TYP
TYP
TYP
TYP
TYP
8
8
8

明 细 表
SUBSIDIARY LIST

*The quantity and weight of this list is to one set
*此表为一套的数量和重量

设计: 日期:
校对: 日期:

1 set/crane, 6248 kg/set, 6248 kg/crane

PROJECT NAME or CODE: SliLanka CICT 12 STS Cranes				SUB-PART NAME: 水平桁架 Horizontal Truss		SUB DRAW NO: J526A010505	
序号 NO.	图号或标准 SUB-NO. or STDD	名称 NAME	规格或型号 SIZE & STYLE	材料 MTRL	每套数量 Q'TY/SET	单重 PIECE WGHT	总重 TOTAL WGHT
1			Φ299X8 — 10317	20#	1	592.3	592.3
2			Φ299X8 — 11410	20#	1	655.1	655.1
3			Φ299X8 — 10690	20#	1	613.7	613.7
4			Φ299X8 — 10634	20#	1	610.5	610.5
5			Φ299X8 — 10196	20#	1	585.4	585.4
6			Φ299X8 — 10196	20#	1	585.4	585.4
7			Φ299X8 — 10862	20#	1	623.6	623.6
8			— 20 × 579 × 718	Q345B	1	52.2	52.2
9			— 14 × 370 × 675	Q345B	1	16.5	16.5
10			— 8 × 191 × 307	Q235	2	3.3	6.6
11			— 20 ×1345 × 1475	Q345B	1	171.3	171.3
12			— 12 × 462 × 860	Q345B	2	29.9	59.9
13			— 10 × 462 × 756	Q345B	4	27.4	109.7
14			— 8 × 462 × 710	Q345B	2	16.5	33.0
15			— 8 × 191 × 326	Q235	12	3.5	42.2
16			— 20 ×1321 × 1737	Q345B	1	198.1	198.1
17			— 8 × 191 × 417	Q235	4	4.5	18.0
18			— 20 ×1350 × 1464	Q345B	1	170.7	170.7
19			— 8 × 410 × 710	Q345B	3	14.6	43.9
20			— 10 × 410 × 756	Q345B	6	24.3	146.0
21			— 12 × 410 × 860	Q345B	3	26.6	79.7
22			— 20 ×1350 × 1439	Q345B	1	167.7	167.7
23			— 20 ×1350 × 1705	Q345B	1	198.8	198.8
24			— 8 × 758 × 400	Q345B	5	19.3	96.4
25	封板		SPW120-299-20	Q345B	28	4.0	112.0
26			— 14 × 223 × 445	Q345B	1	6.5	6.5
27			— 20 × 603 × 768	Q345B	1	54.5	54.5
28			— 14 × 251 × 445	Q345B	1	7.4	7.4
29			— 8 × 191 × 290	Q345B	6	3.1	18.8
30			— 14 × 222 × 445	Q345B	1	6.5	6.5

明 细 表
SUBSIDIARY LIST


*The quantity and weight of this list is to one set
*此表为一套的数量和重量


设计: 日期:
校对: 日期:


1 set/crane, 6248 kg/set, 6248 kg/crane


PROJECT NAME or CODE: SliLanka CICT 12 STS Cranes				SUB-PART NAME: 水平桁架 Horizontal Truss		SUB DRAW NO: J526A010505	
序号 NO.	图号或标准 SUB-NO. or STDD	名称 NAME	规格或型号 SIZE & STYLE	材料 MTRL	每套数量 Q'TY/SET	单重 PIECE WGHT	总重 TOTAL WGHT
31			— 20 × 603 × 768	Q345B	1	54.5	54.5
32			— 14 × 250 × 445	Q345B	1	7.3	7.3
33			— 14 × 225 × 445	Q345B	1	6.6	6.6
34			— 20 × 601 × 1020	Q345B	1	72.2	72.2
35			— 14 × 251 × 445	Q345B	1	7.4	7.4
36			— 8 × 191 × 400	Q235	4	4.3	17.3


REV	DATE	BY	DESCRIPTION
1	2012.05.30	Liuyu	
2	2012.08.17	Liuyu	

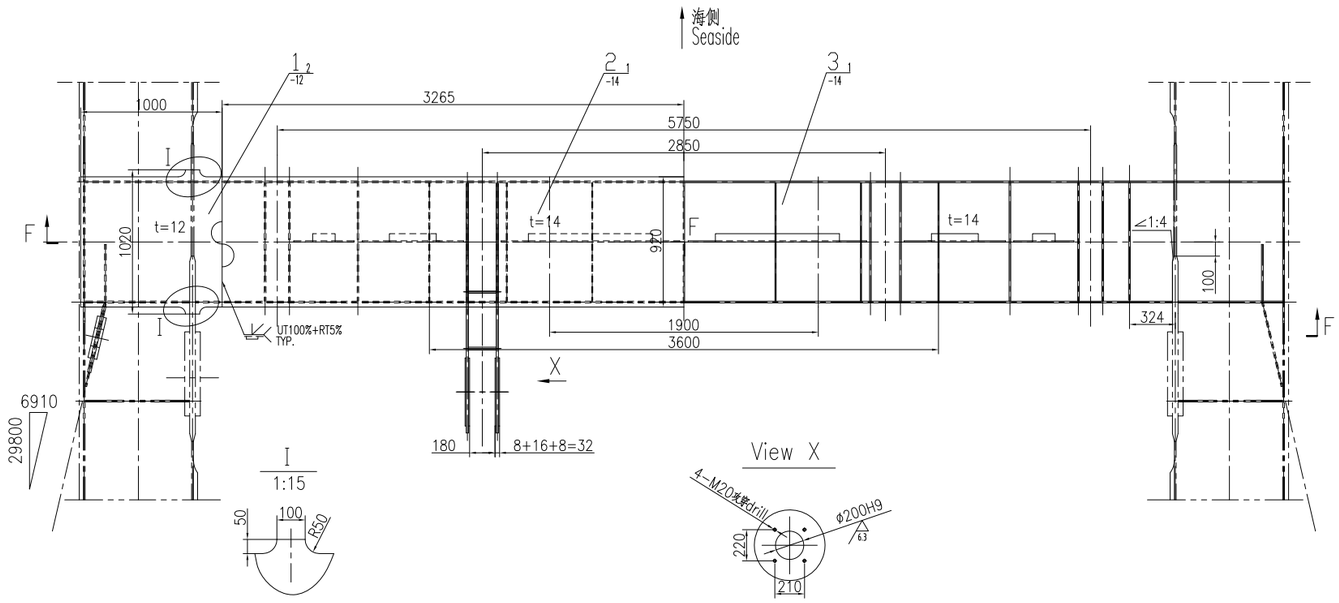


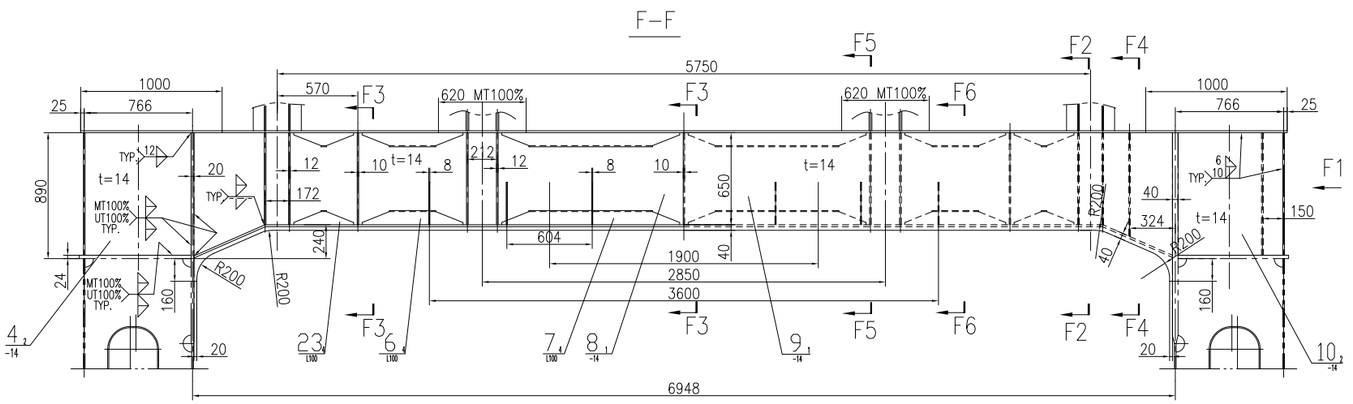














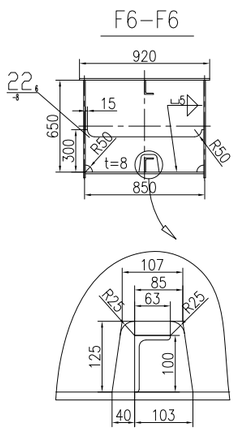







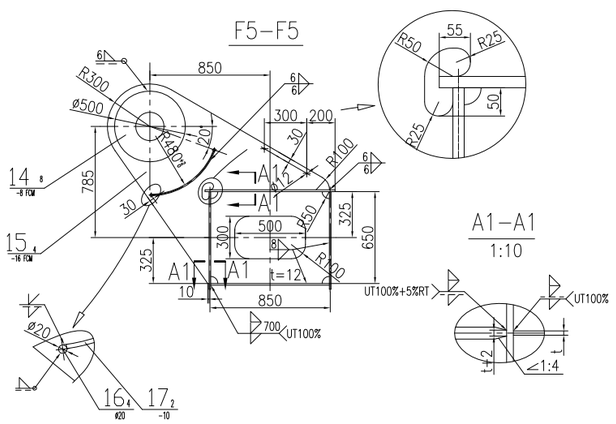

注:1.技术要求按照图纸J526A010501要求执行
2.角钢焊接要求按照图纸J526A010501要求执行

PROJECT: Sri Lanka CICT 12 STS Cranes				DESIGN STAGE:		SCALE: 1:30	
ITEM NAME: 联系横梁 2 Boom 2				DRAW NO: J526A010506		PROJ.	
ZPMC	DSGN			TRACE		APP.	
	DRAW			CHCK		Q'TY/SET	4302 kg
	CHCK			VER.		SET/CRANE	1


明 细 表
SUBSIDIARY LIST


*The quantity and weight of this list is to one set
*此表为一套的数量和重量


设计：
校对：


1 set/crane, 4302 kg/set, 4302 kg/crane


PROJECT NAME or CODE: Sri Lanka CICT 12 STS Cranes				SUB-PART NAME: 联系横梁 2 Boom 2		SUB DRAW NO: J526A010506	
序号 NO.	图号或标准 SUB-NO. or STDD	名称 NAME	规格或型号 SIZE & STYLE	材料 MTRL	每套数量 Q'TY/SET	单重 PIECE WGHT	总重 TOTAL WGHT
1			— 12 × ### × 1020	Q345B	2	87.7	175.3
2			— 14 × 920 × 6530	Q345B	1	660.2	660.2
3			— 14 × 836 × 7020	Q345B	1	645.0	645.0
4			— 14 × 750 × 866	Q345B	2	71.4	142.8
5			— 12 × 866 × 1120	Q345B	2	76.1	152.1
6			L100×63×8 — 713	Q235	4	4.5	18.2
7			L100×63×8 — 1258	Q235	4	9.9	39.7
8			— 14 × ### × 6928	Q345B	1	555.3	555.3
9			— 14 × ### × 6908	Q345B	1	553.3	553.3
10			— 14 × 740 × 866	Q345B	2	70.4	140.9
11			— 12 × 650 × 836	Q345B	8	38.1	304.5
12			— 10 × 650 × 836	Q345B	3	31.9	95.6
13			— 12 × 732 × 836	Q345B	1	45.0	45.0
14	FCM		— 8 × Φ500/Φ200	Q345B	8	10.4	83.2
15	FCM		— 16 × ### × 1570	Q345B	4	103.9	415.5
16			Φ20 — 196	Q235	4	0.5	2.0
17			— 10 × 196 × 563	Q345B	2	8.7	17.3
18			— 20 × Φ300/Φ130	Q345B	4	9.0	36.0
19			— 24 × 500 × 500	Q345B	2	30.8	61.6
20			— 12 × 150 × 603	Q345B	2	9.9	19.8
21			— 12 × 400 × 866	Q345B	2	26.5	52.9
22			— 8 × 300 × 836	Q345B	6	13.1	78.8
23			L100×63×8 — 423	Q235	4	1.7	6.7

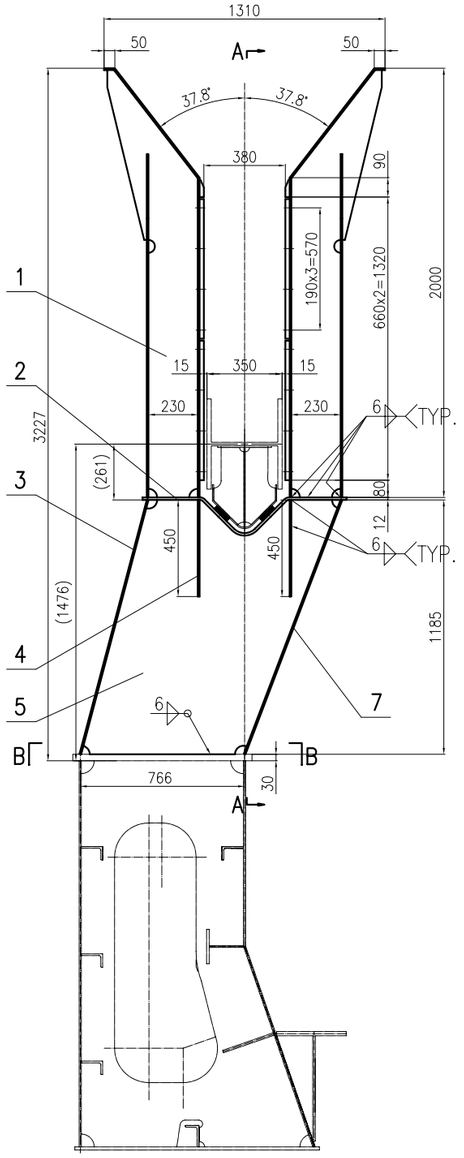


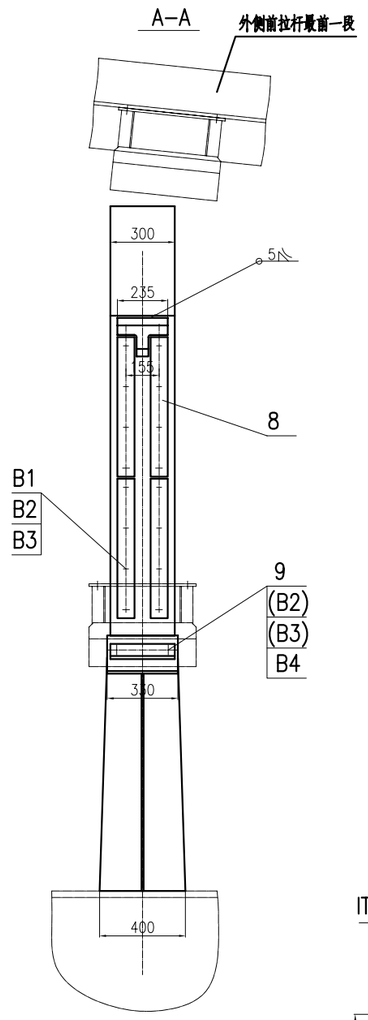


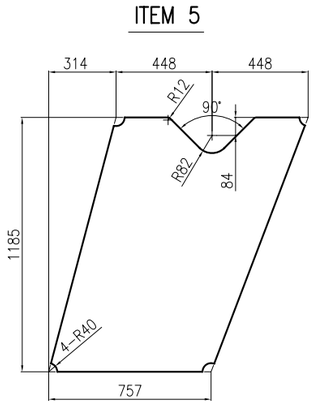















技术要求
Technical Requirements

1. 焊条采用E4315;
   Welding rods should be E4315.
2. 焊缝须包角;
   Welding line should be wrap angle.
3. 对接焊缝打磨光滑.
   Welding line of butt joint should be grinded smoothly.
4. 在前大梁俯仰调试之前,导向架上的全部抗磨块都要安装到位.
   Slap block must be fixed before boom hoisting for test.
5. 未注明焊缝按双面角焊接施焊,焊脚高度为6mm.
   Unmarked weld is fillet welding by both sides and the height is 6mm.
6. 明细表中尺寸仅供备料参考,准确尺寸放样定.
   Dimensions shown on the drawing are prior to those shown in B.O.M. which are for reference only.

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	WEIGHT each	WEIGHT total	NOTE
B4	GB/T 70.2-2000	内六角螺钉M16X50	5.8级	4			达克罗 Dacro
B3	GB95-85	垫圈 16		36			达克罗 Dacro
B2	GB889-86	锁紧螺母 M16		36			达克罗 Dacro
B1	GB/T 70.2-2000	内六角螺钉M16X45	5.8级	32			达克罗 Dacro
9	FGS01A02	Slap block 抗磨块 2	UHMWPE 超高分子量聚乙烯	2	0.6	1.2	ZPMC 标准件
8	FGS01A01	Slap block 抗磨块 1	UHMWPE 超高分子量聚乙烯	8	1.05	8.4	ZPMC 标准件
7		-8x400x1265	Q235	1	24	24	
6							
5		-8x1185x1210	Q235	1	55	55	
4		-8x146x450	Q235	4	4.1	16.4	
3		-8x400x1224	Q235	1	23	23	
2		-12x330x1090	Q235	1	33.9	33.9	
1	J526A01050401	Support 支架 1	焊接件	2	100	200	借用


PROJECT: SliLanka CICT 12 STS Cranes
DESIGN STAGE:
SCALE: 1:30


ITEM NAME: 导向装置2
Forestay Guiding Support 2


DRAW NO: J526A010508


ZPMC


DSGN			TRACE			APP.	
DRAW			CHCK			SET/CRANE	2
CHCK			VER.			WEIGHT	362 kg

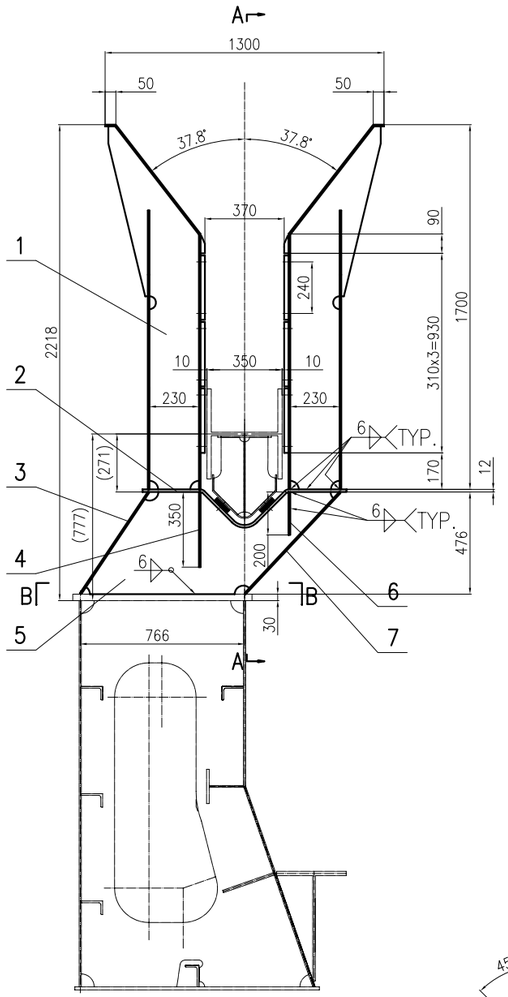


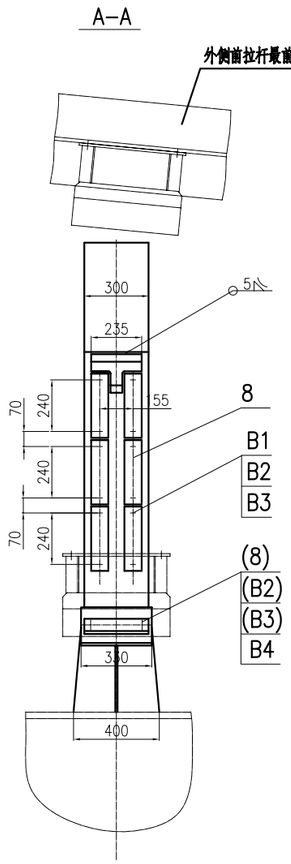


















技术要求
Technical Requirements

1. 焊条采用E4315;
   Welding rods should be E4315.
2. 焊缝须包角;
   Welding line should be wrap angle.
3. 对接焊缝打磨光滑.
   Welding line of butt joint should be grinded smoothly.
4. 在前大梁俯仰调试之前,导向架上的全部抗磨块都要安装到位.
   Slap block must be fixed before boom hoisting for test.
5. 未注明焊缝按双面角焊接施焊,焊脚高度为6mm.
   Unmarked weld is fillet welding by both sides and the height is 6mm.
6. 明细表中尺寸仅供备料参考,准确尺寸放样定.
   Dimensions shown on the drawing are prior to those shown in B.O.M. which are for reference only.

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	each WEIGHT	total WEIGHT	NOTE
B4	GB/T 70.2-2000	内六角螺钉M16X50	5.8级	4			达克罗 Dacro
B3	GB95-85	垫圈 16		28			达克罗 Dacro
B2	GB889-86	锁紧螺母 M16		28			达克罗 Dacro
B1	GB/T 70.2-2000	内六角螺钉M16X45	5.8级	24			达克罗 Dacro
8	FGS01A02	Slap block 抗磨块 2	UHMWPE 超高分子量聚乙烯	14	0.6	8.4	ZPMC 标准件
7		-8x400x644	Q235	1	14	14	
6		-8x146x200	Q235	2	2	4	
5		-8x476x1203	Q235	1	21	21	
4		-8x146x350	Q235	2	3.2	6.4	
3		-8x400x567	Q235	1	11.6	11.6	
2		-12x330x1090	Q235	1	34	34	
1	J526A01050901	Support 支架 3	焊接件	2	84	168	

PROJECT: SliLanka CICT 12 STS Cranes
DESIGN STAGE:
SCALE: 1:30


ITEM NAME: 导向装置3
Forestay Guiding Support 3


DRAW NO: J526A010509


ZPMC


DSGN			TRACE			APP.	
DRAW			CHCK			SET/CRANE	2
CHCK			VER.			WEIGHT	267 kg


REV	DATE	BY	DESCRIPTION
1	2012.05.30	Liuyu	

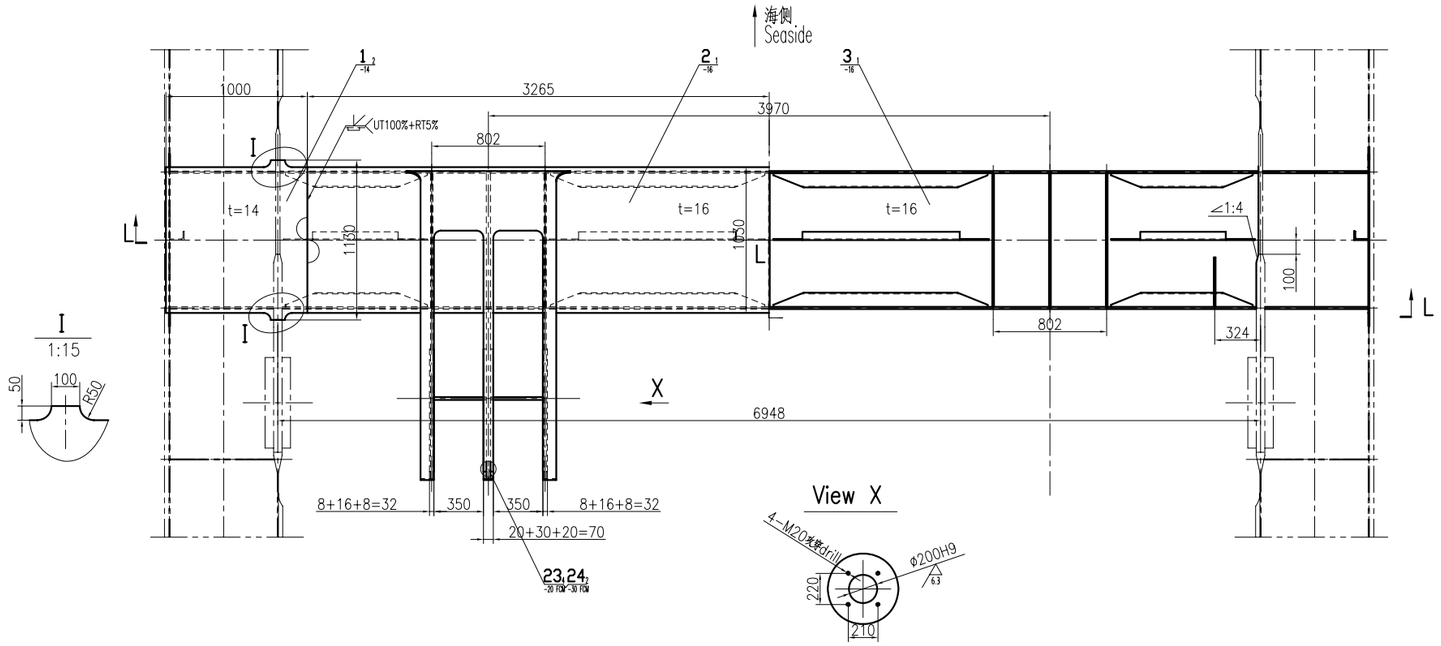


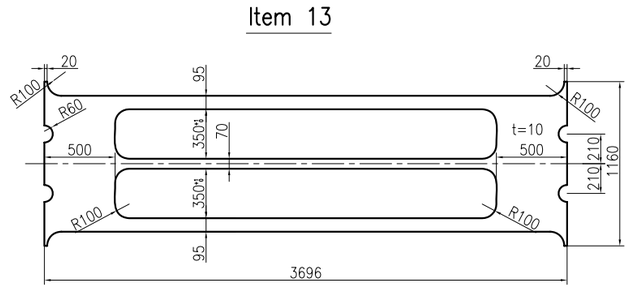


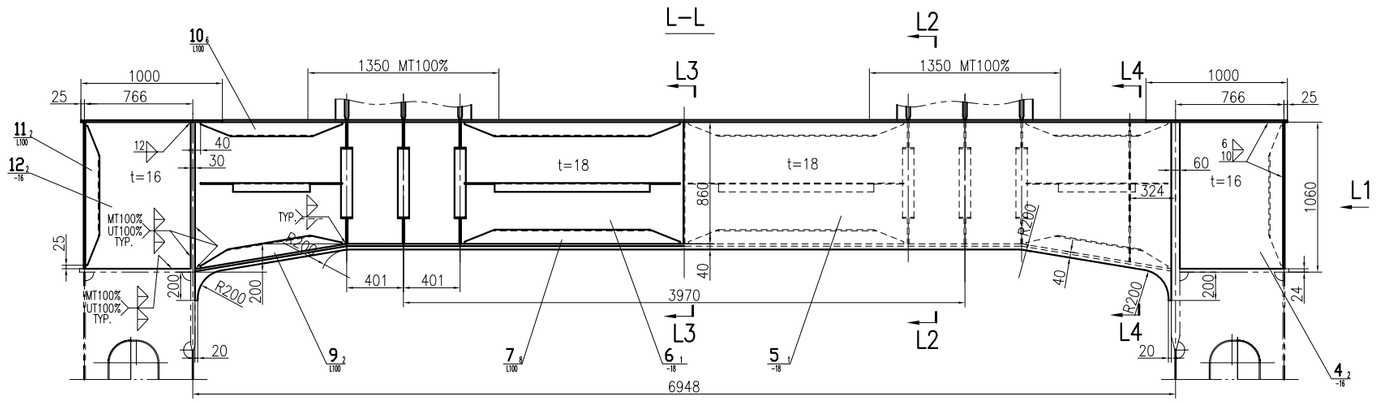




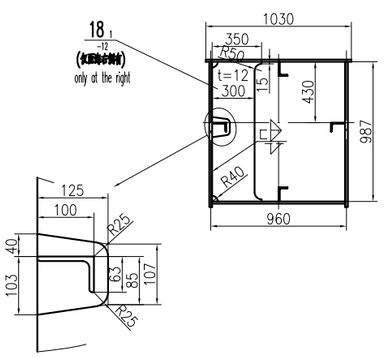

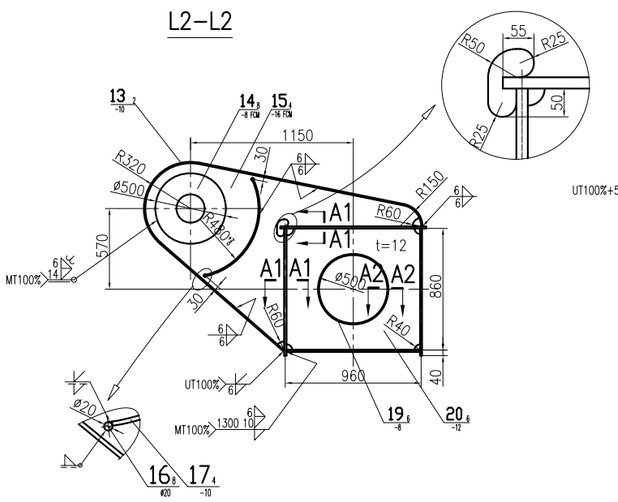





注:1.技术要求按照图纸J526A010501要求执行
2.角钢焊接要求按照图纸J526A010501要求执行

PROJECT: Sri Lanka CICT 12 STS Cranes				DESIGN STAGE:		SCALE: 1:30	
ITEM NAME: 联系横梁 3 Boom 3				DRAW NO: J526A010510			PROJ.
ZPMC	DSGN			TRACE		APP.	
	DRAW			CHCK		Q'TY/SET	6512 kg
	CHCK			VER.		SET/CRANE	1

明 细 表

SUBSIDIARY LIST


*The quantity and weight of this list is to one set
*此表为一套的数量和重量

设计：


校对：

1 set/crane, 6512 kg/set, 6512 kg/crane


PROJECT NAME or CODE: SliLanka CICT 12 STS Cranes				SUB-PART NAME: 联系横梁 3 Boom 3		SUB DRAW NO: J526A010510	
序号 NO.	图号或标准 SUB-NO. or STDD	名称 NAME	规格或型号 SIZE & STYLE	材料 MTRL	每套数量 Q'TY/SET	单重 PIECE WGHT	总重 TOTAL WGHT
1			— 14 ×1000× 1130	Q345B	2	114.2	228.4
2			— 16 ×1030× 6530	Q345B	1	844.8	844.8
3			— 16 × 942 × 6947	Q345B	1	819.9	819.9
4			— 16 × 730 × 1036	Q345B	2	95.0	190.0
5			— 18 ×1260× 6888	Q345B	1	934.8	934.8
6			— 18 ×1260× 6918	Q345B	1	939.3	939.3
7			L100×63×8 — 1523	Q235	8	12.5	100.3
8							
9			L100×63×8 — 1015	Q235	2	7.5	15.0
10			L100×63×8 — 1002	Q235	6	7.4	44.4
11			L100×63×8 — 986	Q235	2	7.2	14.5
12			— 16 × 745 × 1036	Q345B	2	96.9	193.9
13			— 10 ×1160× 3696	Q345B	2	131.0	262.0
14	FCM		— 8 ×Φ500/Φ200	Q345B	8	10.4	83.2
15	FCM		— 16 ×1320× 1950	Q345B	4	124.4	497.6
16			Φ20 — 378	Q235	8	0.9	7.2
17			— 10 × 378 × 852	Q345B	4	25.3	101.1
18			— 12 × 350 × 987	Q345B	1	29.9	29.9
19			— 8 × 80 × 1546	Q345B	6	7.8	46.6
20			— 12 × 860 × 942	Q345B	6	57.8	346.9
21			— 10 × 860 × 942	Q345B	1	44.4	44.4
22			— 12 ×1036× 1230	Q345B	2	98.9	197.7
23	FCM		— 20 ×Φ500/Φ200	Q345B	4	25.9	103.6
24	FCM		— 30 ×1320× 1950	Q345B	2	233.3	466.5

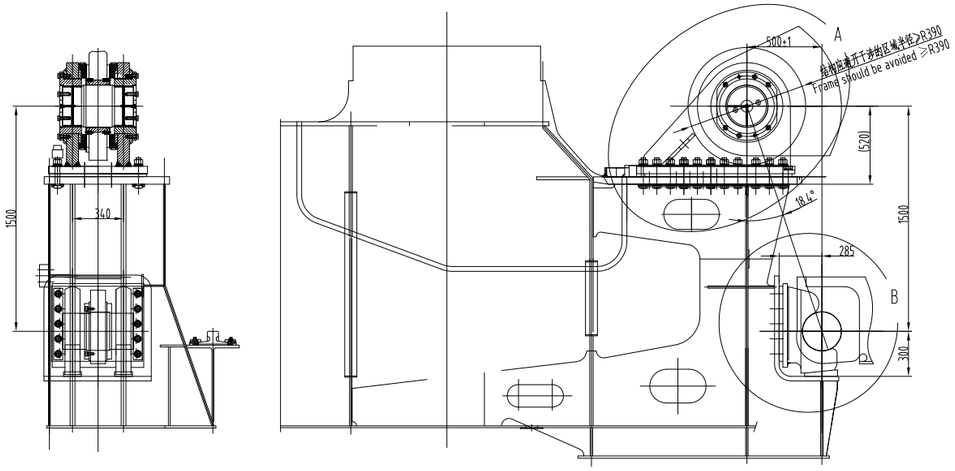


B 放大 (Zoom B)
1:10




B2 向 (View B2)
1:10






B1 向
1:10


A 放大(Zoom A)
1:10

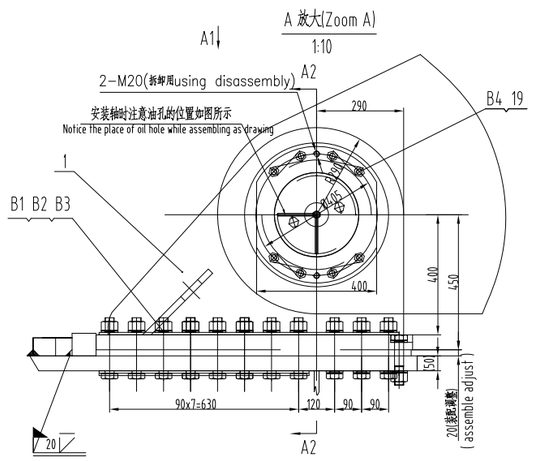


A2-A2
1:10

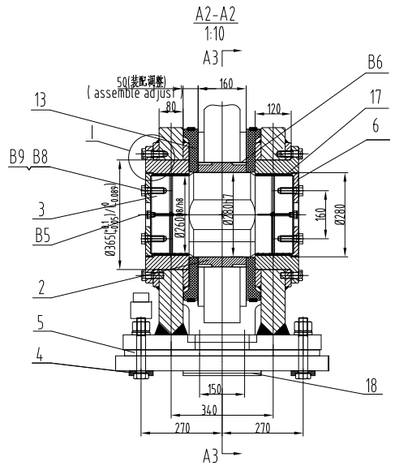


A3-A3
1:10

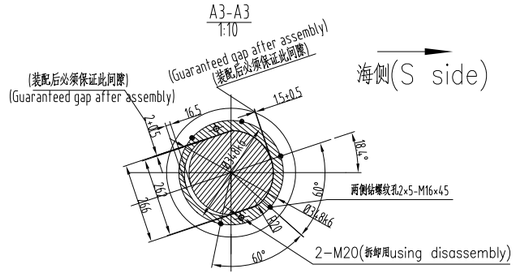

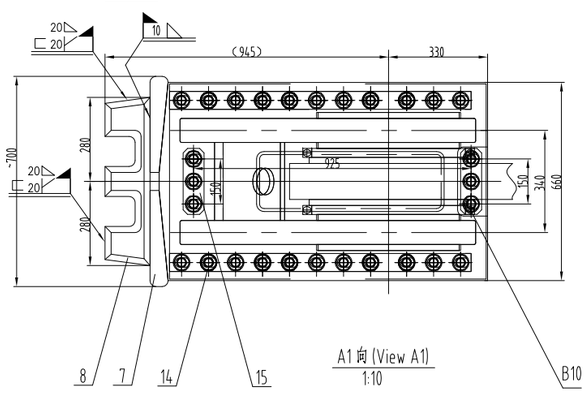

A1 向 (View A1)
1:10

I 部放大
1:2



技术要求 Technical requirement

1.件2安装时请注意方向,见A3-A3,并调整铰点位置,保证前大梁水平时,轴与衬套之间的间隙如图示.
Please pay attention to the direction while assembling piece 2(according to drawing A3-A3).
When the boom is at the level station, adjust the place of hinge joint to ensure the gap between the shaft and bush according to the drawing.

2.上铰点钢铜套(17)内孔铜圈在装配后必须注满油脂,但铜套外径表面不能有油脂.
Grease should be filled to the inside track of the steel-copper bushing (Piece 17) but not the outside track after assembly.

3.序13抗磨块的厚度装配定(调整垫),与前大梁之间顶紧,并在装配时前大梁的重磅板上涂满油脂.
The thickness of the anti-abrasion block (Piece 13) should be decided by assembly (using adjust shim),
it should be fixed to the boom firmly. In addition, the boss of the boom should be coated with grease before assembly.

4.B1,B7,B10高强螺栓M30的预紧力矩为1530N.m(K=0.145),预紧力为352800N. B4螺栓M20的预紧力矩为315N.m(K=0.145),
预紧力为108000N.
The pretightening force for each size of bolts are as follows:
352800N for M30 (Piece B1,B7,B10), 108000N for M20 (Piece B4).
The pretightening torque for each size of bolts are as follows:
1530N.m for M30 (Piece B1), 315N.m for M20 (Piece B4).

NO.	SUB-NO. OR STDD	VER	NAME & SIZE	MTRL	QTY	EACH(Kg)	TOTAL(Kg)	NOTE
B10	GB/T1228-91		高强度螺栓 M30×160 Bolt	10.9S	6	1.5	9.0	'Dacro '
B9	GB/T856-88		外舌止动垫圈 20 Washer	Q235	8	0.0	0.0	'Dacro '
B8	GB5783-86		螺栓 M20×60 Bolt	8.8	8	0.2	1.6	'Dacro '
B7	GB/T1228-91		高强度螺栓 M30×150 Bolt	10.9S	20	1.4	28.0	'Dacro '
B6	GB77-85		紧定螺钉 M16×40 Screw	45H	20	0.0	0.0	'Dacro '
B5	JISB0203		平头油嘴p1/4" Nipple	外购成品	Pur.	4	0.0	0.0	黄铜
B4	GB32.1-88		螺栓 M20×60 Bolt	8.8	32	0.2	6.4	'Dacro '
B3	GB/T1230-91		高强度垫圈 30 Washer	35	114	0.1	11.4	'Dacro '
B2	GB/T1229-91		高强度螺母 M30 High strength nut	10H	76	0.4	30.4	'Dacro '
B1	GB/T1228-91		高强度螺栓 M30×190 Bolt	10.9S	50	1.7	85.0	'Dacro '
19	GB4240-84		不锈钢丝 3.0 l=5000 Stainless wire	0Cr18Ni9Ti	1	0.2	0.2	
18	ZT1-011122-18	0	螺栓挡板 Plate	Q345-B	2	1.4	2.8	
17	ZT1-011121-17	0	自润滑铜轴套 Self lubricating bush	外购成品	Product	4	68.1	272.4	
16	ZT1-011122-16	0	垫板3 plate 3	Q345-B	4	1.6	6.4	
15	ZT1-011122-15	0	垫板2 Plate 2	Q345-B	4	0.7	2.8	
14	ZT1-011122-14	0	垫板1 Plate1	Q345-B	4	3.6	14.4	
13	ZT1-011121-1300	0	抗磨块 anti-abrasion ass.	组件 ASS.	2	24.2	48.4	
12	ZT1-011121-12	0	下铰轴 shaft	42CrMo	2	205.4	410.8	
11	ZT1-011122-11	0	下铰支座 support	焊接件	Wel.	2	202.1	404.2	
10	ZT1-011121-10	0	楔块2 Cuneal Plate 2	A709-50-2	4	8.9	35.6	
9	ZT1-011122-09	0	调整垫板2 plate 2	Q345-B	2	46.9	93.8	
8	ZT1-011121-08	0	挡板 Plate	A709-50-2	2	37.1	74.2	
7	ZT1-011121-07	0	楔块1 Cuneal Plate 1	A709-50-2	4	8.6	34.4	
6	ZT1-011122-06	0	端盖 Cover	Q345-B	4	7.7	30.8	
5	ZT1-011122-05	0	调整垫板1 Plate 1	Q345-B	2	84.4	168.8	
4	ZT1-011122-04	0	螺栓挡板 Plate	Q345-B	4	4.4	17.6	
3	ZT1-011121-03	0	上铰轴 Shaft	42CrMo	2	210.2	420.4	
2	ZT1-011121-02	0	衬套 Bush	45	2	36.9	73.8	
1	ZT1-011122-01	0	上铰支座 Upper support	焊接件	Wel.	2	751.0	1502.0	

更改记录/Copy 描述及日期/Description & Date	设计/DSGN	校对/CHKD	审核/EXAM	图幅/FORMAT
	日期/DATE	日期/DATE	日期/DATE	A1
	材料/MAT 部件Ass.	比例/SCALE 1:10	图名/DRAWING NAME 大梁铰点装配II Boom hinge assembly	
	重量/WEI(Kg) 3785.6			
	ZPMC 上海振华重工集团	图号/DRAWING NO. ZM1-011122-00(J526A)	版本/REV 0	页号/PAGE 1

010301