

REV	DATE	BY	DESCRIPTION
01	2012.05.30	Shengjiaying	
02	2012.08.17	Shengjiaying	


boom hoist rope reeving

俯仰缠绕系统

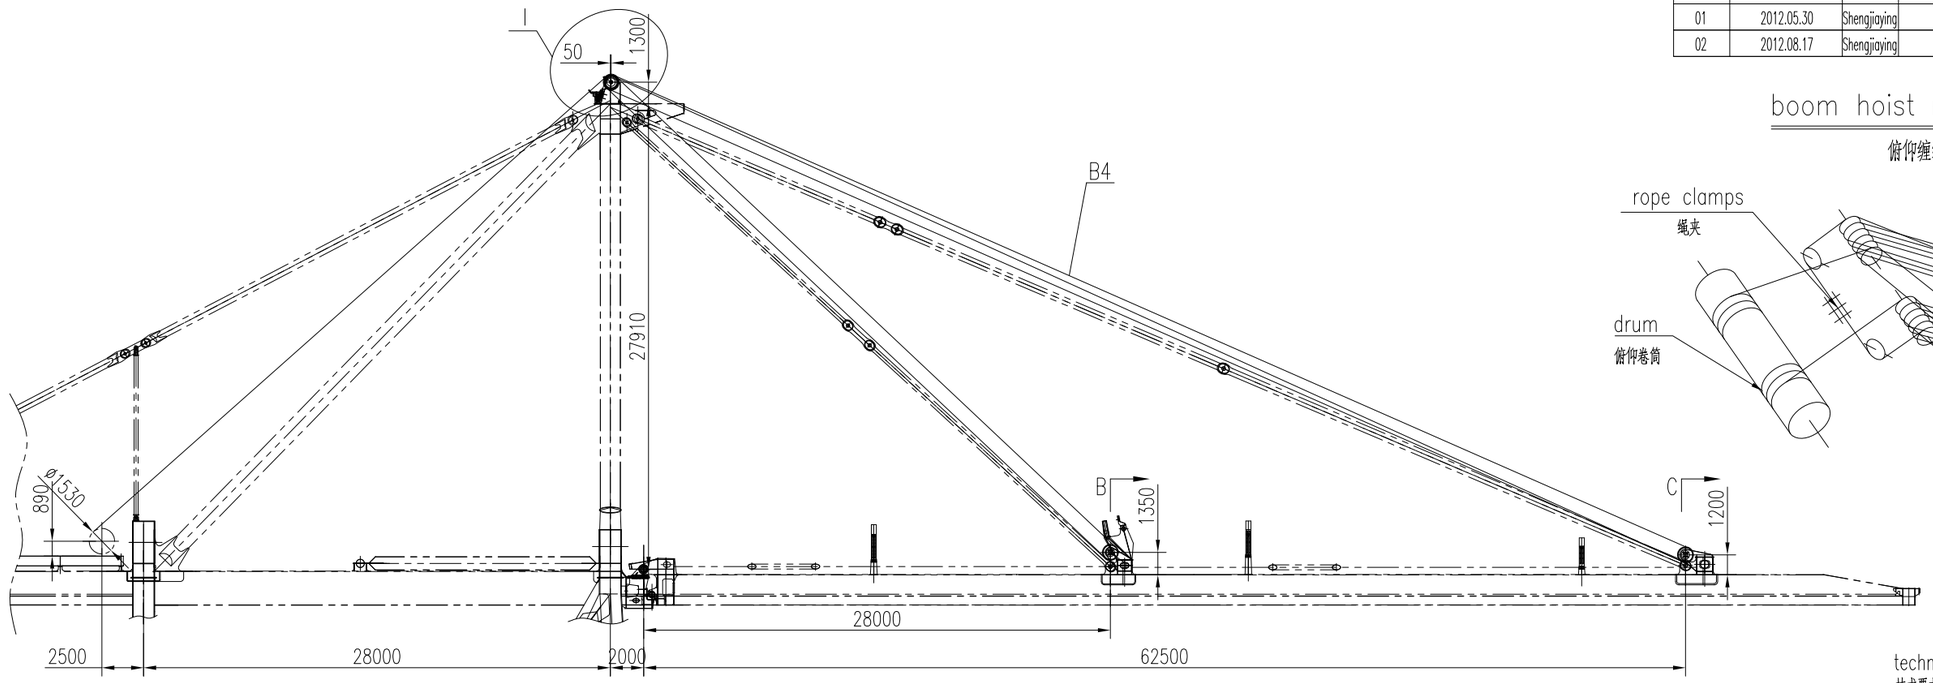


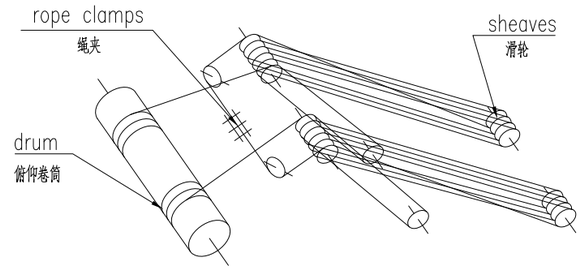


View A
1:18

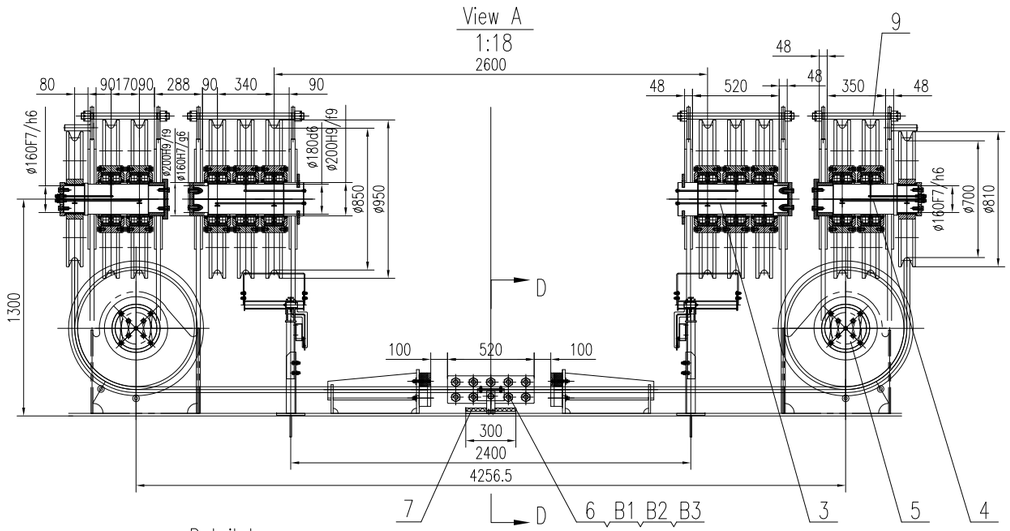


B-B
1:18

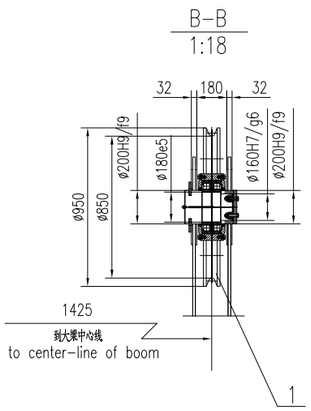


Item 10
1:9

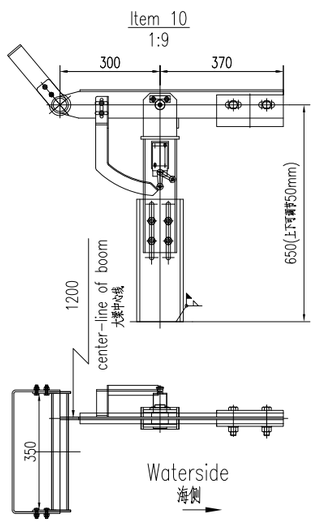


Detail I
1:18

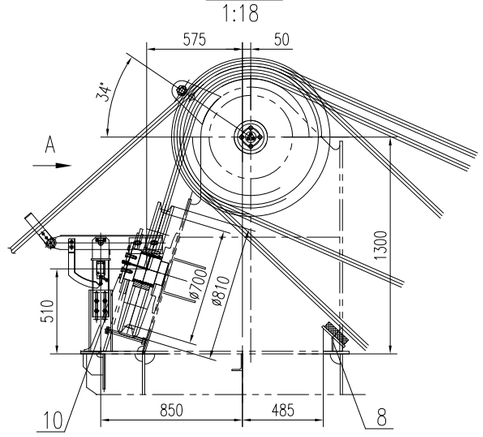


C-C
1:18

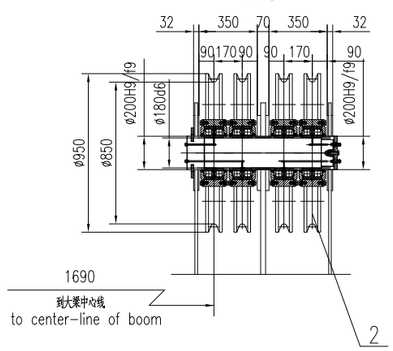


D-D
1:6



Item 8
1:8



View E
1:8



technical requirement:
技术要求:


1. Painting just after bolts being connected.
螺栓连接紧固后立即油漆.
2. When tighten the bolt on the slap block, daub anaerobic gumwater at the same time.
抗磨块上螺钉紧固时涂上厌氧防松胶.
3. Item 8 and item 10 should be located in site.
件8抗磨块和件10松绳限位的位置可现场定.
4. The tightening torque of B1(bolt M30) (ref. to the following table)
B1(螺栓 M30)的预紧力矩为见下表所示,待俯仰钢丝绳在大梁俯仰过程中完全调节平衡后,终拧螺栓.

夹板 Clamp plate	BHR CP1
需用螺栓预紧力 KN	264
参考螺栓预紧力矩 N.m(K=0.145)	1150
适用螺栓尺寸 Apply bolt size	M30

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	each WEIGHT	total WEIGHT	NOTE
B4		钢丝绳 wire rope IWRC 6xP.WS(36)-B-ø35.5, Tokyo		1	5.86	8673	L=1480m
B3	GB/T1230-91	垫圈 washer 30	45 Dacro	20	0.075	1.5	
B2	GB/T1229-91	螺母 nut M30	grade 10H Dacro	10	0.347	3.47	
B1	GB/T1228-91	螺栓 bolt M30x210	grade 10.9H Dacro	10	1.356	13.56	
11	J526A230900	平衡限位装置 balance limit device	组件 Ass.	1		1.83	
10	J526A230800	松绳限位装置 slack rope limit device	组件 Ass.	2	29.5	59	
9	J526A230700	挡绳板 shield	组件 Ass.	2	34.6	69.2	
8	J526A230600	倾斜抗磨块 slap block	组件 Ass.	2	6.5	13	
7	BHR SB2	抗磨块 slap block	组件 Ass.	1	5.52	5.52	
6	BHR CP1	夹绳板 clip plate	A709-50-2	2	39.2	78.4	标准件 Standard
5	J526A230500	平衡滑轮组 equalizer sheave unit	组件 Ass.	2	140	280	
4	J526A230400	滑轮组 4 sheave unit 4	组件 Ass.	2	677	1354	
3	J526A230300	滑轮组 3 sheave unit 3	组件 Ass.	2	832	1664	
2	J526A230200	滑轮组 2 sheave unit 2	组件 Ass.	2	1113	2226	
1	J526A230100	滑轮组 1 sheave unit 1	组件 Ass.	2	303	606	

工号/JOB NO.	项目名称/PROJECT	
ZP12-1873	SliLanka CICT 12 STS Cranes	
设计/DSGN	校对/CHKD	审核/EXAM 审定/APPD 图幅/FORMAT
日期/DATE	日期/DATE	日期/DATE 日期/DATE A1
材料/MAT	比例/SCALE 1:180	图名/DRAWING NAME 俯仰缠绕系统 Boom Hoist Reeving System
重量/WEI (Kg) ~15050Kg		
制图/Description & Date	审核/Sign	图号/DRAWING NO. J526A2300
ZPMC 上海振华重工集团		版本/REV 页号/PAGE

REV	DATE	BY	DESCRIPTION
	2012.05.30	Shengjiaying	

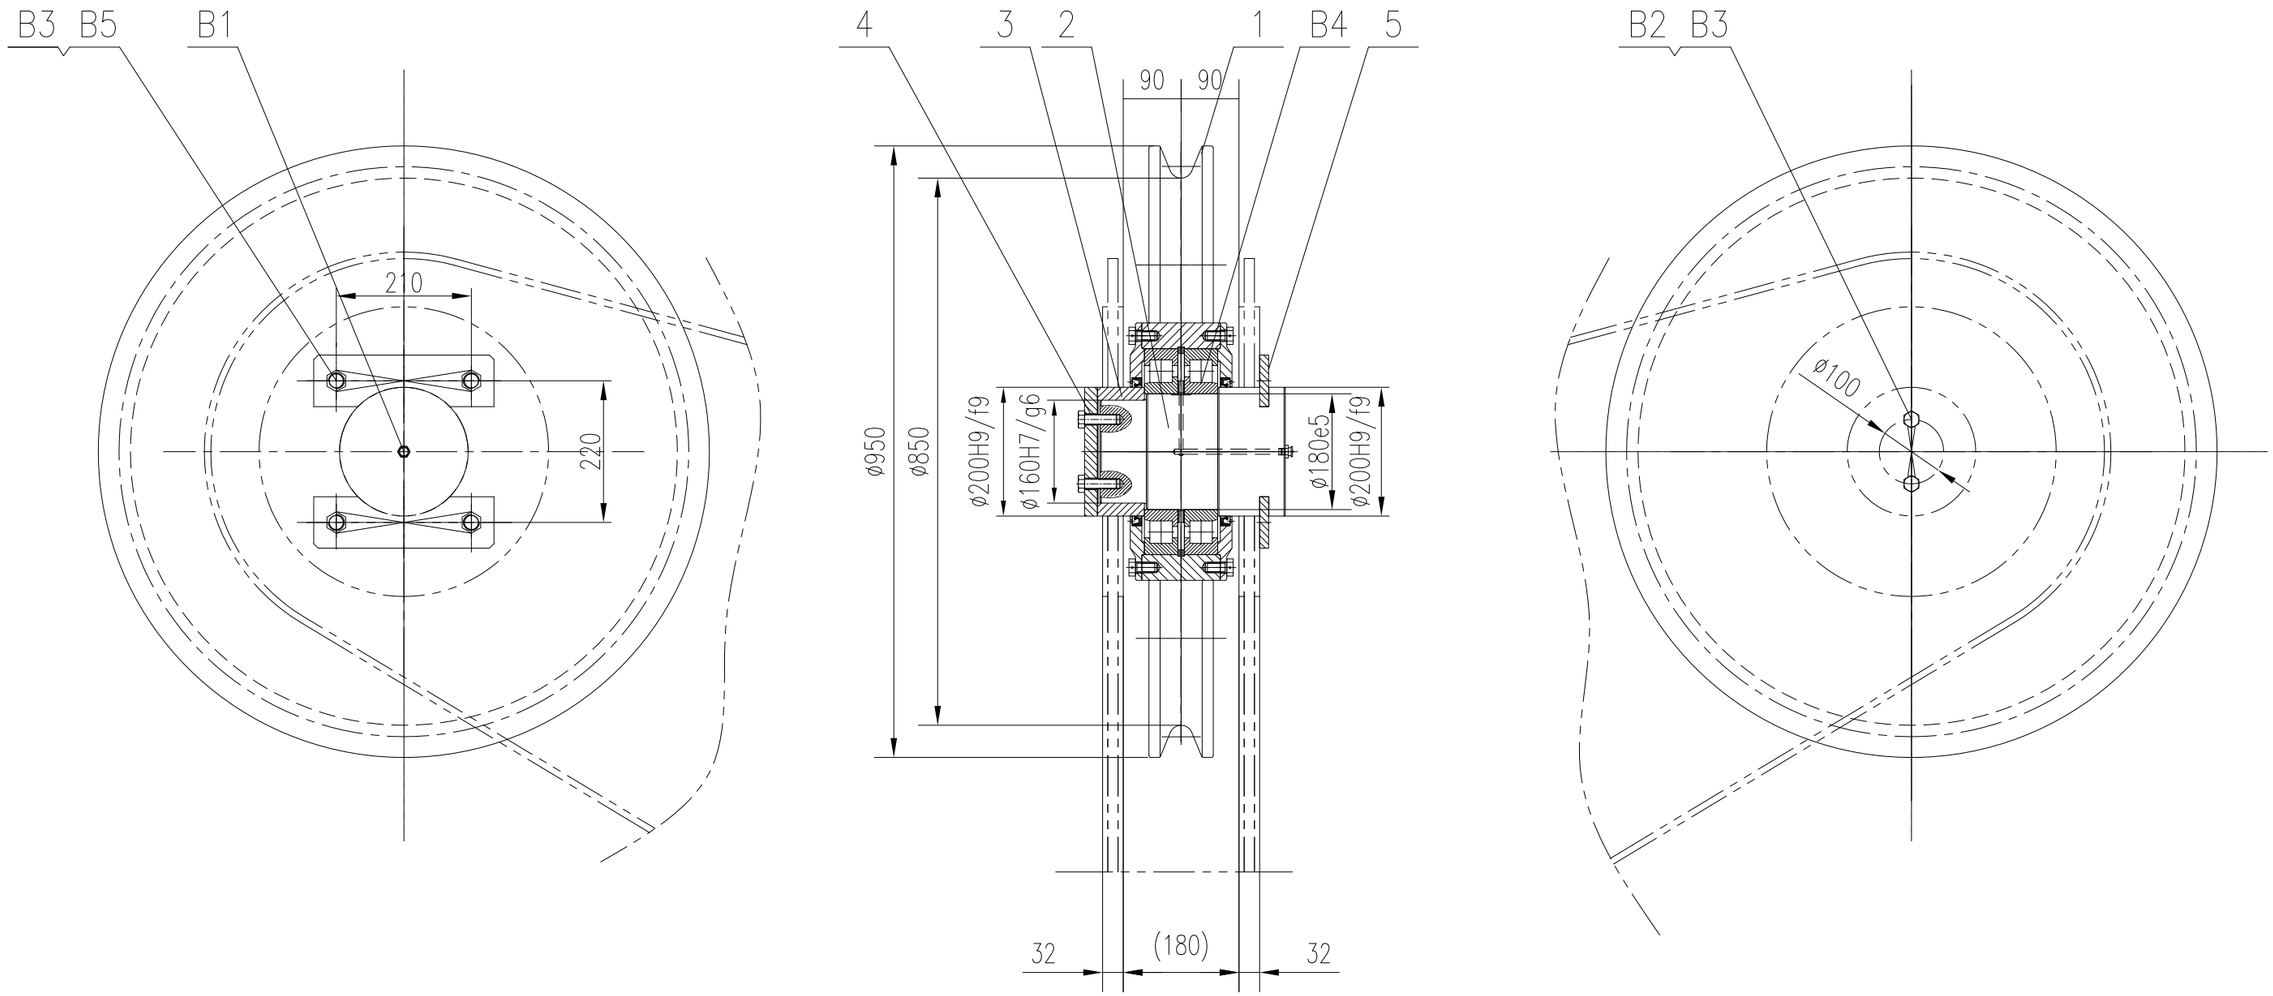

螺栓连接紧固后立即油漆.
Painting just after bolts being connected.

B5	GB32.1-88	螺栓 bolt M20X45	grade 8.8 级	4			达克罗 Dacro
B4	bearing轴承	NJ236EC	ø180xø320x52	2	20	40	SKF/FAG
B3		钢丝 wire ø2.5	不锈钢 Stainless	若干			
B2	GB32.1-88	螺栓 bolt M16X50	grade 8.8 级	2			达克罗 Dacro
B1	JIS B0203	平头油嘴PT1/4"	黄铜 Brass	1			
5	BHR KB-1	卡轴板 plate	Q235	2	2.4	4.8	借用 borrow
4	BHR DG-1	端盖 end-cover	Q235	1		4.8	借用 borrow


NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	WEIGHT each	WEIGHT total	NOTE
3	J526A230102	轴套1 sleeve1	Q235	1		6.5	
2	J526A230101	轴 shaft	45	1		59.4	
1	ZT2-012665	滑轮装配 sheave Ass. A2-850-35.5-180-52	组件 ass.	1		187.2	标准件standard

PROJECT: SliLanka CICT 12 STS Cranes
DESIGN STAGE:
SCALE: 1:10
ITEM NAME: 滑轮组1 sheave unit 1
DRAW NO: J526A230100

ZPMC

DSGN			TRACE		APP.
DRAW			CHCK		Q'TY/SET: 2
CHCK			VER.		TOTAL WEIGHT: 2x303kg

REV	DATE	BY	DESCRIPTION
	2012.05.30	Shengjiaying	

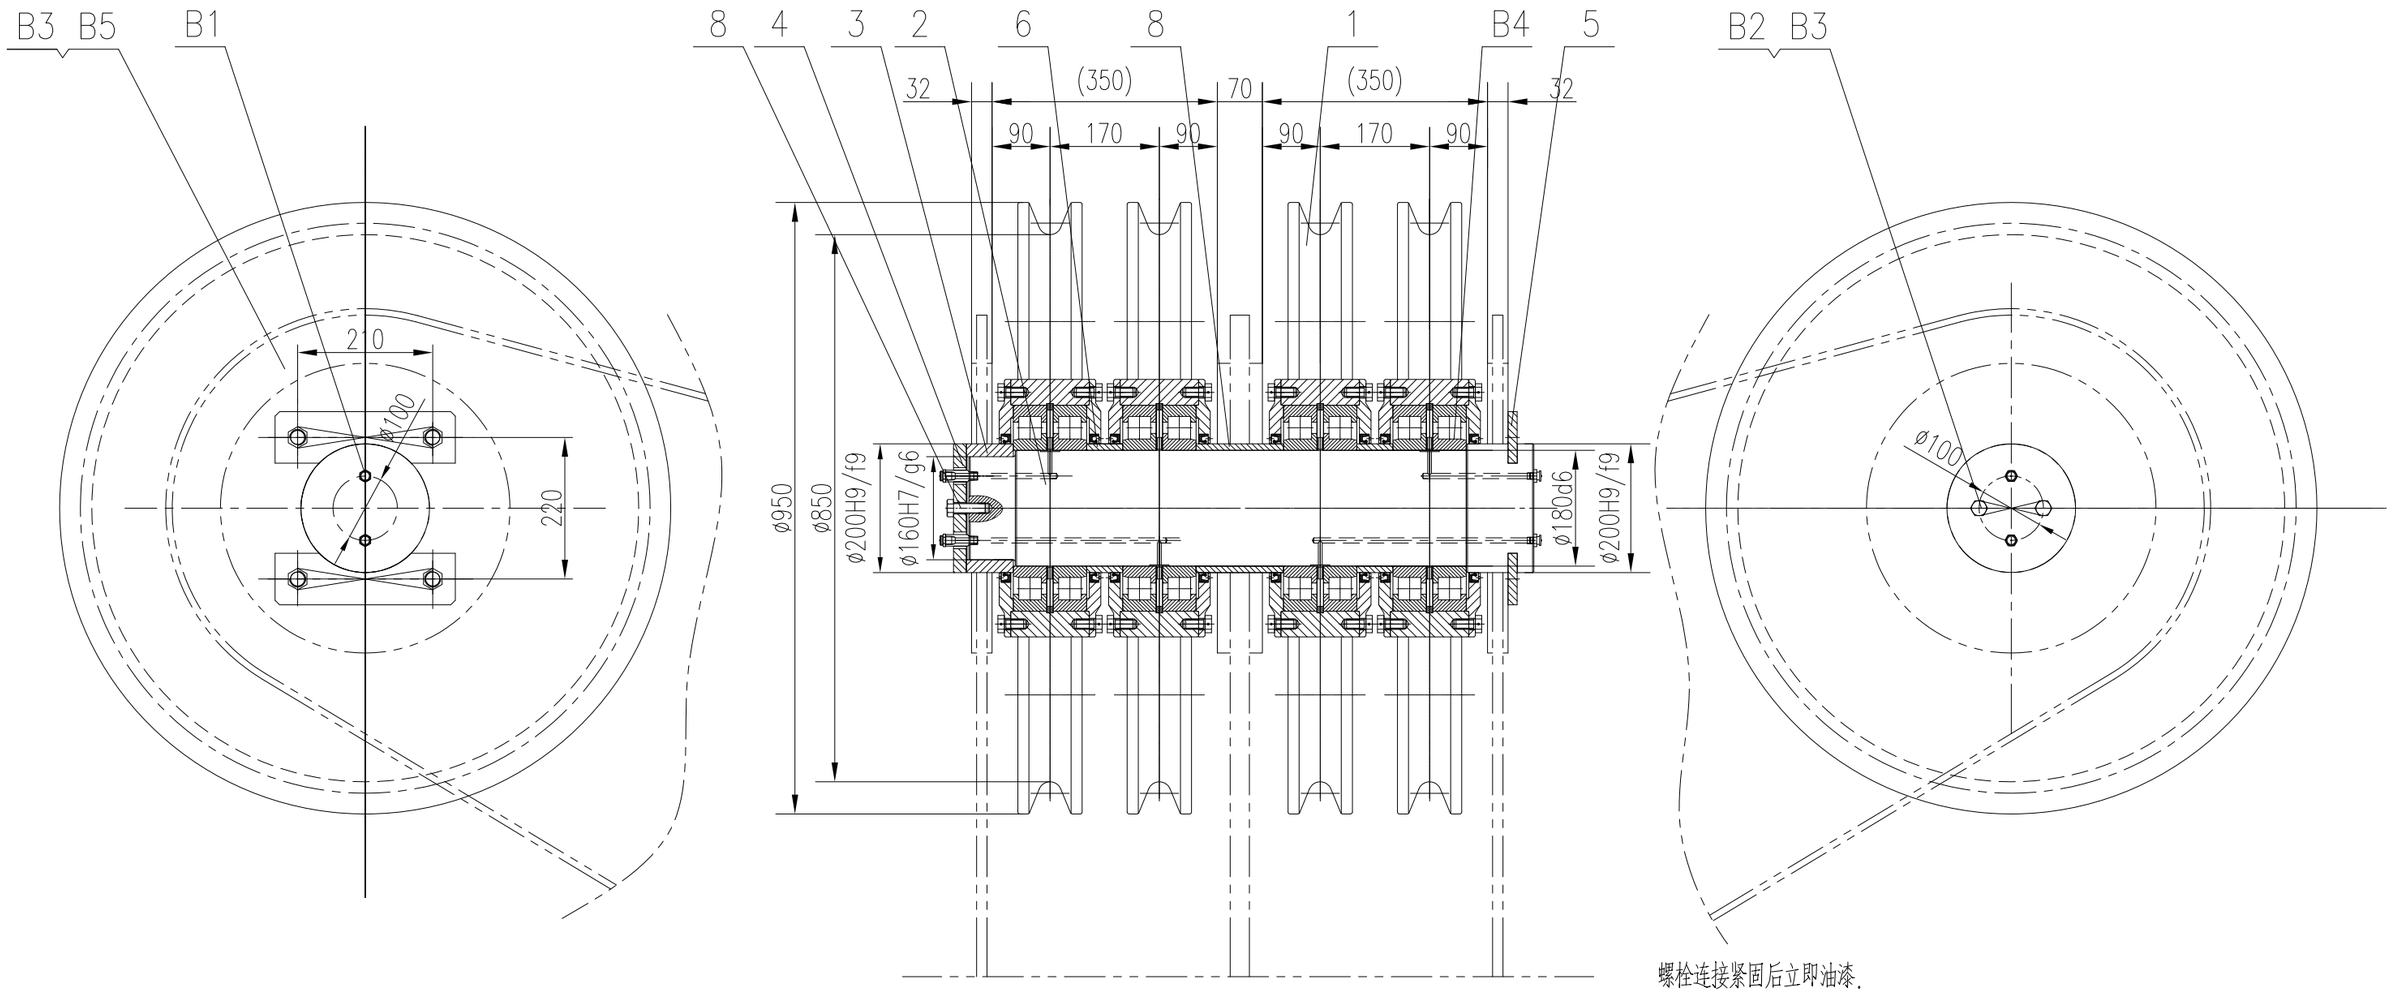

螺栓连接紧固后立即油漆.

Painting just after bolts being connected.

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	WEIGHT each	WEIGHT total	NOTE
B5	GB32.1-88	螺栓 bolt M20X45	grade 8.8 级	4			达克罗 Dacro
B4	bearing轴承	NJ236EC	ø180xø320x52	8	20	160	SKF/FAG
B3		钢丝 wire ø2.5	不锈钢 stainless	若干			
B2	GB32.1-88	螺栓 bolt M16X50	grade 8.8 级	2			达克罗 Dacro
B1	JIS B0203	平头油嘴PT1/4"	黄铜 Brass	4			
8	J526A230203	轴套2 sleeve2	Q235	1	6.4	6.4	
7	NPC2a-R1/4"	油嘴接头 joint A50	Q235	2	0.08	0.16	标准件standard
6	J526A230202	轴套2 sleeve2	Q235	2	2.6	5.2	
5	BHR KB-1	卡轴板 plate	Q235	2	2.4	4.8	借用 borrow
4	BHR DG-2	端盖 end-cover	Q235	1		4.7	借用 borrow
3	J526A230102	轴套1 sleeve1	Q235	1		6.5	借用 borrow
2	J526A230201	轴 shaft	35CrMo	1		176	
1	ZT2-012665	滑轮装配 sheave Ass. A2-850-35.5-180-52	组件 ass.	4	187.2	748.8	标准件standard

PROJECT: SliLanka CICT 12 STS Cranes

DESIGN STAGE: SCALE: 1:10


ITEM NAME: 滑轮组2 sheave unit 2


DRAW NO: J526A230200


ZPMC

DSGN			TRACE		APP.
DRAW			CHCK		Q'TY/SET: 2
CHCK			VER.		TOTAL WEIGHT: 2x1113kg

REV	DATE	BY	DESCRIPTION
	2012.05.30	Shengjiaying	

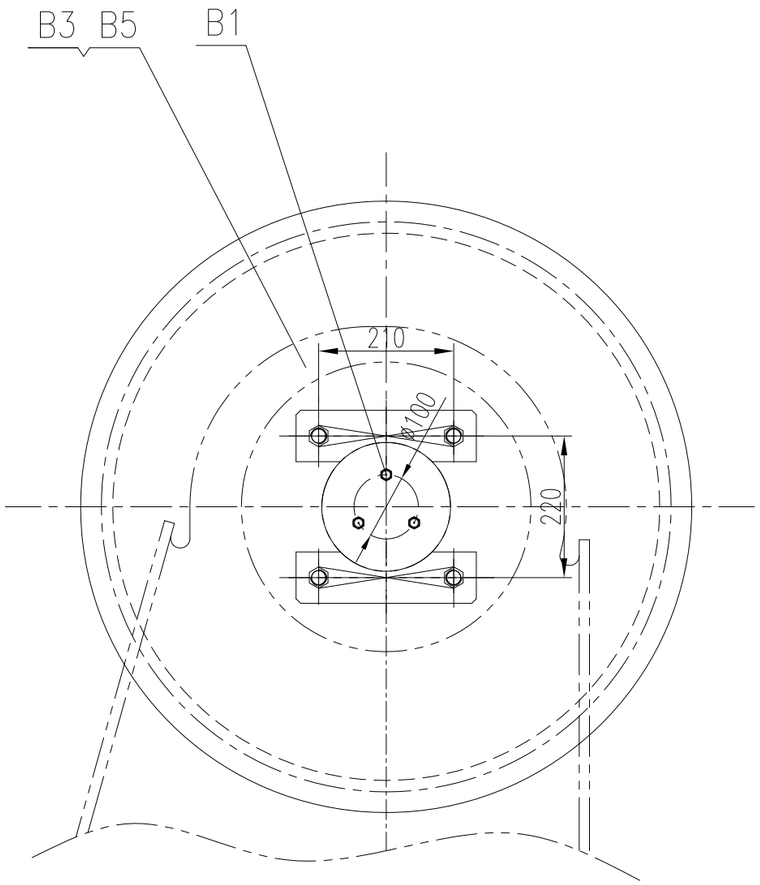

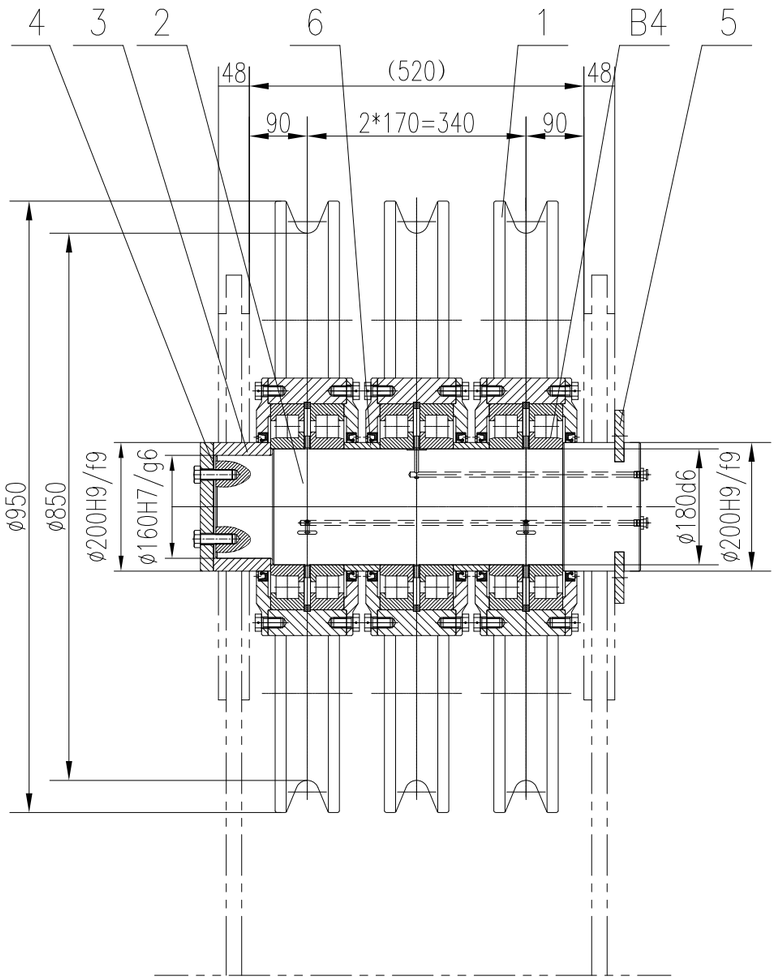

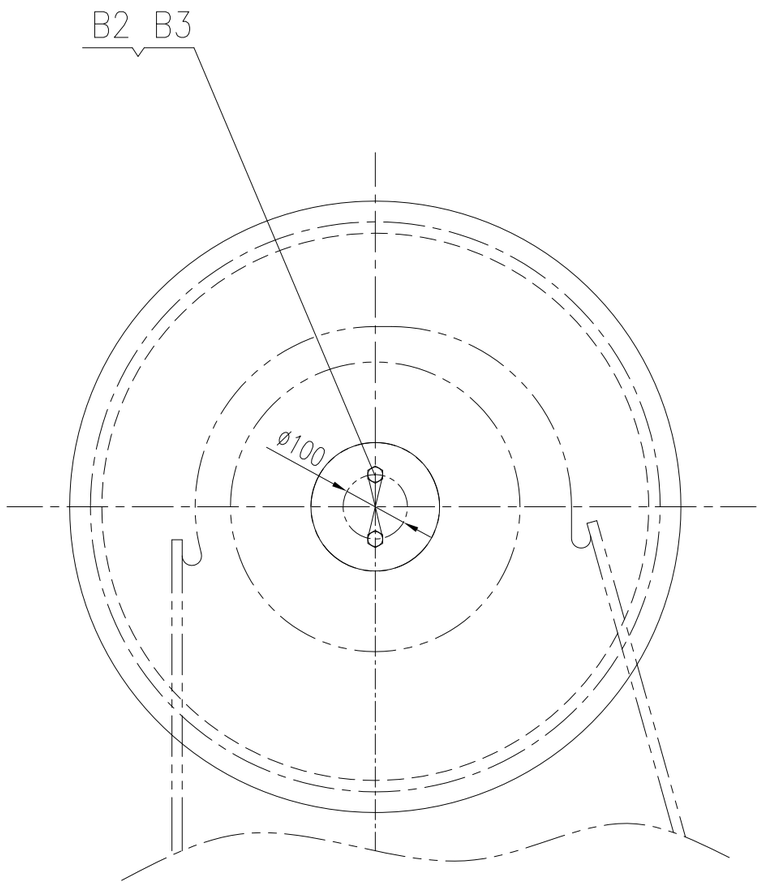

螺栓连接紧固后立即油漆.
Painting just after bolts being connected.

B5	GB32.1-88	螺栓 bolt M20X45	grade 8.8 级	4			达克罗 Dacro
B4	bearing轴承	NJ236EC	ø180xø320x52	6	20	120	SKF/FAG
B3		钢丝 wire ø2.5	不锈钢 stainless	若干			
B2	GB32.1-88	螺栓 bolt M16X50	grade 8.8 级	2			达克罗 Dacro
B1	JIS B0203	平头油嘴PT1/4"	黄铜 Brass	3			
6	J526A230203	轴套2 sleeve2	Q235	2	0.7	1.4	借用 borrow
5	BHR KB-1	卡轴板 plate	Q235	2	2.4	4.8	借用 borrow
4	BHR DG-1	端盖 end-cover	Q235	1		4.8	借用 borrow

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	WEIGHT each	WEIGHT total	NOTE
3	J526A230302	轴套1 sleeve1	Q235	1		7.9	
2	J526A230301	轴 shaft	35CrMo	1		131	
1	ZT2-012665	滑轮装配 sheave Ass. A2-850-35.5-180-52	组件 ass.	3	187.2	561.6	标准件standard


PROJECT: SliLanka CICT 12 STS Cranes
DESIGN STAGE:
SCALE: 1:10

ITEM NAME: 滑轮组3 sheave unit 3
DRAW NO: J526A230300

ZPMC

DSGN			TRACE		APP.
DRAW			CHCK		Q'TY/SET: 2
CHCK			VER.		TOTAL WEIGHT: 2x832kg

REV	DATE	BY	DESCRIPTION
01	2012.05.30	Shengjiaying	
02	2012.08.17	Shengjiaying	

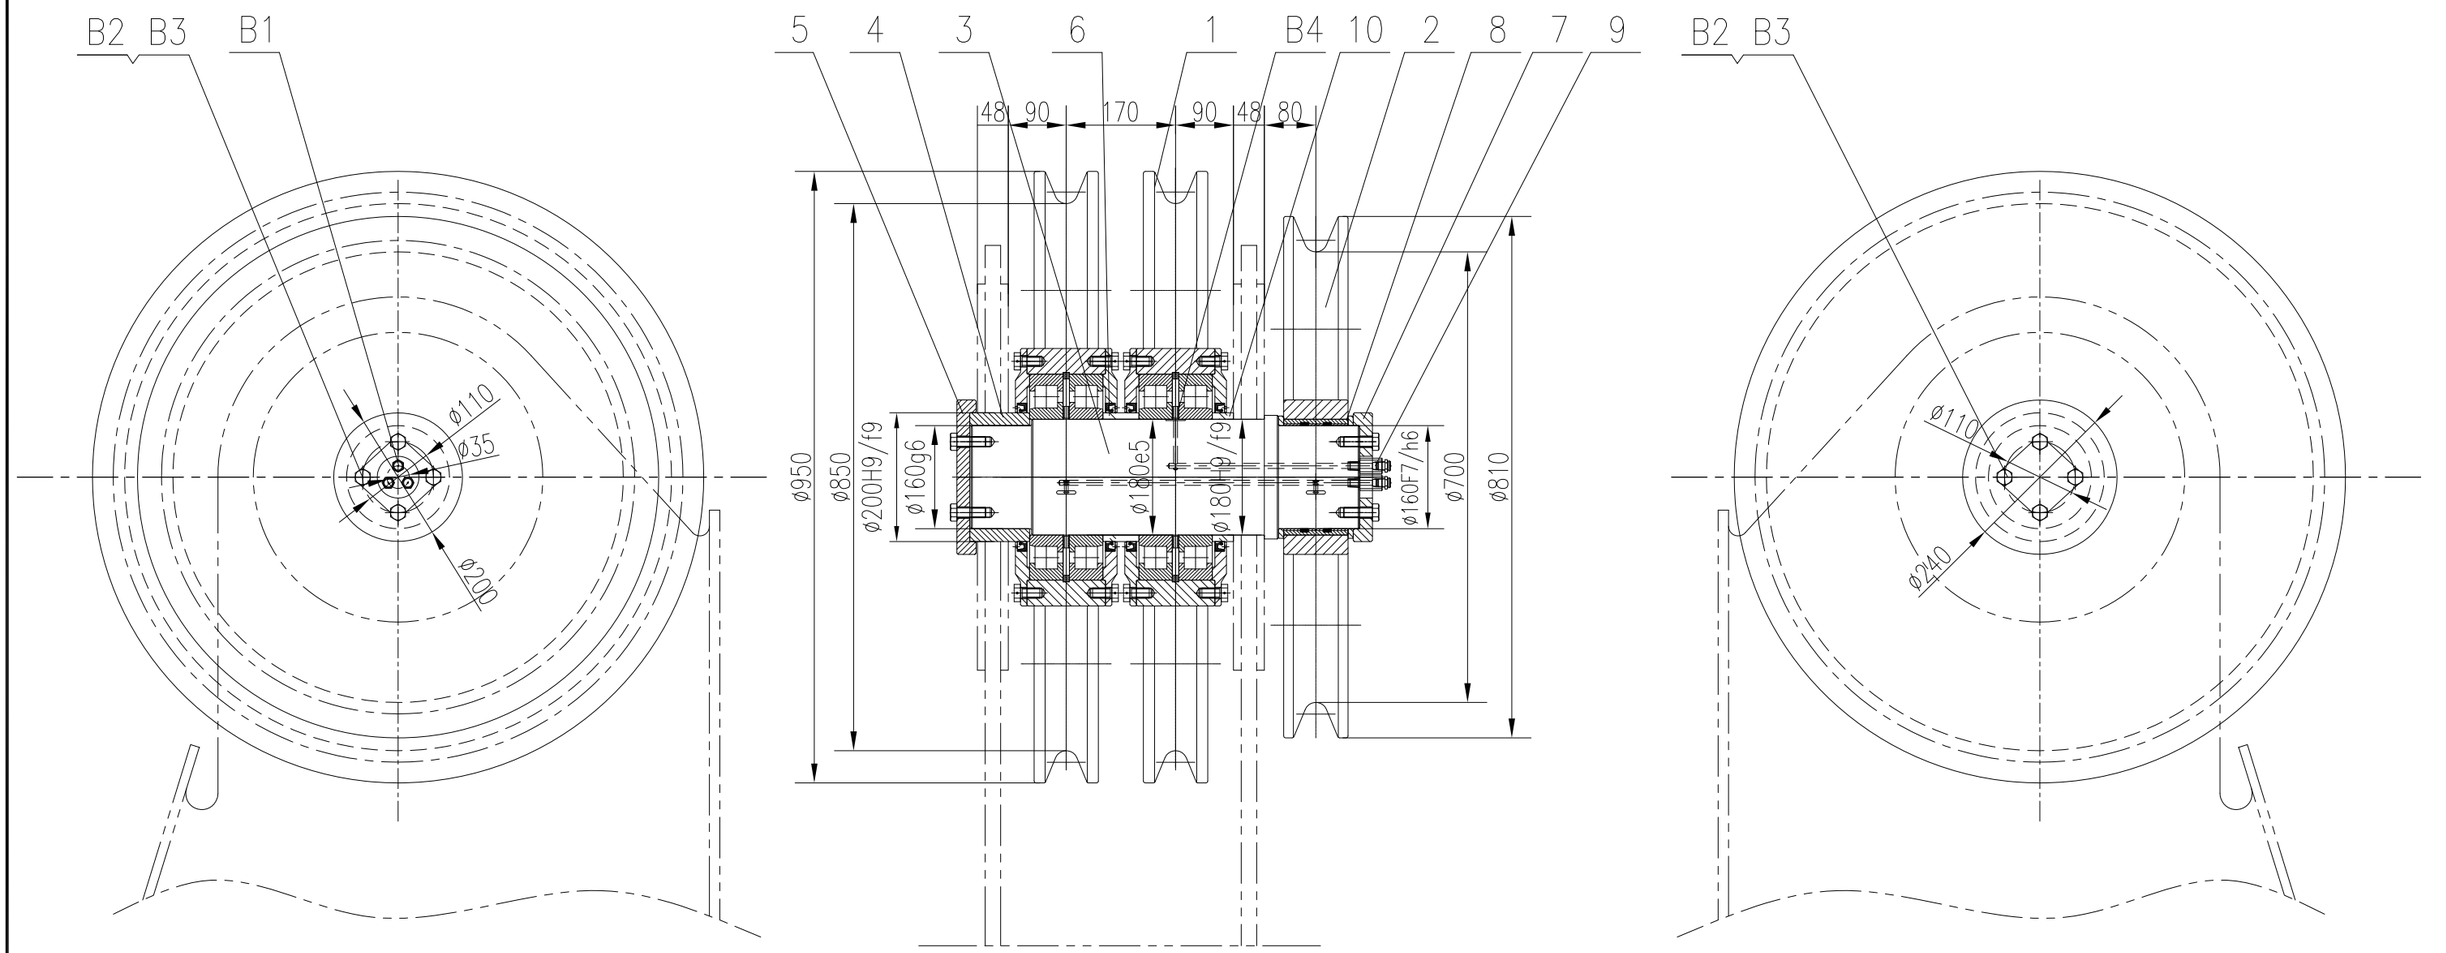

螺栓连接紧固后立即油漆.
Painting just after bolts being connected.

B4	bearing轴承	NJ236EC	ø180xø320x52	4	20	80	SKF/FAG
B3		钢丝 wire ø2.5	不锈钢 stainless	若干			
B2	GB32.1-88	螺栓 bolt M16X45	grade 8.8 级	8			达克罗 Dacro
B1	JIS B0203	平头油嘴PT1/4"	黄铜 Brass	3			
10	J526A230405	轴套2 sleeve2	Q235	1		1.6	
9	NPC2a-R1/4"	油嘴接头 joint A50	Q235	3	0.08	0.16	标准件standard
8	MES0204	铜合金隔圈 Cast bronze alloy washer	铜合金(固体润滑剂) Cast bronze alloy(soild lubricant)	2	0.5	1.0	标准件standard
7	J526A230404	端盖2 end-cover2	Q235	1		4.8	
6	J526A230202	轴套2 sleeve2	Q235	2	2.6	5.2	借用 borrow
5	J526A230403	端盖1 end-cover1	Q235	1		4.8	
4	J526A230402	轴套1 sleeve1	Q235	1		8.3	


NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	WEIGHT each	WEIGHT total	NOTE
3	J526A230401	轴 shaft	35CrMo	1		106	
2	ZT2-012947	滑轮装配 sheave T2-700-35.5-160-52	组件 Ass.	1		90	标准件standard
1	ZT2-012665	滑轮装配 sheave Ass. A2-850-35.5-180-52	组件 ass.	2	187.2	374.4	标准件standard


PROJECT: SliLanka CICT 12 STS Cranes
DESIGN STAGE:
SCALE: 1:10
ITEM NAME: 滑轮组4 sheave unit 4
DRAW NO: J526A230400

ZPMC

DSGN		TRACE		APP.	
DRAW		CHCK		Q'TY/SET	2
CHCK		VER.		TOTAL WEIGHT	2x677kg

REV	DATE	BY	DESCRIPTION
	2012.05.30	Shengjiaying	

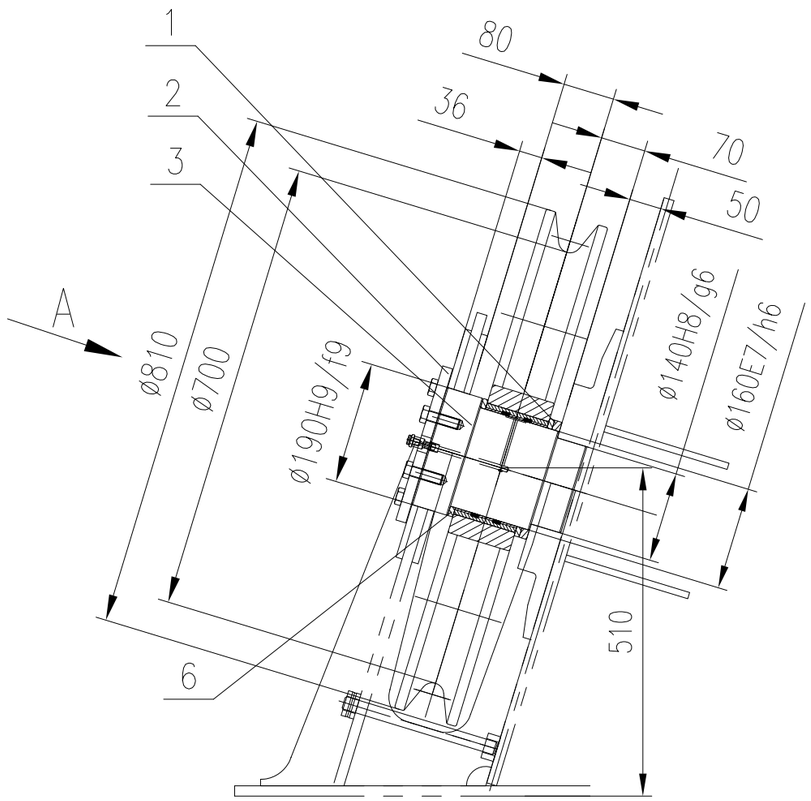

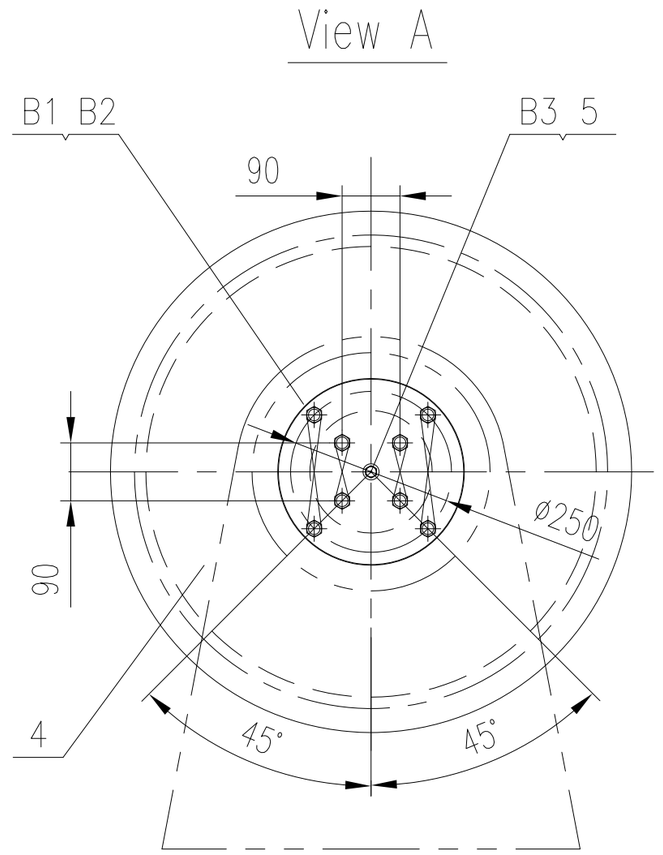

螺栓连接紧固后立即油漆.

Painting just after bolts being connected.

B3	JISB0203	油嘴nozzle PT1/4"	黄铜 Brass	1		0.02	
B2		钢丝 wire ø2.5		1m			不锈钢 STA STL
B1	GB32.1-88	螺栓 bolt M16x45	8.8 级 grade 8.8	8	0.08	0.64	达克罗 Dacro.
6	MES0204	铜合金隔圈 Cast bronze alloy washer	铜合金(固体润滑剂) Cast bronze alloy(soild lubricant)	2	0.5	1.0	标准件 Standard
5	NPC2a-R1/4"	油嘴接头 joint A50	Q235	1		0.08	标准件 Standard
4	ZT2-012947	滑轮装配 sheave T2-700-35.5-160-52	组件 Ass.	1		90	标准件 Standard
3	J526A230503	轴 shaft	45	1		39	
2	J526A230502	盖板 baffle	Q235	1		7.98	
1	J526A230501	轴套 sleeve	Q235	1		1.2	

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	each / total WEIGHT	NOTE

PROJECT: SliLanka CICT 12 STS Cranes

DESIGN STAGE:

SCALE: 1:10

ITEM NAME: 平衡滑轮组 equalizer sheave unit

DRAW NO: J526A230500

ZPMC

DSGN			TRACE			APP.	
DRAW			CHCK			Q'TY/SET	2
CHCK			VER.			TOTAL WEIGHT	2X140kg