


View A

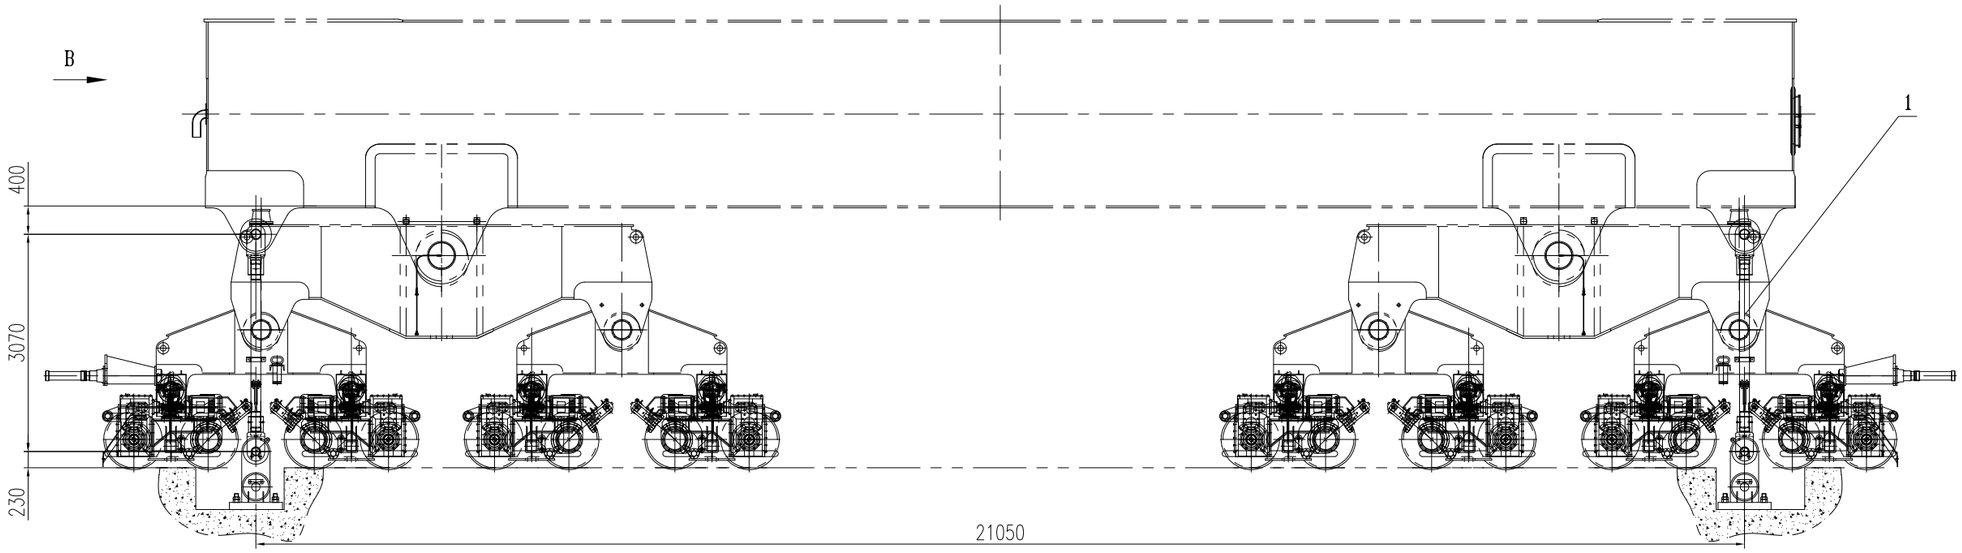


View B

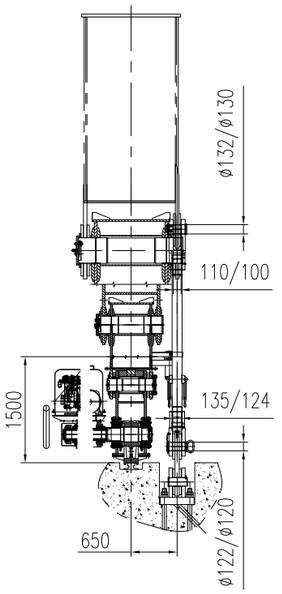


View C

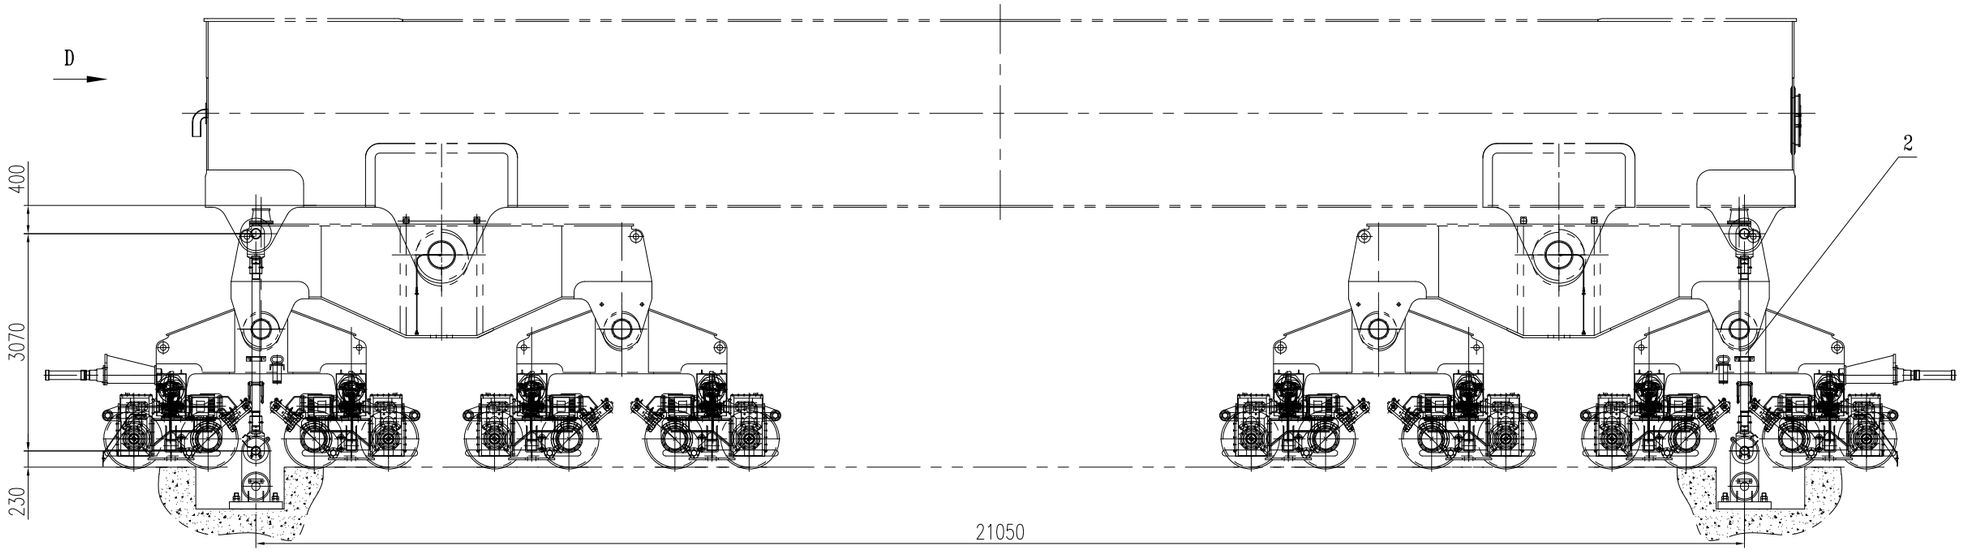

View D

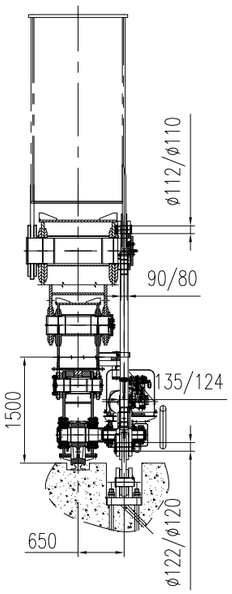

Tie down arrangment
防风系固布置

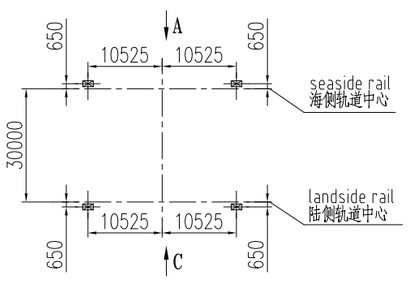

技术要求：
海侧上拔力为350t，陆侧上拔力为160t。
Requirement:
The force of W.S. tie down device is 350t,
and the force of L.S. tie down device is 160t.

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	each	total	NOTE
					WEIGHT		
2	J526A6102	陆侧防风系固装置 L.S. tie down device	Ass.	1		836.2	
1	J526A6101	海侧防风系固装置 W.S. tie down device	Ass.	1		916.4	

设计/DSGN	校对/CHKD	审核/EXAM		图幅/FORMAT
日期/DATE	日期/DATE	日期/DATE		A2
材料/MAT: Ass.	比例/SCALE: 1:60	图名/DRAWING NAME: 防风系固装置 Tie Down Device		
单重/WEI (Kg): 1752.6				
描述及日期/Description & Date		图号/DRAWING NO.: J526A6100	版本/REV: 0	页号/PAGE: 1/1
会签栏/Sign	ZPMC 上海振华重工集团			