



单根主起升钢丝绳上的挂载力(snag load on the main hoist wire rope)20t<F≤25t


MAIN PARAMETER主参数	
cylinder diameter油缸直径	200mm
piston rod杆径	140mm
cylinder journey行程	1400mm
work press工作压力	250bar

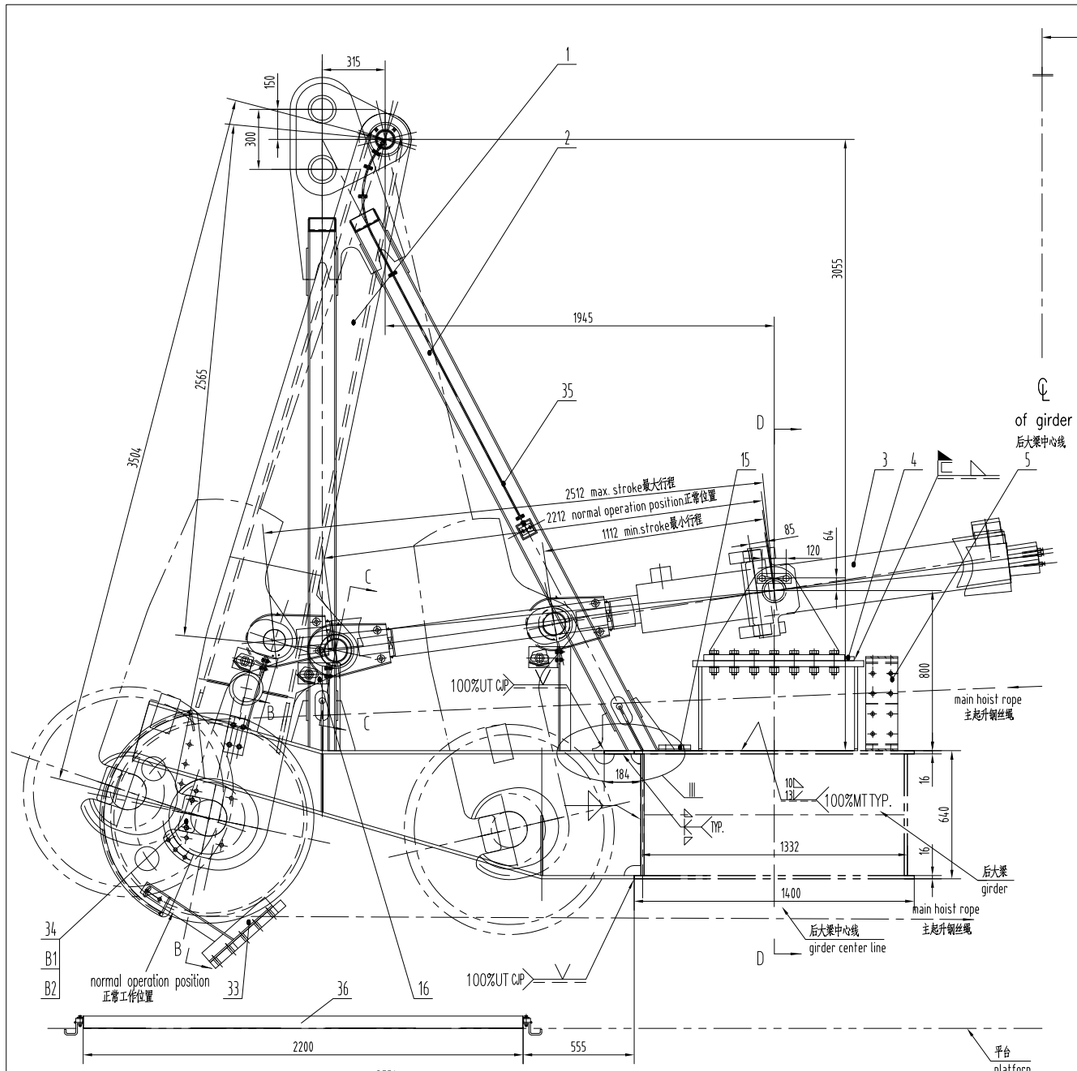


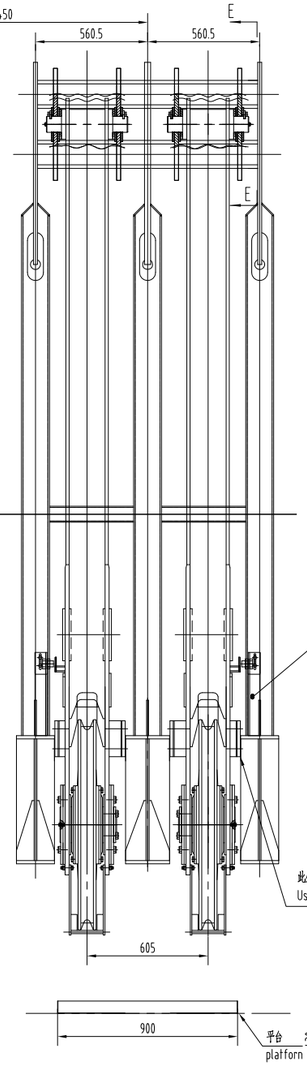


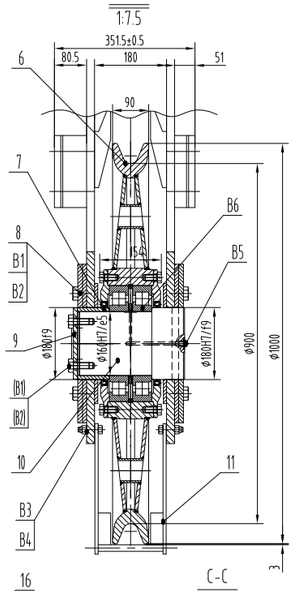


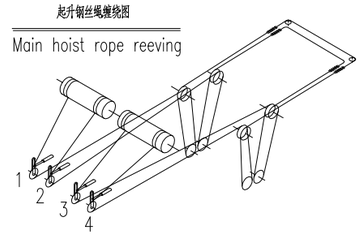











此处使用调节垫片，使摇架两侧与主支架之间间隙为1~2mm
Use the gasket to keep the gap at 1~2mm

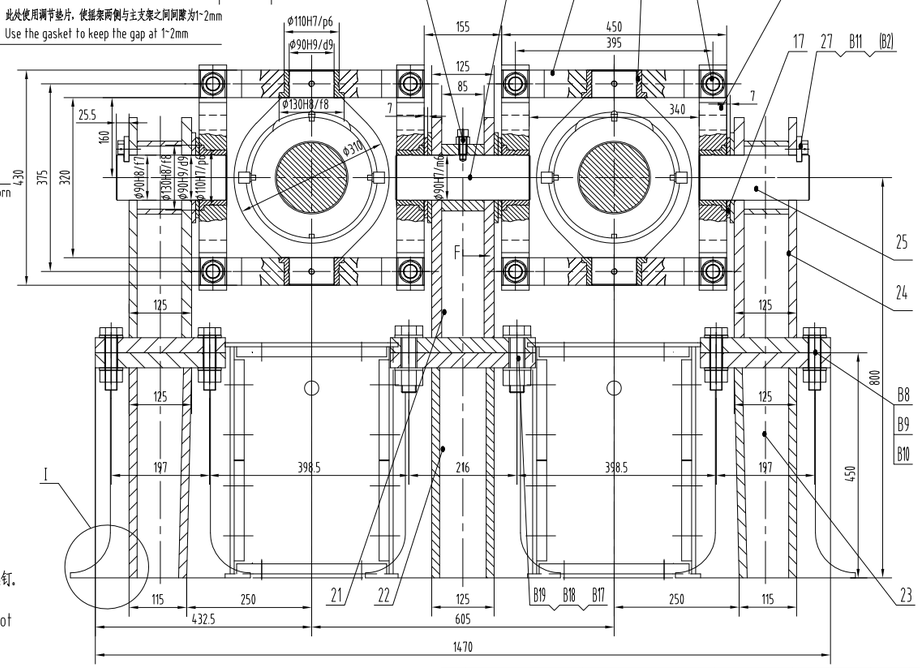

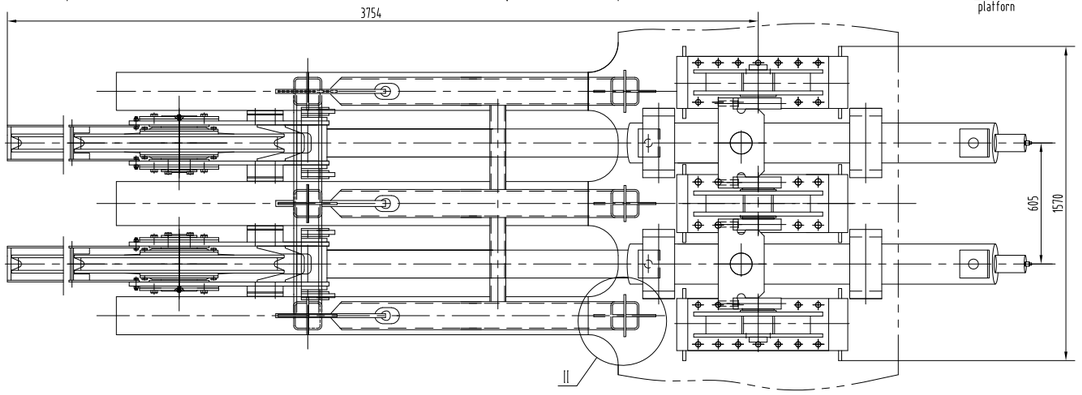


技术要求
Technical Requirement


1.所有支座应按要求安装调整妥后,再焊于后大梁上.
1.Weld all the supports on the girder after correct aligment.
2.使用摇架的调节垫片，使摇架两侧与主支架之间间隙为1~2mm
滑动摩擦付应涂上黄油，摇架摆动时应灵活无卡阻现象发生。
2.Use shims of the pray bar to keep the gap between the pry bar and the main support 1~2mm. Add grease on the suface of sliding block and ensure the pry bar swing freely.
3.件4定位块待安装调整后,现场焊固.
3.Weld the shearing block (item 4) after aligment.
4.如F-F视图所示，件21与件32装配后，配钻ϕ12的孔并安装件B15螺钉。
4.As shown on F-F, after finish installing the piece27 and 32, fasten the screw to drill the ϕ12 hole on the spot and fasten the B15 and B16.
5.如I,III视图所示,打磨R80圆弧根部焊缝使其与面板光滑相切
5.As shown on view I,III, Grind the R80 circular ends to tangent with the surface smoothly
6.螺栓拧紧力矩,拧紧力(K=0.145) Bolts fasten torque & force(K=0.145)


螺栓尺寸bolt size	M24(8.8S)	M24(10.9S)	M30(10.9S)
Torque拧紧力矩M	530Nm	800Nm	1535Nm
Force 拧紧力F	150KN	230KN	352KN

III
1:5

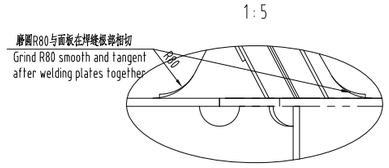

I
1:5

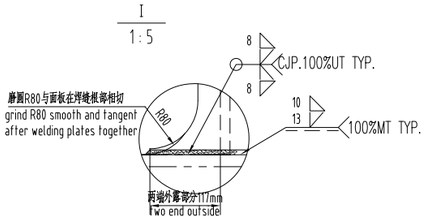



NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	each WEIGHT	total WEIGHT	NOTE
PROJECT: SliLanka CICT 12 STS Cranes			DESIGN STAGE:			SCALE: 1:15	
ITEM NAME: 挂载探头/探杆装置 ANTI-SNAG AND T/L/S DEVICE			DRAW NO: J526A1000			PROJ.	
ZPMC	DSGN		TRACE		APP.		
	DRAW		CHCK		SET/CRANE	1	
	CHCK		VER.		WEIGHT	12943	

明 细 表
SUBSIDIARY LIST

*The quantity and weight of this list is to one set
*此表为一套的数量和重量

_____set/crane, _____kg/set, _____kg/crane

设计：

校对：

PROJECT NAME or CODE: 65t岸边集装箱起重机			SUB-PART NAME: 挂舱/倾转装置		SUB DRAW NO: J526A1000	
序号 NO.	图号或标准 SUB-NO. or STDD	名称与规格 NAME & SIZE	材料或型号 MTRL or STYLE	每套数量 Q'TY/SET	单重 PIECE WGHT	总重 TOTAL WGHT
1	STDF30-(I)	pry bar 摇杆	welded 焊接件	4	665.7	2662.8
2	STDG31-(I)	main support 主支架	welded 焊接件	2	1811.4	3622.8
3	STCY-200/140-I	hydraulic cylinder 油缸	ass.组件	4	620	2480
4	ZP2	locating block 定位块	Q235	6付	1.1	6.6
5	STDB01	slap block 抗磨装置	ass.组件	4	18.4	73.6
6	ZMHL950-Aa	main hoist sheave 滑轮	ass.组件	4	225	900
7	STDD02	sleeve 轴套	Q235	4	3.4	13.6
8	STDC03	shaft baffle 挡板	Q235	8	9	72
9	STDB04	cover 端盖	Q235	4	1.9	7.6
10	STDE05	sheave shaft 滑轮轴	45	4	45	180
11	STDD06-φ950	sheave cover 滑轮罩	welded 焊接件	4	54.6	218.4
12	STDA07	shaft sleeve 轴套	Q235	8	1	8
13	STDB08	baffle 挡板	Q235	4	1.37	5.48
14	STDB09-(I)	shaft 轴	35CrMo	4	19	76
15	STDA37	slap block 抗磨块	ass.组件	4	3.7	14.8
16	STDC34	limited switch 限位开关	ass. 组件	4	2	8
17	STDE35-(I)	washer 垫片	ZQAL9-4	8	0.63	5.04
18	STDC12-(I)	bush 铜套	ZQAL9-4	8	1	8
19	STDD13-(I)	bush 铜套	Cast Bronze 铜合金	8	1.3	10.4
20	STDD14-(I)	shaft 轴	35CrMo	4	16	64
21	STDE15-(I)	support 支架2	welded 焊接件	2	113.8	227.6
22	STDF16-(I)	support 支座2	welded 焊接件	2	160.5	321
23	STDG17-(I)	support 支座1	welded 焊接件	4	155.4	621.6
24	STDE18-(I)	support 支架1	welded 焊接件	4	98.6	394.4
25	STDE19-(I)	shaft 轴	35CrMo	4	11	44
26	STDD20	shaft baffle 卡轴板	Q235	8	0.3	2.4
27	STDB21	shaft baffle 卡轴板	Q235	4	0.55	2.2
28						
29	STDD23-(I)	support 联板1	A709-50-2	8	29.5	236

明 细 表
SUBSIDIARY LIST

*The quantity and weight of this list is to one set
*此表为一套的数量和重量

_____set/crane, _____kg/set, _____kg/crane

设计：

校对：

PROJECT NAME or CODE: 65t岸边集装箱起重机			SUB-PART NAME: 挂舱/倾转装置		SUB DRAW NO: J526A1000	
序号 NO.	图号或标准 SUB-NO. or STDD	名称与规格 NAME & SIZE	材料或型号 MTRL or STYLE	每套数量 Q'TY/SET	单重 PIECE WGHT	总重 TOTAL WGHT
30	STDC24-(I)	bush 铜套	Cast Bronze 铜合金	16	1.5	24
31	STDC25-(I)	support 联板2	A709-50-2	8	32.3	258.4
32	STDC26-(I)	shaft 轴	35CrMo	2	12.8	25.6
33	STDB27	protect support 防脱绳保护块	ass.组件	4	19	76
34	STDA28	shaft baffle 卡轴板	Q235	4	2.2	8.8
35	STDD29-R1/4″	lubrication layout 润滑接管图	ass.组件	8	0.9	7.2
B1	GB32.1-88	bolt 螺栓M20x40	8.8s dacro. 达克罗	56	0.15	8.4
B2		wire 钢丝φ2	STA STL 不锈钢			
B3	GB5783-86	bolt 螺栓M16x55	8.8s dacro. 达克罗	48	0.11	5.28
B4	ZN6175-T-SL	nut 防松螺母M16	8s dacro. 达克罗	48	0.03	1.44
B5	JIS B0203	Nipple 油嘴PT1/4″	STA STL 不锈钢	20		0
B6	GB/T283-94(SKF)	bearing 轴承NJ232E(NJ232EC)	φ160xφ290x48	8	14	112
B7	GB32.1-88	bolt 螺栓M16x40	8.8s dacro. 达克罗	28	0.09	2.52
B8	GB/T1228-91	high strength bolt 螺栓M24x105	10.9s dacro. 达克罗	56	0.5	28
B9	GB/T1229-91	high strength nut 螺母M24	10H dacro. 达克罗	56	0.2	11.2
B10	GB/T1230-91	high strength washer 垫圈24	HRC35-45 dacro. 达克罗	112	0.06	6.72
B11	GB32.1-88	bolt 螺栓M20x30	8.8s dacro. 达克罗	8	0.08	0.64
B12	GB5782-86	bolt 螺栓M24x240	8.8s dacro. 达克罗	16	1	16
B13	ZN6175-T-SL	nut 防松螺母M24	8H dacro. 达克罗	16	0.1	1.6
B14	GB97.1-86	washer 垫圈24	200HV dacro. 达克罗	16	0.03	0.48
B15	GB/T85-88	screw 方头长圆柱端紧定螺钉M16x50	45H dacro. 达克罗	2	0.06	0.12
B16	GB6170-86	nut 螺母M16	8s dacro. 达克罗	2	0.03	0.06
B17	GB/T1228-91	high strength bolt 螺栓M30x115	10.9s dacro. 达克罗	28	0.7	19.6
B18	GB/T1229-91	high strength nut 螺母M30	10H dacro. 达克罗	28	0.3	8.4
B19	GB/T1230-91	high strength washer 垫圈30	HRC35-45 dacro. 达克罗	56	0.07	3.92