




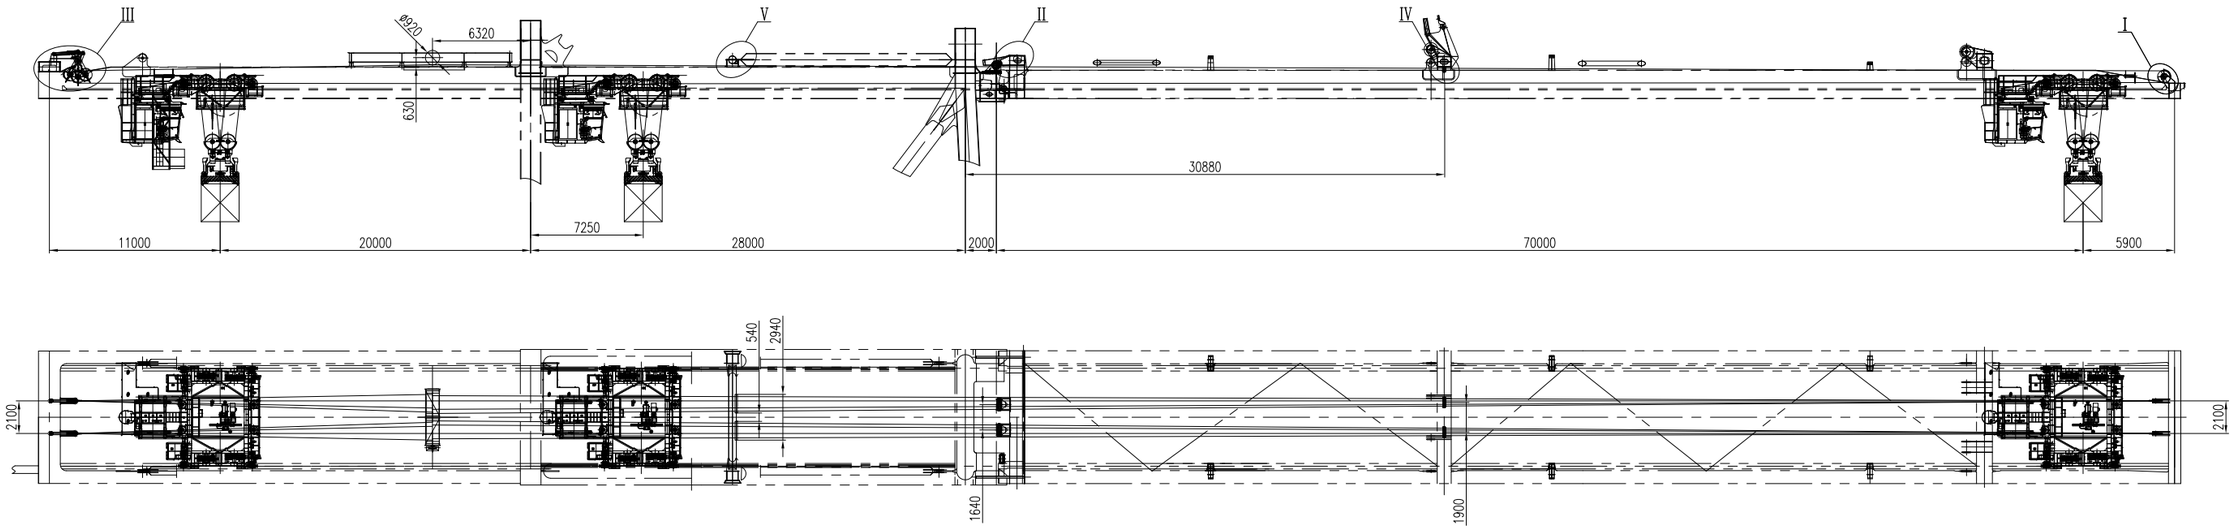


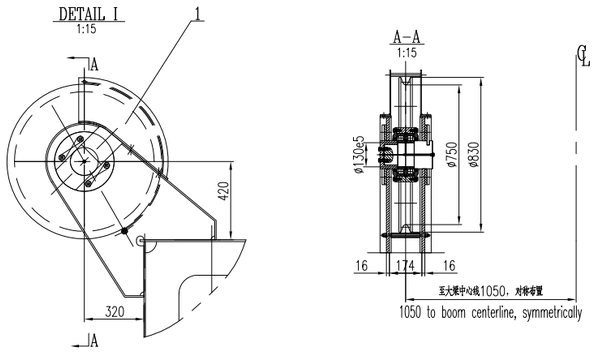


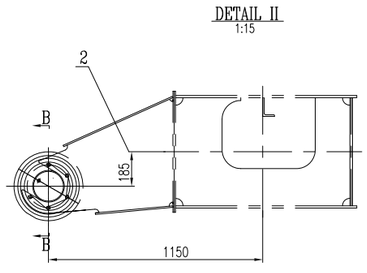











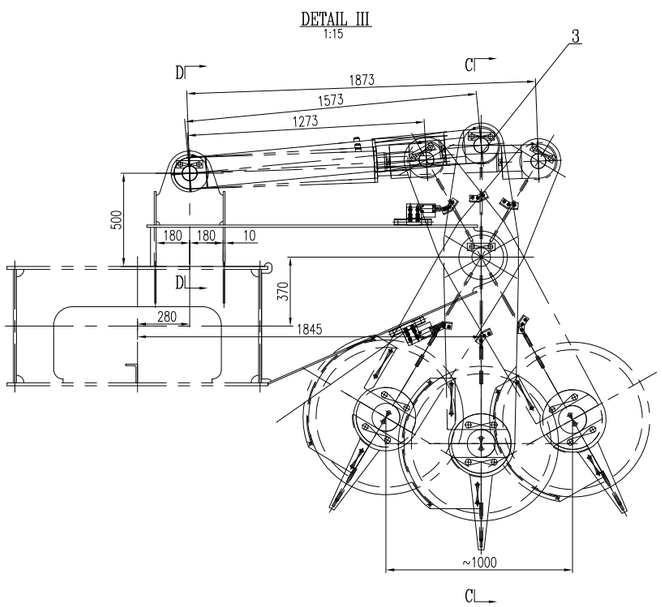

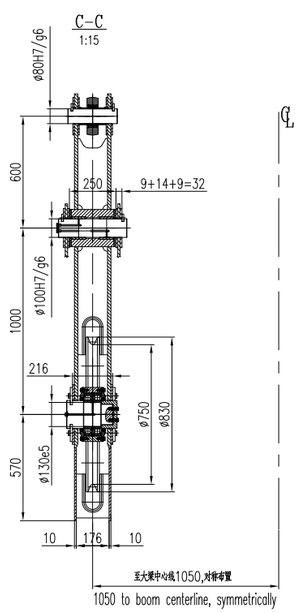


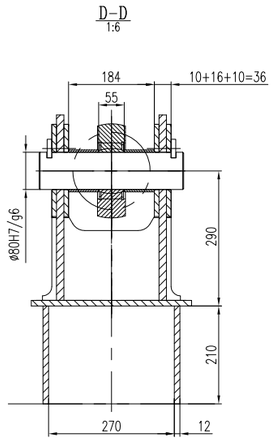





小车牵引钢丝绳缠绕系统
Trolley Rope Reeving

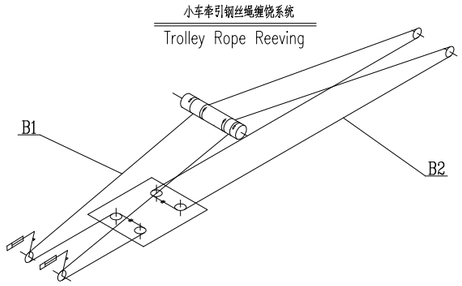

REV	DATE	BY	DESCRIPTION
01	2012.05.30	Gu	
02	2012.05.30	Gu	


NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	WEIGHT each	WEIGHT total	NOTE
B2	海侧钢丝绳	wire rope IWRC 6xP.WS(36)-B-484KN-ø25		1	523m	1480	Tokyo(含余量)
B1	陆侧钢丝绳	wire rope IWRC 6xP.WS(36)-B-484KN-ø25		1	351m	993	Tokyo(含余量)
5	J526A2105	拉滑装置1 slap block 1	组件 Ass.	2	37.7	75.4	
4	J526A2104	托辊装配 idler assembly	组件 Ass.	2	27	54	
3	J526A2103	张紧装置 tension device	组件 Ass.	2	937.3	1874.6	
2	J526A2102	铰点托辊 idler assembly	组件 Ass.	2	212.8	425.6	
1	J526A2101	大钢滑轮装配 sheave unit	组件 Ass.	2	296.7	593.4	


PROJECT: Sri Lanka CICT 12 STS Cranes DESIGN STAGE: SCALE: 1:200

ITEM NAME: 主小车缠绕系统 main trolley rope reeving system

DRAW NO: J526A2100

ZPMC	DSGN			TRACE			APP.	
	DRAW			CHCK			Q'TY/SET	
	CHCK			VER.			TOTAL WEIGHT	5496kg

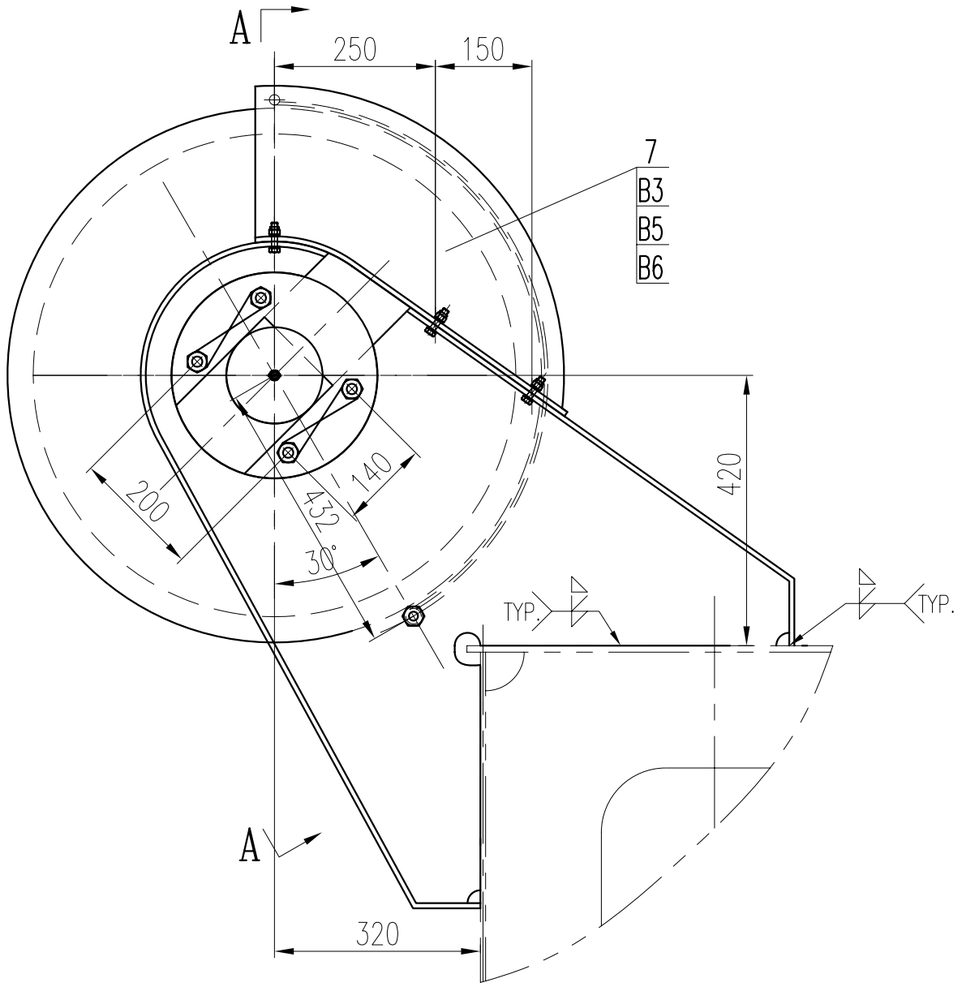

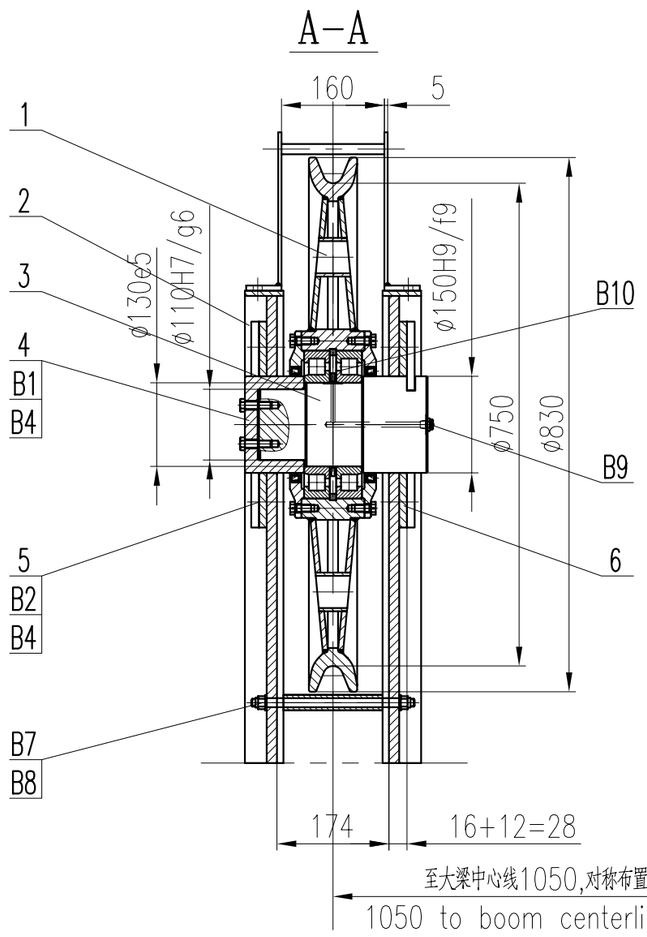

B10	NJ226EC	bearing 轴承	ø130xø230x40	2	7	14	SKF/FAG
B9	JIS B0203	nipple 平头油嘴 PT1/4"	brass	1			
B8	GB889-86	nut 锁紧螺母 M12	STA.STL. 不锈钢	2			
B7	GB953-88	Stud 等长双头螺柱 M12x260	Q235	1			
B6	GB97.1-85	washer 垫圈 10	STA.STL. 不锈钢	6			
B5	GB889-86	nut 锁紧螺母 M10	STA.STL. 不锈钢	6			
B4		wire 不锈钢丝 ø2	STA.STL. 不锈钢	2m			
B3	GB5782-86	bolt 螺栓 M10x35	STA.STL. 不锈钢	6			
B2	GB32.1-88	bolt 螺栓 M20x40	grade 8.8 级	8			Dacro. 达克罗
B1	GB32.1-88	bolt 螺栓 M12x40	STA.STL. 不锈钢	2			
7	J526A210106	cover 罩壳	welded 焊接件	1		21.2	
6	J526A210105	axle stop plate 卡轴板2	Q235	1		4.4	
5	J526A210104	axle stop plate 卡轴板1	Q235	1		4.4	
4	J526A210103	end-cover 端盖	Q235	1		7.4	
3	J526A210102	shaft 轴	45	1		27	
2	J526A210101	support 支座	welded 焊接件	1		108	
1	ZT2-013047	Sheave Ass. 滑轮装配 A2-750-ø25-230	Ass. 组件	1		114.3	ZPMC

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	WEIGHT each	WEIGHT total	NOTE

PROJECT:


DESIGN STAGE: SCALE: 1:10


ITEM NAME: 头部滑轮装配 sheave ass.

DRAW NO: J526A2101


ZPMC

DSGN		TRACE		APP.	
DRAW		CHCK		Q'TY/SET	2
CHCK		VER.		TOTAL WEIGHT	2x296.7kg

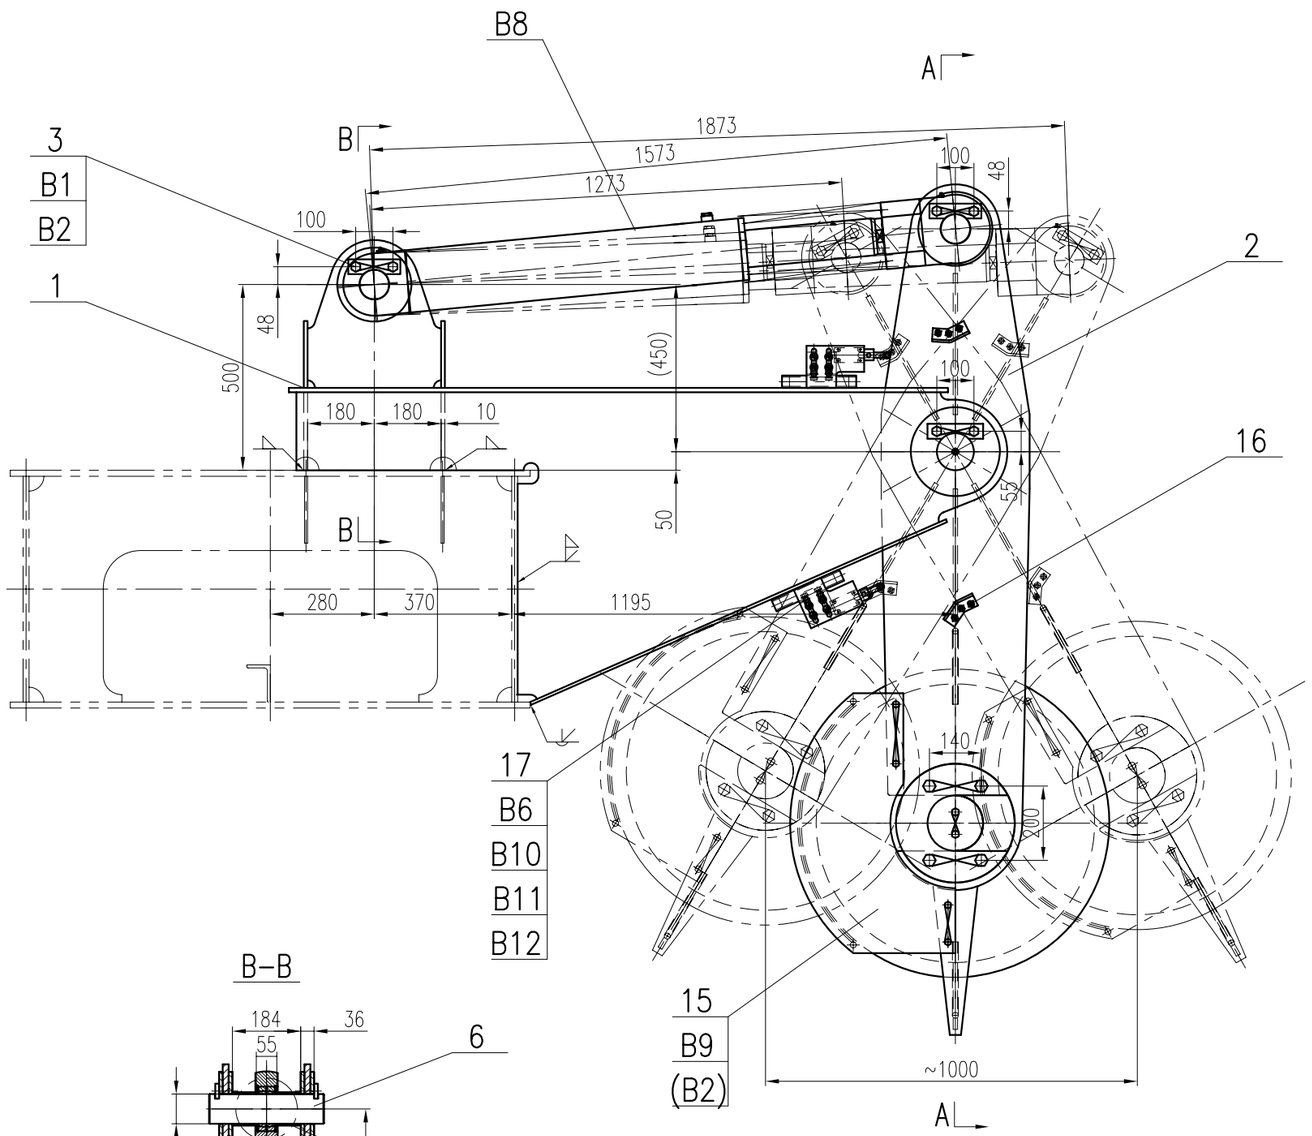

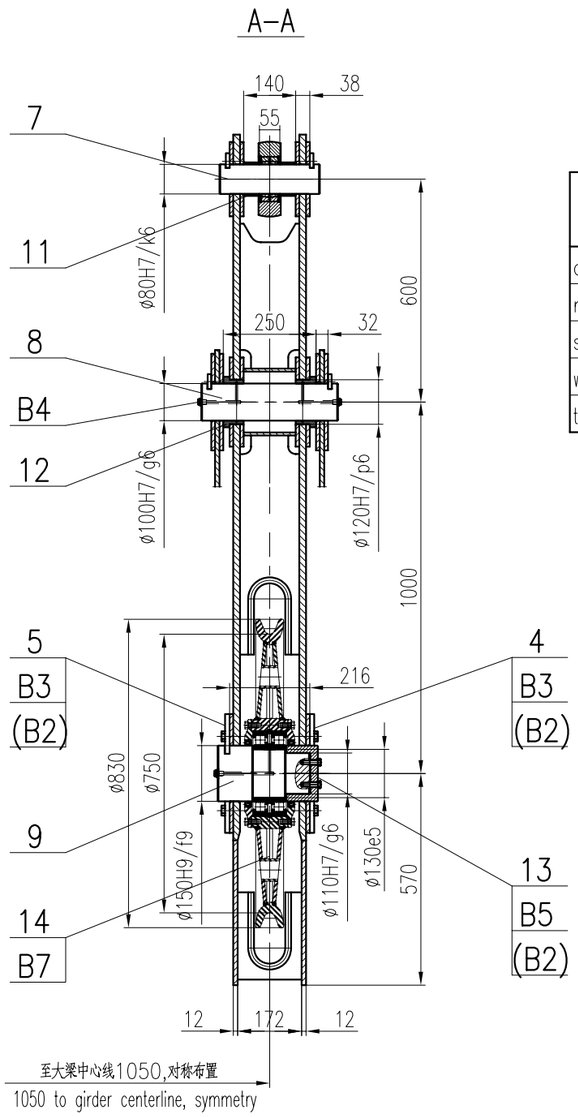

Cylinder Parameter 油缸参数	
cylinder dia. 缸径	ø140 mm
rod dia. 杆径	ø100 mm
stroke 行程	600 mm
working Pressure工作压力	25 MPa
testing Pressure 试验压力	37.5 Mpa

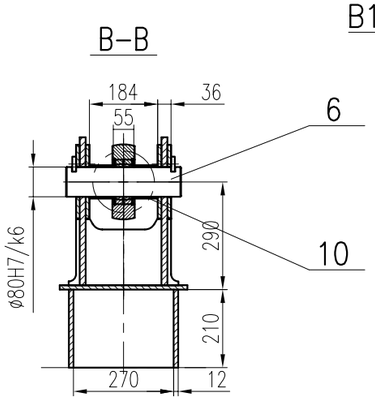

Note: 1.Item 16 and 17 should be fixed on the site according to the requirements of limiting.
注: 1.件16和17现场定位,以满足限位要求,图中尺寸仅供参考.

B12	GB95–85	washer 垫圈 5		8			STA.STL.不锈钢	17	CTR0608a	L.S. support 限位支架	Q235	2	7.22	14.4	
B11	GB889–86	nut 螺母 M5		8			STA.STL.不锈钢	16	CTR0609a	knock block 撞块	Q235	2	0.5	1	
B10	GB5782–86	bolt 螺栓 M5x35		8			STA.STL.不锈钢	15	J526A210312	cover 罩壳	welded 焊接件	1		21.8	
B9	GB32.1–88	bolt 螺栓 M10x20		8			STA.STL.不锈钢	14	ZT2–013047	sheave 滑轮 A2–750–ø25–230	Ass. 组件	1		158.3	
B8		hydraulic cylinder 液压油缸	ø140/ø100x600–00	1		149		13	J526A210311	end–cover 端盖	Q235	1		6.9	
B7		bearing 轴承 NJ226EC	ø130xø230x40	2	5	10	SKF/FAG	12	J526A210310	bush 自润滑轴套	铜合金+固体润滑剂	2	1.5	3.0	
B6	XCKJ10541H29C	limit switch 限位开关		2			electrical 电气配套	11	J526A210309	shaft sleeve 轴套2	Q235	2	0.5	1.0	
B5	GB32.1–88	bolt 螺栓 M12x40		2			STA.STL.不锈钢	10	J526A210308	shaft sleeve 轴套1	Q235	2	0.6	1.2	
B4	JISB0203	nipple 平头油嘴 PT1/4"			3			brass							
B3	GB32.1–88	bolt 螺栓 M20x40	grade 8.8级		8			Dacro.达克罗							
B2		wire 不锈钢丝 ø2			3m			STA.STL.不锈钢							
B1	GB32.1–88	bolt 螺栓 M16x40	grade 8.8级		12			Dacro.达克罗							

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	WEIGHT each	WEIGHT total	NOTE
9	J526A210307	shaft 轴	45	1		27	
8	J526A210306	shaft 轴3	45	1		22	
7	J526A210305	shaft 轴2	35CrMo	1		10	
6	J526A210304	shaft 轴1	35CrMo	1		12	
5	J526A210105	axle stop plate 卡轴板2	Q235	1		4.4	borrow 借用
4	J526A210104	axle stop plate 卡轴板1	Q235	1		4.4	borrow 借用
3	J526A210303	axle stop plate 卡轴板	Q235	6	0.4	2.4	
2	J526A210302	lever 杠杆	welded 焊接件	1		220	
1	J526A210301	support 支座	welded 焊接件	1		268.5	

PROJECT:		DESIGN STAGE:		SCALE: 1:12	
ITEM NAME: Tension Device 小车张紧装置		DRAW NO: J526A2103		PROJ.	
ZPMC	DSGN	TRACE	APP.		
	DRAW	CHCK	SET/CRANE	2	
	CHCK	VER.	WEIGHT	2x937.3kg	