

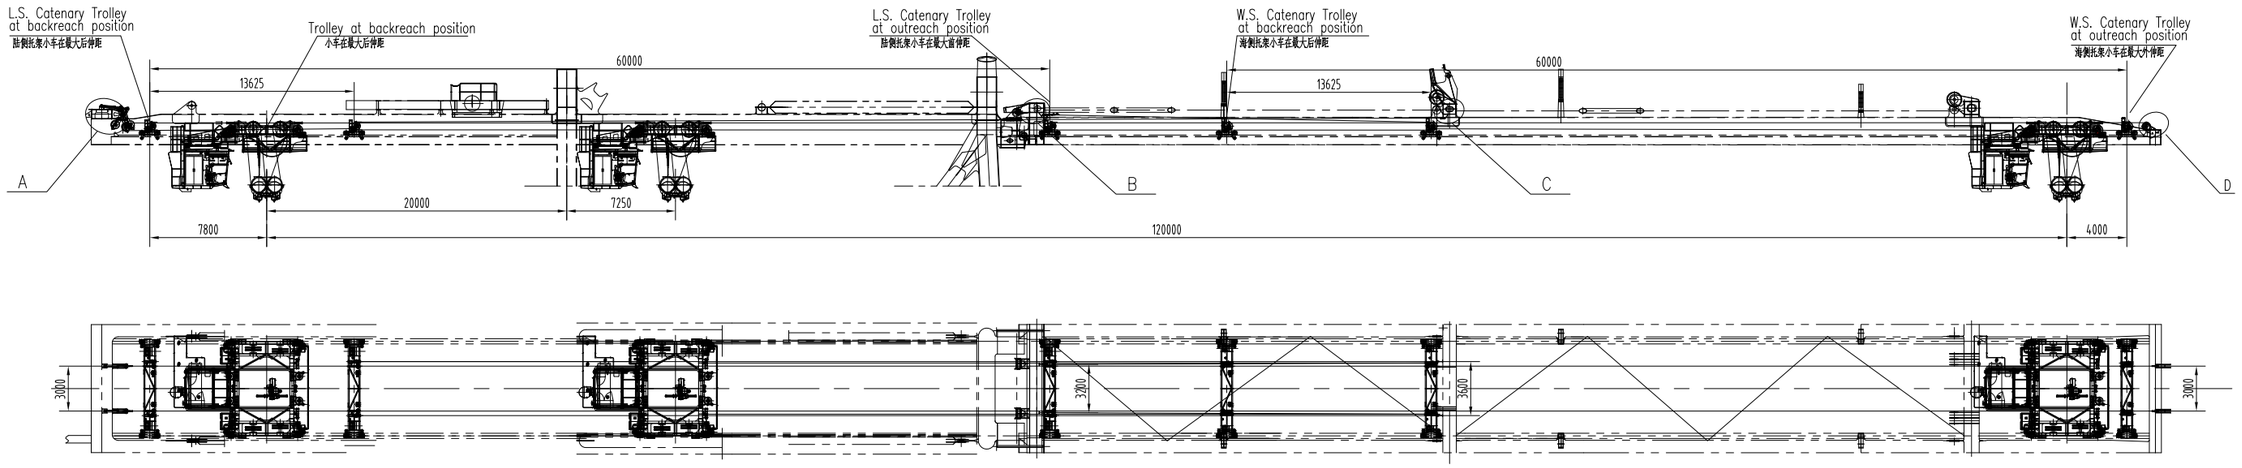



Detail A
1:20

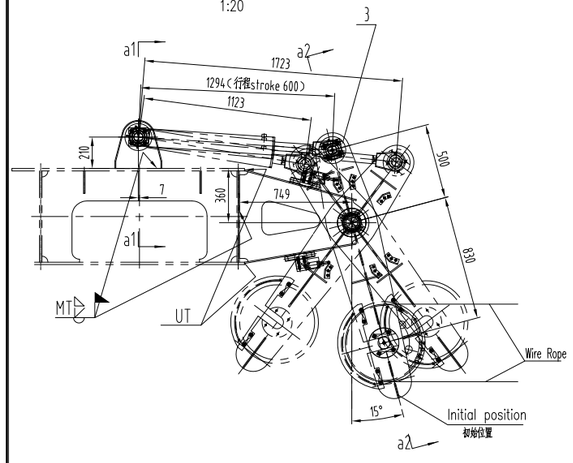


a2–a2
1:20

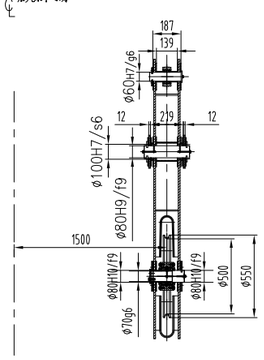


L.S. Catenary Trolley
陆侧托架小车
1:40




W.S. Catenary Trolley
海侧托架小车
1:40




Detail B
1:20

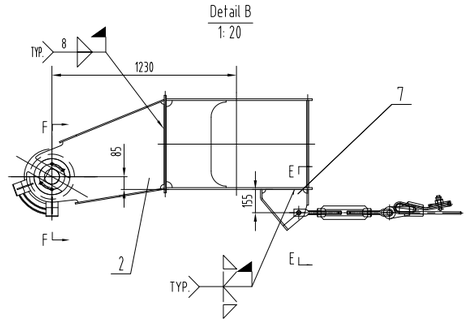


Section F–F
1:20




Detail C
1:20




G–G/E–E
1:40





Catanery trolley reeving system
托架小车缠绕系统示意图

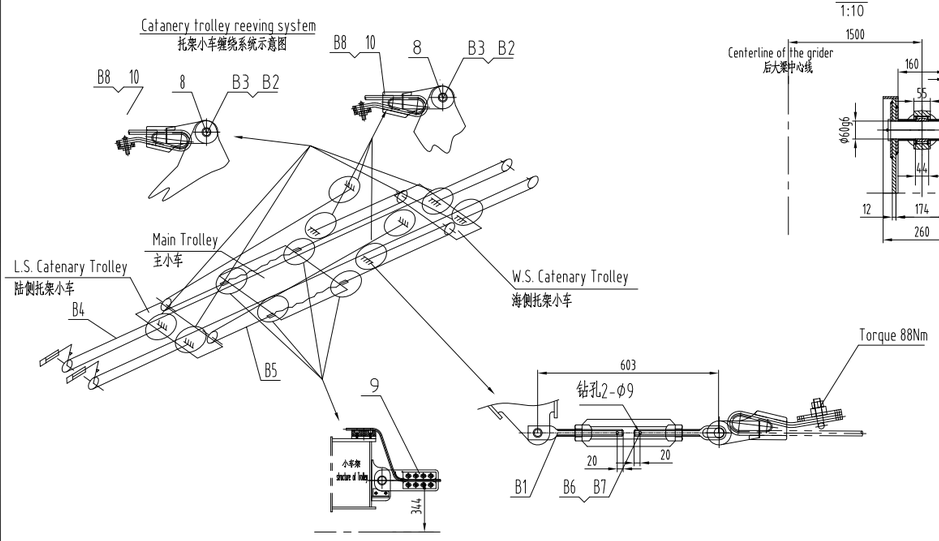


a1–a1
1:10



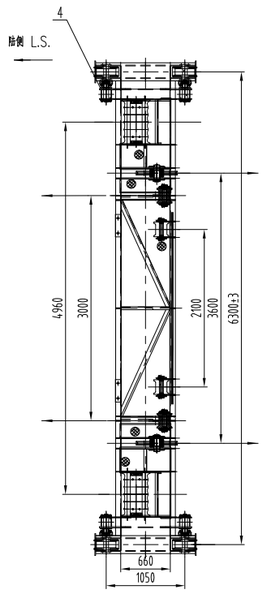


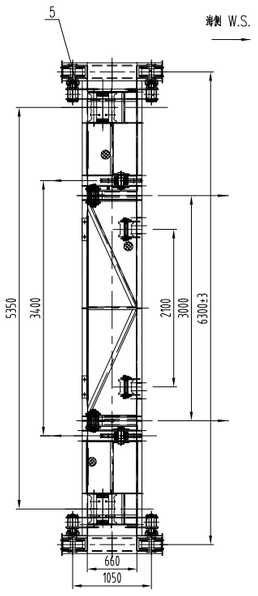

C.L. of boom
直大梁中心线
J–J
1:20
Symmetry
对称制作





Scale D
1:20




REV	DATE	BY	DESCRIPTION
1	2012.05.30	Shenyanrong	
2	2012.08.17	Shenyanrong	

PROJECT:	Sri Lanka CICT 12 STS Cranes			DESIGN STAGE:			SCALE:	1:200
ITEM NAME:	托架小车缠绕系统 Catenary Trolley Rope Reeving System			DRAW NO:	J526A2200		PROJ.	
ZPMC	DSGN			TRACE			APP.	ASS.
	DRAW			CHCK			SET/CRANE	1
	CHCK			VER.			WEIGHT	5985.1

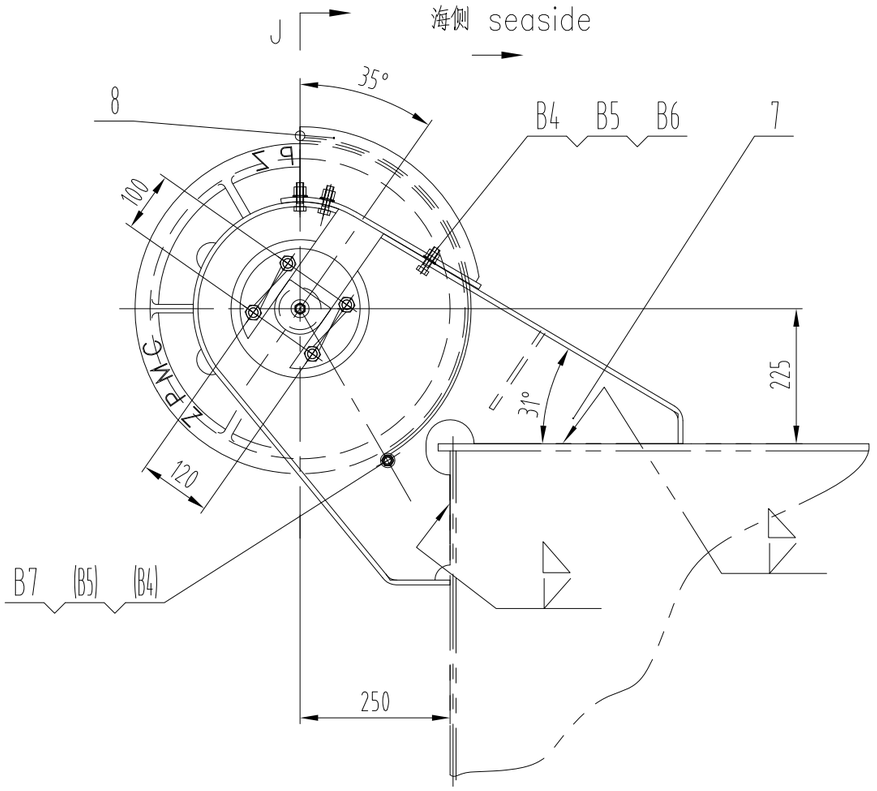

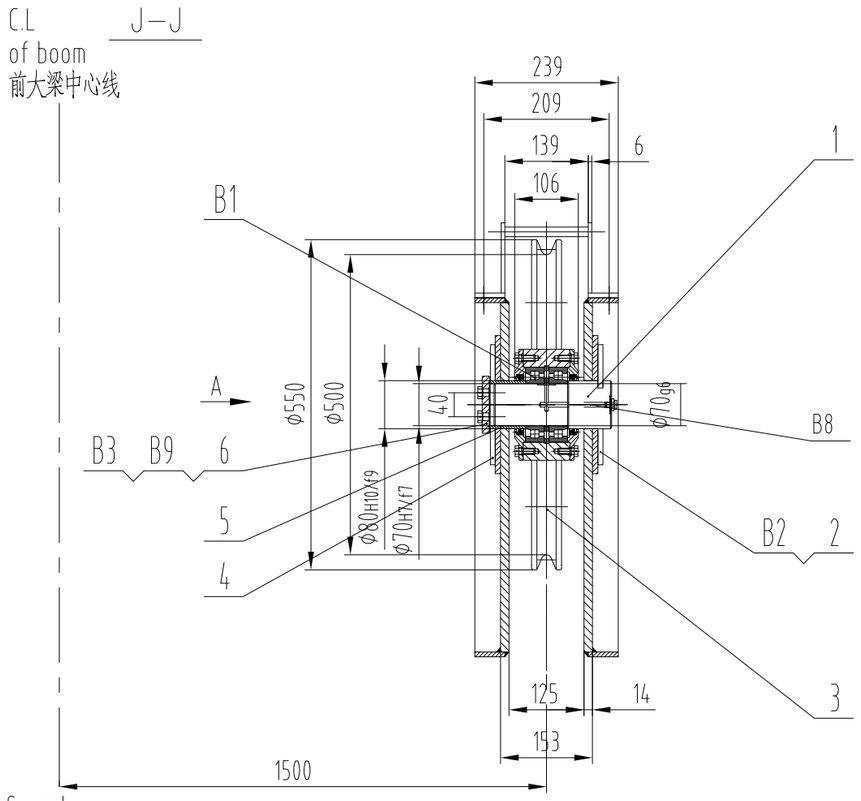

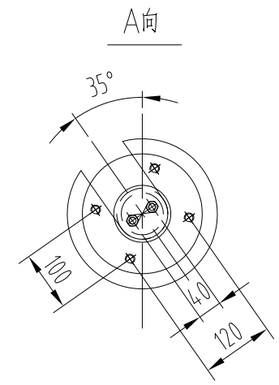

技术要求

1.安装时注意两两对称。

Technical requirements

1.To be installed symmetrically.

REV	DATE	BY	DESCRIPTION
01	2012.05.30	Shenyanrong	
02	2012.08.17	Shenyanrong	

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	WEIGHT each	WEIGHT total	NOTE
B9		不锈钢丝 φ2 Stainless wire		若干 Some			
B8	JISB0203	Grease Fitting平头油嘴PT 1/4"	brass黄铜	1			
B7	GB953-88	双头螺柱 M12×200 Stud	STA.STL. 不锈钢	1	0.2	0.2	
B6	GB5783-86	螺栓 M12×40 Bolt	STA.STL. 不锈钢	6	0	0	
B5	GB97.1-85	平垫圈 12 Washer	STA.STL. 不锈钢	8	0	0	
B4	GB889-86	锁紧螺母 M12 Lock nut	STA.STL. 不锈钢	8	0	0	
B3	GB32.1-88	螺栓 M12×35 Bolt	STA.STL. 不锈钢	2	0	0	
B2	GB32.1-88	螺栓 M16×30 Bolt	8.8S	8	0.1	0.8	达克罗 Dacro.
B1	SKF\FAG	轴承 NJ2214EC Bearing	φ70×φ125×31	2	1.6	3.2	
8	CTR0406-500Ab	罩壳 Sheave cover	焊接件 Wel.	1	10.3	10.3	Borrow 借用
7	J526A220101	支架 Support	焊接件 Wel.	1	63.4	63.4	
6	CTR0405-500Ab	调整端盖 Adjust cap	Q235	1	0.7	0.7	Borrow 借用
5	CTR0404-500Ab-J526A	轴套 Sleeve	20	1	0.9	0.9	
4	CTR0403-500Ab-J526A	卡轴板II Baffle 2	Q235	1	1.6	1.6	
3	ZT2-013022	滑轮装配(φ500) Sheave Ass.	组件 Ass.	1	48.2	48.2	
2	CTR0402-500Ab-J526A	卡轴板I Baffle 1	Q235	1	1.3	1.3	
1	CTR0401-500Ab-J526A	轴 Shaft	45	1	6.9	6.9	
NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	WEIGHT each	WEIGHT total	NOTE

PROJECT: Sri Lanka CICT 12 STS Cranes

DESIGN STAGE:

SCALE: 1:10

ITEM NAME: Sheave Ass. 头部滑轮装配

DRAW NO: J526A2201

PROJ.


ZPMC


DSGN			TRACE			APP.
DRAW			CHCK			SET/CRANE
CHCK			VER.			WEIGHT

Ass. 部件

2

137.5

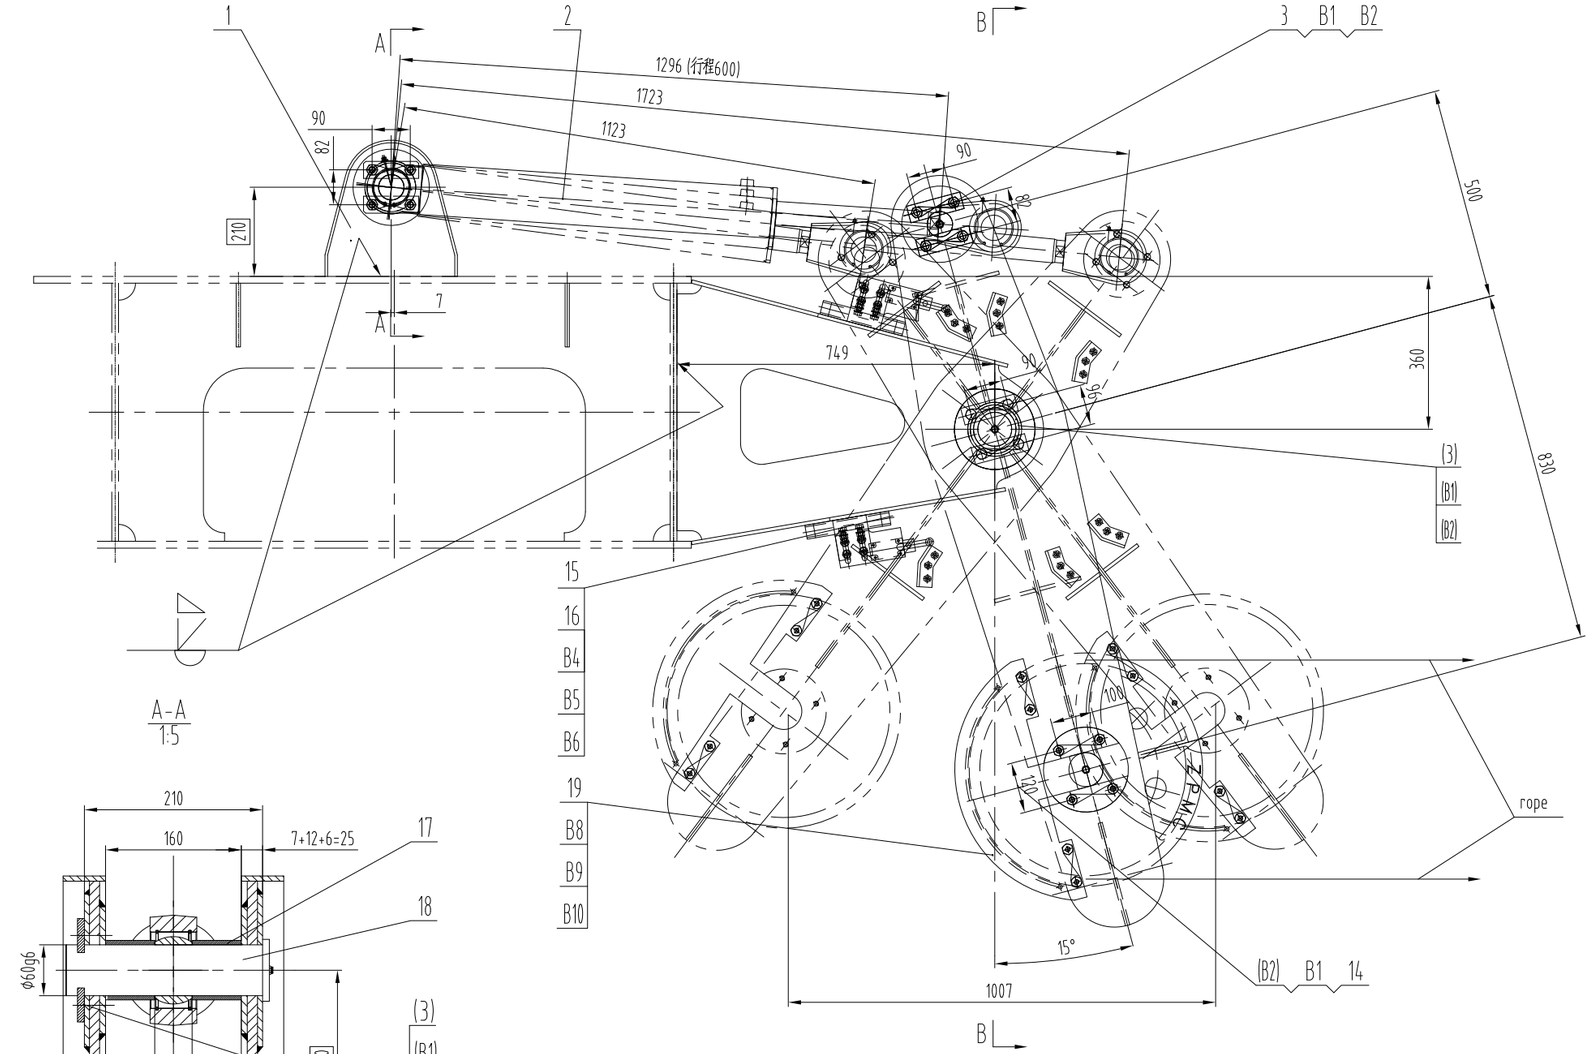

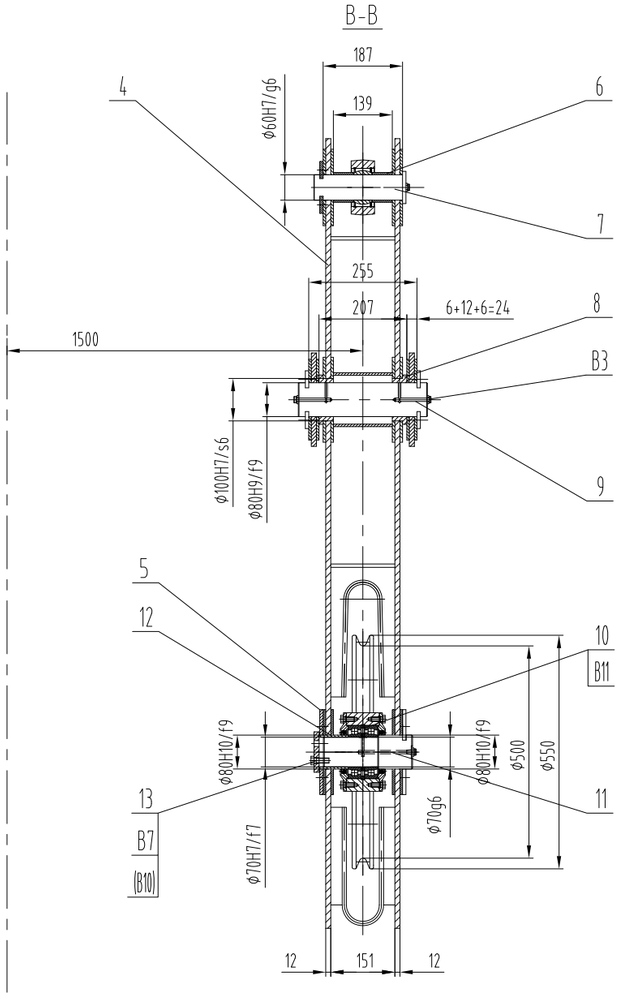

技术要求

安装时两两对称安装

NOTE

To be assembled symmetrically.

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	WEIGHT each	WEIGHT total	NOTE
B11		轴承 NJ2214EC Bearing	ϕ70xϕ125x31	2	1.6	3.2	SKF\FAG
B10		不锈钢丝 ϕ1.5 Stainless wire					若干 Some
B9	GB95-85	垫圈 12 Washer	A2-70	8			
B8	GB32.1-88	螺栓 M12x20 Bolt	A2-70	8			
B7	GB32.1-88	螺栓 M12x35 Bolt	A2-70	2			
B6	GB889-86	螺母 M5 Nut	A2-70	8			
B5	GB5782-86	螺栓 M5x60 Bolt	A2-70	8			
B4		限位开关 Limit switch		2			电气件 Electric
B3	JISB0203	Grease Fitting平头油嘴PT 1/4"		5			brass黄铜
B2		不锈钢丝 ϕ2 Stainless wire					若干 Some
B1	GB32.1-88	螺栓 Bolt M16x30	8.8级 S	24			达克罗 Dacro.
19	CTR0612-500	罩壳 Cover	焊接件 Welded	1	11.4	11.4	标准件 Standard
18	CTR0611-60	轴3 Shaft 3	45	1	5.3	5.3	标准件 Standard
17	CTR0610-60	轴套3 Sleeve 3	20	2	0.5	1	标准件 Standard
16	CTR0609a	撞板 Plate	Q235	2	0.5	1	标准件 Standard
15	CTR0608a	可调限位支架 Adjustable limit switch support	Q235	2	1.6	3.2	标准件 Standard
14	CTR010304-C	卡轴板2 Baffle 2	Q235	1	1.3	1.3	标准件 Standard
13	CTR010305-A	调整端盖 Adjustable cap	Q235	1	0.7	0.7	标准件 Standard
12	CTR0614-A-J526A	轴套 Sleeve	20	1	1	1	
11	CTR0613-A-J526A	轴 Shaft	45	1	7.5	7.5	
10	ZT2-013022	滑轮装配 Sheave Ass.	组件 Ass.	1	48.2	48.2	通用件 General
9	CTR0607	轴 Shaft	45	1	11.9	11.9	标准件 Standard
8	CTR0606a	衬套 Bush	Cast Bronze+SL	2	1.2	2.4	订货图 Ordering drawing
7	CTR0605-60	销轴 Pin shaft	45	1	4.8	4.8	标准件 Standard
6	CTR0604-60	轴套1 Sleeve 1	20	2	0.4	0.8	标准件 Standard
5	CTR010302-C	卡轴板1 Baffle 1	Q235	1	1.5	1.5	标准件 Standard
4	CTR0603-500-C	支座 Support	焊接件 Welded	1	118.8	118.8	标准件 Standard
3	CTR0602	卡轴板1 Baffle 1	Q235	8	0.3	2.4	标准件 Standard
2		张紧油缸 Tension cylinder	组件 Ass.	1	72	72	液压件 Hydraulic
1	J526A220301	支架 Support	焊接件 Welded	1	96.5	96.5	

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	WEIGHT each	WEIGHT total	NOTE

PROJECT:

DESIGN STAGE:

SCALE: 1:10


ITEM NAME: 拉索小车张紧装置 Catenary trolley rope tensioner device


DRAW NO: J526A2203


PROJ.


ZPMC


DSGN			TRACE		APP. 部件 Ass.
DRAW			CHCK		SET/CRANE 2
CHCK			VER.		WEIGHT 395

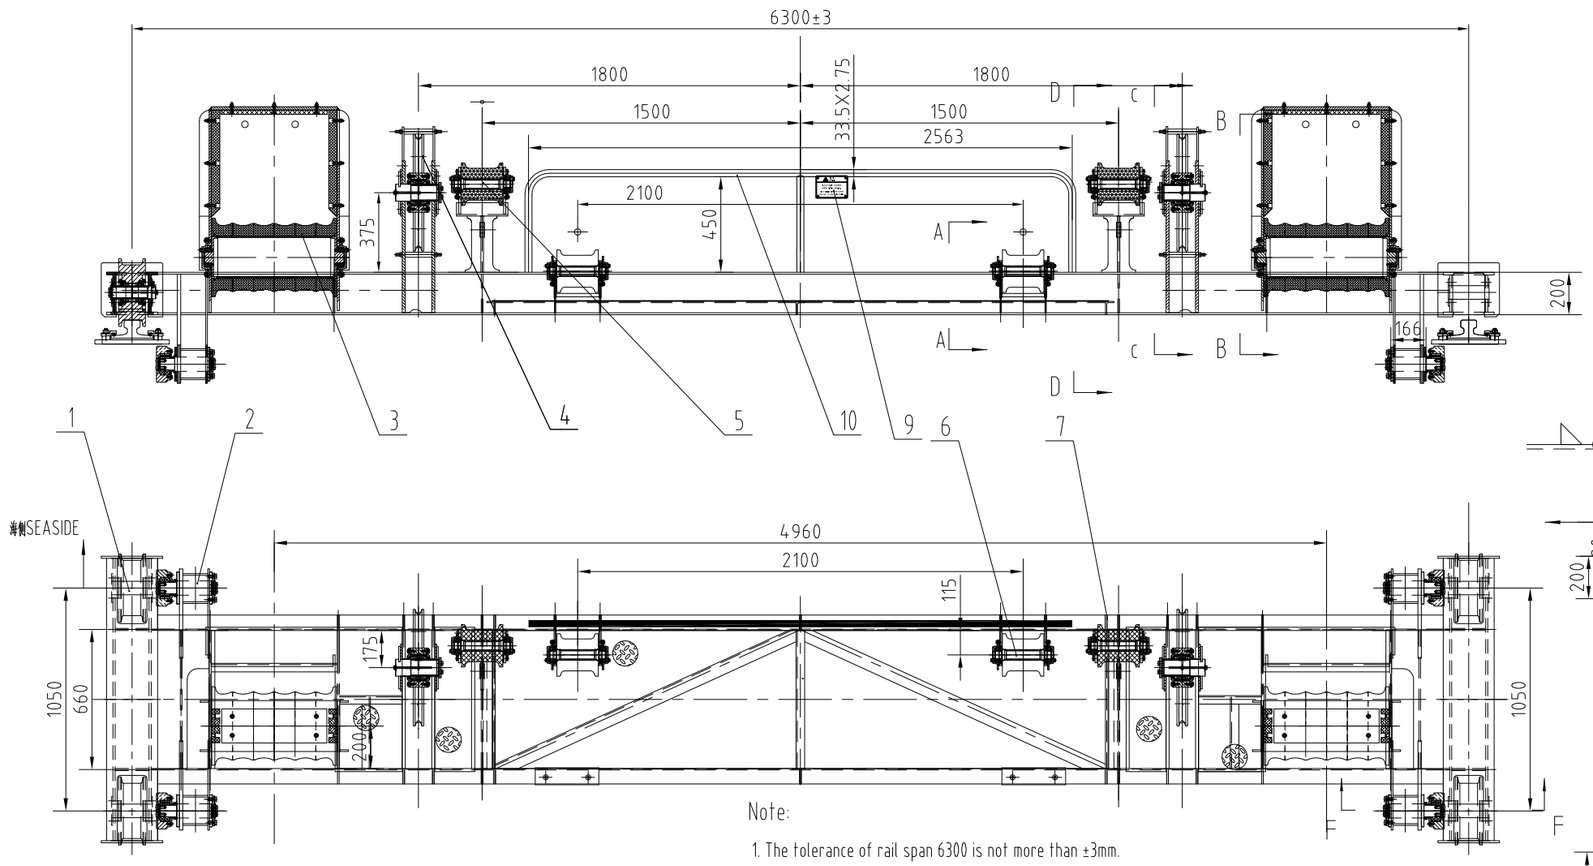


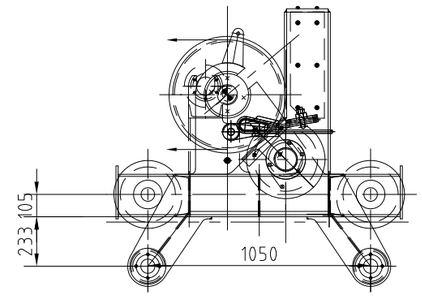


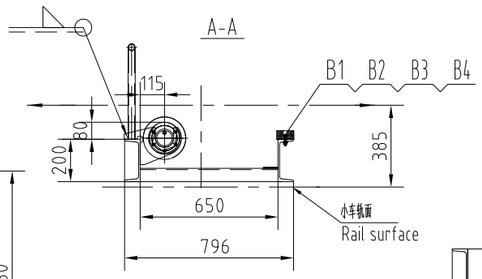



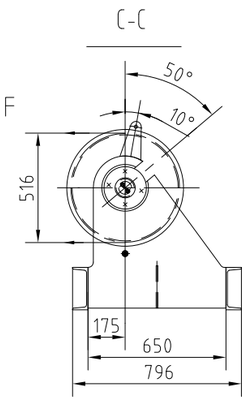




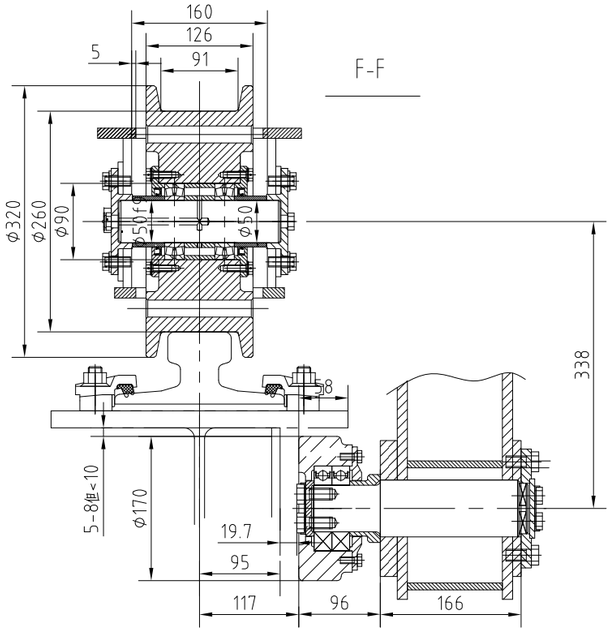

Note:

1. The tolerance of rail span 6300 is not more than ±3mm.
   轨距 6300 公差<=±3;
2. b. In cases where the top of the rail is flat,the inclination of the wheel axis from the horizontal must be between +0.52mm and -0.26mm for the unladed crane;
   车轮轴线相对于水平面的倾斜度在+0.52mm~-0.26mm之间.



3. c. The axes of the wheel bores must not have an angular deviation greater than ±0.52mm from its theoretical axis,in the horizontal plane.
   车轮轮孔中心线同其理论中心线之间在水平面内的角度偏差±0.52mm.
4. d. The centre planes of wheels rolling on a common rail must not diverge more than 2mm from the theoretical axis.
   同一轨道上的车轮中心面同车轮理论中心线的偏差<2mm.
5. e. The clearance between the roller top and the below surface of the rail support plate should be of 5~8mm.
   The max.clearance should not more than 10 mm. as the right view.
   反滚轮装置的滚轮与承轨梁翼板下平面的间隙调整在5~8mm,
   安装后应在全行程范围内检查间隙,其最大值不得大于10mm,如右图所示.

REV	DATE	BY	DESCRIPTION
01	2012.05.30	Shenyanrong	
02	2012.08.17	Shenyanrong	

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	Q'TY/SET	SET*WEIGHT		SCALE
B4	ZN6175-T-SL	Nut 螺母M10	A2-70	4			
B3	GB853-88	Washer 槽钢用方斜垫圈10	A2-70	4			
B2	GB70.3-2000	Screw 内六角沉头螺钉M10x50	A2-70	4			
B1	B1-J526A	Slap block抗磨块	UHMWPE	2	1.6	3.2	
10		φ33.5x2.75-7m	Q235	1	15	15	
9	ZT2-027601	警示牌 warn sign	Assy.组件	1	0.5	0.5	
NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	Q'TY/SET	SET*WEIGHT		SCALE


NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	Q'TY/SET	SET*WEIGHT		SCALE
7	J526A220406	L.S. Trolley Frame陆侧小车架	welding焊接件	1	1012.9	1012.9	
6	J526A220405	Guide Idle 托辊装配 (3)	Assy.组件	2	12.9	25.8	
5	J526A220404	Guide Idle 托辊装配 (2)	Assy.组件	2	23.8	47.6	
4	J526A220403	Sheave assembly 滑轮装置	Assy.组件	2	64.4	128.8	
3	J526A220402	Guide Idle 托辊装配 (1)	Assy.组件	2	136.7	273.4	
2	AJR01b	Roller 反滚轮	Assy.组件	4	19.0	76	
1	J526A220401	wheel assembly 车轮装配	Assy.组件	4	56.7	226.8	


PROJECT: Sri Lanka CICT 12 STS Cranes
DESIGN STAGE:
SCALE: 1:20
ITEM NAME: 陆侧托架小车 Landside catenary trolley
DRAW NO: J526A220400
PROJ.


ZPMC


DSGN			TRACE		APP.	ASS.
DRAW			CHCK		SET/CRANE	1
CHCK			VER.		WEIGHT	1781.3


设计	
校对	
审核	
工艺	
标准	
批准	ASS.

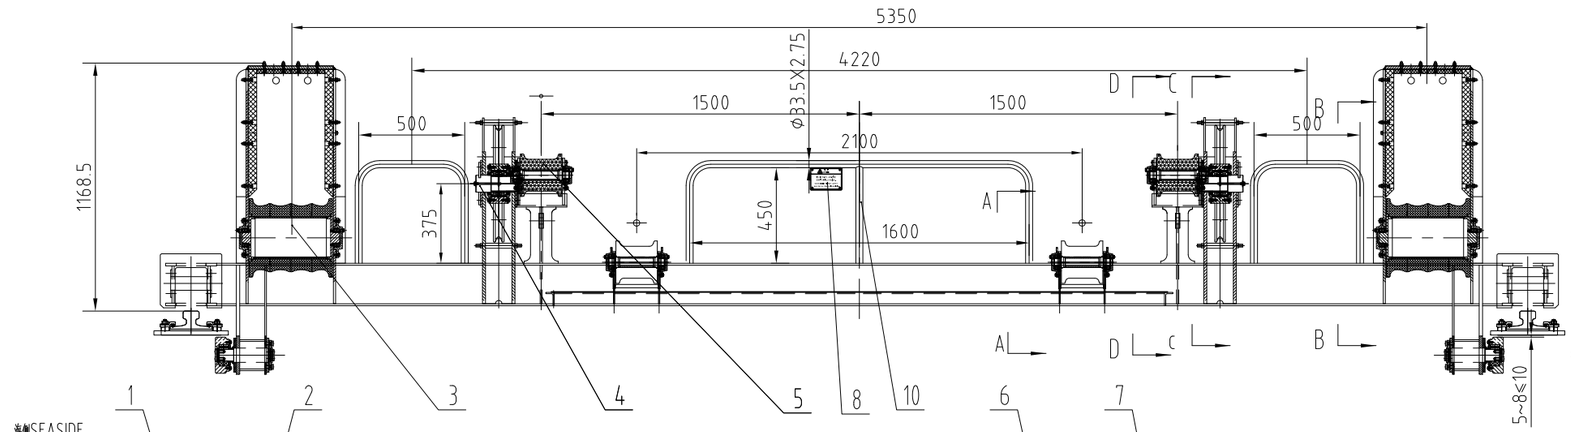


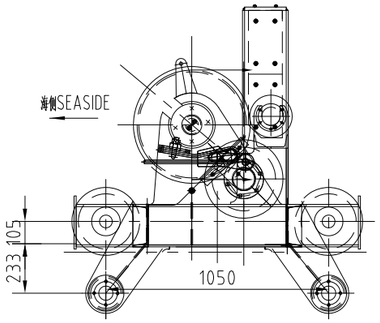


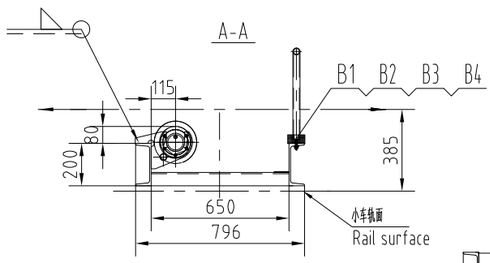




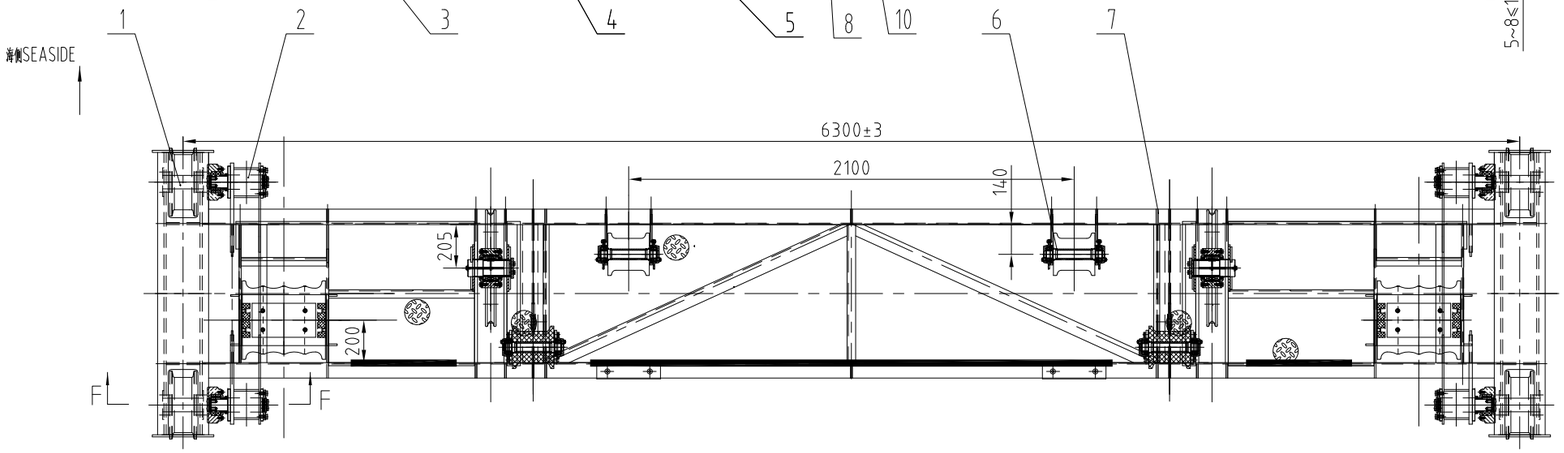

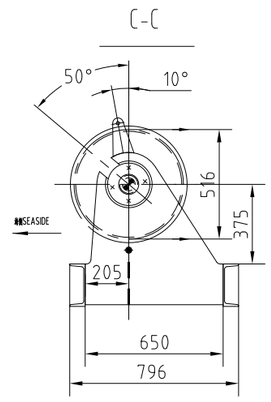




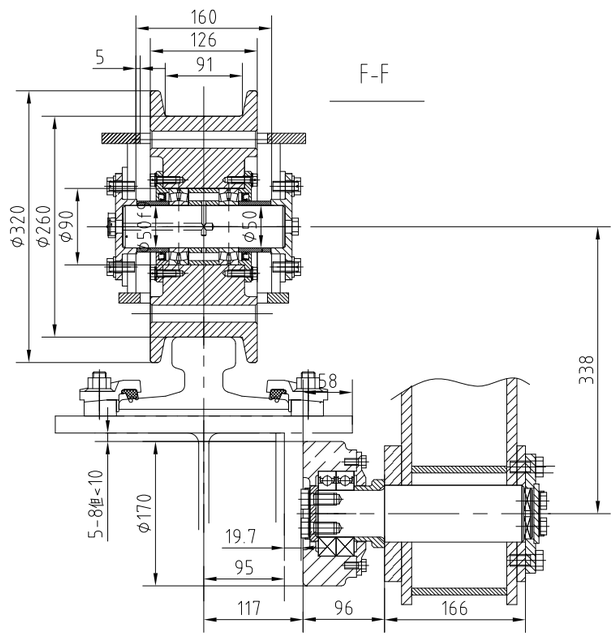

Note:

1. The tolerance of rail span 6300 is not more than ±3mm.
   轨距 6300 公差<=±3;
2. b. In cases where the top of the rail is flat,the inclination of the wheel axis from the horizontal must be between +0.52mm and -0.26mm for the unladed crane;
   车轮轴线相对于水平面的倾斜度在+0.52mm~-0.26mm之间.



3. c. The axes of the wheel bores must not have an angular deviation greater than ±0.52mm from its theoretical axis,in the horizontal plane.
   车轮轮孔中心线同其理论中心线之间在水平面内的角度偏差±0.52mm.
4. d. The centre planes of wheels rolling on a common rail must not diverge more than 2mm from the theoretical axis.
   同一轨道上的车轮中心面同车轮理论中心线的偏差≤2mm.
5. e. The clearance between the roller top and the below surface of the rail support plate should be of 5~8mm.
   The max.clearance should not more than 10 mm. as the right view.
   反滚轮装置的滚轮与承轨梁翼板下平面的间隙调整在5~8mm,
   安装后应在全行程范围内检查间隙,其最大值不得大于10mm,如右图所示.

REV	DATE	BY	DESCRIPTION
01	2012.05.30	Shenyanrong	
02	2012.08.17	Shenyanrong	

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	Q'TY/SET	SET*WEIGHT		SCALE
B3	ZN6175-T-SL	Nut 螺母M10	A2-70	4			
B3	GB853-88	Washer 槽钢用方斜垫圈10	A2-70	4			

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	Q'TY/SET	SET*WEIGHT		SCALE
B2	GB70.3-2000	Screw 内六角沉头螺钉M10x50	A2-70	4			
B1	B1-J526A	Slap block抗磨块	UHMWPE	2	1.6	3.2	
10		Φ33.5x2.75-6m	Q235	1	12.5	12.5	按需分段
8	ZT2-027601	警示牌 warn sign	Assy.组件	1	0.5	0.5	
7	J526A220502	S.S.Trolley Frame 海侧小车架	welding焊接件	1	931.7	931.7	
6	J526A220405	Guide Idle 托辊装配 (3)	Assy.组件	2	12.9	25.8	
5	J526A220404	Guide Idle 托辊装配 (2)	Assy.组件	2	23.8	47.6	
4	J526A220403	Sheave assembly 滑轮装置	Assy.组件	2	41.2	82.4	
3	J526A220501	Guide Idle 托辊装配 (1)	Assy.组件	2	128	256	
2	AJR01b	Roller 反滚轮	Assy.组件	4	19.0	76	
1	J526A220401	wheel assembly 车轮装配	Assy.组件	4	56.7	226.8	

PROJECT: Sri Lanka CICT 12 STS Cranes
DESIGN STAGE:
SCALE: 1:20
ITEM NAME: 海侧托架小车 Seaside catenary trolley
DRAW NO: J526A220500
PROJ.

ZPMC

DSGN			TRACE		APP.	ASS.
DRAW			CHCK		SET/CRANE	1
CHCK			VER.		WEIGHT	1680.2

设计	
校对	
审核	
工艺	
标准	
批准	ASS.