



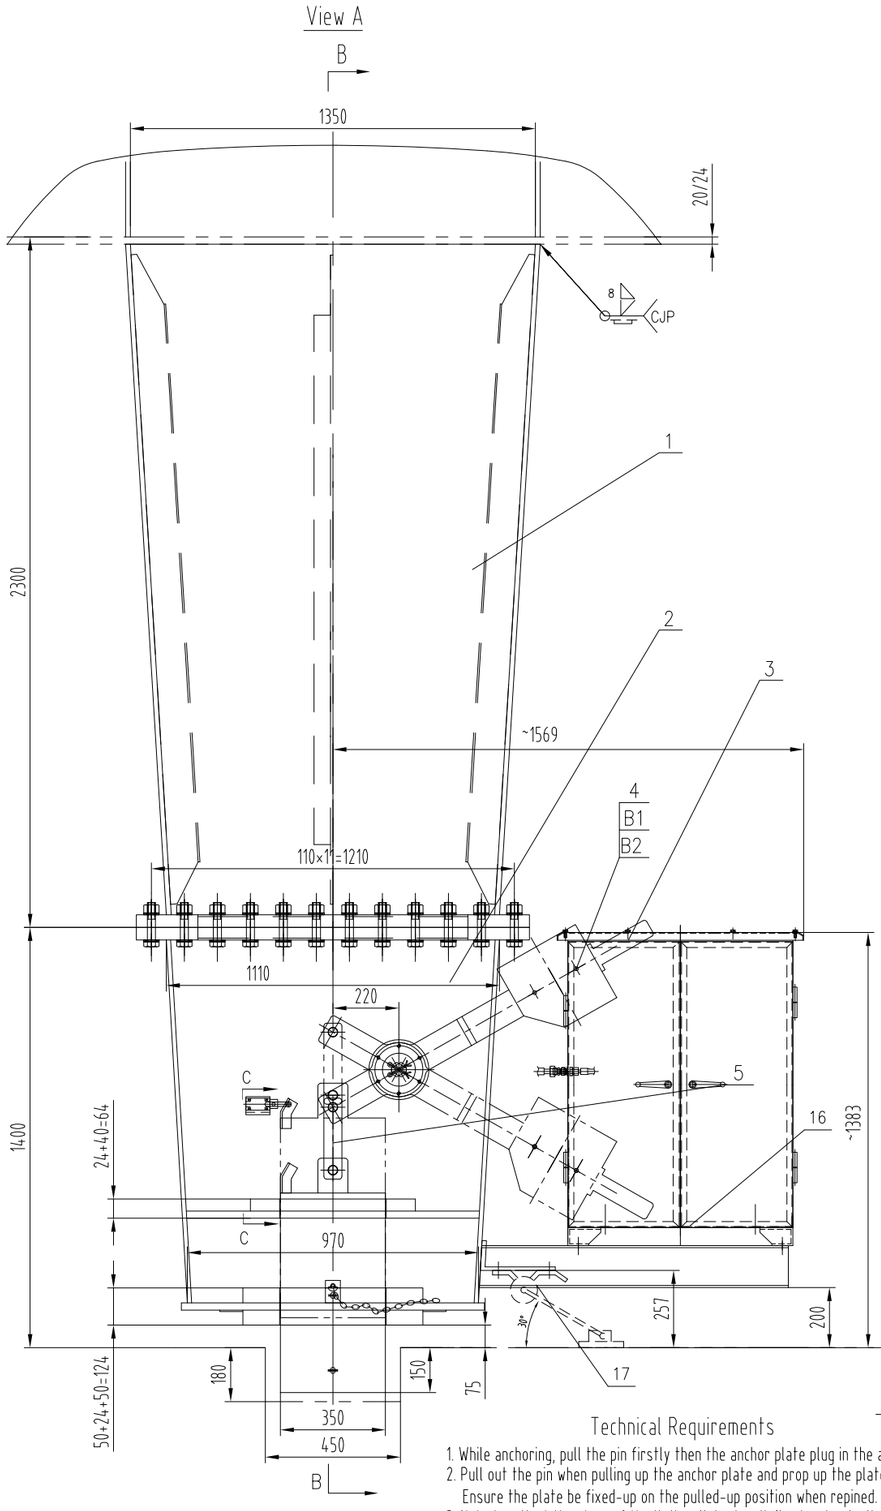


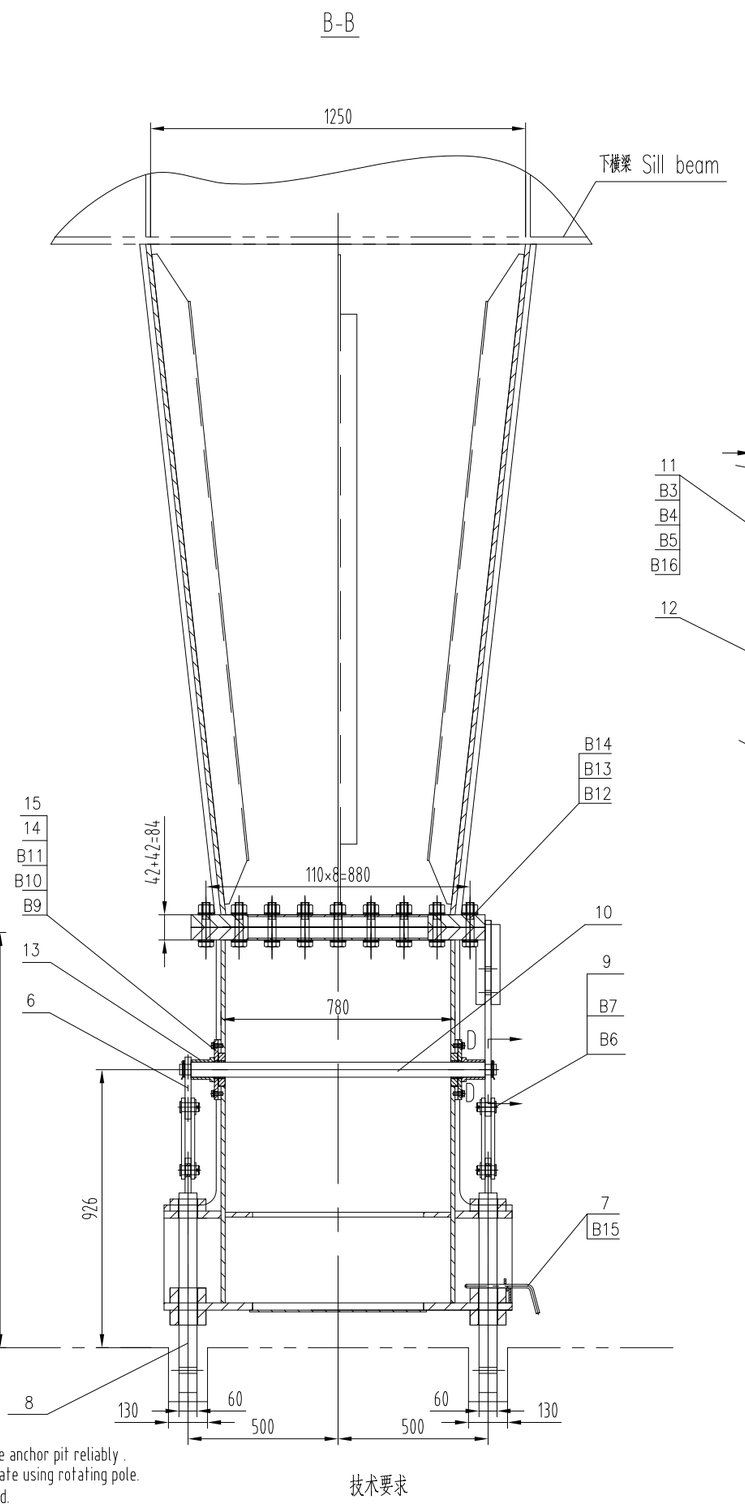

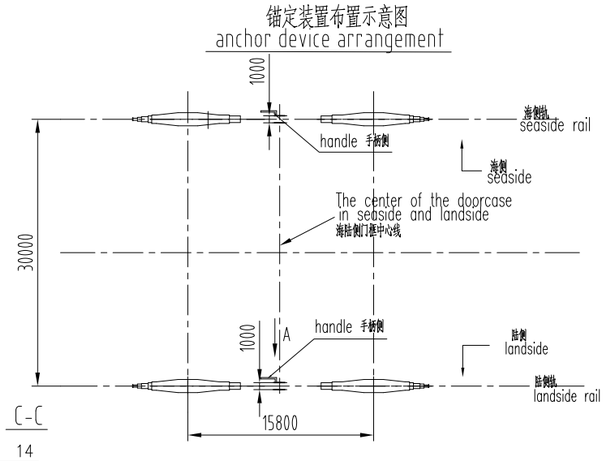





Technical Requirements

1. While anchoring, pull the pin firstly then the anchor plate plug in the anchor pit reliably .
2. Pull out the pin when pulling up the anchor plate and prop up the plate using rotating pole. Ensure the plate be fixed-up on the pulled-up position when repined.
3. Note to adjust the place of the limit switch when it fixed and make it work effectively when it the anchor plates are pull up.
4. According to the place of anchor pit, the anchor plates on both sides should be kept in the same direction along the rail, avoid the force acting on one side.
5. The handles of seaside and landside anchor device are assembled at seaside of the rail . The hydraulic station door should face landside.
6. The pre-tightening force of bolts M27 is 294 KN. The pre-tightening moment of bolts is 1150 N×M.(K=0.145)
7. Anchor-holding force is 224t/rail.

技术要求

1. 锚定时,首先拉出插销,锚定板应在自重作用下可靠插入锚定坑中.
2. 拉起锚定板时,首先拉出插销,并用转杆撑起锚定板,保证插销弹回插入后,将锚定板定位在上拔位置.
3. 安装时注意调节限位开关高低,使其在锚定板处于上拔位置时正常工作.
4. 安装时注意两侧锚定板在沿轨道方向相对锚定坑位置保持一致,以免在锚定时单边受力.
5. 锚定装置的手柄安装在轨道海侧,液压站开门向陆侧.
6. 件B12高强度螺栓的预紧力为294KN,预紧力矩为1150NM.(K=0.145)
7. 本装置能承受的最大锚定力为224t.

B16		限位开关 Limit Switch		2			电气提供
B15	GB5802-86	链条 5.6x500		若干			不锈钢 Staste
B14	GB/T1230-91	高强垫圈 Washer 27	HRC35-45	152			达克罗 Dacro.
B13	GB/T1229-91	高强螺母 Nut M27	10S	76			达克罗 Dacro.
B12	GB/T1228-91	高强螺栓 Bolt M27×140	10.9S	76			达克罗 Dacro.
B11		钢丝 Steel Wire φ1					不锈钢 Staste
B10	GB95-85	垫圈 Washer 12	100HV	24			不锈钢 Staste
B9	GB32.1-88	螺栓 Bolt M12×30		24			不锈钢 Staste
B8	GB91-86	开口销 Pin 8×50		4			不锈钢 Staste
B7	GB91-86	开口销 Pin 6.3×50		8			不锈钢 Staste
B6	GB95-85	垫圈 Washer 30	100HV	8			达克罗 Dacro.
B5	GB889-86	螺母 Nut M5		8			不锈钢 Staste
B4	GB5782-86	螺栓 Bolt M5×60		8			不锈钢 Staste
B3	GB95-85	垫圈 Washer 5		8			不锈钢 Staste
B2	GB889-86	螺母 Nut M12		4			不锈钢 Staste
B1	GB5782-86	螺栓 Bolt M12×100		4			不锈钢 Staste
17	J526A6011	挂靴触支架 bracket	焊接件 Welded	2	3.0	6.0	
16	J526A6010	液压站支架 hydraulic station bracket	焊接件 Welded	2	14.8	29.6	
15	AD0113	法兰 Flange	Q235	4	3.9	15.6	借用 Borrow
14	AD0112b	轴套2 Sheeve 2	Cast Bronze+SL	4	0.3	1.2	借用 Borrow
13	J526A6009	轴套1 Sheeve 1	Q235	4	1.0	4.0	
12	J526A6008	撞块 Striking Block	Q235	2	1.2	2.4	
11	J526A6007	限位支架 Limit Support	Q235	2	0.5	1.0	
10	AD0108c-1000	轴 Shaft	45	2	12.3	24.6	借用 Borrow
9	AD0107	销轴 Pin Shaft	Q235	8	0.4	3.2	借用 Borrow
8	J526A6006	锚定板 Anchor Plate	焊接件 Welded	4	110	440	
7	J526A6012	挡销装置 Pin Shaft	组件 Ass.	2	0.4	0.8	
6	J526A6005	转杆 Rotating Bar	Q235	2	4.7	9.4	
5	J526A6004	连杆 Link Bar	Q235	8	1.4	11.2	
4	J526A6013	配重 Counterweight	Q235	4	18.6	74.4	
3	J526A6003	手柄 Handle	Q235	2	19	38	
2	J526A6002	锚定下支座 Anchor Support II	焊接件 Welded	2	114.5	2290	
1	J526A6001	锚定上支座 Anchor Support I	焊接件 Welded	2	1605	3210	

设计/DSGN	校对/CHKD	审核/EXAM	图幅/FORMAT	
日期/DATE	日期/DATE	日期/DATE	A1	
材料/MAT	比例/SCALE	图名/DRAWING NAME	锚定装置 Anchor device	
重量/WEI (Kg) ~6161	1:15			
ZPMC 上海振华重工集团	图号/DRAWING NO. J526A6000	版本/REV	页号/PAGE	

描述及更改内容/Description & Date | 更改标志/Sign