


REV	DATE	BY	DESCRIPTION
01	2012.05.30	Tang	
02	2012.08.17	Tang	

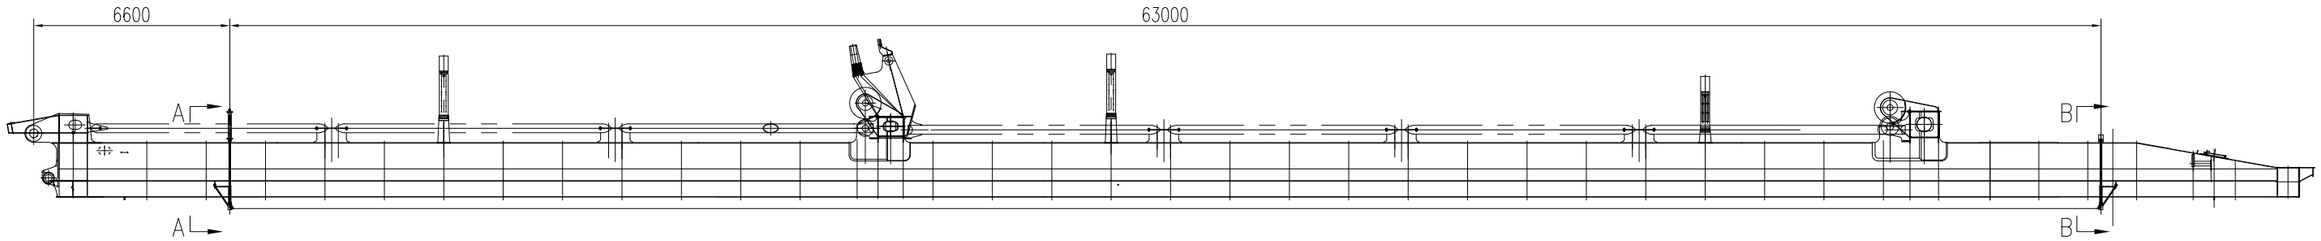


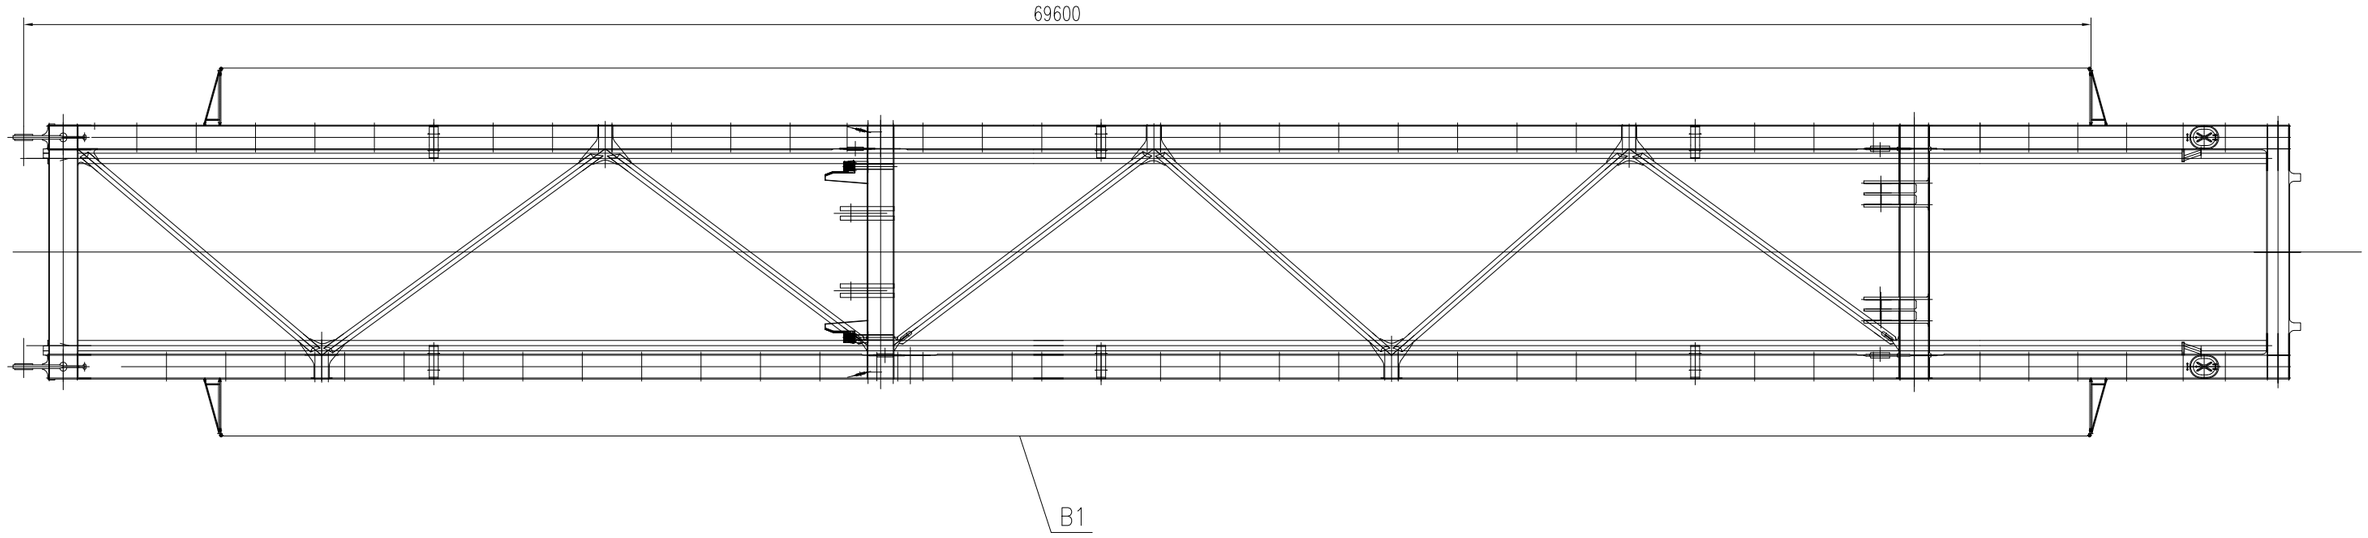

A–A
1:30

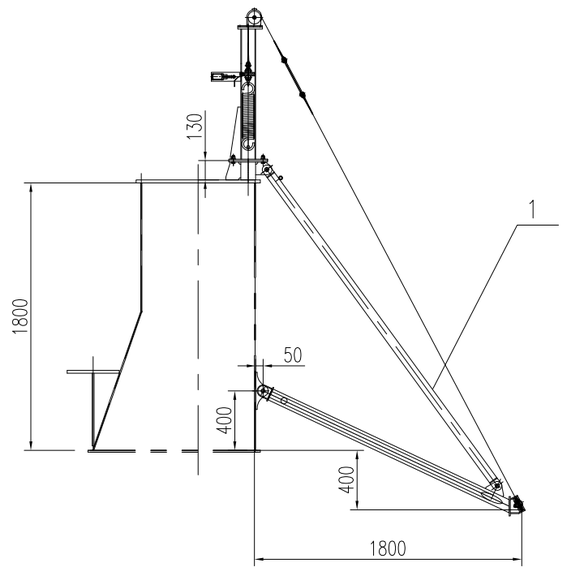

B–B
1:30

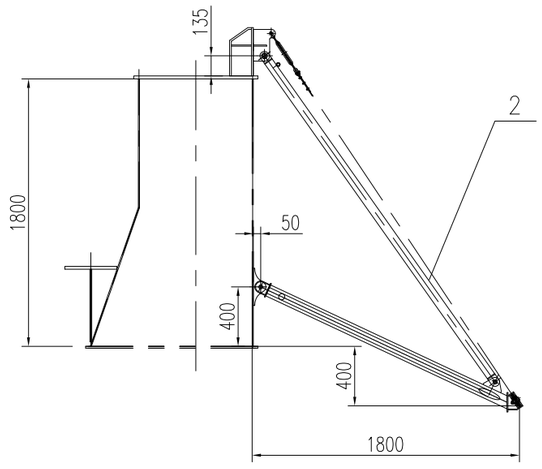

技术要求

1.钢丝绳垂直挠度控制在200mm,控制弹簧变形量L=60~80mm左右.
2.后张紧架上的限位开关与限位挡板间间距控制在20mm左右
3.除了后张紧架竖立安装的带槽导架采用热浸锌,表面再涂油漆处理外,其他支架采只用油漆防锈处理.

Technical Requirement

1.When the tightwire vertical flexibility extent is 200mm, control the tension length of the spring is 60~80mm.
2.The distance between the limit switch and the touch plate is about 20mm.
3.Expect the house of spring is done with hot dip zinc and paint, other devices is only done with paint.

NO.	SUB-NO. or STDD	NAME & SIZE	MTRL or STYLE	QTY/set	each	total	NOTE
					WEIGHT		
B1	GB9944-88	Wire rope 5.0NAT 6x7+1WS	不锈钢Sta. Stl. 316	2	6.8	13.6	2x72m
2	J526A6302	Front support	Ass.	2	65	130	
1	J526A6301	Back support	Ass.	2	85	170	

PROJ436ECT: SliLanka CICT 12 STS Cranes
DESIGN STAGE:
SCALE: 1:150

ITEM NAME: 大梁防撞装置 boom anti collision
DRAW NO: J526A6300

ZPMC

DSGN		TRACE		APP.	
DRAW		CHCK		Q'TY/SET	1
CHCK		VER.		WEIGHT	320Kg