
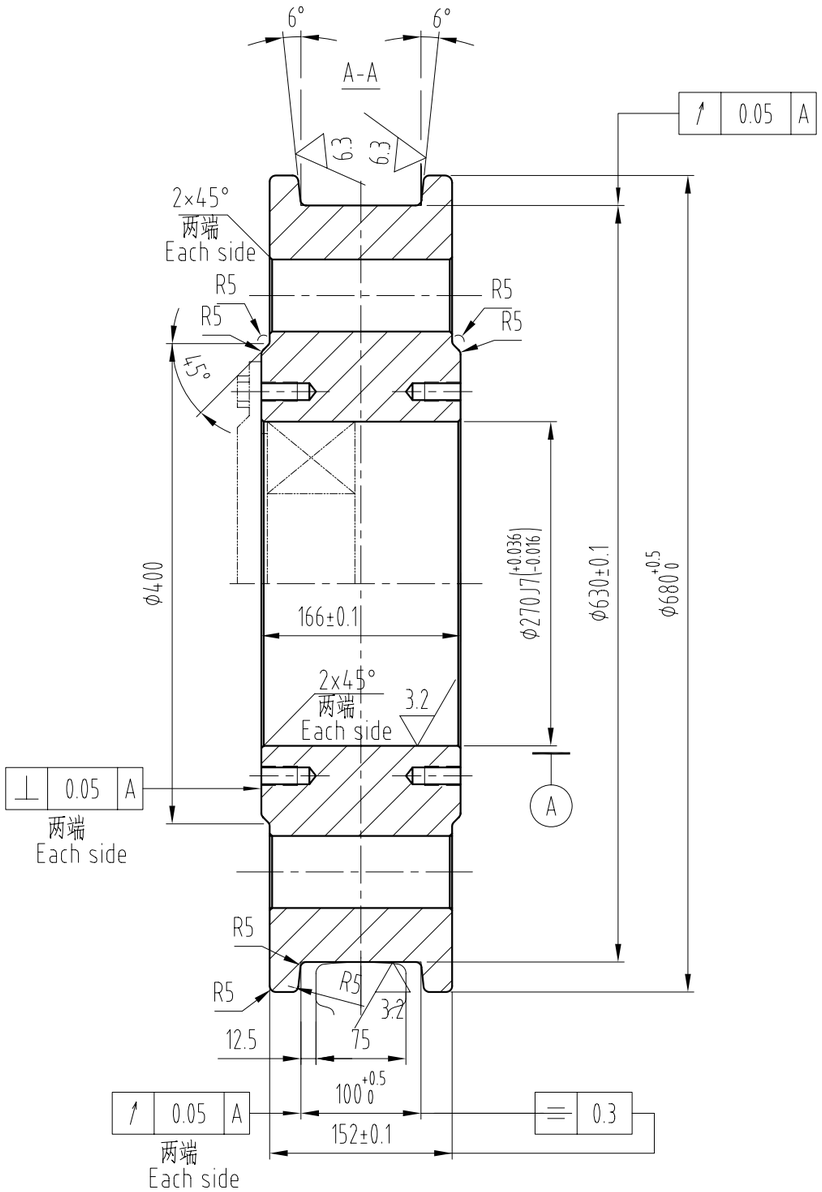


Technical Requirement

1. Surface heat treatment shall be according to the ZPMC standard which is more critical than the ASTM A504;the hardness of the wheel tread shall be HRC50~56,the effective hardness depth shall not be less than 15mm,hardness at 15mm depth shall not be less than HRC35.
2. The wheel body should be checked and accepted according to the national forging standard GB12361-90 and GB12362-90,and UT inspection should be carried out according to the ASTM A504-C.

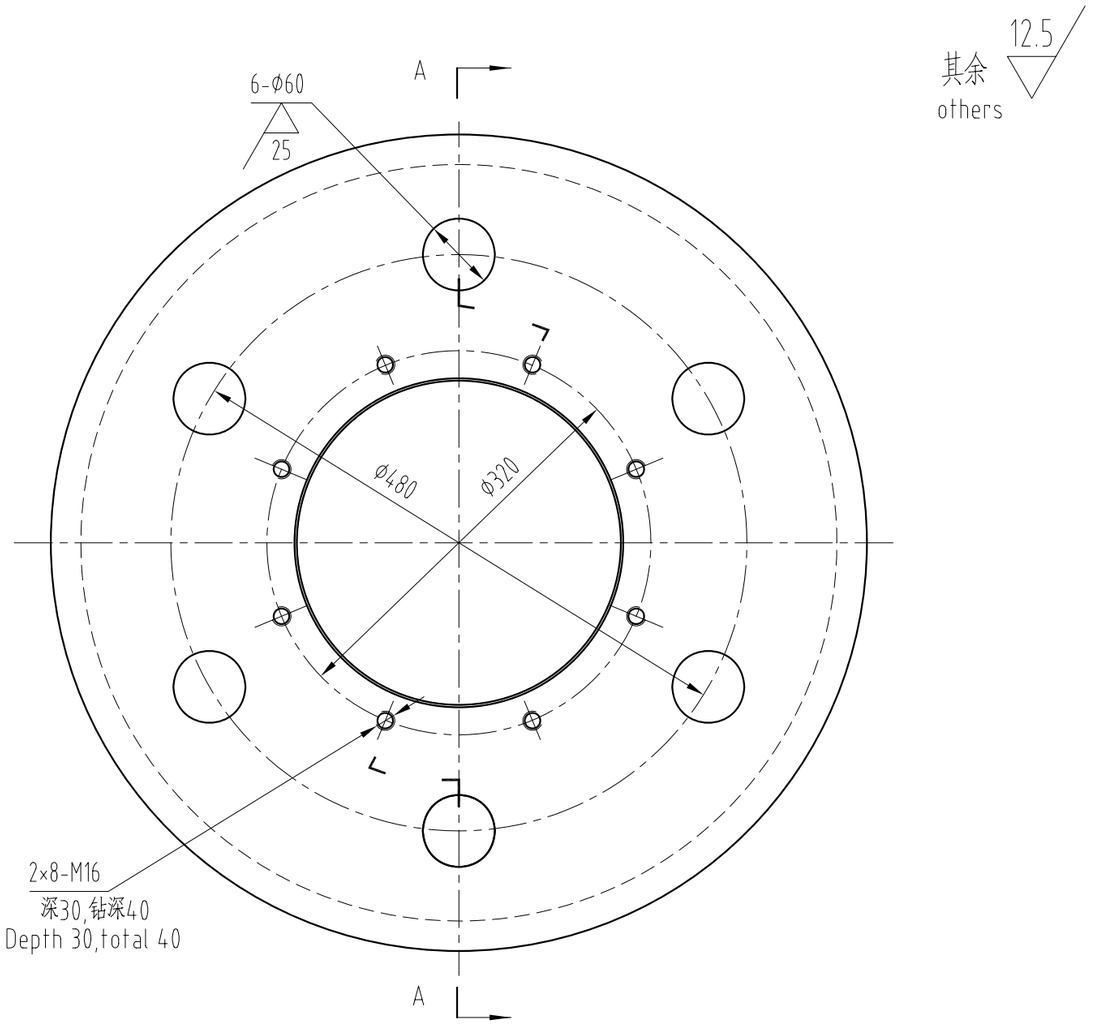

技术要求

1. 制作时按公司内控标准(高于ASTM A504标准)制作: 踏面硬度HRC50~56,硬化层有效深度≥15mm,15mm深处硬度≥HRC35.
2. 车轮锻件按GB12361-90和GB12362-90技术条件验收,探伤应按美国ASTM A504-C级进行验收.

描述及日期/Description & Date	设计/DSGN 徐魏魏	校对/CHKD	审核/EXAM	图幅/FORMAT	A3
	日期/DATE 2009-4-28	日期/DATE	日期/DATE		
	材料/MAT 42CrMo	比例/SCALE 1:5	图名/DRAWING NAME 小车车轮630x75 Trolley Wheel		
	单重/WEI (Kg) 296.5				
修改标志/Sign	ZPMC 上海振华重工集团		图号/DRAWING NO. ZT2-015022	版本/REV 0	页号/PAGE 1

010350dt