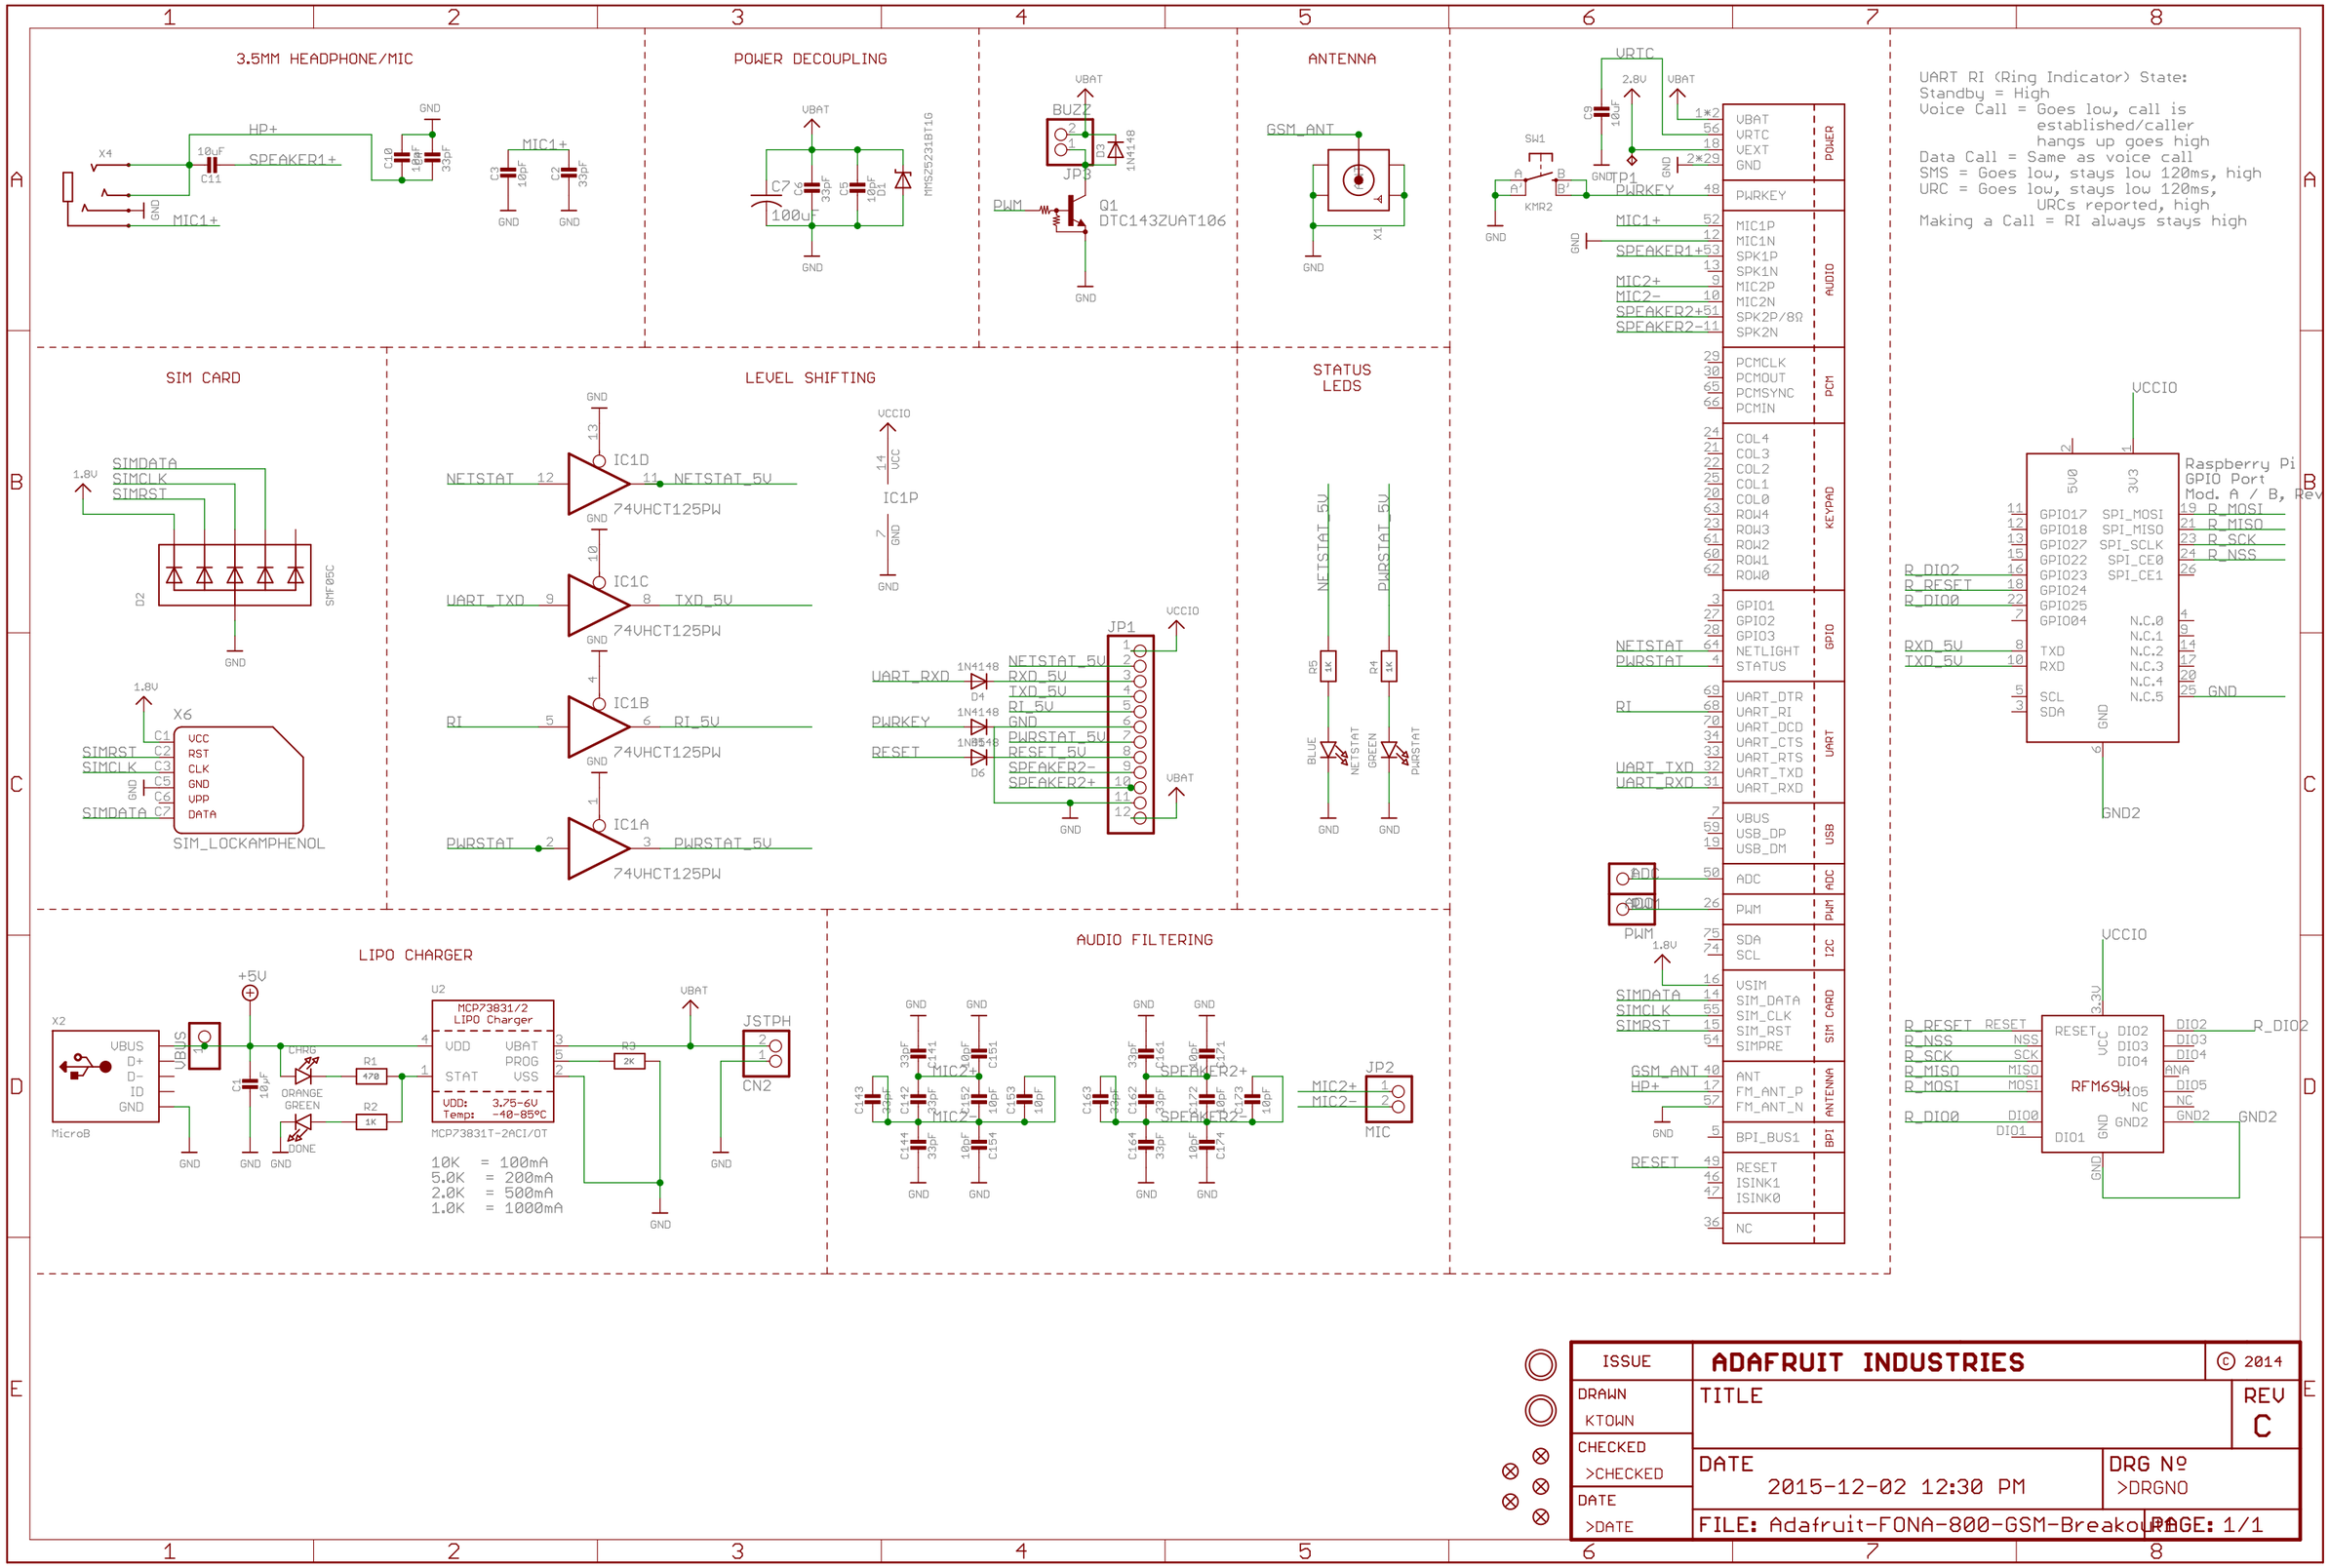
3.5MM HEADPHONE/MIC
POWER DECOUPLING
ANTENNA
SIM CARD
LEVEL SHIFTING
STATUS LEDS
LIPO CHARGER
AUDIO FILTERING
UART RI (Ring Indicator) State:
Standby = High
Voice Call = Goes low, call is established/caller hangs up goes high
Data Call = Same as voice call
SMS = Goes low, stays low 120ms, high
URC = Goes low, stays low 120ms, URCs reported, high
Making a Call = RI always stays high
Raspberry Pi GPIO Port Mod. A / B, Rev 2
RFM69W
74VHCT125PW
SIM_LOCKAMPHENOL
MCP73831/2 LIPO Charger
10K = 100mA
5.0K = 200mA
2.0K = 500mA
1.0K = 1000mA
ADAFRUIT INDUSTRIES
© 2014
ISSUE
DRAWN KTOWN
CHECKED >CHECKED
DATE >DATE
TITLE
REV C
DATE 2015-12-02 12:30 PM
DRG Nº >DRGNO
FILE: Adafruit-FONA-800-GSM-Breakout.sch
PAGE: 1/1