

clamp fit:
screw tightening torque: 0.59 Nm
rec. shaft length: 10-11 mm

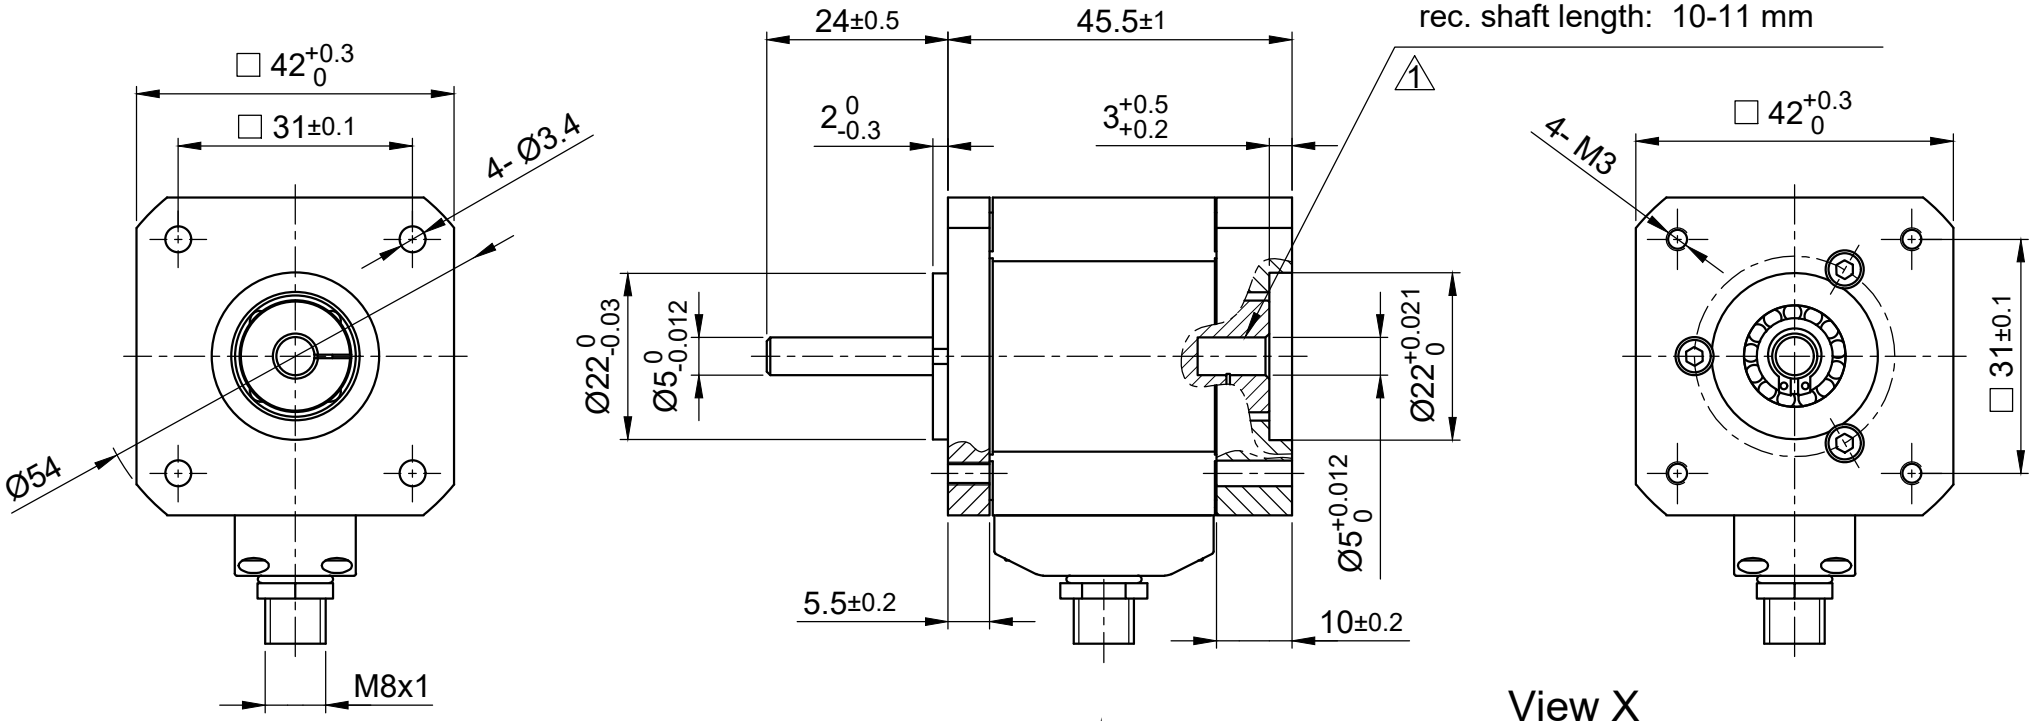

X

View X

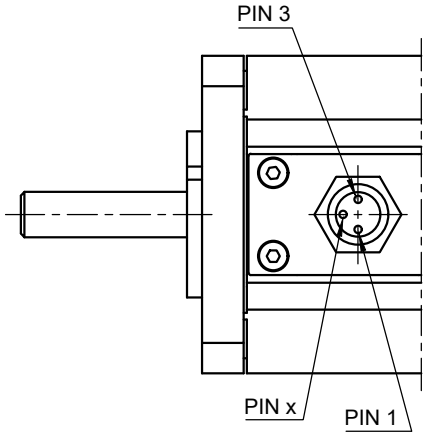

BRAKE SPECIFICATION			
Type: **SPRING-LOADED BRAKE**			
Static Holding Torque		Nm	≥0.4
Max. Input Torque		Nm	0.9
Backlash		°	<1
Rated Power		W	6.9
Operating Voltage	±10%	V DC	24
Release Voltage	max.	V DC	16.8
Re-Engage Voltage	min.	V DC	0.5
Resistance	±7%	Ω	83
Switch-Off Time		ms	30
Switch-On Time		ms	50
Max. Axial Force		N	20
Max. Radial Force (shaft middle)		N	50
Max. Speed		rpm	4200
Moment of Inertia		kg m²	0,53 x10^{-6}

1

PIN Assignment Brake	
PIN1	Brake+
PIN3	Brake-
PINx	n.c.

GENERAL BRAKE SPECIFICATION		
Ambient Temperature	°C	-10 ...60
Insulation Class		F
Insulation Resistance	MΩ	>100
Dielectric Strength	V AC	1200
Protection Class (except for shaft output)		IP65

ISO 8015	ISO 1302	ISO 2768 cK	ISO 13715

					Date	Name
				Drawn	17.05.2022	Schneid_A
				Reviewed	02.05.2023	Sejdini._B
				Released	11.05.2023	Micheli._M
01	change specification	Schneid_A	01.10.2024			
REV	Rev. Text	Name	Date			

Nanotec® PLUG & DRIVE

Weight: ±10% 0.28 kg

BRAKE-BCD42-0,4-5

20001486

State: Released | Rev: 01 | CONFIDENTIAL