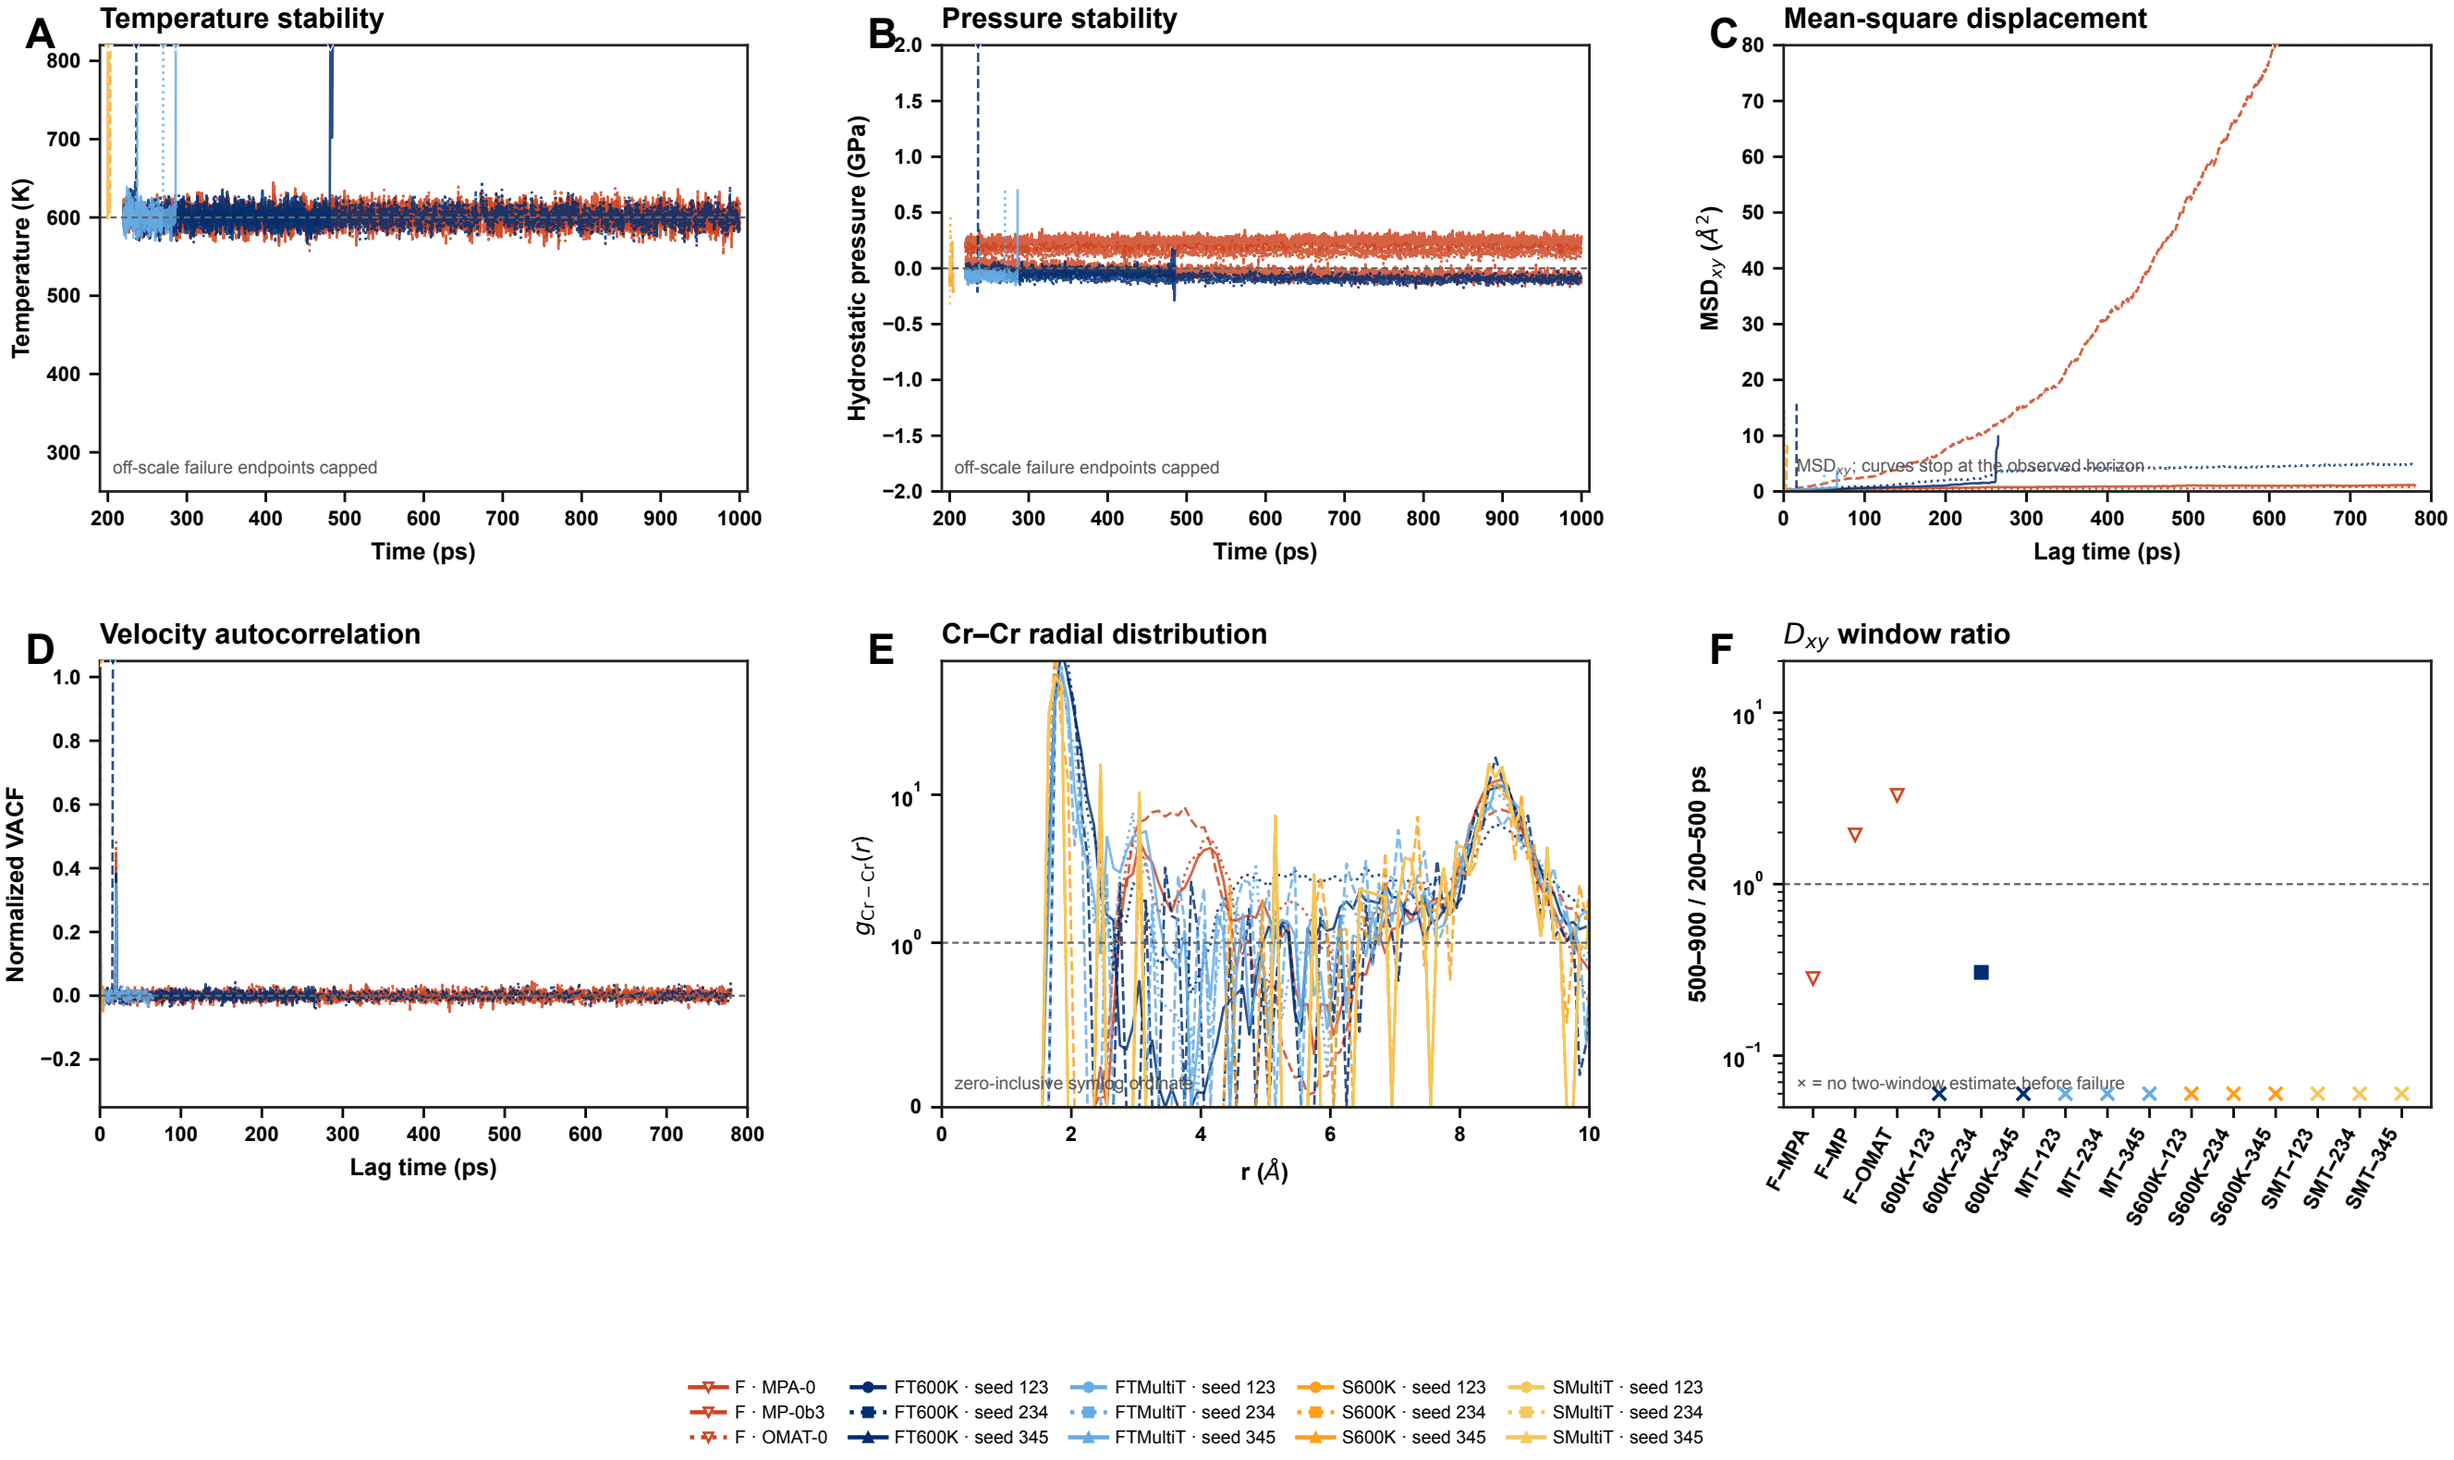

A
Temperature stability
Temperature (K)
Time (ps)
off-scale failure endpoints capped
B
Pressure stability
Hydrostatic pressure (GPa)
Time (ps)
off-scale failure endpoints capped
C
Mean-square displacement
MSD$_{xy}$ ($Å^2$)
Lag time (ps)
MSD$_{xy}$; curves stop at the observed horizon
D
Velocity autocorrelation
Normalized VACF
Lag time (ps)
E
Cr–Cr radial distribution
$g_{Cr-Cr}(r)$
r ($Å$)
zero-inclusive symlog ordinate
F
D_{xy} window ratio
500–900 / 200–500 ps
× = no two-window estimate before failure
F–MPA
F–MP
F–OMAT
600K–123
600K–234
600K–345
MT–123
MT–234
MT–345
S600K–123
S600K–234
S600K–345
SMT–123
SMT–234
SMT–345
F · MPA-0
F · MP-0b3
F · OMAT-0
FT600K · seed 123
FT600K · seed 234
FT600K · seed 345
FTMultiT · seed 123
FTMultiT · seed 234
FTMultiT · seed 345
S600K · seed 123
S600K · seed 234
S600K · seed 345
SMultiT · seed 123
SMultiT · seed 234
SMultiT · seed 345