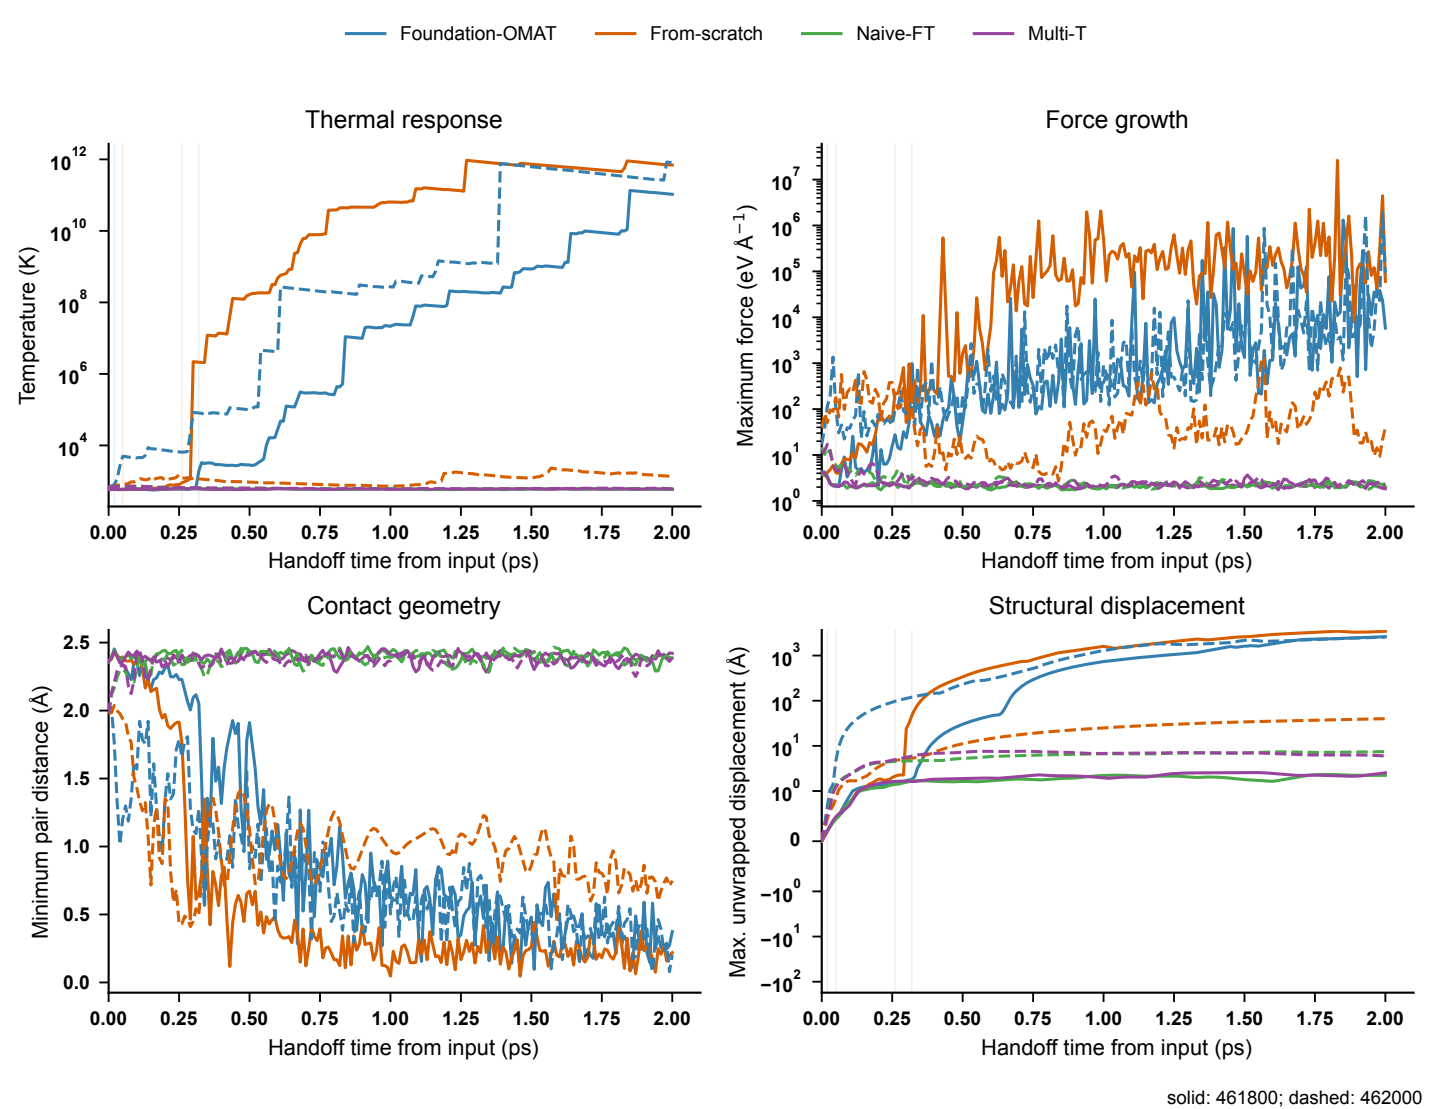

Foundation-OMAT
From-scratch
Naive-FT
Multi-T
Thermal response
Temperature (K)
Handoff time from input (ps)
Force growth
Maximum force (eV Å^{-1})
Handoff time from input (ps)
Contact geometry
Minimum pair distance (Å)
Handoff time from input (ps)
Structural displacement
Max. unwrapped displacement (Å)
Handoff time from input (ps)
solid: 461800; dashed: 462000