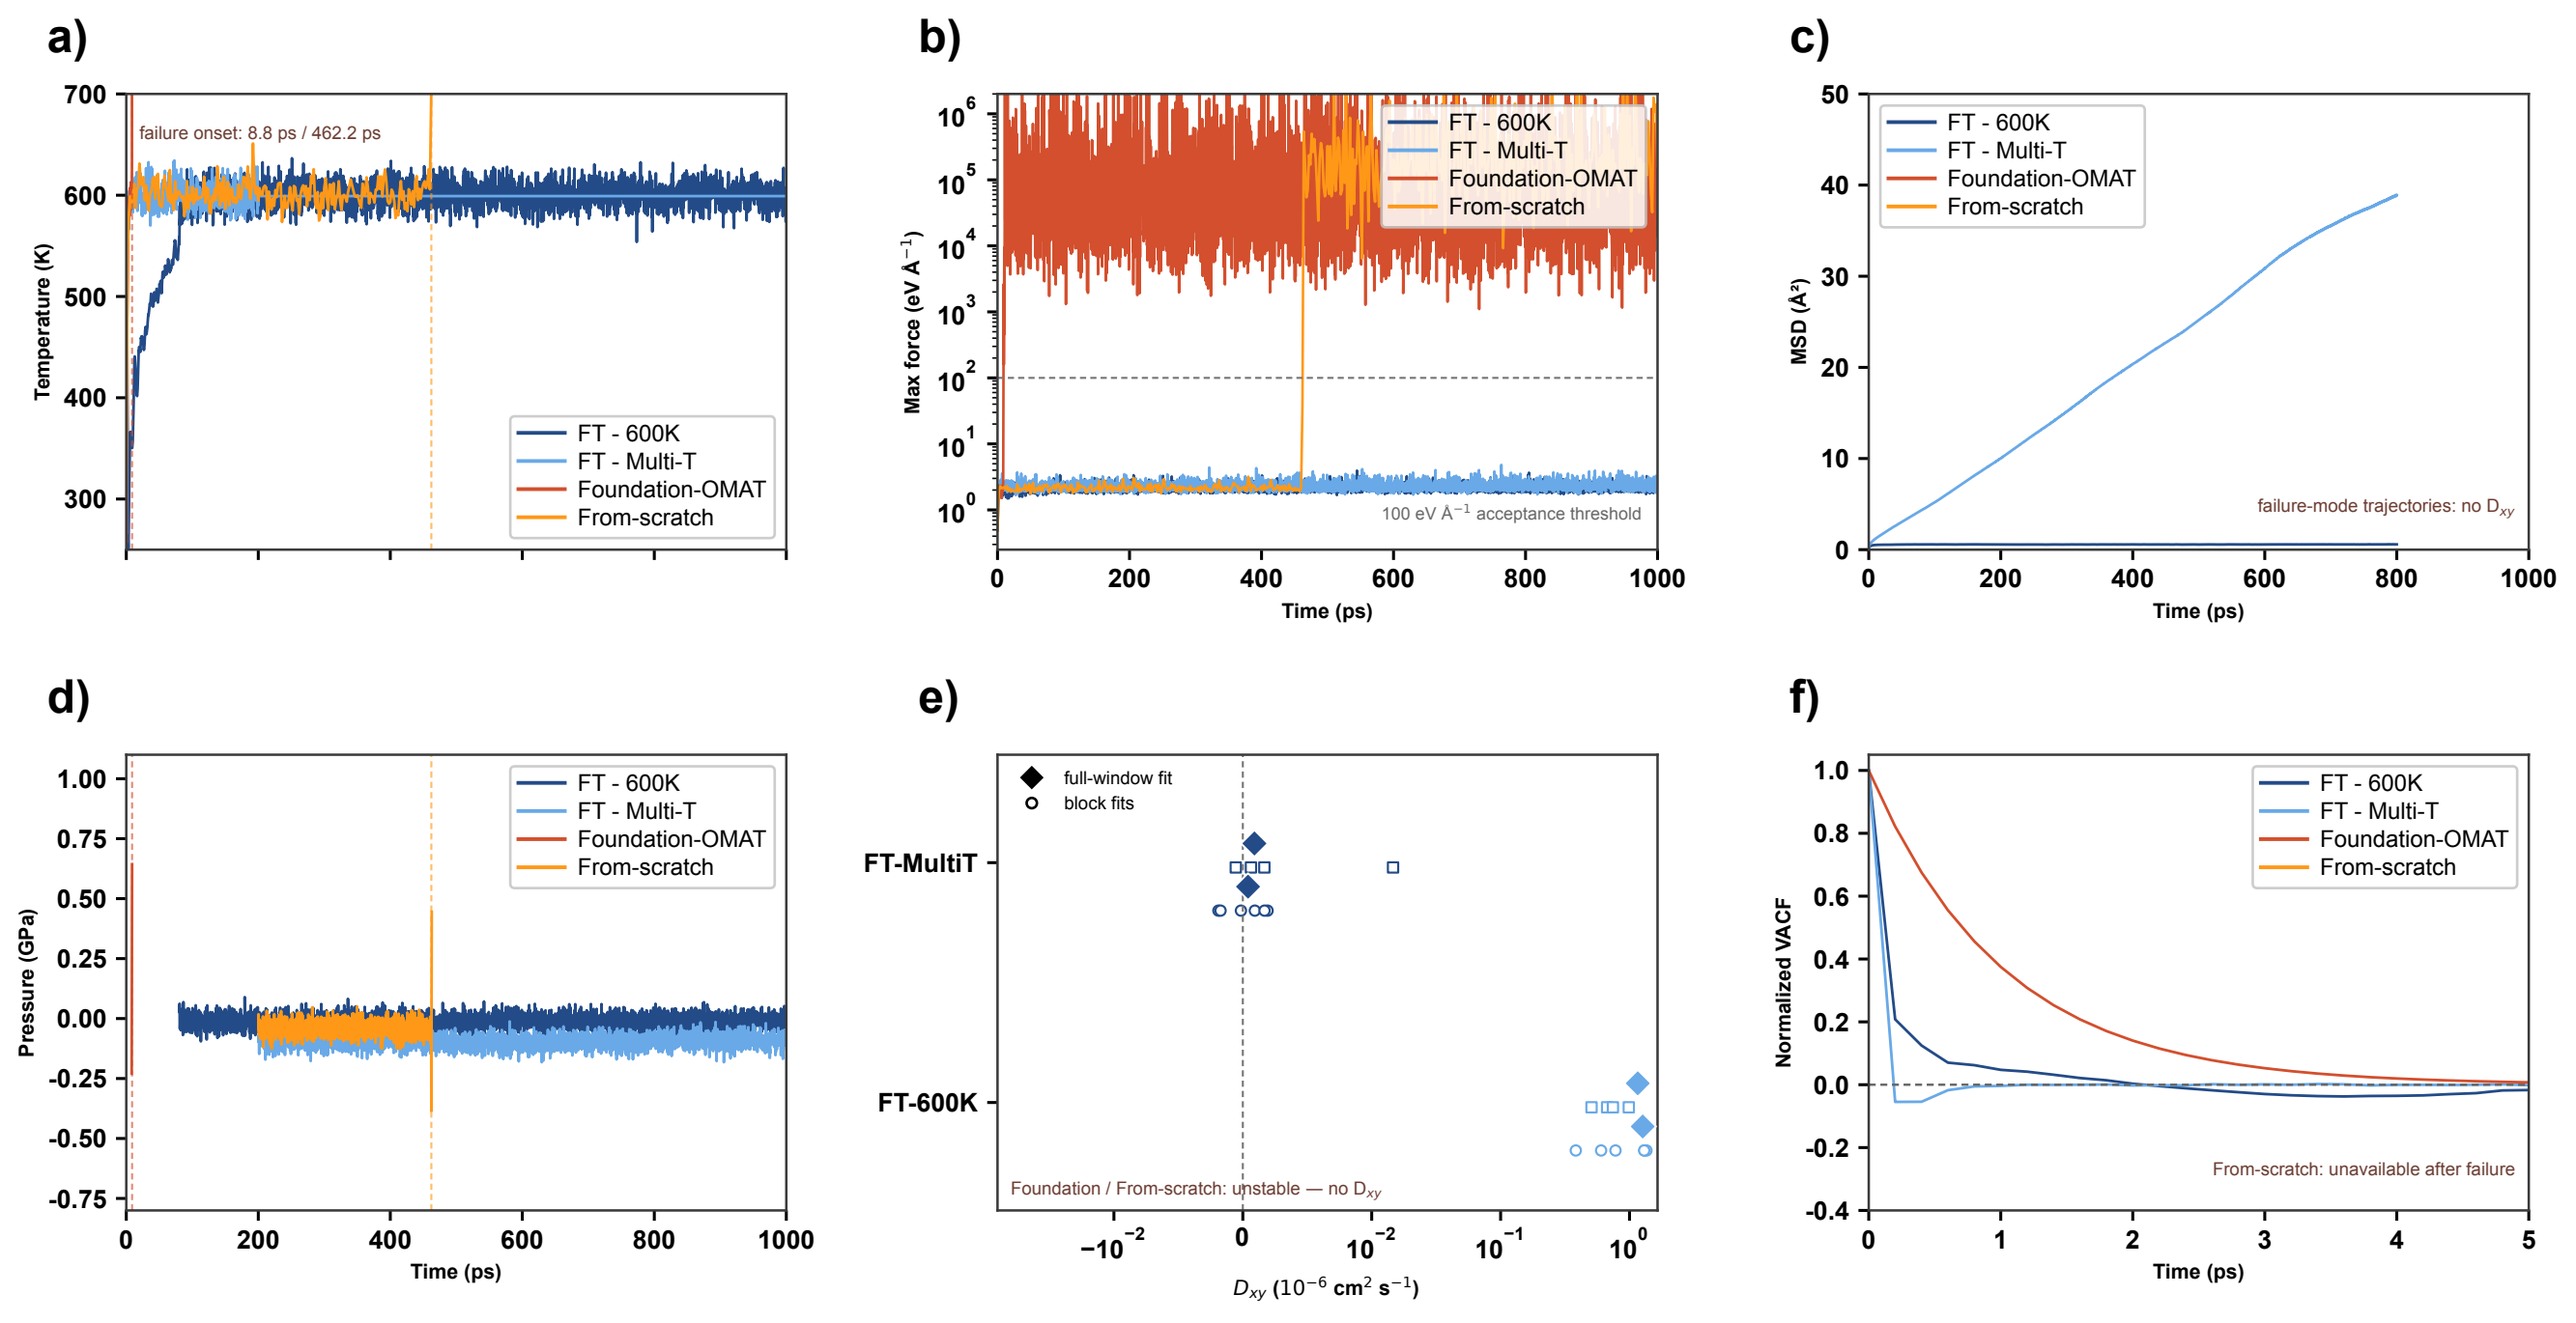

a)
failure onset: 8.8 ps / 462.2 ps
Temperature (K)
FT - 600K
FT - Multi-T
Foundation-OMAT
From-scratch
b)
Max force (eV Å^{-1})
100 eV Å^{-1} acceptance threshold
Time (ps)
c)
MSD (Å²)
failure-mode trajectories: no D_{xy}
Time (ps)
d)
Pressure (GPa)
Time (ps)
e)
full-window fit
block fits
FT-MultiT
FT-600K
Foundation / From-scratch: unstable — no D_{xy}
D_{xy} (10^{-6} cm^2 s^{-1})
f)
Normalized VACF
From-scratch: unavailable after failure
Time (ps)