GI-TBC: a Gini-interval tailored branch-and-cut algorithm for equitable bicycle redistribution

14 November 2026

Contents

Abstract . . . 3
1. Introduction . . . 3
2. Physical model and objective . . . 4
3. Shared inventory states and GI-TBC . . . 5
4. Computational design . . . 10
5. Complete-method, resource and weight results . . . 11
6. Mechanisms, AM and stage interpretation . . . 24
7. Conclusions and implications . . . 31

Appendix A. Complete model, scoped strengthening and proof obligations **33**
A.1 Sets, data and variables . . . 33
A.2 Routing, service and physical resources . . . 34
A.3 Original and disaggregated Gini objective . . . 35
A.4 Integrality, embedding and fairness propositions . . . 36
A.5 Enabled strengthening: construction, proofs and scope . . . 37
A.6 Cutoff and coverage proof . . . 43
A.7 Numerical implementation boundary . . . 43
A.8 Writer and variable map . . . 44
A.9 Compact joint-state alternative C166 . . . 45
A.10 Continuous decision bounds from existing physical fleets . . . 46

Appendix B. Executable method specification **48**

B.0 Complete leaf and cover subprocedures 48

B.1 Active entry and parameters 49

B.2 State, identity and order 51

B.3 NEXT, child target and terminal decisions 51

B.4 Native requests, Starts and returned actions 52

B.5 Teaching states and a separately sourced event 54

B.6 H encoding and top-level procedure 54

B.7 Joint insertion 55

B.8 Single and paired quantity modification 55

B.9 Complete greedy decoder and its compensating moves 56

B.10 Guided order descent and ties 57

B.11 Neutral block moves and exit argument 58

References **59**

Abstract

Static bicycle redistribution must realize an equitable final inventory through routes with empty departures, prefix capacity and paid handling, including loaded returns. We develop GI-TBC, an exact method connecting shared inventory states, objective products, movement and nonzero visits with complete true-Gini interval coverage. A compact alternative preserves the joint local hull with at most five legal stock supports and a separate binary-product layer, under an explicit full-model interface condition. The historical breadth panel gives GI-TBC 9/12 certificates versus 7/12 for each compact control; a positive-resource panel gives 4/8 versus 0/8. In a new same-build six-input representation comparison, B certifies 3/6 and compact C166 2/6. C166 improves two open primal endpoints but weakens all three large-instance proof endpoints, so B remains the main method. Reconstructed physical fleets and global lower bounds also give continuous-weight quality guarantees: one fixed fleet is within an absolute objective tolerance of 1.00002e-7 throughout its covered range, while other families exhibit supported plan switches or wide unresolved bands. Two-sided route-time bounds establish strict optimal-objective improvement even for open instances. These finite, numerically qualified results distinguish information-preserving representations, complete computational value and useful bounded decisions; the controls do not establish an independent speed advantage from external interval scheduling.

1. Introduction

Redistribution vehicles can improve station availability only when the chosen inventory vector can be realized by feasible routes and loading operations. Supply must be collected before it is delivered, capacity applies at every route prefix, and handling consumes the same time budget as travel. When equity is measured by inventory-to-target ratios, the final inventory vector also determines both the numerator and denominator of the Gini coefficient. These dependencies make routing and inventory allocation inseparable.

We study static bicycle redistribution with empty vehicle departure, loaded return, and at most one nonzero one-way service at each station. The objective combines inventory-to-target ratio-Gini dispersion and weighted relative target deviation. The operational model and HGA-TGBC heuristic framework originate in the available same-problem author manuscript (*Equity-Aware Bike Repositioning in Station-Based Bike-Sharing Systems* 2026). Our exact method reuses its decoder within a finite startup procedure and supplies the bounds and complete coverage needed for certification.

The research question is how a common inventory representation can connect allocation and routing, support a complete exact method, and yield decisions whose quality can be bounded. Three connected contributions address it. First, a shared stock state represents the objective product, absolute movement and nonzero visits. Under the inherited unique one-way service rules, integer stock implies integer service quantities. We further characterize the joint local graph: at most five legal stock supports preserve its continuous convex hull, while a separate absolute-stock binary-product layer preserves integer exactness. The resulting common LP projection survives embedding only when all other state uses pass through the declared interface. This identifies both a compact representation and its precise boundary.

Second, GI-TBC combines inventory/service connections and physical valid inequalities with an own feasible startup and complete true-Gini interval control. Objective-preserving physical extensions, cutoff complements and complete region coverage establish correctness. The implementation supplies the full method, including exact continuation at depth/width guards. Custom valid rows are static; Gurobi performs branch-and-cut inside each canonical model. P, own-start PS, strengthened root-only control, complete B and the separate proof extension answer different formulation, startup and architecture questions. The compact representation is evaluated as the separately named C166 candidate; it does not change B's definition.

Third, computational evidence and certified decision analysis use both feasible fleets and qualified problem bounds. The complete package improves finite certificate counts over the specified compact controls, with ad-

verse endpoints and open cases retained. An offline archive of fully reconstructed physical fleets yields feasible upper envelopes and concavity-based lower bands over continuous objective-weight intervals. Controlled route-horizon pairs yield two-sided bounds on the improvement in the optimal objective, including pairs where neither optimum is certified. These decisions concern inventory-to-target ratio dispersion and target deviation. They do not imply demographic fairness, monetary benefit, a complete Pareto frontier or an independent speed gain from the outer controller.

1.1 Relation to previous work

Static bike redistribution has been studied under several target, service and vehicle conventions. Raviv et al. develop static repositioning models; Chemla et al. study static rebalancing; Erdogan et al. address demand intervals and an exact rebalancing algorithm (Raviv et al. 2013; Chemla et al. 2013; Erdoğan et al. 2014, 2015). Schuijbroek et al. connect inventory requirements to routing (Schuijbroek et al. 2017). Forbidden temporary operations, repeated visits, robust inventory requirements and demand-interval disjunctions give related but different feasible sets (Bruck et al. 2019; Bulhões et al. 2018; Bruck et al. 2025; Ikonen et al. 2025). The HGA-TGBC manuscript is the direct same-problem antecedent; the other studies supply routing and formulation context rather than matched performance baselines.

Station-ratio dispersion measures a different object from vehicle-workload equity (Matl et al. 2018). Qiao et al. balance task durations in a coordinated two-echelon rebalancing framework (Qiao et al. 2026). Caggiani et al. consider free-floating electric micromobility, battery swapping and a modified Gini measure involving availability and state of charge, with zonal fair targets (Caggiani et al. 2026). Their accessible abstracts identify these equity objects and operation settings; the unread complete formulations do not support equivalence or dominance claims. Here zero Gini means equal proportional station inventory, which can still represent inadequate stock. The deviation term separately rewards approaching targets.

McCormick envelopes and convex epigraphs are standard tools (McCormick 1976; Boyd and Vandenberghe 2004). Gupte et al. study unary/binary reformulations and relaxations of integer-continuous single-product sets (Gupte et al. 2013). Köppe et al. develop finite block values, linking polyhedra and an aggregate representation (Köppe et al. 2008). Our connection is the use of one final-stock state across the objective, absolute movement and nonzero-service indicator, within this physical routing problem. Embedding and piecewise-linear formulations provide established endpoint, encoding and convexification tools (Vielma 2018; Huchette and Vielma 2023). Our compact result applies these tools to the jointly visible movement, visit and product functions, including their discrete service jump, and establishes the interface needed to embed the replacement. Neither binary expansion, finite disjunction, endpoint convexification nor spatial partitioning is claimed as new. The state-penalty comparison in Supplement S6 applies Jensen's inequality and a direct projection construction; the complete route model is not the hull of an isolated product block.

2. Physical model and objective

Let N contain n stations and let 0 be the depot. Station i has integer initial inventory b_i, capacity C_i, positive target $D_i > 0$, and weight $\omega_i \geq 0$. Vehicle k has capacity Q_k and route-duration limit T. Routes depart empty. A station can be served by at most one vehicle, in one direction, with a nonzero operation. Loaded return is allowed and its unloading time is counted. The depot enters neither target deviation nor dispersion.

The computational text format stores integer targets. All present test targets also satisfy $D_i \leq C_i$, a data convention rather than an additional physical constraint; the inventory capacity bounds apply to b_i, Y_i.

With pickup p_{ki} and delivery d_{ki},

$$Y_i = b_i + \sum_k (d_{ki} - p_{ki}), \qquad R_k = \sum_i (p_{ki} - d_{ki}) \in [0, Q_k], \qquad \sum_i Y_i = \sum_i b_i - \sum_k R_k.$$

Thus total final station inventory is bounded above by $B = \sum_i b_i$, rather than fixed at B. Vehicle capacity limits the instantaneous prefix load, rather than cumulative pickup. If pickup and unloading/delivery take t_p, t_d per unit, complete handling time is

$$t_p \sum_i p_{ki} + t_d \left(\sum_i d_{ki} + R_k \right) = (t_p + t_d) \sum_i p_{ki}.$$

Travel plus this quantity cannot exceed T. The tested distance convention is Euclidean travel time from serialized metre coordinates at 1.5 m/s. Inventory, route, assignment, direction and prefix-load logic retain their original integer domains. Continuous pickup/delivery variables preserve the integer physical operations because unique one-way service and integer Y_i fix the sole inventory difference. Appendix A gives the complete formulation and embedding proof.

Define

$$r_i = Y_i / D_i, \quad S = \sum_i r_i, \quad A = \sum_{i<j} |r_i - r_j|, \quad P = \sum_i \omega_i |r_i - 1|,$$

$$G = \begin{cases} A/(nS), & S > 0, \\ 0, & S = 0, \end{cases} \qquad F = G + \lambda P, \quad \lambda \geq 0.$$

This is ratio dispersion and two-sided relative target deviation. It is not a direct measure of population equity, rental failure or travel burden. Put $\Omega = \sum_i \omega_i > 0$, $P_{\text{avg}} = P/\Omega$ and $\rho = \lambda\Omega$. Then $F = G + \rho P_{\text{avg}}$. The generator normalizes weights by their maximum, so equal λ across inputs does not hold ρ fixed. The breadth panel retains this convention; the resource panel fixes $\rho = 1$, and the weight study varies ρ within fixed physical configurations.

For positive total shortage $s = \sum_i D_i - \sum_i b_i > 0$, positive weights and $\lambda > 0$ (equivalently $\rho > 0$), let $a = \min_i \omega_i / D_i > 0$. Nonnegative loaded return yields

$$P \geq a \sum_i |D_i - Y_i| \geq a \left| \sum_i D_i - \sum_i Y_i \right| \geq as, \qquad F \geq \lambda as = \rho as/\Omega > 0.$$

We use this established stock-shortage construction to guarantee positive objectives in the resource study, without filtering on observed difficulty. It does not guarantee a binding route horizon. With all other physical and objective data fixed, $T_1 \leq T_2$ gives $X(T_1) \subseteq X(T_2)$ and $F^*(T_2) \leq F^*(T_1)$. Finite-budget primal/dual endpoints and runtimes need not be monotone.

3. Shared inventory states and GI-TBC

3.1 Discrete states and implicit service integrality

For the legal finite inventory domain $\mathcal{Y}_i$, binary selectors s_{iy} and continuous q_{iy} represent stock and products on a Gini interval $[\alpha, \beta]$:

$$\sum_y s_{iy} = 1, \quad Y_i = \sum_y y s_{iy}, \quad \alpha s_{iy} \le q_{iy} \le \beta s_{iy}, \quad \sum_y q_{iy} = g, \quad Z_i = \sum_y y q_{iy}.$$

At an integer state, $Z_i = gY_i$. The objective epigraph uses

$$H_{ij} \ge r_i - r_j, \quad H_{ij} \ge r_j - r_i, \qquad e_i \ge r_i - 1, \quad e_i \ge 1 - r_i,$$
$$\sum_{i<j} H_{ij} \le n \sum_i Z_i / D_i, \qquad \min f = g + \lambda \sum_i \omega_i e_i.$$

For $S > 0$, integer state selection makes the numerator inequality imply $g \ge G_{\text{true}}$, so every integer completion satisfies $f \ge F_{\text{true}}$. Conversely a physical fleet assigned to its true-G interval has an objective-preserving extension: select its final inventories, set $g = G_{\text{true}}$, set each selected $q_{iy} = g$, and use the true absolute differences and deviations. At $S = 0$, all ratios are zero and $g = 0$ supplies the physical extension. Valid domain and strengthening rows retain that extension, as established in Appendix A.

Let z_{ki} be the binary service assignment. The same state supports the service equations

$$\sum_k p_{ki} = \sum_y (b_i - y)^+ s_{iy}, \quad \sum_k d_{ki} = \sum_y (y - b_i)^+ s_{iy}, \quad \sum_k z_{ki} = \sum_{y \ne b_i} s_{iy}.$$

These links connect objective mixtures to movement and service. They are not the convex hull of all vehicle routes. In isolation, a finite-state product block with the same extreme stock bounds projects to the McCormick rectangle: its four corner graph points give one inclusion, and every state line lies in the rectangle hull, giving the other. An advantage must therefore come from the links, domain information or complete search, rather than the VD-P label alone.

Lemma 1 (implicit service integrality). Suppose initial and final inventories are integer, a station is assigned to at most one vehicle, and a binary direction permits either pickup or delivery at its unique service. Continuous pickup and delivery variables then take integer values at every integer solution of the remaining model.

Proof. An unassigned vehicle has zero quantities. At the unique assigned vehicle, pickup direction fixes delivery to zero, so inventory balance gives $p_{ki} = b_i - Y_i$. Delivery direction fixes pickup to zero and gives $d_{ki} = Y_i - b_i$. Each is integer. Integer load variables are unnecessary for this implication. The claim concerns integer feasible solutions; it does not equate the continuous relaxations of alternative formulations. □

For an integer service, total movement is $|b_i - Y_i|$, and nonzero one-way service occurs exactly when $Y_i \ne b_i$. Hence the shared equations above reproduce the original operations without changing the physical problem. They also couple fractional inventory mixtures to the movement and visits that must support them.

3.1.1 A compact shared-state representation On a legal contiguous stock domain $\mathcal{Y}_i = \{l_i, \dots, u_i\}$, define $m_i(y) = |b_i - y|$, $v_i(y) = \mathbf{1}\{y \ne b_i\}$, and the common local object

$$\mathcal{H}_i = \text{conv}\{(y, m_i(y), v_i(y), g, gy) : y \in \mathcal{Y}_i,\ g \in [\alpha, \beta]\}.$$

The relevant physical coordinates are inventory, aggregate movement, aggregate visits, g and Z_i. Balance linearly recovers aggregate pickup and delivery from inventory and movement. The relaxed VD-P block and A/B links represent this joint object; independently convexifying service and the product can instead use inconsistent inventory mixtures.

Compact joint-state proposition. For $0 \le \alpha \le \beta \le 1$, let

$$\mathcal{K}_i = \{l_i, u_i\} \cup (\{b_i - 1, b_i, b_i + 1\} \cap \mathcal{Y}_i).$$

Replacing $\mathcal{Y}_i$ by these at most five legal supports preserves $\mathcal{H}_i$. Continuous perspective weights on those supports, combined with an independent absolute-Y_i binary-product layer, preserve B's integer physical projection, original objective and common raw LP projection, provided every other deleted-state use passes through the common interface.

Proof sketch. On the legal donor, initial singleton and receiver pieces, all three functions $y, m_i(y), v_i(y)$ are affine. An interior integer stock is interpolated between its piece's legal endpoints at the same g, preserving gy as well. The converse uses the legality of every retained support. The bit layer makes $Z_i = gY_i$ exact at integer stocks. Its relaxed projection contains every true stock/product graph point, hence their convex hull; its disjoint auxiliary variables therefore do not change the breakpoint block's common LP projection. Intersecting with unchanged outside constraints preserves this equality under the stated interface condition. Appendix A.9 supplies the construction, both directions, sizes and failure cases. □

Continuous breakpoint weights and integer Y_i alone do not enforce the product, and binary breakpoint weights would delete legal interior stocks. B keeps its original e_i epigraph, so target deviation is not an additional shared-state function here. Exact state penalties, threshold counts, vehicle-state assignment or holed stock domains need additional supports or restrictions. The candidate C166 applies only this representation change, with the full B lifecycle and own startup. Equal raw LP projections do not imply identical presolve cuts, branch decisions or complete costs.

3.2 Ordered supply and support/handling information

Let τ be metric travel time and $h = t_p + t_d$. For each receiving station j, define

$$\mathcal{C}_{kj} = \{i \neq j : \tau_{0i} + \tau_{ij} + \tau_{j0} + h \leq T\}.$$

Proposition 1 (ordered supply compatibility). Every physical fleet with empty departure satisfies

$$d_{kj} \leq \sum_{i \in \mathcal{C}_{kj}} p_{ki}.$$

Proof. Label the units collected by a vehicle. In route order, match each delivered unit to an earlier collected unit that has not yet been delivered. Nonnegative prefix loads guarantee such a match. A unit delivered at j from source i entails the ordered subsequence $(0, i, j, 0)$, whose travel lower bound follows by metric shortcutting. Collecting at least that unit incurs handling of at least h, including delivery or final unloading. Thus its source lies in $\mathcal{C}_{kj}$. Counting distinct matched units proves the inequality. Unmatched collected units can return to the depot. □

For a set W of served stations, let $\tau(W)$ be the shortest depot tour through W, computed by explicit orders for pairs or triples. Write $P_k^{\text{pick}} = \sum_i p_{ki}$. Nonzero integer service and empty departure give

$$|W| \leq \sum_{i \in W} (p_{ki} + d_{ki}) \leq 2P_k^{\text{pick}}, \qquad P_k^{\text{pick}} \geq \lceil |W|/2 \rceil.$$

Consequently $\tau(W) + h\lceil |W|/2 \rceil > T$ rules out serving all of W with that vehicle. Otherwise a conditional duration inequality combines the tour lower bound and pickup handling. Supply for W may come from outside W; cumulative pickup is not bounded by Q_k. Appendix A gives the exact conditional coefficients, deactivation

proof and finite selection rule. GI-TBC keeps pair support uniformly and omits triple support. These rows strengthen necessary physical conditions without replacing route-prefix capacity.

3.3 Complete startup and interval search

The startup H is a finite construction and descent procedure. It completes a joint insertion and 24 shuffled station/separator orders plus a constructive order, fully decodes them, applies guided first-improvement descent, and closes physical quantity/insertion and neutral balanced/exchange moves. The active path has no genetic generations. It provides a verified feasible upper bound and a possible MIP Start; it is never credited with a positive lower bound. Each GI-TBC and paid-start compact run pays for its own complete H.

The controller starts from the complete potentially improving domain $[0, \min\{U, (n-1)/n\}]$. It maintains incumbent epoch, valid cutoff complements and complete interval coverage. A local bound is used only for its model, interval, cutoff and qualified source. Split children replace a parent atomically only after complete coverage and both results are checked. NEXT and child-target values are requests, rather than proof that a milestone was reached.

```
Algorithm 1  GI-TBC (B)
Input: physical instance, lambda/weights, common deadline; fixed .08 AM rule,
       depth 8, minimum width 1e-4, numerical policy epsilon=1e-7.
Output: verified own fleet, physical U, qualified L, CERT or OPEN and cover.
1 Complete own H and verify the fleet; initialize U and incumbent epoch e=0.
2 Cover [0,min(U,(n-1)/n)] (also [0,0]); retain independent global floor 0.
3 While a relevant open region exists and the common deadline permits:
    select on the minimum-bound plateau, cycling widest-first (B.2);
    rebuild its canonical model at current epoch/cutoff c=U when necessary;
    qualify its complete LP and merge its applicable same-region floor.
    If proved infeasible or fathomable: retain the scoped closure; else:
      apply NEXT: requeue if noncontrolling, or request a parent-MIP target
      equal to the next strictly larger open-region bound (B.3);
      if NEXT permits lookahead and depth/width permit, solve both child LPs;
      split atomically if either is infeasible or the finite AM rule passes;
      otherwise request parent MIP to the valid child minimum when strict;
      if guarded or without strict child improvement, run full parent MIP.
    After each Native return, finalize/qualify its actual bound and source;
    verify fleet improvements, update U/epoch and invalidate stale artifacts;
    install both covering children, retain a scoped closure, or requeue the
    parent according to the returned evidence (ProcessLeaf, Appendix B.0).
    Recompute the full-cover minimum including cutoff-complement floors.
    On TimeLimit retain unresolved coverage; on failed qualification stop.
4 FinalizeAndUpdateCover retains every unresolved obligation (Appendix B.0).
  If native proof is rejected, final qualification restores the unresolved
  physical domain and independent floor 0; no dependent proof is credited.
5 Release Native resources; finalize the selected fleet's physical check.
  Apply the independent exact-zero rule or qualified full-cover gap rule;
  complete required output and return CERT, otherwise OPEN with its bounds.
```

Proposition 2 (coverage). In ideal arithmetic, a controller that preserves complete improving-domain coverage, retains valid bound/cutoff complements and closes a region only by an applicable proof provides a valid global lower bound. If it closes all relevant regions against a verified U, it proves optimality to its declared certificate margin.

Proof. Every improving physical solution belongs to the root domain because $F \geq G$ and $G \leq (n-1)/n$. A valid interval restriction and cutoff cover its regional solutions; the cutoff complement has floor equal to that cutoff. A complete split preserves the union. Taking the minimum over the valid regional floors and complements therefore bounds every physical solution from below. Closure against U eliminates every possible improvement to the margin. Revoking a source requires removing every conclusion that depends on it; an independent full-domain bound remains valid. □

The proof's source-dependency requirement is not a claim of a general online revocation engine. The frozen scheduler accumulates same-unit bounds monotonically. Its actual final qualification rejects affected native proof dependencies and conservatively restores the unresolved physical domain; Appendix B.4 distinguishes that fallback from ideal proof accounting. This proposition does not turn floating-point native calculations into exact rational proofs. Numerical qualification, physical objective agreement and lifecycle evidence are additional implementation conditions. The final implementation separates ordinary positive-objective native/outer certificates from the independent zero rule. Supporting material records numerical anomalies and version corrections without making them algorithmic contributions.

The depth and width guards limit extra partitioning, then retain a full parent MIP continuation. In ideal arithmetic, complete terminal solutions on the bounded integer domains and valid coverage yield the corresponding finite proof. Under the actual common deadline an unresolved terminal obligation returns OPEN; the guards themselves establish no certificate.

3.4 Numerical qualification and termination

Independent zero termination. Under the stated nonnegative objective premises, a complete physically verified fleet with exact objective zero is globally optimal, independently of the native search source.

Proof. For every original physical solution, $F \geq 0$. The verified fleet gives $F^* \leq 0$, so $0 \leq F^* \leq 0$. With positive λ and positive weights, integer equality $Y_i = D_i$ for every station is a sufficient exact-zero condition. More generally equal exact ratios give zero Gini, and every positive-weight penalized station must meet its target. The implementation checks these conditions using integer stock arithmetic, then repeats the complete physical-fleet verification. A merely small positive floating objective does not establish exact zero. □

The numerical ε-certificate policy is separate. A source-rejected positive solution without a sufficient independent bound remains open. Certification cost includes the verification needed to establish the proof, normal native cleanup and required output. A later offline audit cannot backdate a production proof.

3.5 A separately paid proof-only inventory source

The frozen enhancement E+ augments GI-TBC/B with an independently computed, qualified inventory lower bound. It uses the run's own first canonical root, actual supported inventories and valid final-stock total bounds. On an epigraph interval $[\gamma_L, \gamma_U]$, its objective and domain are

$$\min_{Y} \ \max\{\gamma_L, G_{\mathrm{true}}(Y)\} + \lambda \sum_i \omega_i |Y_i/D_i - 1|, \qquad G_{\mathrm{true}}(Y) \leq \gamma_U.$$

The lower interval endpoint constrains the epigraph; it does not impose $G_{\mathrm{true}} \geq \gamma_L$. At $S = 0$, $G_{\mathrm{true}} = 0$. The inherited exact hard-total dynamic program and one uniform RN16384 producer retain their original absolute price

gap, zero/fallback handling, scope qualification and global deadline. This is an application of established integer-inventory, normalization and proof-ledger techniques, not a new general fractional-programming or convex-hull theorem.

Only an applicable proof ledger consumes the returned floor. Formal Native rows, raw AM bounds, hints, Starts and branching inputs keep their intended B design. On a common domain, independent bounds combine by maximum; complete covering regions combine by minimum, including each source's cutoff complement. Helper rejection supplies no new floor and retains the independent B information. Every E+ run pays its own H, root, DP/RN work and qualification. That cost changes remaining search time, and legitimate early certification can change the finite trajectory. Preserving the formal expression therefore does not guarantee identical B/E+ physical incumbents or solve times.

The C++ complete-method implementation and the historical Python inventory helper are separately identified in the supplement. No per-instance, source, scale, machine-speed or elapsed-time enhancement switch is used. Stable B and the paper recommendation remain separate from released defaults.

E+ evidence is confined to its separately registered runs. B/P solver-Seed repeats do not retest the helper or establish its robustness. The inventory source's mathematical validity, numerical qualification and net value for the complete paid method remain separate questions.

4. Computational design

The main comparisons use the same physical problem and original objective. P is the independent cold compact model; PS pays its complete own H and maps only its own fleet into the original compact model; GI-TBC pays its complete own H, model construction, verification, interval search and proof/output. No solution, bound, tree or Start crosses methods, Seeds, objective weights or physical configurations. Gurobi 13.0.2 uses one thread and fixed processor affinity on an Intel i7-12700KF Windows host. H seed 20260626 is held fixed; each study registers its Gurobi Seeds separately. Same Seed does not mean different models follow the same random trajectory.

Each comparison answers a different question. P/PS measures the complete cost and benefit of an own feasible startup in the compact model. The strengthened root-only control retains shared-state and physical rows and its own startup, using native branch-and-cut on the unsplit root domain; its comparison with complete B tests the additional external control package. B/P and B/PS evaluate the integrated exact method. E+/B prices a separate inventory-proof source and its lower-bound contribution. C166/B keeps the complete flow and changes the shared-state representation, testing whether equal raw LP information can be carried at a better complete cost. The historical controls and the new representation comparison retain separate versions, inputs and denominators.

The fixed-source protocol was committed before once-only generation. Six known roles and six new draws form a twelve-input breadth panel (four each at $n \in \{15, 20, 35\}$); CITI, CABI and Divvy supply archived station geometry/capacity. Ten new draws in total include four additional shortage bases at $n \in \{20, 35\}$, each paired at two transparently designed route horizons. Targets, initial stock, weights and depot are synthetic or transformed; this is not observed demand, a new source, or independent population sampling. Every selected source row and serialized input is disclosed.

Breadth retains $\lambda = .15$. Resource pairs fix $\rho = 1$ and alter only T; the two extra weight levels $\rho \in \{.5, 2\}$ reuse the matching $\rho = 1$ baseline at two preselected physical configurations. AM and mechanism defaults share only exactly matching input/T/weight/Seed/cap/configuration runs. The earlier main panels use Seed 0; four preselected full-method triplets and small overlapping AM/mechanism blocks use Seed 1. They are finite repeated observations, not independent new inputs or an estimated runtime distribution. The later six-input archived-source cohort uses Seed0 for its B/E+/P comparison and Seeds1/2 for the complete B/P confirmation in §5.5. The additional 24 commands and offline feasible targets are frozen together; this extends existing Seed research on exposed inputs rather than supplying new unseen inputs.

For each new resource base, let $d_{\max}$ be its maximum serialized station-to-depot distance and M its vehicle count. Before optimization, the route horizons were fixed by

$$T_{\text{base}} = 2d_{\max}/1.5 + 120 \sum_{i \in N} \max(b_i - D_i, 0)/M,$$
$$T_1 = 300 \left\lceil \frac{\max(1800, .75T_{\text{base}})}{300} \right\rceil,$$
$$T_2 = 300 \left\lceil \frac{1.5T_1}{300} \right\rceil.$$

This input-based rule uses geometry, initial stock, targets and fleet size; it supplies neither a binding-horizon guarantee nor an outcome-dependent difficulty filter. The weight study preselects R-B20-S-T1 and R-X35-S-T2. Within each T pair, every datum except T is identical.

Caps are 600/1200/2400 s by size; every open certificate time remains null. Actual production, postverification and total clocks are retained separately. Native proof qualification and physical original-objective endpoints follow the registered numerical policy in §3.4 and Appendix A.7. Rejected native sources cannot support a bound. A current run can still qualify its own independently finalized exact-zero certificate under that policy; this basis and any rejected source are reported separately. Both-certified time differences are substantive when at least max(10s, 10% of the faster time); numerical values and the conditioned intersection denominator accompany the classification.

Table 1. Registered studies, observations and shared defaults.

Study	Configurations / observations	Purpose
Breadth	12 physical inputs / 36 methods	Sources, stock regimes and scales
Positive-resource pairs	4 bases, 8 physical configurations / 24 methods	$\rho = 1$, guaranteed positive objective
Weights	2 physical configurations, 2 extra rho levels / 12 methods	Relative method dependence on objective weight
AM	4 roles, 2 extra thresholds / 8 methods	Observed gates/actions and complete cost
Mechanisms	4 roles, 4 contrasts / 16 methods	Conditional formulation/control effects
Earlier second Seed	12 main+4 AM+8 mechanism methods	Preselected limited repeat check
Archived-source Seed 0 cohort	6 inputs / 18 B, E+, P method observations	Complete main method and separate proof extension
Exposed-cohort Seeds1/2	24 new B/P arms, plus 12 historical Seed0 B/P arms	Six inputs; three within-input paired observations
Compact shared-state comparison	6 exposed inputs / 12 fresh same-build B/C166 Seed0 arms	Equivalent common LP information and complete-method costs

5. Complete-method, resource and weight results

5.1 Current main panel and historical context

Table 2. Qualified certificates in the main Seed 0 panels.

Panel	GI-TBC	P	PS
Breadth	9/12	7/12	7/12
Resource pairs	4/8	0/8	0/8

Certificates in this table require formal performance eligibility. Earlier evidence retains its own source and policy: the two-Seed breadth study obtains 17/24 versus P 9/24 and PS 4/12; the earlier final confirmation obtains 12/14

versus P 9/14 and PS 2/4. These are separate panels and repeated observations, and are not pooled with the current denominators. The earlier breadth study also retains its disclosed source-reduced own-zero observation outside formal timing counts.

Table 3. Certificate-time comparisons conditioned on both methods certifying.

Panel	Other	Both certified	GI-TBC W / L	Geo Other / GI-TBC
Breadth	P	7	6 / 0	11.3534
Breadth	PS	7	4 / 1	4.22522
Resource pairs	P	0	0 / 0	n/a
Resource pairs	PS	0	0 / 0	n/a

Time ratios and substantive time wins/losses in this table condition on both methods qualifying a certificate; their intersection sizes are shown explicitly. A ratio above 1 means a lower GI-TBC certificate time on this conditioned subset. An open cap supplies no certificate time and enters neither the ratio nor these time-win counts. Certificate-only differences and open endpoints remain in the complete panel.

The new positive-objective certificate cases include N-B15-B, N-X15-S and N-C20-U. On N-B15-B, GI-TBC takes 24.0684 s versus P 279.663 s and PS 306.307 s. On N-X15-S the corresponding times are 10.2683/538.867/401.931 s. GI-TBC certifies N-C20-U in 265.529s while P and PS remain open. These observations retain the independent cost of each complete method.

Paid startup and the subsequent method have distinct effects. On X-35-B, PS certifies in 7.45014 s versus GI-TBC 17.9046 s, a substantive PS reversal under the declared rule. On N-X20-B, PS 6.08515 s and GI-TBC 7.45537s differ by less than 10 s, so the nominal ordering is not substantive. All twelve breadth PS/GI-TBC pairs independently complete H with matching semantic and fleet hashes; the complete post-startup packages can still behave differently.

GI-TBC remains open on K-20-S, K-35-U and N-B35-S. K-35-U exposes an opposed-endpoint result: P has the lower U, 0.664747 versus GI-TBC 0.692854, while GI-TBC has the higher L, 0.565766 versus P 0.335556. No single endpoint-dominance or certificate-time claim follows. On N-B35-S, GI-TBC improves both endpoints over P and PS but still leaves a positive proof gap. These qualified limits accompany the certification gains.

N-X20-B cold P has a rejected native bound source and an own zero feasible objective. Its 24.0892 s qualified certificate uses the separately finalized nonnegative full-domain floor, not the rejected native proof. The complete cost and rejection records remain. This current-policy independent-zero certificate does not retroactively change the separately preserved historical exclusion above.

The complete paired interpretation, including substantive reversals and conditioned runtime statistics, is given in the stage decision and the full supplement. Smaller signed gap alone does not establish endpoint dominance: U and L are compared separately. No cap is substituted for a certificate time.

5.2 Positive objectives and physical resource pairs

All four serialized shortage bases have positive weights, a strictly positive analytic floor, and both local donor and receiver stations before movement. Relaxing T enlarges the feasible set; the observed feasible plans, qualified bounds and proof progress test how the methods use that resource, not a causal effect of n alone. The physical operation records distinguish travel, handling, returned stock, prefix peaks and route-duration utilization.

Table 4. Input-based positive-objective resource design.

Base / source	n	T1 / T2 (s)	Shortage s	Ω	Floor lambda a s
R-B20-S /CABI	20	3300 /5100	20	13.47	0.103935
R-X20-S /DIVVY	20	4800 /7200	20	7.88889	0.126761
R-B35-S /CABI	35	4800 /7200	35	18.1405	0.0797268
R-X35-S /DIVVY	35	4200 /6300	35	13.2617	0.0977471

The floor is a pre-solve guarantee at $\rho = 1$, shared by the two physical horizons. It is not the reported solver L, and a larger T need not improve a finite-budget U or L monotonically.

On R-B20-S, GI-TBC qualifies certificates at F=0.480735 with T=3300 s and F=0.198473 with T=5100 s. The two qualified intervals establish a strict value improvement under the controlled resource change. Certificate times are 784.143/538.603 s respectively. The lower proof cost on this pair is an observed result; feasible-set inclusion supplies no runtime ordering for other inputs.

R-X20-S-T1 isolates a proof-gap difference. All three verified feasible objectives coincide at 0.645325, while GI-TBC forms its own qualified certificate in 20.5065 s. P and PS retain L=0.589197/0.590359, respectively, and remain open under their own evidence. The complete-method comparison concerns closure of the dual gap on this witness; the conditional controls delimit attribution to individual mechanisms. No other method inherits the GI-TBC proof or certificate time.

On R-X20-S, the larger horizon reduces the certified objective from 0.645325 to 0.434796, while the GI-TBC certificate cost increases from 20.5065 to 337.305 s. Together with R-B20-S, these two $n = 20$ pairs show the same resource-value direction and opposite observed proof-cost directions. They remain finite Seed 0 observations; the input differences across bases prevent a pure source or scale attribution.

Value improvement can also be demonstrated while both GI-TBC runs remain open. On R-B35-S, the qualified T1 lower endpoint 0.455904 exceeds the verified T2 feasible upper endpoint 0.344643. The separated intervals [0.455904,0.591518] and [0.218986,0.344643] support a strict resource-value improvement under the stated numerical policy. Each optimum remains inside its own interval, and no certificate-time comparison is reported.

All four resource bases admit this type of strict endpoint separation: an eligible T2 feasible upper endpoint lies below the qualified GI-TBC T1 lower endpoint. This offline value comparison preserves every method's own certificate/open status and clocks; no bound or feasible plan is transferred into another production run. It establishes strict improvement for these four designed pairs without claiming that every increase in T must improve the optimum strictly.

For fixed physical data and objective, let $[L_j, U_j]$ contain $F^*(T_j)$, with $T_2 > T_1$. Feasible-set inclusion gives the complete improvement interval

$$\max\{0, L_1 - U_2\} \le F^*(T_1) - F^*(T_2) \le U_1 - L_2.$$

Table 5. Two-sided resource-value improvement intervals. The bounds use complete physical fleets and qualified global lower sources. Displayed interval endpoints are rounded outward after reducing each original lower by 10^{-7} and adding 10^{-12} to exactly recomputed feasible objectives; full original endpoints and arithmetic are retained in the decision data.

Base	T1 / T2 (s)	Improvement interval	Interval width	B state T1 / T2
R-B20-S	3300 / 5100	[0.2822618761, 0.2822620892]	0.0000002131	C / C
R-X20-S	4800 / 7200	[0.2105292995, 0.2105295021]	0.0000002026	C / C
R-B35-S	4800 / 7200	[0.1112611656, 0.3725317852]	0.2612706196	open / open
R-X35-S	4200 / 6300	[0.0600858983, 0.3813035291]	0.3212176308	open / open

The two 35-station pairs prove a strictly positive optimal-objective improvement despite both runs remaining open, but leave substantial uncertainty about its magnitude. The two smaller pairs localize the improvement much more closely. These intervals measure the change in the specified objective, not monetary savings or a general marginal price of vehicle time. No source run acquires another run's certificate or clock.

All four own-fleet comparisons show lower Gini and lower average target deviation at the larger horizon, accompanied by more cumulative pickup (B20-S 30 to 43; X20-S 16 to 22; B35-S 41 to 60; X35-S 29 to 42). Returns change from 0 to 0 on B20, 1 to 0 on X20, 2 to 3 on B35, and 1 to 0 on X35. B35 therefore improves its objective while returning more stock. Its final station total decreases by one; X35 recovers one additional station unit. Counts of under-target, at-target and over-target stations and every route's travel/handling utilization are retained together in the supplement. These are descriptions of displayed feasible plans, not causal explanations of the unknown optimal fleets. The supplement reports operations of each verified own incumbent, including open configurations. The components and S distinguish changes in dispersion, target deviation and the inventory denominator. Duration utilization describes the displayed routes; a near-unit ratio alone does not establish a binding optimum. Full per-vehicle travel/handling, pickups/drops/returns and prefix peaks are retained in the operations data supplement.

Both G and P_{avg} decrease between the saved GI-TBC plans in every resource pair. The longest route uses at least 99.4109% of its horizon in each displayed plan. The separate strict endpoint separations establish resource-value relevance; near-full route use alone does not establish exact binding. R-X35-S also illustrates why S must be distinguished from inventory mass: loaded returns fall from 1 to 0, so total station inventory increases by one, while S falls from 28.7591 to 28.2238. The different target denominators make S depend on the allocation of units, not only their total. These are verified feasible-plan comparisons; the $n = 35$ optima remain unresolved.

All three methods remain open on all four $n = 35$ resource configurations. GI-TBC has lower U and higher L than both controls at the registered complete caps, but none of these endpoint improvements is a certificate-time gain. On R-X35-S-T2, GI-TBC reports U/L=0.403272/0.210887, versus PS 0.404567/0.203817 and P 0.490517/0.201288. The feasible-objective advantage over PS is only 0.00129523; primal and dual differences remain visible separately. These persistent open outcomes delimit the positive-objective scale reached by this finite panel.

Paid-start effects are conditional on the resource configuration. On R-B35-S-T1, cold P has lower U and higher L than PS; this two-endpoint direction reverses at T2. P also has both better endpoints on R-X20-S-T2. All of these compact runs remain open. These fixed-budget comparisons retain the complete cost of startup and do not establish an eventual proof-time ordering or a universal startup benefit.

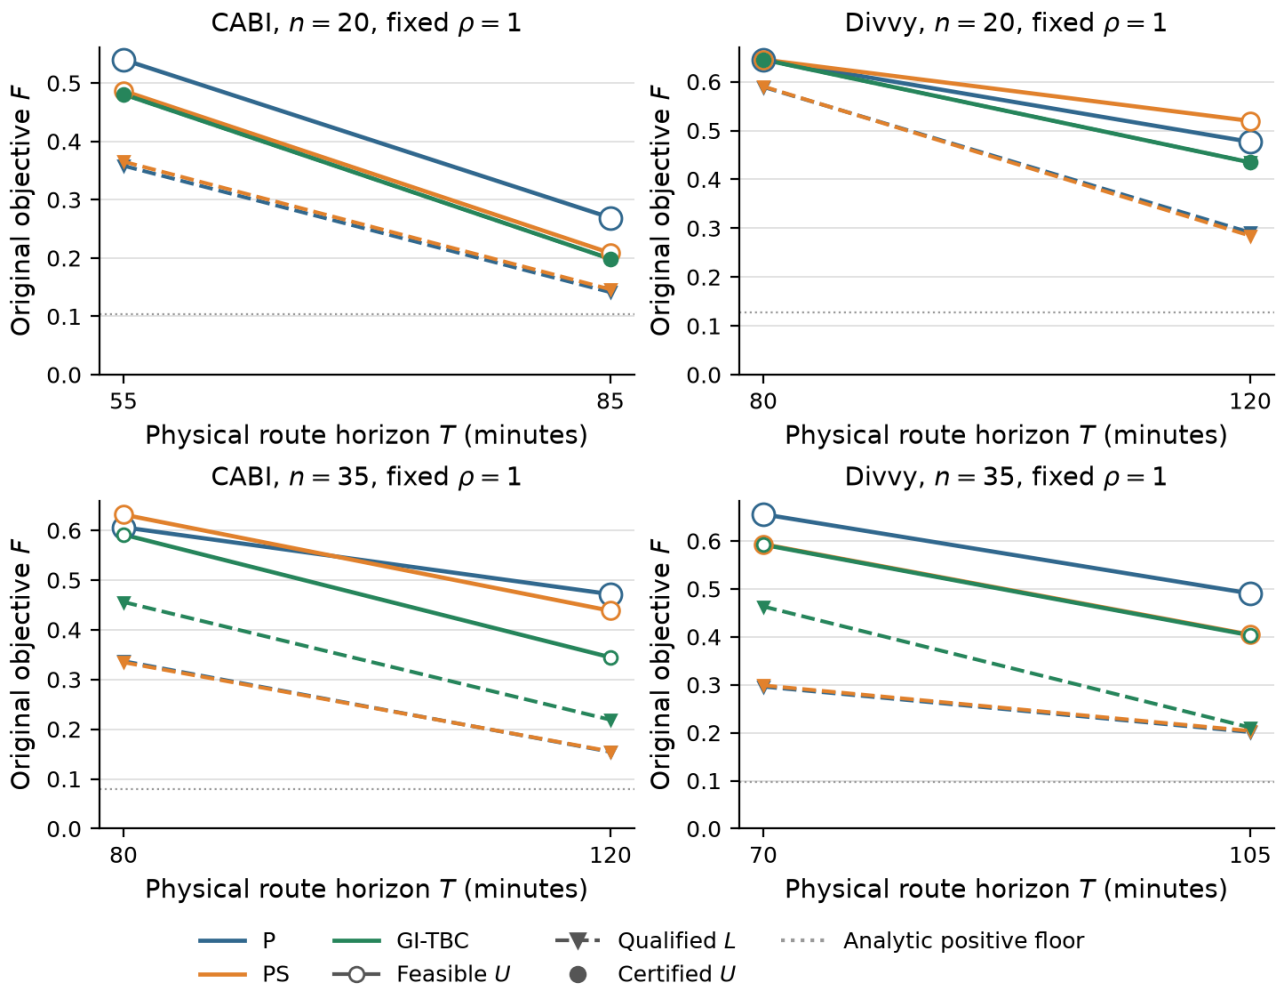


Figure 1: Original-objective endpoints at the two physical horizons. Solid lines join feasible U circles; dashed lines join qualified L triangles. Filled U circles denote qualified certificates, and grey dotted lines show the pre-solve positive floor. Connecting lines describe finite-budget observations, not an exact optimal-value curve.

5.3 Objective weights

Table 6. Objective-weight evidence. (a) Sampled complete-method outcomes; C denotes an own qualified certificate.

Physical configuration	ρ	P: U / L	PS: U / L	GI-TBC: U / L
R-B20-S-T1	0.5	0.380389 /0.229542 (open)	0.347458 /0.240479 (open)	0.347458 /0.331864 (open)
R-B20-S-T1	1	0.540085 /0.358158 (open)	0.486639 /0.365324 (open)	0.480735 /0.480735 (C)
R-B20-S-T1	2	0.756988 /0.610312 (open)	0.744646 /0.616106 (open)	0.744646 /0.744646 (C)
R-X35-S-T2	0.5	0.260978 /0.108223 (open)	0.257631 /0.108019 (open)	0.255825 /0.122332 (open)
R-X35-S-T2	1	0.490517 /0.201288 (open)	0.404567 /0.203817 (open)	0.403272 /0.210887 (open)
R-X35-S-T2	2	0.620443 /0.36178 (open)	0.611892 /0.363572 (open)	0.524553 /0.388438 (open)

The sampled comparisons retain different search outcomes: B certifies R-B20-S-T1 at $\rho = 1, 2$, while all methods remain open at $\rho = .5$; all three methods remain open at every tested R-X35-S-T2 weight. The table reports each original run's own U/L. Cross-weight information is used only for the following offline analysis.

We reconstruct every available complete fleet from the two configurations above and from the earlier K-15-S and UC-B20-B weight study: 32 run records, with all method/Seed owners retained. Routes, nonzero one-way operations, stock balance, empty departure, load prefixes, loaded returns and unloading time are independently checked. Each family has identical physical data and normalized station weights. True Gini and weighted penalty are recomputed from the full inventories and actual loaded weights; rounded table components are not used to manufacture fleets or certificates.

For a fixed family, put $p(x) = P(x)/\Omega$ and

$$v(\rho) = \min_{x \in \mathcal{F}} \{G(x) + \rho p(x)\}, \qquad U_{\mathcal{A}}(\rho) = \min_{x \in \mathcal{A}} \{G(x) + \rho p(x)\}.$$

The archive $\mathcal{A}$ contains only verified physical fleets. Thus $U_{\mathcal{A}}$ is an upper bound, not the algorithm's result at unrun weights. The value v is concave as an infimum of affine functions. For qualified global $L_a \le v(\rho_a)$, $L_b \le v(\rho_b)$, $\rho_a < \rho_b$, concavity gives the lower chord

$$v(\rho) \ge \frac{\rho_b - \rho}{\rho_b - \rho_a} L_a + \frac{\rho - \rho_a}{\rho_b - \rho_a} L_b, \qquad \rho \in [\rho_a, \rho_b].$$

Let L_C be the maximum of applicable chords. A repeated actual coordinate uses the greatest qualified lower and contributes no zero-length chord. Chords are never extrapolated. These standard parametric-optimization facts yield $0 \le U_{\mathcal{A}}(\rho) - v(\rho) \le U_{\mathcal{A}}(\rho) - L_C(\rho)$. We calculate the worst bound over the entire covered interval from all true affine-line intersections, active-chord intersections and domain endpoints using rational arithmetic. No dense grid or new solver is used. Actual binary64 lambda/weight coordinates are retained, including small differences from displayed .5/1/2. The numerical guards are those stated with Table 5.

Table 6, panel (b). Continuous-weight quality guarantees from the complete fleet archive. Ranges below are display coordinates; the machine-readable data preserve exact loaded coordinates. Regret bounds are rounded upward.

Fixed physical family	Covered rho range	Runs / distinct G,p lines	Supported archive lines	Worst absolute regret bound
K-15-S	[0.710502825, 2.8420113]	8 / 3	3	0.002356282
UC-B20-B	[0.88725, 3.549]	6 / 1	1	0.000000100002
R-B20-S-T1	[0.5, 2]	9 / 7	3	0.015594269
R-X35-S-T2	[0.5, 2]	9 / 9	1	0.136115162

UC-B20-B has the same component line across the full historical range, with an essentially numerical-width bound for one fixed fleet. K-15-S exhibits three supported component choices; the largest archive regret bound occurs at $\rho \approx 1.217804157$, between sampled weights. R-B20-S-T1 has component tradeoffs but a wider low-weight search gap. R-X35-S-T2 has one archive line supported throughout, while its proof band remains wide. Dominated fleets and their owners remain in the archive. Stability among known fleets does not prove a complete optimal frontier.

The R-X35-S-T2 fleet found at the higher sampled weight improves both components of the original unit-weight B incumbent. Re-evaluated at its actual original rho coordinate, its feasible objective is 0.3365058165 instead of 0.4032719989, a known improvement of 0.06676618239. The old U, discovery time and certificate status are unchanged. This offline deficit diagnosis is not injected into the C166/B comparison's startup or treated as production acceleration.

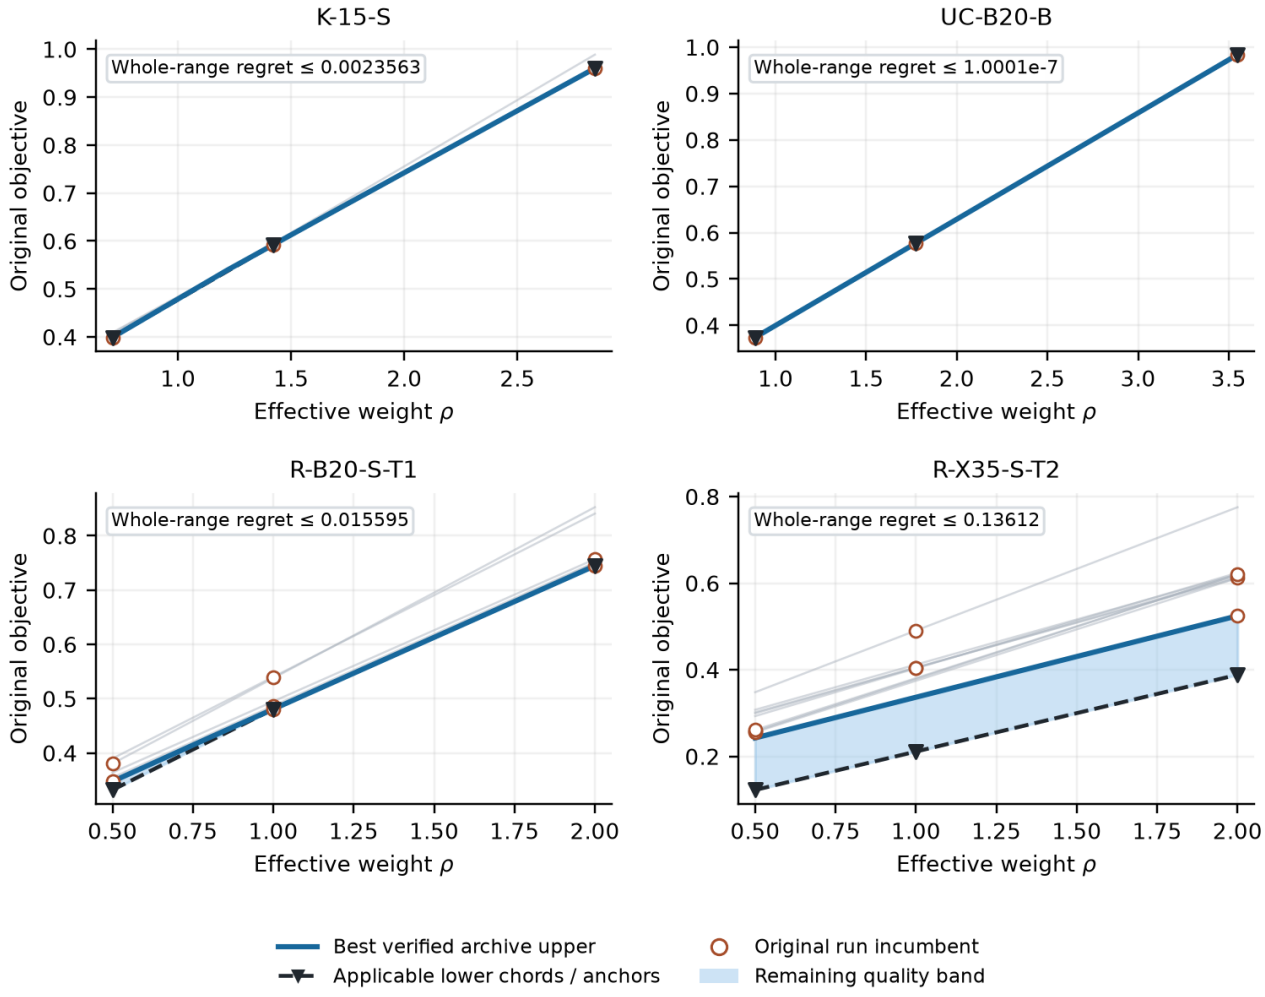


Figure 2: Certified continuous-weight bands for four fixed physical families. Blue is the best verified archive objective; black dashed chords are applicable qualified lower bounds; shading is the remaining quality band. Pale lines retain other feasible component choices, circles mark original run incumbents, and triangles mark qualified lower anchors. These are upper/lower bounds, not a known exact optimum curve.

5.4 Limited preselected second Seed

Table 7. Certificates in the four preselected second-Seed configurations.

Method	Selected Seed 0 certificates /4	Seed 1 certificates /4
P	1	1
PS	1	1
GI-TBC	3	3

These four configurations were selected before the current results. Their Seed 1 observations remain distinct from the full main Seed 0 panel and do not replace an unfavorable first observation. Same Seed is a common setting for different models, not a shared random trajectory, and two Seeds do not estimate a runtime distribution. Complete H remains part of the defined algorithm configuration with its own fixed seed; the AM/mechanism repeat blocks use the corresponding actual Seed 1 baselines.

K-15-S retains the same certificate pattern in the limited repeat: only GI-TBC certifies, in 112.769 / 115.444 s at Seed 0 / Seed 1, a nonmaterial complete-cost difference under the declared rule. All six runs attain the same verified feasible objective, but each compact run retains its own open proof status. Finite dual progress is less stable in direction: Seed 0 cold P / paid-start PS end at L=0.527663/0.520583, whereas Seed 1 ends at 0.529115/0.53228. Thus the compact dual ordering reverses even while feasible objectives and this role-specific certificate pattern agree. This finite observation does not establish a distribution or an eventual proof-time ranking.

UC-B20-B also retains its certificate pattern, with all three methods certifying at both Seeds. GI-TBC takes 4.14897/4.0999 s and cold P 315.403/314.513 s, respectively; their cross-Seed differences are below the substantive rule. Paid-start PS changes from 236.091 to 125.391 s. This descriptive change exceeds that rule while the GI-TBC advantage over both compact controls persists in this role. Complete own H and matched within-Seed trace/fleet identities are retained; unchanged certification status does not make every complete runtime stable. Two Seeds still supply finite checks rather than a distribution or a best-Seed selection.

R-B20-S-T1 preserves own certification only for GI-TBC, whose certificate cost changes from 784.143 to 656.734 s, a substantive descriptive shift under the stated rule. At Seed 1, paid-start PS reaches the same feasible U=0.480735, but retains its own lower endpoint 0.367482 and remains open. Cold P improves its feasible objective from 0.540085 to 0.493224 while its lower bound falls from 0.358158 to 0.354626. The complete-method certificate pattern therefore coexists with material time variation and opposed cross-Seed endpoint changes. These are finite matched observations; the Seed 0 panel remains the primary evidence, and no certificate is transferred to a compact run.

K-35-U remains open for every method at both Seeds. At Seed 1, GI-TBC has U/L=0.668358/0.55478, compared with P 0.758852/0.330574 and PS 0.712648/0.335095. GI-TBC improves both endpoints over both controls within Seed 1, whereas Seed 0 retains the better P feasible objective and stronger GI-TBC lower bound. GI-TBC also improves its own U from 0.692854 to 0.668358 across Seeds while L falls from 0.565766 to 0.55478. A smaller signed gap therefore does not make both of its own endpoints better. The compact comparison reverses in both endpoints: P is better than PS at Seed 0, while PS is better than P at Seed 1. No open certificate time is supplied, and the adverse Seed 0 observations are retained.

5.5 Archived-source cohort and within-input Seed confirmation

The six-configuration cohort was generated once from a prospectively frozen recipe using three archived sources, two sizes and three compact/three regional selections. All configurations and all 18 Seed0 B/E+/P commands were sealed before the formal comparison; balanced/surplus and shortage selections were retained regardless of

difficulty or inventory-floor value. Synthetic inventories, targets and weights are not observed demand. This supplies finite configuration coverage rather than new-city or IID validation. These same six configurations are now exposed when used for additional solver-Seed confirmation.

Each configuration has independently paid B, E+ and cold P runs under one common PE/DLL, original physical T, actual lambda and cap. The n20 cap is 1200 s and n35 cap 2400 s, including startup and helper. P has NumStart=0; B/E+ each execute their own H. Original complete fleets are independently recomputed. Qualified proof endpoints and the inherited signed/near-zero certificate policy determine state. OPEN cap values are not certificate times.

Table 8. Historical Seed0 configuration confirmation, separate from the earlier panels. Each entry is state, physical U / qualified proof L, then paid T_cert for CERT (seconds). Full binary64 values, verification costs, Work/nodes and source identities are in the supplement.

Configuration	B	E+	P
C20-S	CERT; 0.1912806 / 0.1912806; T_cert=199.7794	CERT; 0.1912806 / 0.1912806; T_cert=225.8837	OPEN; 0.1912806 / 0.1602342
B20-B	CERT; 0.4232322 / 0.4232322; T_cert=5.058292	CERT; 0.4232322 / 0.4232322; T_cert=6.756587	CERT; 0.4232322 / 0.4232322; T_cert=235.8555
X20-S	CERT; 0.4477476 / 0.4477476; T_cert=119.7494	CERT; 0.4477476 / 0.4477476; T_cert=125.9267	OPEN; 0.4609478 / 0.2616497
C35-U	OPEN; 0.1295664 / 0.0198375	OPEN; 0.1295664 / 0.0198375	OPEN; 0.09331934 / 0.008286772
B35-S	OPEN; 0.1942903 / 0.120234	OPEN; 0.1942903 / 0.120234	OPEN; 0.249253 / 0.1139794
X35-S	OPEN; 0.4574753 / 0.3949883	OPEN; 0.4574753 / 0.4231995	OPEN; 0.5415307 / 0.3629714

Both B and E+ certify 3/6 configurations, versus cold P 1/6. Their physical U agree on all six; E+ raises only X35's final qualified L, from .3949882559151472 to .42319954961578576 at U=.45747531701601785. The original relative gap falls from 13.659110945800548% to 7.492375244155952%, without a new certificate or primal improvement. Its slightly lower raw search L=.39492875817006656 distinguishes the independent proof contribution from AM/Native search progress. B/P tests the integrated main method, while E+/B isolates the complete enhancement comparison; no per-configuration best-of-B/E+ result is formed.

For the three joint-CERT E+/B pairs, E+ adds about 26.10 s on C20, 1.70 s on B20 and 6.18 s on X20; the ratios are 1.13067, 1.33574 and 1.05159. Only C20 meets the declared substantive scale $\max\{10\text{ s}, .1 \times \text{faster time}\}$. The other two numerical increases remain nonmaterial. The helper and verification ledgers in the supplement retain their full costs without adding nested helper time twice. Uniform E+ is a reasonable alternative when its stronger X35 proof endpoint is prioritized. Choosing B as the main paper method balances certificate count, paid time and both endpoints; it is not a dominance theorem.

B and E+ each have lower U than P on three configurations, higher U on C35-U, and equivalent U on two. Their proof L are higher on five configurations and equivalent at the frozen numerical scale on B20. In particular, C35-U retains P's better U=.09331934374779818 against B/E+'s .12956638965196035, together with the opposite proof direction. The B/P and E+/P joint-CERT intersections each contain only B20 (1/6); their conditional time ratios supply no full-panel speedup. Every OPEN endpoint and paid cost remains included, and a single Seed does not estimate a runtime distribution.

C20, B20 and X20 finish with search L above their qualified inventory value uppers. C35's numerically near-zero inventory result is not an exact-zero physical proof. The capacity-limited B35/X35 inventory widths remain .014387103336740467/.02295563610060769. B35's floor is below final search L while its inventory upper is above it; X35's floor improves the final proof but its price remains unresolved. Earlier near-tight same-domain inventory results therefore do not bound these two remainders.

The proof-only helper adds no floor to Native rows or raw AM. Its separate return-time/floor/search-L ledger distinguishes dominated inventory values, zero optima, rejected sources and unresolved prices. A tighter inventory proof source supplies neither a physical incumbent nor an automatic complete-method benefit. These E+ observations retain their one-Seed scope.

Finite solver-Seed confirmation on the exposed cohort The same six inputs were subsequently registered together for Gurobi Seeds1/2, giving 24 additional B/P runs and twelve new paired comparisons. Historical Seed0 qualifies under the same input, physical, method, executable, numerical and paid-clock contracts, with matching documented runtime observations. Each new run starts a fresh lifecycle; B recomputes and pays its own H with seed20260626. These are six mathematical inputs with three within-input observations each, rather than eighteen independent new inputs. No best Seed, cross-Seed certificate, additional method or outcome-dependent stop is used.

Table 9. Within-input paired differences in Seed order 0/1/2. Seed 0 is historical; Seeds 1/2 are the subsequent confirmation observations. ΔU=B−P is favorable to B when negative; ΔL=B−P is favorable when positive. Values within the frozen 1e-7 equivalence scale are displayed as 0. Full individual U/L, raw search bounds, paid costs, medians/ranges and binary64 values remain in the supplement.

Configuration	B CERT /3	P CERT /3	ΔU: S0 / S1 / S2	ΔL: S0 / S1 / S2
C20-S	3	0	0 / 0 / -0.05927393	0.03104638 / 0.03369846 / 0.03941158
B20-B	3	3	0 / 0 / 0	0 / 0 / 0
X20-S	3	0	-0.01320014 / -0.01721348 / -0.01320014	0.186098 / 0.1948245 / 0.1974955
C35-U	0	0	0.03624705 / -0.05019445 / -0.03868052	0.01155073 / 0.01347433 / 0.009334378
B35-S	0	0	-0.0549627 / -0.101716 / -0.13296	0.006254594 / 0.004661458 / 0.004752414
X35-S	0	0	-0.08405536 / -0.06065283 / -0.06178785	0.03201682 / 0.04660159 / 0.04442013

At each Seed, B certifies 3/6 inputs and P 1/6. The three n20 B certificate patterns persist, while cold P certifies only B20. B35 and X35 retain lower B U and higher B L at every Seed, but all eighteen n35 method observations remain OPEN. C35's primal ordering reverses: P is better at Seed0, whereas B is better at Seeds1/2. B's C35 L remains higher at all three Seeds. These input-specific consistencies do not establish a general success probability or a structural cause of the observed differences.

Table 10. Paid n20 certificate times, seconds. A dash means OPEN, without an imputed convergence time.

Configuration	B T_cert: S0 / S1 / S2	P T_cert: S0 / S1 / S2
C20-S	199.7794 / 354.3877 / 341.81022	- / - / -
B20-B	5.058292 / 4.963643 / 5.277053	235.8555 / 303.0334 / 266.8006
X20-S	119.7494 / 136.9986 / 131.8292	- / - / -

Certificate-status consistency does not imply constant complete cost. B's C20 and X20 times vary substantively across these observations under the declared scale; its B20 spread is below 10 s, whereas P's B20 range is 235.8555019-303.0333761 s. Within each Seed, the joint-CERT B/P intersection contains only B20 (1/6). Its B/P time ratios at Seeds0/1/2 are .02144657385/.01637985662/.01977901536 and its signed paid differences

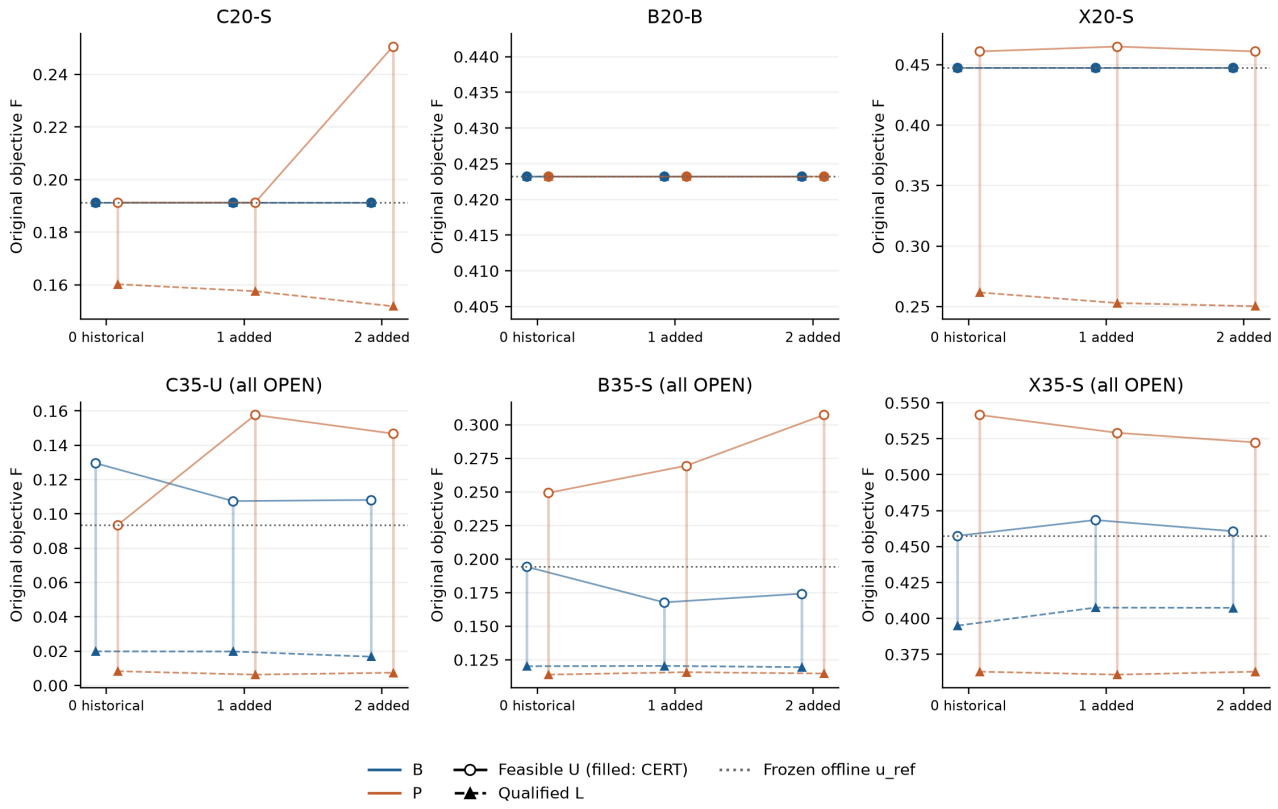


Figure 3: Three-Seed original-objective endpoints on the six archived-source inputs. Colours identify B and cold P; circles are physical U and triangles qualified L. Filled U circles denote CERT and open circles OPEN. Dotted lines mark the pre-frozen offline feasible target. Seed 0 is historical; Seeds 1/2 were added on these same exposed inputs. Lines connect repeated observations and imply neither independent inputs nor a performance distribution.

are −230.7972095/−298.0697328/−261.5235357 s. Each exceeds the 10 s substantive scale in B's favor. These conditional comparisons supply no full-panel speedup, and an OPEN budget is never treated as a certificate time.

The uniform offline target is the better qualified Seed0 U, frozen before any new Optimize and absent from production. B reaches the saved target on all three observations of each n20 input and B35; on C35 it reaches none, and on X35 only the historical Seed0 observation reaches it. P reaches it on all three B20 observations, two C20 observations and historical C35 Seed0, with none observed on X20/B35/X35. In particular, B's new X35 U are both worse than its own Seed0 U while its L are stronger, despite favorable within-Seed B/P directions. Recorded availability intervals and censoring, not exact first-discovery times or impossible-target claims, support these statements.

The C35 H value is .17449020363402973 at all three fixed-H-seed lifecycles. Native improves B's U to .12956638965196035/.10742986645444105/ .10808393649972804; P's U are .09331934374779818/.15762431259566606/ .14676445594619023. The historical P fleet therefore still supplies a known better feasible point for every B run. Its advantage is not a persistent within-Seed P-over-B ranking. Seed0's fleets differ in ownership, service amounts and co-served relative order simultaneously; no single operator or route-feedback benefit is isolated. The fixed unserved-station penalty .011402553447730399 cannot exclude attaining P's target. Setting the other visited inventories to target gives .03359254619609878, but exceeds the saved routes' time limits and one prefix capacity. It is neither a physical solution nor a certificate about every legal service choice on that skeleton.

6. Mechanisms, AM and stage interpretation

6.1 AM rule and experimental interpretation

For finite valid child LP evidence, the actual controller uses

$$\begin{aligned}\Delta &= \max\{U - b, \max(\epsilon, 10^{-12})\},\\ v_j &= \mathrm{clip}_{[0,1]}((\ell_j - b)/\Delta), \qquad j = 0, 1,\\ \eta &= \min(v_0, v_1), \qquad \mu = (v_0 + v_1)/2, \qquad S_{\mathrm{AM}} = \eta\mu.\end{aligned}$$

The actual eligibility conditions, score tolerance, terminal decisions and target continuation remain unchanged. An infeasible child invokes logical coverage handling independently of this finite-score threshold. Missing or invalid evidence cannot justify a split. A run without a finite gate exposure does not test threshold sensitivity. Depth 8 and minimum width 1e-4 are fixed. The preserved AM construction and threshold-validation evidence in the supplement supports the default .08; the bounded current study compares .04/.08/.16 without per-instance selection.

The research control sets the actual first-class split threshold after presets; the implementation mapping and readback checks are specified in Appendix B.1. Offline replay can describe different actions at observed states, but cannot reuse the original post-divergence trajectory as a runtime counterfactual. The score estimates gap-normalized two-sided bound improvement, not remaining complete proof cost.

The Seed 0 AM comparison contains eight additional positions and twelve views after sharing the four matching default runs. The Seed 1 AM block contains four additional positions and six views, using its two independently measured Seed 1 defaults.

Table 11. Observed Seed 0 AM score gates, actions and complete production cost.

Seed 0 main AM comparison

Role	τ_{AM}	Max gate score	Actions	Production (s)
K-15-S	0.04	0.000356687	native-target:1, exact-close:1	113.062
K-15-S	0.08	0.000356687	native-target:1, exact-close:1	112.769
K-15-S	0.16	0.000356687	native-target:1, exact-close:1	113.315
UC-B20-B	0.04	0.00031863	split:3, native-target:1, exact-close:1	4.21966
UC-B20-B	0.08	0.00031863	split:3, native-target:1, exact-close:1	4.14897
UC-B20-B	0.16	0.00031863	split:3, native-target:1, exact-close:1	4.08117
K-20-S	0.04	0.000478466	native-target:1, exact-close:1	1172.26
K-20-S	0.08	0.000478466	native-target:1, exact-close:1	1172.19
K-20-S	0.16	0.000478466	native-target:1, exact-close:1	1172.26
K-35-U	0.04	n/a	exact-close:1	2371.02
K-35-U	0.08	n/a	exact-close:1	2371.15
K-35-U	0.16	n/a	exact-close:1	2371.03

Scores in this table summarize finite score gates only; all-child and finite-score ledgers are joined by decision sequence. Separate classes retain no-strict-improvement terminal, logical one/both-child infeasibility and other

actions, including runs without a child decision exposure. Logical infeasibility has no finite score/margin and is independent of tau. Different thresholds need not create different actions, and no split was forced for table coverage.

K-15-S illustrates finite threshold exposure with a wide negative margin. Each Seed 0 run has one finite gate with normalized score 0.000356687; tolerance-adjusted margins at tau=.04/.08/.16 are -0.0396431 / -0.0796431 / -0.159643. All select native-target, followed by a separately classified no-strict-improvement exact-close terminal. All three qualify certificates in 113.062 / 112.769 / 113.315 s, respectively; their 0.545396 s spread is below the declared substantive-difference rule. This finite comparison reports the three actual complete runs and their observed gates; it does not establish sensitivity on other configurations.

UC-B20-B separates logical splitting from the finite score test. Each threshold run records three one-child-infeasible splits with no finite score or margin; those actions are independent of tau. The subsequent finite gate has score 0.00031863 and selects native-target at all three thresholds. Qualified certificate times are 4.21966 / 4.14897 / 4.08117 s in the same threshold order, with no substantive time difference. The split counts therefore do not establish that a finite AM score crossed a threshold.

All three K-20-S runs remain open at U=0.716807, with qualified L in [0.705356,0.705386]. The observed finite gate score is 0.000478466, below the tested thresholds. The later exact-close label names a scheduled exact solve; it does not mean that a qualified certificate was completed. These capped endpoints and unchanged finite-gate choices do not establish a general threshold ranking.

K-35-U reaches a finite no-strict-child-improvement terminal before a threshold comparison in each run. The paired child observations are present, but no finite score gate is exposed; the near-zero terminal score is not counted as a threshold test. All three remain open at U=0.692854, with L in [0.565766,0.566106]. This is distinct from both a logical-infeasibility split and a run with no recorded child decision.

Each tested threshold therefore yields two qualified certificates among the same four Seed 0 roles. The observed finite gates of K-15-S, K-20-S and UC-B20-B remain well below the smallest tested threshold; K-35-U stops at the separate no-strict-improvement test. These finite observations provide no basis for replacing the accepted $\tau_{\mathrm{AM}} = .08$, while leaving sensitivity at unvisited states outside the claim. The limited Seed 1 checks remain separately identified.

The limited Seed 1 AM repeat preserves these reached action classes on both selected roles: one finite native-target gate and one no-strict terminal, plus three logical splits on UC-B20-B. All six observations certify, with no substantive within-role time difference across the three thresholds. Their finite scores remain below .04 with negative margins; the repeat does not test unvisited near-threshold states.

Across the eighteen AM views, all 51 recorded eligibility evaluations are reconstructible and none rejects depth 8 or width 1e-4. Across all 58 current outer-controller runs, the 125 recorded evaluations likewise contain no such rejection. These are checks of recorded guards, not proof that no unrecorded attempt occurred or that the limits are irrelevant elsewhere.

6.2 Conditional mechanism results

The Seed 0 mechanism comparison adds sixteen positions to four shared defaults, giving twenty views. The separately reported Seed 1 block adds eight positions to its two actual Seed 1 defaults, giving ten views. Root values below are observed complete LP optima, while the final search bounds discussed in the text are different quantities.

Table 12. Observed Seed 0 initial LP optima for the conditional mechanism controls.

Role	Full	Root only	Minus A/B	Minus C_R	Minus C_G
K-15-S	0.167137	0.167137	0.167016	0.167137	0.167137
UC-B20-B	0.479076	0.479076	0.479076	0.479076	0.479076
K-20-S	0.195149	0.195149	0.193825	0.195149	0.195149
K-35-U	0.200178	0.200178	0.200178	0.200178	0.200178

The entries are observed initial LP optima, with n/a for an unexposed complete point. Numerical deletion attribution also requires the paired domain, objective, cutoff and own-H checks in the supplement. Full per-variant complete clocks, returned effort counters and limited Seed 1 observations are retained there.

All 24 paired root comparisons meet the saved common-domain/objective/cutoff and complete-own-H conditions. A/B deletion lowers the initial optimum by 0.000121173 on K-15-S and 0.00132415 on K-20-S. No initial objective increment above tolerance 1e-7 is observed for either resource-group or geometry/objective-group retention on the four Seed 0 roles; the selected Seed 1 roots reproduce these patterns. Equal initial optimal objective values do not establish that retained rows are slack, inactive or redundant; the optimal face and later search can change. Final lower-bound changes cannot be relabelled as initial-root increments.

K-15-S exposes mixed conditional complete-method effects. All five methods qualify their own certificates at the same objective. The full method takes 112.769 s; deleting A/B or C_G takes 128.325 / 143.15 s, respectively, while deleting C_R takes 75.1064 s. Those three differences are substantive under the declared rule, including the deletion advantage for C_R. GI-TBC-R takes 112.649 s, a nonmaterial difference from the full method. These contrasts retain the rest of the representation and complete own H, so their directions are conditional rather than additive component shares.

Table 13. Conditional Seed 0 construction cost and returned solver effort on K-15-S.

K-15-S variant	Canonical generation (s)	Explicit LP Runtime (s)	MIP Runtime sum (s)	Work sum	Native B&B nodes sum
GI-TBC	0.414438	0.196	110.549	160.926	48701
GI-TBC-R	0.14161	0.0600002	110.807	160.157	48700
minus A/B	0.413122	0.16	126.181	186.183	55424
minus C_R	0.391302	0.178	73.048	109.31	29036
minus C_G	0.271173	0.169	141.108	204.7	68560

The K-15-S C_R deletion reversal is accompanied by a change mainly inside native MIP search: summed returned MIP Runtime falls from 110.549 to 73.048 s, Work from 160.926 to 109.31, and summed native B&B nodes from 48701 to 29036. The cumulative canonical-generation timer differs by only 0.0231363 s. Conversely, C_G deletion reduces timed canonical generation to 0.271173 s but increases returned MIP Runtime to 141.108 s and the complete certificate cost. These matched conditional observations separate artifact-generation cost from the native search that follows. They do not identify an additive causal share or a net controller overhead. The diagnostics are nested inside production; explicit LP counts omit internal MIP relaxations, target-MIP families are included in the MIP sum, Work is not seconds, and node sums are per-call native counters rather than unique nodes of the outer interval tree. The full cost tables and actual phase statuses are retained in the supplement.

The preselected Seed 1 mechanism repeat reverses all three K-15-S row-deletion time directions. Full GI-TBC certifies in 115.444 s, versus 93.6997/132.475/99.6006 s after A/B, resource-group and geometry/objective-group deletion. Each difference is substantive: A/B and geometry/objective deletion are now faster, while resource-group deletion is slower. The corresponding returned MIP Runtime sums are 113.257 s for full and 91.513/130.239/97.652 s after deletion. The same initial-root pattern, independently paid H and recorded action classes coexist with these reversed native search costs. Root-only takes 113.58 s, a nonmaterial difference. The

two Seeds therefore support conditional mixed effects, not a stable runtime ranking or an additive component share.

All five UC-B20-B methods qualify certificates between 1.87206 and 4.91775 s. Every pairwise difference is below the ten-second absolute floor, so this tiny case supplies no substantive complete-cost ranking. The logical split activity reported above and the net benefit of the whole outer package are assessed separately; visible outer actions alone do not determine a full-method speed advantage.

The C_R result differs on K-20-S. Both runs remain open at the same verified U=0.716807, while the full method has qualified L=0.705356 versus 0.703444 after deletion. Thus the deletion advantage in K-15-S certificate cost coexists with better finite-budget dual progress for the full method on K-20-S. These are final-endpoint observations at matched complete caps; root-LP attribution additionally requires its own matched-scope evidence.

The whole K-20-S contrast also retains an adverse endpoint for the full controller: GI-TBC-R has the same U and final qualified L=0.706405, above the full method's 0.705356. A/B and C_G deletion end at L=0.704128/0.705296. All five runs remain open. These are final qualified bounds from search under the registered budget; numerical root-LP optima require their separate matched-scope evidence. No certificate-time ranking follows. Row strengthening and outer scheduling therefore have distinct conditional interpretations.

Table 14. Opposed Seed 0 open endpoints in the K-35-U mechanism panel.

K-35-U variant	Own feasible U	Qualified final L	Status
GI-TBC	0.692854	0.565766	open
GI-TBC-R	0.692854	0.566106	open
minus A/B	0.654639	0.564355	open
minus C_R	0.689763	0.536996	open
minus C_G	0.666262	0.55098	open

K-35-U exposes an opposed-endpoint result for C_G deletion. The full method reports U/L=0.692854/0.565766, versus 0.666262/0.55098 after deletion. The deleted model finds a better feasible objective, while the full method retains the stronger qualified final lower bound. A smaller signed gap after deletion therefore does not establish endpoint dominance. Both ledgers record one no-strict-improvement exact-close action under the same outer policy; the native searches remain separate and both runs remain open. No certificate-time comparison is assigned.

A/B deletion also has opposed endpoints on K-35-U: its verified own U/L=0.654639/0.564355 improves the feasible objective by 0.0382155, while the full method retains L higher by 0.00141073. Both runs remain open. Thus the full-method certificate advantage of A/B on K-15-S and its higher final bound on K-20-S coexist with a better K-35-U feasible objective after deletion. A smaller deletion gap does not combine these distinct endpoint directions into dominance, and no instance-specific setting is selected.

C_R deletion has U/L=0.689763/0.536996 on this larger role. All three row-group deletions therefore improve the saved feasible objective while weakening the qualified final lower endpoint relative to the full formulation. This repeated within-role primal/dual opposition is retained alongside the easier certificate-cost advantages and the K-15-S C_R reversal. It does not justify an instance-specific setting or a complete-proof-time ordering.

The legal root-only comparison also retains a higher final lower endpoint on K-35-U: GI-TBC-R reports U/L=0.692854/0.566106, at the same U as the full method and a final L higher by 0.000340054. Both runs remain open under the matched complete cap. Together with K-20-S, these selected hard-role observations show no full-controller endpoint advantage over root-only at the saved Seed 0 endpoints. They do not compare initial root-LP optima or establish an eventual proof-time ordering; the remaining mechanism and limited Seed 1 findings retain their separate scopes.

Across these four preselected Seed 0 roles, no substantive full-over-root certificate-cost advantage is observed: the two easier roles certify with nonmaterial differences, while both harder roles remain open and root-only has

the same U with slightly higher final L. The strengthened root already suffices for the two easier certificates in this panel. Thus visible outer activity and the strong integrated GI-TBC results relative to compact controls do not assign a separate incremental speed advantage to the outer package here. The accepted post-R130 attribution history remains relevant with its own version and cases; the current limited Seed 1 repeats are reported separately.

The row-deletion controls keep the configured outer policy fixed, but can change its reached states and realized actions. On K-15-S and K-20-S, A/B deletion records only a no-strict-improvement terminal, while full, C_R-deleted and C_G-deleted runs each also record one finite native-target gate. On UC-B20-B, each of the four outer variants records three logical-infeasibility splits, one finite gate and one terminal. On K-35-U, each records only the no-strict terminal; root-only has no child-AM record on any role. The complete Seed 0 mechanism observations therefore contain ten finite gates, sixteen terminals and twelve logical splits. These counts describe reached decisions, not independent instances. Conditional formulation effects include any induced control-path change; identical configured policy is not identical realized scheduling or native search.

The saved initial domain/objective/cutoff and independently paid H determine which numerical roots may be compared; the full paired report flags their actual matches. Root values require an observed OPTIMAL LP; n/a means no complete applicable point was exposed. The ideal deletion relation is not a runtime theorem. Work/nodes, LP/MIP time, model-construction cost, complete own H and outer actions accompany these conditional contrasts; no additive allocation of total speed-up is made. Depth 8 / minimum width 1e-4 remain fixed. Recorded eligibility rows are joined to retained scheduler-epoch geometry; a source-rejection reset or missing leaf makes the reconstruction unknown. Eligible child work may stop before its ledger row, so missing records do not prove no attempted test. The depth guard short-circuits the width check; a width that would also reject after depth failure is not counted as another causal trigger. Zero-width proofs without recorded guard evaluations are not counted as width-limit triggers. Final materialized-leaf and decision-parent/probed-child depths are distinct observations. The full-versus-variant results and exposure limits are interpreted in the stage decision and supplement.

6.3 Mechanism synthesis and boundaries

Table 15. Mechanisms, mathematical roles, supporting evidence and boundaries.

Mechanism	Mathematical role	Corresponding experiment	Supported conclusion	Boundary
Complete own H	Constructs and checks its own feasible Start; supplies no lower-bound proof	P/PS across main panels and four Seed 1 triplets	PS materially wins X-35-B; P improves both endpoints on K-20-S and R-X20-S-T2	Startup package only; no operator or H-seed attribution
Outer interval controller	Preserves improving-interval coverage through probing, targeting and exact continuation	Full/GI-TBC-R: four Seed 0 roles, two Seed 1 repeats	No substantive certificate-cost gain here; both hard Seed 0 roles have higher root-only final L	Reached actions do not establish net benefit; prior versioned evidence remains separate
Shared-state A/B links	Valid movement/visit equalities connect service to inventory mixtures	A/B deletion: four Seed 0 roles, two Seed 1 repeats	Two initial LP increments; K-15-S time direction reverses across Seeds; full K-20-S has higher final L	Core products retained; unique one-way service preserves implicit quantity integrality
Resource group C_R	Ordered-supply and pair-cover/handling inequalities strengthen necessary resource conditions	Single-group deletion: four Seed 0 roles, two Seed 1 repeats; pair-only unchanged	K-15-S deletion wins Seed 0 and loses Seed 1; full K-20-S has higher final L; initial increments undetected	Valid LP tightening need not accelerate search; no additive shares
Geometry/objective group C_G	Spread, centering and objective estimators use dedicated auxiliaries	Single-group deletion: four Seed 0 roles, two Seed 1 repeats; original domains/products retained	K-15-S time direction reverses; K-35-U deletion improves U and weakens L; initial increments undetected	This group does not contain all fairness structure; endpoint opposition persists
AM score and logic	Normalized child-bound score applies after eligibility, validity and terminal tests	Three thresholds: four Seed 0 roles, two Seed 1 repeats	Finite scores stay below .04; logical splits hold separately; K-35-U stops before its threshold test	Observed unchanged actions do not prove global robustness or small proof cost

These rows summarize the observed conditional findings. The full Seed 0 and separately identified Seed 1 tables retain every selected role, and the accompanying paired/root and cost reports determine where numerical root attribution is actually exposed. Shared inventory-state/core products are retained throughout the current mechanism study, so they have no isolated runtime effect assigned here.

6.4 Structural information and complete algorithm value

The structural experiments distinguish exclusion of a saved point, improvement of a freely reoptimized same-scope LP, improvement of a paid Native call, improvement of the complete own-H method, and confirmation outside candidate development. These are different evidence levels. Inventory-budget certificate gains, selected reciprocal-normalization and Gini-deviation gains, and inventory-objective proof-floor increments remain positive results. Their adverse and mixed complete outcomes limit uniform adoption.

The physical projection, an integer resource necessary domain and an inventory necessary domain can be ordered only with a proved common objective/scope embedding. A continuous expression replacement does not acquire an ordering from integer equivalence alone. The retained four-station example has an exact $1/4$ original-objective gap on its fixed-positive-total slice even with the complete joint service hull. At the loaded coefficient the inherited proof also minimizes over all legal loaded-return totals; the physical problem is not newly restricted to that

slice. It distinguishes service compatibility from the integer objective epigraph without needing a changing Gini denominator. The fixed four-station derivation gives the instance, feasible mixtures and full loaded-return lower proof. Shared-state movement/visit links strengthen the fractional representation; they remain unnecessary as premises of the implicit-integrality lemma.

The full-physical shared-G completion experiment illustrates this distinction. Both saved points fail their fixed completion tests, but free reoptimization on one domain returns the same qualified LP value; the other gains about .00018725. A projected row retains about 87% of that scoped increment. Removing the complete duration rows removes the increment conditional on the remaining constraints; it does not prove time alone sufficient or separate travel from handling. In six complete primary-role arms the tested completion has worse U than both fresh controls, equal proof L and no certificate. Four conditional positions remain unstarted. The supplement retains the source identities, row size, positive increment and adverse complete outcomes.

For one common global inventory relaxation and original physical problem, $L_I \le f_I^* \le U_I$ and $f_I^* \le f_P^* \le U_P$ give

$$U_P - L_I = (U_P - f_P^*) + (f_P^* - f_I^*) + (f_I^* - L_I).$$

Only the last term is controlled by $U_I - L_I$. A tightly priced inventory value therefore limits the remaining numerical precision of that same scalar floor, while incumbent suboptimality can still contribute to the complete gap. This conclusion is scope-specific: the later B35/X35 inventory prices retain widths about .0143871/.0229556, so the earlier near-tight remainder cannot be assigned to them. Local interval/cutoff bounds need the coverage contract before a global interpretation. A small continuous-Q increment is not an upper bound on the integer physical gap. The supplement preserves the exact domains, qualifications and both positive and negative complete results; none of these observations excludes all future structural progress.

6.5 Compact representation and complete costs

The separately named C166 replaces only the shared-state representation in Section 3.1.1. Six exposed inputs are compared once at Seed0, with fresh B controls from the same new executable. Each arm independently pays its own complete startup; offline parameter fleets and bounds enter neither method. The original 1200 s n20 and 2400 s n35 caps, one thread, native defaults, requested gaps 0 and complete B lifecycle are common.

Eight same-scope qualification LP pairs cover all six roots and two fixed children. Their largest signed objective difference in absolute value is 3.33e-16, consistent with the proved common raw LP projection. Columns fall in every pair, but rows and nonzeros can increase after retaining the exact bit layer. The supplement reports all sizes and pre-native construction pipeline costs. A smaller representation gives no root-bound improvement and need not improve native search.

Table 16. Same-build complete B/C166 comparison on the six exposed inputs. Entries give qualified state and physical U / global L. The final column is T_produce for B / C166, in seconds, including startup and close. It is a certificate time only for a CERT entry; OPEN has null T_cert. Individual post-verification costs and full-precision endpoints are in the supplement.

Input	B: state; U / L	C166: state; U / L	Paid production B / C166 (s)
C20-S	CERT; 0.1912806 / 0.1912806	OPEN; 0.1912806 / 0.186598	210.415 / 1171.44
B20-B	CERT; 0.4232322 / 0.4232322	CERT; 0.4232322 / 0.4232322	5.09644 / 5.66122
X20-S	CERT; 0.4477476 / 0.4477476	CERT; 0.4477476 / 0.4477476	125.3 / 544.902
C35-U	OPEN; 0.1295664 / 0.0198375	OPEN; 0.1210433 / 0.01420654	2371.28 / 2371.2
B35-S	OPEN; 0.1942903 / 0.120234	OPEN; 0.1792896 / 0.1160533	2371.1 / 2372.23
X35-S	OPEN; 0.4574753 / 0.3949883	OPEN; 0.4758712 / 0.3866997	2371.14 / 2371.1

B certifies 3/6 and C166 certifies 2/6. The joint-CERT denominator is 2/6; only those pairs have certificate-time ratios C166/B: B20-B: 1.1108 (below the substantive scale); X20-S: 4.3488 (substantive). The predeclared material-difference scale is max(10 s, 0.1 times the faster certificate time). Native Runtime, Work and node counts describe nested work within the paid clock and are not added to it. All open/adverse endpoints remain in the table. This is one representation comparison on previously exposed inputs, with no new B/P test or independent Seed claim.

The three n20 pairs have the same recorded AM action sequences and numerically equal initial raw LP values. On X20, accumulated native Runtime is 122.891 s for B and 542.289 s for C166, Work is 220.964 versus 992.214, and returned nodes are 8842 versus 66425. Accumulated writer time is 0.721 s versus 0.724 s. The extra paid time is almost entirely inside native optimization. This observes the cost difference without identifying a particular presolve, cut or branching cause. Native MIP root processing can exploit the different integer extensions despite equal raw LP projections. Once own incumbents differ, cutoffs and reached paths may differ as well; the full comparison includes those consequences of the representation.

The complete panel supports retaining B as the uniform main method and keeping C166 as a default-off research alternative. C166 loses C20's certificate and has the substantive X20 certificate-cost increase. Its C35 and B35 feasible objectives improve by about .00852312 and .01500068, but their proof lowers weaken; on X35 both endpoints are worse. These primal gains are retained as useful mixed evidence, without a per-input portfolio or a single-Seed generalization. Smaller state support preserves information at the declared interface, while its native integer search consequences remain an empirical question.

7. Conclusions and implications

The inherited bicycle-redistribution operations and HGA-TGBC decoder lineage provide the problem setting. GI-TBC connects inventory allocation to objective products, movement and visits, and supplies a complete exact method through physical embeddings and improving-region coverage. The compact joint-state result identifies a transferable interface condition: legal affine-piece endpoints preserve the local continuous hull, and an independent product layer restores integer exactness. It applies standard disjunction and product tools; it establishes neither a routing hull nor general ideality or a capacity-independent integer encoding.

The historical breadth panel certifies 9/12 configurations versus 7/12 for each compact control, and the positive-resource panel gives 4/8 versus 0/8. In the later six-input B/P cohort, the 3/6 versus 1/6 certificate pattern repeats at three solver Seeds. C35 reverses its primal ordering, all n35 observations remain open, and fixed-target diagnostics expose incumbent deficits. E+ retains its genuine X35 proof gain without another certificate, together with its substantive C20 cost increase. These versioned results support finite competitiveness of the integrated method. The selected full/root controls leave the outer controller's independent computational value unresolved.

The new same-build representation comparison gives B 3/6 certificates and C166 2/6. C166 reduces columns in all eight qualification LP pairs, with unchanged common LP information, but can add rows/nonzeros and alter native search. Two n35 primal improvements coexist with weaker proof endpoints; X35 worsens on both sides, and X20 costs substantially more to certify. Uniform B remains the main recommendation. The structural result and the mixed C166 evidence remain useful without changing released defaults or forming a best-of-two method.

Complete physical plans also turn existing runs into bounded decisions between sampled weights. The four archive envelopes have whole-range absolute regret upper bounds of .002356282, .000000100002, .015594269 and .136115162. They distinguish supported component choices, stability of one known fleet and unresolved quality. The X35 reweighting identifies a known feasible improvement of about .0667662 over the old unit-weight incumbent, without changing its discovery or certificate clock. All four physical time pairs have strictly positive optimal-objective improvement bounds; the two n35 magnitude intervals remain wide. Improved objectives can coexist with more loaded return, as on B35, while X35 returns less stock. These statements concern inventory-to-target ratio dispersion and the specified objective, rather than monetary gains, demographic fairness or causal claims about an unknown optimal route mechanism.

7.1 Remaining scientific limits

A suboptimal feasible incumbent and an unresolved proof lower are different shortcomings. C35's historical P fleet witnesses suboptimality of all three B incumbents, while the within-Seed P/B ordering changes. Joint ownership, relative order and integer service differences do not identify a causal operator. A weak necessary penalty or an infeasible target-inventory vector also cannot settle the whole fixed-skeleton value question.

Finite repeated endpoints cannot identify structural causality or an eventual proof-time ranking. Any future claim of improved joint service information requires its own physical-domain contract and complete paid evidence. Existing fixed-route quantity and route-feedback objects already address parts of that question; their positive, mixed and adverse evidence remains relevant. The archived diagnostic prerequisites are in the research navigation, rather than a new mechanism or an executed query in this study.

The compression result leaves a specific computational question: how native presolve, cuts and branching respond to equivalent integer extensions. The X35 continuous-weight guarantee still has a broad quality band, while the full/root attribution remains limited. These are separate unresolved questions rather than consequences settled by a smaller representation.

Appendix A. Complete model, scoped strengthening and proof obligations

The complete physical formulation and strengthening proofs below are retained from the maintained manuscript. GI-TBC uses uniform pair support and no triple support. The GI-TBC termination rule includes the independent exact-zero proof in Section 3.4; native-source qualification and all normal positive-objective rules remain separate. Historical source pointers identify their own snapshots and are not claims that an old executable produced the final panel.

This appendix is the single maintained model specification for the manuscript. It transcribes the frozen writer, including constraints sometimes redundant for integer solutions. It does not replace the implemented model by a different vehicle-routing formulation. Equations are mathematical real-arithmetic expressions; A.7 states the separate numerical implementation boundary. Historical source-line pointers retained in this derivation refer to snapshot 355eefd2be3fe5651195681faf7b3a63ee4032f8. That historical E3 source base and its binding belong to the earlier attribution controls (TailoredExact project 2026). The current GI-TBC identity and the separately pinned historical R134/R135 studies are distinguished in B.1; source_publication.json provides the historical R137 source-byte capsule. The later measured C++ source is e920b92e199e825ec89a2932f701861ff158e0d4 (R163/R164), PE SHA256 fa7283b0ad3e54dc47315ea3d5987a0aaf8daefe58048beb3dae4be76642be93; the current document source manifest distinguishes these generations. Current state/service, own-H, pair-only and inclusive-domain conditions are checked against these final identities, rather than inferred from historical line numbers.

A.1 Sets, data and variables

Let $N = \{1, \ldots, n\}$ be service stations, $N_0 = N \cup \{0\}$, $K = \{1, \ldots, m\}$, and $A = \{(i, j) \in N_0^2 : i \neq j\}$. Depot 0 is absent from every inventory, ratio, weight and Gini sum. Vehicle indexing is shifted by one relative to source indices $0, \ldots, M-1$. All vehicle-indexed formulas hold for each $k \in K$; all station formulas hold for each $i \in N$, unless otherwise stated.

Station capacity C_i and initial inventory b_i are integers with $0 \leq b_i \leq C_i$; Target inventory satisfies $D_i > 0$. The computational text format stores integer targets, and the present test targets additionally satisfy $D_i \leq C_i$; this describes the data rather than adding a target-capacity constraint to physical feasibility. The parser's depot capacity/stock fields do not provide departure supply. Vehicle capacity $Q_k > 0$ is integer. A vehicle starts empty and returns to the same depot, possibly loaded. Travel time $\tau_{ij} = \|v_i - v_j\|_2/1.5$ uses the serialized planar coordinates. The route horizon is T; unit pickup/drop times are t_p, t_d, with $h = t_p + t_d$. Penalty multiplier $\lambda \geq 0$ and station weights $\omega_i \geq 0$ are data; the current breadth panel uses $\lambda = .15$, the resource panel fixes $\rho = 1$, and the within-configuration weight study uses $\rho \in \{.5, 1, 2\}$, with $\lambda = \rho/\Omega$, positive weights and $t_p = t_d = 60$. No inventory floor is imposed by the compatibility field min_ratio.

The binary variables are arc decisions x_{kij}, station service assignments z_{ki}, and pickup-direction indicators a_{ki}. Source calls the last variable mName(k,i); we rename it a to avoid confusing it with the fleet size. Pickup p_{ki}, drop d_{ki}, final inventory Y_i, and post-service load ℓ_{ki} are nonnegative. The rank u_{ki} is continuous. Define $\bar{p}_{ki} = \min(b_i, Q_k)$ and $\bar{d}_{ki} = \min(C_i - b_i, Q_k)$.

Variable	Domain and bound in the active formulation
x_{kij}, z_{ki}, a_{ki}	Binary, for all stated indices; no self arcs
p_{ki}, d_{ki}	Integer for cold P and ENS-C; continuous for M-B; upper bounds $\bar{p}_{ki}, \bar{d}_{ki}$
ℓ_{ki}	Integer in $[0, Q_k]$, retained by all three methods
u_{ki}	Continuous in $[0, n]$
Y_i	Integer in $[\underline{y}_i, \bar{y}_i]$; plain model has $[0, C_i]$
r_i	Continuous in $[0, C_i/D_i]$

Variable	Domain and bound in the active formulation
e_i	Continuous in $[0, \max(1, C_i/D_i - 1)]$
$H_{ij}, i < j$	Continuous in $[0, C_i/D_i + C_j/D_j]$
g, Z_i	Continuous; $g \in [0,1]$ in the unsliced writer, $g \in [\alpha, \beta] \subseteq [0,1]$ for an interval; $Z_i \in [0, C_i]$
f_{kij}	Continuous in $[0, n]$, F0 connectivity flow only
s_{iy}, q_{iy}	Binary inventory selectors and continuous selected-G products, for $y \in \mathcal{Y}_i = \{\underline{y}_i, \ldots, \bar{y}_i\}$, VD-P only
$b_{it}^{\text{bit}}, w_{it}$	Binary inventory bits and continuous products, plain P only
W_{SP}	Continuous in $[\max(0, \underline{SP}), \max\{\max(0, \underline{SP}), \bar{S}\bar{P}\}]$, when the aggregate SP estimator is active

The model objective is $f = g + \lambda P$, where $P = \sum_i \omega_i e_i$; $f, S = \sum_i r_i$, and $H_\Sigma = \sum_{i<j} H_{ij}$ are expressions, not new columns. Constants $\underline{y}, \bar{y}, \underline{S}, \bar{S}, \underline{P}, \bar{P}$ are defined in A.5. Bound-only extrema columns r_min,r_max may still be allocated by the writer; with the shared factory their centering inequalities use the projected pair form below and those columns have only their original bounds $[0, \max_i C_i/D_i]$. No additional vehicle-used binary exists: $v_k = \sum_j x_{k0j}$ is an expression.

A.2 Routing, service and physical resources

The complete routing core is

$$\sum_{j \in N} x_{k0j} = \sum_{i \in N} x_{ki0}, \qquad \sum_{j \in N} x_{k0j} \le 1, \tag{A1}$$

$$\sum_{j \in N_0 \setminus \{i\}} x_{kji} = \sum_{j \in N_0 \setminus \{i\}} x_{kij} = z_{ki}, \qquad \sum_k z_{ki} \le 1, \tag{A2}$$

$$z_{ki} \le u_{ki} \le n z_{ki}, \qquad u_{ki} - u_{kj} + n x_{kij} \le n - 1 \quad (i, j \in N,\ i \ne j). \tag{A3}$$

These are the writer's original depot degree, station degree and MTZ rows. Any selected station cycle contradicts the sum of (A3) around the cycle. Thus an integer nonempty selection has one depot-connected elementary tour; an unused vehicle has all arcs and assignments zero. A depot-to-depot empty route is represented without a self arc. The MTZ rows remain when F0 also adds the following connectivity flow:

$$0 \le f_{kij} \le n x_{kij} \quad ((i,j) \in A), \qquad \sum_{j \ne i} f_{kji} - \sum_{j \ne i} f_{kij} = z_{ki}, \tag{A4}$$

$$\sum_{j \in N} (f_{k0j} - f_{kj0}) = \sum_{i \in N} z_{ki}.$$

F0 here means the round20-current flow variant, including return-arc columns, with no $f \ge x$ normalization or start-coupling additions. A route visiting q stations admits downstream-count flows $q, q-1, \ldots, 1, 0$. These flows establish validity for every original route, independently of MTZ. Cold plain P does not receive this strengthening. The row package also called F0 has additional families in A.5; these two uses of the historical label must not be confused.

All protected service rows are retained:

$$p_{ki} \le \bar{p}_{ki} z_{ki}, \quad d_{ki} \le \bar{d}_{ki} z_{ki}, \quad a_{ki} \le z_{ki}, \quad p_{ki} \le \bar{p}_{ki} a_{ki}, \tag{A5}$$

$$d_{ki} \le \bar{d}_{ki}(z_{ki} - a_{ki}), \quad p_{ki} + d_{ki} \ge z_{ki}, \quad 0 \le \ell_{ki} \le Q_k z_{ki}.$$

The first pair is not silently dropped even where implied by direction rows. Zero directional bounds cause no division. Unique service, a binary direction and the last service inequality forbid split service, simultaneous pickup/drop and zero-operation visits.

Loads are the writer's original two-sided Big-M recurrences:

$$-Q_k(1-x_{k0i}) \le \ell_{ki} - p_{ki} + d_{ki} \le Q_k(1-x_{k0i}), \tag{A6}$$

$$-Q_k(1-x_{kij}) \le \ell_{kj} - \ell_{ki} - p_{kj} + d_{kj} \le Q_k(1-x_{kij}) \quad (i,j \in N,\ i \ne j), \tag{A7}$$

$$R_k := \sum_i (p_{ki} - d_{ki}) \ge 0, \qquad \sum_{(i,j)\in A} \tau_{ij} x_{kij} + h \sum_i p_{ki} \le T. \tag{A8}$$

The first selected arc fixes departure load to zero. Selected internal arcs propagate each post-service load. A return has no service operation: its load equals the last ℓ, hence is at most Q_k. Summing the recurrence gives R_k as that load, so its upper bound follows without a separate R_k column or explicit upper row. Inactive recurrence rows are valid because their difference is between a feasible before-service load and another feasible post-service load, each in $[0, Q_k]$. Empty vehicles have $p = d = \ell = R = 0$.

In (A8), let $P_k = \sum_i p_{ki}$ and $D_k^{\text{drop}} = \sum_i d_{ki}$. Since $R_k = P_k - D_k^{\text{drop}}$, original handling time is

$$t_p P_k + t_d(D_k^{\text{drop}} + R_k) = (t_p + t_d)P_k. \tag{A9}$$

Return unloading is paid. Capacity Q_k limits every load, not cumulative pickup P_k, which may exceed Q_k after intermediate drops. There is one physical time limit per vehicle and a separate computational deadline.

Inventories and objective auxiliaries satisfy

$$Y_i + \sum_k (p_{ki} - d_{ki}) = b_i, \quad r_i = Y_i/D_i, \quad e_i \ge r_i - 1, \quad e_i \ge 1 - r_i, \tag{A10}$$

$$H_{ij} \ge r_i - r_j, \quad H_{ij} \ge r_j - r_i \quad (i < j). \tag{A11}$$

Consequently $\sum_i Y_i + \sum_k R_k = \sum_i b_i$. Loaded returns permit a decrease of station inventory; no external depot inventory can increase it.

A.3 Original and disaggregated Gini objective

The physical objective is

$$F(Y) = G_{\text{true}}(Y) + \lambda \sum_i \omega_i |Y_i/D_i - 1|, \quad G_{\text{true}} = \begin{cases} \dfrac{\sum_{i<j} |r_i - r_j|}{n \sum_i r_i}, & S > 0, \\ 0, & S = 0. \end{cases} \tag{A12}$$

The native epigraph is

$$n \sum_i Z_i/D_i \ge H_\Sigma, \qquad \min f = g + \lambda \sum_i \omega_i e_i. \tag{A13}$$

Cold P uses inventory bits. With $B_i = \max(1, \lceil \log_2(C_i + 1) \rceil)$, for $t = 0, \ldots, B_i - 1$,

$$Y_i = \sum_t 2^t b_{it}^{\text{bit}}, \quad Z_i = \sum_t 2^t w_{it}, \quad 0 \le w_{it}, \quad w_{it} \le g, \quad w_{it} \le b_{it}^{\text{bit}}, \quad w_{it} \ge g + b_{it}^{\text{bit}} - 1. \tag{A14}$$

The capacity bound removes unused bit encodings. These products are exact at binary bits. ENS-C and M-B instead use the finite value-disaggregated perspective block VD-P:

$$\sum_{y \in \mathcal{Y}_i} s_{iy} = 1, \quad Y_i = \sum_y y s_{iy}, \quad \alpha s_{iy} \le q_{iy} \le \beta s_{iy}, \quad \sum_y q_{iy} = g, \quad Z_i = \sum_y y q_{iy}. \tag{A15}$$

The active mode is VD-P, not VD-J: equalities reconstructing r_i or e_i from selectors are not substituted for (A10). The shared factory's bit-product McCormick rows are skipped for this block because those bit columns are absent. Products (A15) already use interval bounds. M-B additionally writes the original A/B rows

$$\sum_k (p_{ki} + d_{ki}) = \sum_{y \in \mathcal{Y}_i} |b_i - y| s_{iy}, \qquad \sum_k z_{ki} + s_{i,b_i} = 1. \tag{A16}$$

A missing initial state means $s_{i,b_i} = 0$, not a new selector. The independent ENS-Q option is false. The mode-linked direction equality of another variant is absent; M-B retains its original binary a_{ki}. ENS-C uses integer p/d and omits (A16). These are the material representation differences; the complete H and controller are shared.

A.4 Integrality, embedding and fairness propositions

Lemma A1 (implicit service integrality). With integer b_i, Y_i, (A2), (A5), inventory balance (A10), and binary assignments/directions, M-B's continuous quantities are integer.

Proof. If $z = 0$, its quantities and direction are zero. At the only assigned vehicle, direction 1 forces $d = 0$, so $p = b_i - Y_i$ is integer. Direction 0 forces $p = 0$, so $d = Y_i - b_i$ is integer. No other vehicle contributes. Retained integer loads are not needed for this argument. Removing unique service, one-way direction or integer inventory invalidates the inference. The statement concerns integer feasible solutions, not equality of LP convex hulls. □

Validity of A/B. For an integer original service, total movement at a station equals $|b_i - Y_i|$, which its selected state reproduces. An assigned service is nonzero and one-way, so $Y_i \neq b_i$ exactly when the station is served. This proves both (A16); neither is an extra premise of Lemma A1.

Lemma A2 (physical objective embedding). Assume inventory domains and rows preserve all physical points assigned to a true-G interval $[\alpha, \beta]$ and cutoff $F \le c$. Every such fleet has an extension satisfying the applicable original or VD-P groups, with $g = G_{\text{true}}$ and $f = F$, up to permutation of identical vehicle labels if symmetry rows are present.

Proof. Use the physical arcs, service, load prefixes, tour ranks and downstream flows. Select its integer inventory state, put $q_{iy} = g$ at the selected state and zero at others; (A15) yields $Z_i = gY_i$. Set $e_i = |r_i - 1|$ and $H_{ij} = |r_i - r_j|$. Then (A13) holds, with equality for $S > 0$. At $S = 0$ all inventories, ratios and differences are zero and $g = 0$ realizes the stipulated convention. Bounds and valid strengthening are satisfied by assumption. Conversely an integer product completion has $Z_i = gY_i$, hence $g \ge G_{\text{true}}$ for $S > 0$ and $f \ge F$; at zero sum, $g \ge 0$ suffices. □

Arbitrary native g may exceed physical Gini. A fleet with $G_{\text{true}} < \alpha$ can have an inflated-g auxiliary completion. The proof assigns physical points by their true Gini and requires their objective-preserving extension; it does not classify every completion by its auxiliary g. An inventory vector without compatible routes is not an upper-bound witness.

For $n > 1$, triangle inequalities give $A := \sum_{i<j} |r_i - r_j| \le (n-1)S$, so $G_{\text{true}} \le (n-1)/n$. For $S > 0$, $G_{\text{true}} = 0$ means every ratio is equal; at $S = 0$ all are zero by nonnegativity. A common ratio below one is a common proportional shortage, not target attainment. If $\lambda > 0$ and all $\omega_i > 0$, $F = 0$ if and only if every $Y_i = D_i$. These are dispersion and target-deviation statements, with no implied demographic/service/revenue interpretation.

A.5 Enabled strengthening: construction, proofs and scope

The finite list below describes the actual M-B path, not every option in the repository. All rows are assembled **statically when a canonical interval model is written**, before its LP or MIP request. A new cutoff epoch rewrites the relevant model; it does not separate these rows at fractional native nodes. The writer supplies physical rows, and the shared interval factory supplies the interval rows. Families registered by the factory are not all rows emitted by it. In particular, the factory's bit-product rows are filtered out for VD-P. The original objective and physical constraints remain present.

A.5.1 Construction of the inventory rectangle (D1)

Let the current true-G interval be $I = [\alpha, \beta]$, the independently verified own incumbent be U_e, and the cutoff be $c = U_e$. **The active controller sets incumbent_epsilon to zero**, so this is a non-strict objective cutoff; a generic writer can subtract an epsilon, but that is not this frozen request. Start with $l_i = 0, u_i = C_i$. With $\lambda > 10^{-12}$, finite positive U_e, and $B = (c - \alpha)/\lambda \ge -10^{-10}$, for each $\omega_i > 10^{-12}$ intersect with

$$l_i \leftarrow \max\{l_i, \lceil D_i(1 - \max(0, B/\omega_i)) - 10^{-9} \rceil\}, \quad u_i \leftarrow \min\{u_i, \lfloor D_i(1 + \max(0, B/\omega_i)) + 10^{-9} \rfloor\}. \tag{A19}$$

This is followed by one intersection with physical movement reachability. Write $t_i = \tau_{0i} + \tau_{i0}$ and

$$\begin{aligned} M_{ki} &= \begin{cases} \min\{Q_k, \lfloor (T - t_i)/h + 10^{-9} \rfloor\}, & T + 10^{-9} \ge t_i,\ h > 10^{-12}, \\ Q_k, & T + 10^{-9} \ge t_i,\ h \le 10^{-12}, \\ 0, & \text{otherwise.} \end{cases} \\ l_i &\leftarrow \max\{l_i, b_i - \max(0, \max_k \min(b_i, Q_k, M_{ki}))\}, \\ u_i &\leftarrow \min\{u_i, b_i + \max(0, \max_k \min(C_i - b_i, Q_k, M_{ki}))\}. \end{aligned} \tag{A20}$$

The outer max with zero transcribes the actual zero-initialized reachability accumulators, including a slightly negative quotient admitted by a floating travel guard. The mathematical version omits the floating guards, uses $h = 0$ for the second case, and clips movement below at zero. Positive published $h = 120$ avoids the small-positive-h threshold ambiguity. If an interval becomes empty, the code flags domain infeasibility, resets that station's storage bounds to $[0, C_i]$, and emits an impossible row. The reset prevents malformed column ranges; it does not reinstate the excluded domain as feasible.

Proposition A5 (budget and reachability). Every physical point in $I, F \le c$ satisfies the ideal versions of (A19)-(A20). Indeed $F = G + \lambda P$, $G \ge \alpha$, and nonnegative weighted deviations imply $\omega_i |Y_i/D_i - 1| \le (c - \alpha)/\lambda$. Integer Y_i gives the rounded bounds. A visited station requires a depot tour with travel at least t_i. Its pickup is at most Q_k, b_i, and its drop is at most $Q_k, C_i - b_i$; because $D_k^{\text{drop}} \le P_k$, either operation is at most cumulative pickup, which has handling cost $hP_k \le T - t_i$. Maximize over its unique possible vehicle. These are necessary, not sufficient, attainability conditions: a delivery still needs a source. Zero weight or zero lambda supplies no individual penalty bound and is skipped. □

Actual order and pass count. The writer first computes budget bounds, intersects reachability, and derives interval extrema; the shared factory recomputes this same sequence from $[0, C_i]$ and replaces the local arrays. It does not feed the first result into a second tightening pass. There is no propagation loop in this enabled path and no iterative fixed point. The preset advertises `iterative` and requested rounds 2, but the legacy completion field is capped at 1. Thus the operative definition is one budget intersection plus one reachability intersection, independently recomputed by the factory. R124's "original two passes" description was incorrect; production is unchanged.

Set $\underline{y}_i = l_i, \bar{y}_i = u_i, \mathcal{Y}_i = \{l_i, \dots, u_i\}$, and

$$\begin{aligned} &\underline{r}_i = l_i/D_i, \quad \bar{r}_i = u_i/D_i, \\ &\underline{S} = \sum_i \underline{r}_i, \quad \bar{S} = \sum_i \bar{r}_i, \\ &\underline{e}_i = \operatorname{dist}(1, [\underline{r}_i, \bar{r}_i]), \quad \bar{e}_i = \max\{|\underline{r}_i - 1|, |\bar{r}_i - 1|\}, \\ &\underline{P} = \sum_i \omega_i \underline{e}_i, \quad \bar{P} = \sum_i \omega_i \bar{e}_i. \end{aligned} \tag{A21}$$

The last extrema bound the **tight physical completion** of e. They do not assert that every nonminimal native epigraph e_i is at most $\bar{e}_i$. There is no stock-weighted knapsack or optimization in the denominator calculation: these are sums over the rectangle, with no extra conservation-driven tightening.

A.5.2 Physical conservation and activation (P1-P4)

The following rows hold on the full physical domain, independently of (I,c):

$$\sum_i b_i - \sum_k Q_k \le \sum_i Y_i \le \sum_i b_i; \quad -b_i \sum_k z_{ki} \le Y_i - b_i \le (C_i - b_i) \sum_k z_{ki} \quad (i \in N); \tag{A22}$$

$$h \sum_{k,i} p_{ki} \le mT; \qquad z_{ki} \le 0 \quad \text{if } t_i + h > T + 10^{-9}. \tag{A23}$$

Proof. Each return load lies in $[0, Q_k]$; insert this into conservation (A10). If no vehicle serves i, inventory balance fixes $Y_i = b_i$; otherwise unique assignment makes the visit sum one and the two activation bounds reduce to $0 \le Y_i \le C_i$. Sum (A8) and drop nonnegative travel for global handling. Any nonzero integer service has at least one pickup somewhere on the vehicle: for a drop use empty departure and load nonnegativity. Consequently a tour through i takes at least $t_i + h$. The physical meaning of the historical `transfer_subset_capacity` flag here is this singleton visit exclusion, not a separate general subset-flow formulation. All vehicles and stations are enumerated in increasing index order. These inequalities are implied for integer physical points, but can strengthen the relaxation. The global-handling impossible-row diagnostic based on accumulated required pickup is inactive in the shared-factory path because that legacy accumulator is not populated there. □

A.5.3 Ordered supply compatibility (P5)

For every vehicle k and receiving station j, define

$$\mathcal{C}_{kj} = \{i \in N \setminus \{j\} : \tau_{0i} + \tau_{ij} + \tau_{j0} + h \le T + 10^{-9}\}. \qquad d_{kj} \le \sum_{i \in \mathcal{C}_{kj}} p_{ki}. \tag{A24}$$

All stations passing this test enter the set, even those with zero stock; their pickup column is then fixed at zero. Common T, h, τ make the sets identical across vehicles, but their pickup bounds still use Q_k. No demand assumption or target sign is used.

Proposition A6. (A24) is necessary for a physical fleet under metric travel and empty departure. Label the integer units collected by a vehicle. Scan its route in order, assigning each delivered unit to one previously collected, not yet delivered unit. Every prefix load is nonnegative, so this matching always exists. If a unit received at j came from i, the route includes the ordered subsequence (0,i,j,0). Repeated triangle inequalities give travel at least $\tau_{0i} + \tau_{ij} + \tau_{j0}$, and its at least one collected unit entails $hP_k \ge h$. Hence $i \in \mathcal{C}_{kj}$. Counting matched units at j proves the row; a pickup unit can be delivered only once. Intermediate stations can add travel or receive other units but cannot create supply. Unmatched collected units may return to depot. An unvisited source has $p_{ki} = 0$; an empty compatibility set forces $d_{kj} = 0$. Preloading, cross-vehicle handoffs, or nonmetric shortcut assumptions would break this proof and are excluded. □

The row is a coarse aggregate necessity, not a claim that all compatible pickups can simultaneously reach j. It neither imposes $P_k \le Q_k$ nor substitutes for prefix loads.

A.5.4 Two- and three-station support (P6)

For $W = \{a, b\}$,

$$\tau(W) = \min\{\tau_{0a} + \tau_{ab} + \tau_{b0}, \tau_{0b} + \tau_{ba} + \tau_{a0}\}.$$

For $W = \{a, b, c\}$, take the minimum of the six expressions

$$\tau_{0\pi_1} + \tau_{\pi_1\pi_2} + \tau_{\pi_2\pi_3} + \tau_{\pi_3 0}, \quad \pi \text{ a permutation of } (a, b, c). \tag{A25}$$

These are explicit finite formulas, not new shortest-route optimization calls. Metric shortcutting of a complete tour yields one such order, so its travel is at least $\tau(W)$.

Lemma A7 (integer handling). If all stations in W are served by k, their nonzero integer operations give

$$|W| \le \sum_{i \in W} (p_{ki} + d_{ki}) \le P_k + D_k^{\text{drop}} \le 2P_k, \quad P_k \ge \lceil |W|/2 \rceil. \tag{A26}$$

Here $P_k = \sum_{i \in N} p_{ki}$, not $\sum_{i \in W} p_{ki}$: supplies may lie outside W. Integer P_k gives the ceiling; the LP relaxation alone cannot justify it. Capacity does not bound cumulative pickup. Therefore the writer emits exactly one of the following rows for each selected support:

$$\begin{cases} \sum_{i \in W} z_{ki} \le |W| - 1, & \tau(W) + h\lceil |W|/2 \rceil > T + 10^{-9}, \\ h \sum_{i \in W} p_{ki} + M_{kW} \sum_{i \in W} z_{ki} \le T - \tau(W) + M_{kW}|W|, & \text{otherwise}, \end{cases}$$
$$M_{kW} = T + \tau(W) + h \max\{1, \sum_{i \in W} \min(b_i, Q_k)\}. \tag{A27}$$

Proposition A8 (both branches). The cover branch follows from (A8), (A25), (A26). In the conditional branch, if every station is served, cancel $M_{kW}|W|$. Since full travel is at least $\tau(W)$ and $\sum_W p \le P_k$, the remaining inequality is necessary. If at least one is unserved, put $q = |W| - \sum_W z \ge 1$, $B_W = \sum_W \min(b_i, Q_k)$. The right side after moving the visit terms is $T - \tau(W) + qM_{kW} \ge 2T + h\max(1, B_W) \ge hB_W \ge h\sum_W p$. This proves deactivation for all nonnegative T, h, including $B_W = 0$, empty vehicle and $h = 0$. It does not rely on an invalid cumulative-capacity bound. □

Selection is finite and ordered. GI-TBC visits vehicles k in increasing order and enumerates only increasing pairs $a < b$. Triple emission is disabled, so no triple row consumes the shared counter budget. One counter starts at zero outside the vehicle loop. The helper returns without adding a row once it reaches 50000; it increments once before choosing cover versus conditional. At n=50, the current pair-only enumeration has 1225 candidate supports per full vehicle before this shared limit.

The historical full-M-B writer with triples enabled enumerates each vehicle's pairs first and then its increasing triples $a < b < c$. Only in that historical configuration does a full n=50 vehicle contribute 1225+19600=20825 supports, with the third vehicle receiving the prefix needed to reach 50000. Outer loops can continue evaluating cycle formulas after the helper stops adding rows. The limit counts emitted supports, rather than violated covers, and is shared across vehicles. Row validity is independent of selection policy; the dormant exhaustive-subset and rank3 variants have different coefficients/order and are excluded.

A.5.5 Dispersion, spread and centering (G1-G4)

For every pair $i < j$, let $d_{ij} = |r_i - r_j|$. For each $u \notin \{i, j\}$, triangle inequality gives $d_{iu} + d_{ju} \ge d_{ij}$. These pairs are distinct in the unordered numerator; the omitted pairs among the other stations are nonnegative. Hence

$$A = d_{ij} + \sum_{u \ne i,j} (d_{iu} + d_{ju}) + \sum_{u<v;\ u,v \ne i,j} d_{uv} \ge [1 + (n-2)]d_{ij} = (n-1)d_{ij}. \tag{A28}$$

For $n = 2$ the other sums are empty and equality holds. For $n = 1$, spread and centering are skipped. For true $G \in [\alpha, \beta]$ and $S > 0$, $n\alpha S \le A \le n\beta S$. At $S = 0$, all ratios and A are zero; only the interval containing true $G = 0$ needs that physical embedding. With **tight** $H_{ij} = d_{ij}$, the emitted rows are

$$n\alpha S \le H_\Sigma \le n\beta S; \qquad (n-1)H_{ij} \le n\beta S \quad (i < j). \tag{A29}$$

This proves existence of an objective-preserving completion. It does **not** prove that an arbitrary inflated native H_{ij}, even at integer physical variables, satisfies the new row. For example $r = (1, 1), g = .5, H_{12} = 1$ satisfies the unsliced original epigraph $2gS \ge H$; the true-G-zero cap excludes this completion while preserving $H = 0, g = 0$. Accordingly these static rows are not advertised as callback user cuts preserving all original native integer completions.

Using the retained $H_{ij} \ge \pm(r_i - r_j)$ in the pairwise row gives the two variable-S rows, and $S \le \bar{S}$ then gives the fixed rows:

$$(n-1)(r_i - r_j) \le n\beta S, \quad (n-1)(r_j - r_i) \le n\beta S; \quad \pm(r_i - r_j) \le \frac{n\beta\bar{S}}{n-1}. \tag{A30}$$

The fixed form is the projection of a common min/max ratio band. The allocated extrema columns do not receive that extended formulation in the shared path. All increasing pairs, forward then reverse, are generated. The ideal implication chain is (A29)+absolute-value lower rows → variable-S → fixed-S. Redundancy in ideal arithmetic is not an ablation and authorizes neither row deletion nor an individual speedup claim. The cap/floor, H-spread

and signed-difference rows constrain different auxiliary completions even though they preserve the same tight physical embedding.

A.5.6 Required movement and penalty closure (C1-C3)

For each station, emit only the applicable bound consequence:

$$\sum_k (d_{ki} - p_{ki}) \geq l_i - b_i \quad (l_i > b_i), \qquad \sum_k (p_{ki} - d_{ki}) \geq b_i - u_i \quad (u_i < b_i). \tag{A31}$$

These follow by substituting inventory balance in $Y_i \geq l_i$ or $Y_i \leq u_i$. Their scope inherits the domain: a cutoff-derived l_i is not an unrestricted physical bound. If $b_i \notin \mathcal{Y}_i$, A/B forces service, consistently with required movement. If $\mathcal{Y}_i = \{b_i\}$, A/B forces no service. A singleton zero domain and zero operation bounds require no divisions.

For all active finite positive-cutoff requests write

$$g + \lambda P \leq c, \qquad P \geq \underline{P}, \qquad e_i \leq \max(0, B/\omega_i) \ (\omega_i > 10^{-12}). \tag{A32}$$

The last row uses the same budget activation tests as A19. The floor follows station by station from the distance to 1 in (A21); the original e upper bound is retained and the budget row intersects it. $\alpha + \lambda \underline{P} > c$ proves ideal cutoff infeasibility. The historical pre-repair writer tested $\alpha + \lambda \underline{P} \geq c - 10^{-9}$ and wrote an impossible row. Equality to c is not infeasibility of the non-strict cutoff set, so that row fails the inclusive embedding contract. The corrected current writer deletes it in both emitters and keeps the legal floor; A.7 states the exact boundary check and the separate version qualification. The factory's "Global" metadata on the incumbent row means the entire current model, not all physical objectives at every cutoff.

Historical Round128 clarification (the ordinary rule was unchanged at that stage): if the actual cutoff-domain bound is $L_a = \alpha + \lambda \underline{P}$, its unconditional regional bound is $\min\{L_a, c\}$ by coverage with the cutoff complement. $L_a > c$ excludes the inclusive cutoff domain; $L_a = c$ permits equality and excludes only strict improvement. For $c - 10^{-9} \leq L_a < c$, the raw supported bound remains L_a and does not rule out every arbitrarily small improvement. The impossible-row shortcut is not a physical embedding inequality for all $F \leq c$. A known witness contradicting its alleged own-domain bound takes priority for investigation. The separately defined MD-R omits only this named shortcut and checks its own Start against the inclusive root; no frozen production numerical policy is upgraded by that control.

A.5.7 Scalar objective estimate and SP lifting (C4-C6)

For $S > 0$, multiplying the true cutoff inequality by nS gives

$$A + n\lambda SP \leq ncS. \tag{A33}$$

Since $A \geq 0$, $\bar{S} \geq S$ gives $A/(n\bar{S}) \leq A/(nS)$, so $A + n\bar{S}\lambda P \leq n\bar{S}c$ when $\bar{S} > 0$. Equivalently A33 implies $A \leq nS(c - \lambda P) \leq n\bar{S}(c - \lambda P)$, because the original cutoff and nonnegative G imply $c - \lambda P \geq 0$. The emitted scalar row is

$$H_\Sigma + n\bar{S}\lambda \sum_i \omega_i e_i \leq n\bar{S}c \quad (\bar{S} > 10^{-12}). \tag{A34}$$

The bound on S is the rectangular upper estimate (A21), not a new optimum of S. Tight H/e complete every physical point. If $S = 0$, then $A = 0$, $P = \sum_i \omega_i$, and the original condition is $\lambda P \le c$. Multiplication alone makes A33 tautological and cannot enforce that condition. Thus the original objective cutoff (A32) remains essential. A34 also holds directly at S=0 if that cutoff holds.

Introduce $W = W_{SP}$ and take $W = SP$ on physical completions. The four nonnegative products on the rectangle are $(S-\underline{S})(P-\underline{P})$, $(\bar{S}-S)(\bar{P}-P)$, $(\bar{S}-S)(P-\underline{P})$, and $(S-\underline{S})(\bar{P}-P)$. Expanding them proves respectively

$$\begin{aligned} W &\ge \underline{S}P + \underline{P}S - \underline{SP}, \\ W &\ge \bar{S}P + \bar{P}S - \bar{S}\bar{P}, \\ W &\le \bar{S}P + \underline{P}S - \bar{S}\underline{P}, \\ W &\le \underline{S}P + \bar{P}S - \underline{S}\bar{P}. \end{aligned} \tag{A17}$$

These are the standard McCormick envelopes (McCormick 1976), derived here without attributing an unread theorem number. They are relaxations, not an exact continuous-product identity. The writer bounds W by $w_l = \max(0, \underline{SP})$, $w_u = \max(w_l, \bar{S}\bar{P})$, and emits

$$H_\Sigma + n\lambda W - nc\sum_i r_i \le 0. \tag{A35}$$

Every coefficient is explicit: H coefficients 1; r coefficients $-nc$; W coefficient $n\lambda$; e coefficients in each McCormick row are the corresponding S coefficient times ω_i. The active objective remains $g + \lambda\sum_i \omega_i e_i$ with **ObjCon=0**; W is absent from the objective. Equal S or P bounds cause valid degenerate envelopes. Zero S forces the physical W to zero but does not remove the original penalty. These rows preserve a joint tight completion of g,e,H,W and must not be claimed to preserve all loose auxiliary assignments. No GS or disaggregated-SP lift is enabled.

A.5.8 Symmetry, skipped rows and dependency order

With the active symmetry option, if **all** capacities are equal and $m > 1$, the writer adds $\sum_i z_{ki} \ge \sum_i z_{k+1,i}$ for adjacent vehicles. Common T, travel and handling make those vehicles interchangeable; relabel routes by nonincreasing visits to obtain an objective-preserving representative. Heterogeneous capacities skip the whole writer family. Start normalization may sort within equal-capacity classes, which is harmless relabelling but does not add mixed-fleet symmetry rows. A physically feasible labelled route need not itself satisfy the symmetry rows before relabelling.

Bit-only interval envelopes are $\alpha b \le w \le \beta b$, $g - \beta(1-b) \le w \le g - \alpha(1-b)$. They follow by the cases b=0,1; they are **not emitted in active VD-P**, whose q block already embeds its interval bounds. Dormant receiver-source covers, Benders, pricing, D1, exhaustive subset duration, dynamic resource cuts, custom branch priorities, S buckets, GS, AMF/RC, and old timed quanta are not part of this specification. Monitoring/target callbacks do not turn the static strengthening into dynamic separation.

The proof dependency is: physical core → implicit integer service and conservation → reachability/transfer/support; budget plus reachability → rectangle → movement/penalty/S bounds; triangle lemma plus true-G membership → Gini rows; rectangle plus original cutoff → SP/scalar rows. A/B use unique nonzero one-way service independently of the implicit-integer lemma. All can be satisfied by the same physical completion, which avoids circularly assuming the validity of a tightened domain to prove its own construction. Analytic validity and actual partial support selection are separate from computational contribution; no family-level performance attribution is made without an ablation.

A.6 Cutoff and coverage proof

Lemma A3 (cutoff complement). Suppose a returned lower bound ℓ is qualified for a model containing objective-preserving embeddings of every physical point with $G_{\text{true}} \in I$ and $F \leq c$. Then $\min(\ell, c)$ is an unconditional regional lower bound.

Proof. A point in the cutoff set has $F = f \geq \ell$. A point outside has $F > c$. The minimum covers both. If the cutoff model is infeasible, only that cutoff set is empty, so c, rather than $+\infty$, is the original-region floor. □

Lemma A4 (complete cover). Let every possible improving true-G value belong to at least one registered unit I, with a qualified unconditional floor β_I. Include the analytic complement, whose applicable floor is U. Then

$$L = \min\{U, \min_{I \in \mathcal{C}} \beta_I\} \tag{A18}$$

is a lower bound on the original optimum.

Proof. Any feasible point is in the complement or at least one covering region. Its corresponding floor bounds its objective. Taking the minimum is safe for the union. Initially $F \geq G_{\text{true}}$ allows $[0, \min((n-1)/n, U)]$ as the improving Gini range. Replacing $[\alpha, \beta]$ by both closed children $[\alpha, \mu]$, $[\mu, \beta]$ preserves coverage, including the shared endpoint. Replacement commits both children atomically with their evidence. An unsplit parent, unresolved leaf, or qualified closed leaf remains represented. Induction over updates proves the invariant. □

Bounds on the same physical domain can be combined by maximum; the union of sibling domains requires minimum. Transfer to a narrower domain requires containing scope and a handled cutoff complement, and does not construct that domain's feasible Start. Proof identities include actual model SHA, input, call, epoch, domain, cutoff and return. A local terminal status cannot certify the whole original problem. Depth/width/scheduling limits can select a request or leave an obligation open; they cannot delete it.

For a compatible own fleet, the mapped complete Start includes unused vehicles and all auxiliaries. Setting $g = G_{\text{true}}$ outside a leaf is not a valid exact-g Start. Submission, API acceptance and an improved native incumbent are different observations. No optimality proof follows from H, repeated physical U or Start acceptance.

A.7 Numerical implementation boundary

Lemmas A1-A4 concern ideal exact arithmetic and valid mathematical domains. Stored matrices use binary64 arithmetic and Gurobi 13.0.2. Native FeasibilityTol and OptimalityTol are 10^{-6}, IntFeasTol 10^{-5}, requested MIPGap/MIPGapAbs zero; retained evidence closure uses 10^{-7}. Ordinary native/outer certificates are numerical certificates under this policy. The stock-based independent zero theorem and the rational tiny-reference proof have their separately stated exact premises.

A historical inclusive-cutoff writer could serialize an artificial contradictory row at a legal cutoff boundary. R133 removed that row while retaining valid penalty and domain rows. Its exact boundary fixture and finite qualification remain in the supplement; historical raw and performance denominators are not rewritten. The final implementation retains the corrected writer. For a native-derived bound or closure, the complete physical embedding, applicable cutoff complement and qualified source are required even when an analytic floor independently exists.

Every final selected own fleet is physically verified. Ordinary positive numerical certification additionally requires qualified source/return chains and complete coverage, normal lifecycle completion and a signed gap in $[-10^{-7}, 10^{-7}]$. Rejected native proof dependencies cannot close a domain. A sufficient independent original-objective zero proof can instead establish optimality while the native-source flag stays rejected. A near-zero positive objective is not exact zero. The finalizer, normal process completion and required output belong to the production clock; later postproduction checks cannot backdate a certificate.

The source-rejected zero observations in R132/R133 keep their historical unqualified certificate/performance decisions. They are distinct from the newly executed final-panel observations under the independent-proof rule. Historical numerical anomalies and readout repairs are collected in the supporting material, with unavailable hidden-tree causes left unresolved.

The total process deadline makes a run finite, rather than guaranteeing certification in every finite window. Finite physical space and ideal complete search provide no linear forecast from a remaining objective gap.

A.8 Writer and variable map

Appendix group	Frozen source authority / mapping
Data, travel, physical objective	Parser.cpp; Evaluator.cpp; Result.cpp physical objective evaluator around line 109
Variables and VTypes	CplexBaseline.cpp 890-1005; $a \leftrightarrow mName$, $Y \leftrightarrow yName$, $\ell \leftrightarrow lName$, $H \leftrightarrow hName$, $Z \leftrightarrow zprodName$
A1-A4	Same writer 1600-1695 and 1807-1824; ConnectivityFlow.cpp downstream-count embedding and Round20Current bounds
A5-A9	Same writer 1826-1932; no Round66 arc-load replacement or Round92 handling activation
A10-A11	Same writer 2241-2274 and 2329-2335
A13-A16	Same writer 2975-3154; stateName and stateGName give s, q; bitName and prodName give plain bits/products
F0 configuration and domains	PaperK1AmSf.cpp 38-114; IntervalRowFactory.cpp 391-807; writer 1697-1750, 2049-2108, 2203-2238, 2311-2327
Factory global/local metadata	IntervalRowFactory.cpp 402-451; verified-incumbent “Global” remains cutoff-scoped
M-B mode isolation	include/Round98StateService.hpp; no projected direction, linked direction, ENS-Q or other opt-in mode
AM, targets, cover and lifecycle	PaperExternalGiniTree.cpp; GurobiBaseline.cpp; ProcessPhaseLedger.cpp; MipStartMapping.cpp

The linked implementation snapshot is the historical source authority for this unchanged formulation map. The final implementation and its exact byte capsule are identified by candidate_manifest.json and source_publication.json in the current reproduction entry. Line locations aid review; they do not replace derivations. This appendix supplies constraint groups and validity premises without claiming every engineering identifier as a mathematical contribution.

A.9 Compact joint-state alternative C166

This separately named candidate changes only the inventory representation of B. Let $M_i = \sum_k (p_{ki} + d_{ki})$, $V_i = \sum_k z_{ki}$, and fix the legal integer interval $\mathcal{Y}_i = \{l_i, \dots, u_i\}$ and $0 \le \alpha \le \beta \le 1$. Put $m_i(y) = |b_i - y|$, $v_i(y) = \mathbf{1}\{y \ne b_i\}$. The shared object is

$$\mathcal{H}_i = \operatorname{conv}\{(y, m_i(y), v_i(y), g, gy) : y \in \mathcal{Y}_i,\ g \in [\alpha, \beta]\}. \tag{AC1}$$

The continuous relaxation of (A15)-(A16) projects to (AC1). Inventory balance recovers aggregate pickup/drop as $(M_i + b_i - Y_i)/2$ and $(M_i - b_i + Y_i)/2$. This assertion adds neither a linked-direction equation nor a vehicle-state product to B.

Proposition A9 (legal-piece compression). Define $\mathcal{K}_i = \{l_i, u_i\} \cup (\{b_i - 1, b_i, b_i + 1\} \cap \mathcal{Y}_i)$. Then (AC1) is unchanged when its stock support is restricted to $\mathcal{K}_i$, which contains at most five values.

Proof. Partition the legal integers into their nonempty donor piece below b, initial singleton and receiver piece above b. On each piece, $(y, m_i(y), v_i(y))$ is affine. If a legal interior integer y lies between the legal endpoints a<c of its piece, choose $\theta = (c - y)/(c - a)$. At the same g, $(y, m_i(y), v_i(y), g, gy)$ equals the $\theta, 1-\theta$ combination of the endpoint graph points. Singletons require no interpolation. All endpoints are in $\mathcal{K}_i$, proving one inclusion for all convex mixtures. Every retained endpoint is legal, proving the reverse. □

Use continuous variables t_{ia}, q_{ia} for a in $\mathcal{K}_i$:

$$\begin{aligned}
&\sum_a t_{ia} = 1, \quad Y_i = \sum_a a t_{ia}, \quad M_i = \sum_a |b_i - a| t_{ia}, \\
&V_i = \sum_a \mathbf{1}\{a \ne b_i\} t_{ia}, \quad \sum_a q_{ia} = g, \quad Z_i = \sum_a a q_{ia}, \\
&t_{ia} \ge 0, \qquad \alpha t_{ia} \le q_{ia} \le \beta t_{ia}.
\end{aligned} \tag{AC2}$$

If $t_{ia} > 0$, set $g_a = q_{ia}/t_{ia} \in [\alpha, \beta]$; zero t forces zero q. Hence (AC2) is a convex combination of legal graph points. Conversely collect any such combination into t/q. This proves its exact continuous projection without imposing adjacency or SOS2 on hull mixtures.

Continuous (AC2) plus integer Y does not make the product exact. For b=0, domain $\{1, 2, 3\}$, g=1/4, supports $\{1, 3\}$, weights 1/2 each and q=(0,1/4), it gives Y=2,Z=3/4 instead of gY=1/2. Making t binary excludes that legitimate interior stock. C166 therefore also keeps the independent absolute-Y binary layer (A14), with interval products

$$\begin{aligned}
&Y_i = \sum_h 2^h b_{ih}^{\mathrm{bit}}, \quad Z_i = \sum_h 2^h w_{ih}, \\
&\alpha b_{ih}^{\mathrm{bit}} \le w_{ih} \le \beta b_{ih}^{\mathrm{bit}}, \\
&g - \beta(1 - b_{ih}^{\mathrm{bit}}) \le w_{ih} \le g - \alpha(1 - b_{ih}^{\mathrm{bit}}), \quad b_{ih}^{\mathrm{bit}} \in \{0, 1\}.
\end{aligned} \tag{AC3}$$

The implementation retains the three additional original [0,1] product rows in (A14) and all four factory interval rows in (AC3). It does not skip the bit family as VD-P does.

Proposition A10 (integer correspondence and common LP projection). Under B's original unique nonzero one-way service, balance and integer inventory constraints, replacing (A15)-(A16) by (AC2)-(AC3) preserves the integer physical projection and original objective. Their raw LP projections in (Y_i, M_i, V_i, g, Z_i) are equal. Global equality holds when every remaining row and the objective uses deleted state variables only through that common interface.

Proof. Extend an old integer physical point by the absolute bits of its legal stock, exact w=g*bit, and the same-g legal-piece interpolation of Proposition A9. It keeps all physical columns and the original g/e objective. Conversely (AC3) gives exact Z=gY; retained physical constraints and Lemma A1 give the original integer service. The old extension s_Y=1,q_Y=g reproduces that point. For the LP claim, the relaxed bit block is convex and contains an extension of every true legal (Y,g,gY) graph point, so its projection contains the projection of (AC1). More explicitly, for endpoint weights t and q, let B_h(a) be the h-th absolute bit of a and choose the relaxed variables as $\bar{b}_h = \sum_a B_h(a) t_a$, $\bar{w}_h = \sum_a B_h(a) q_a$. Convexity gives every inherited bit inequality, while binary expansion recovers the same Y and Z. The two auxiliary blocks are disjoint, sharing only (Y,g,Z). Every point of (AC1) therefore still extends to their intersection. Equal projected local sets, intersected with the same outside system through their shared coordinates, give equal global projection, station by station. □

For actual B, r=Y/D and e retain (A10), H/S/Gini and physical/resource rows use common or route columns, and the objective uses G and weighted e. The computed state-penalty/ratio reconstructions are emitted only by VD-J, which is not active. Thus no target kink is missing from (AC2). AP, exact state penalties, threshold counts/CDF, theta, linked direction, RN and historical state-dependent resource/decomposition combinations are not silently extended; the research entry rejects unsupported combinations. Original domain-infeasibility flags and explicit contradiction rows remain authoritative even if storage bounds reset.

Singleton and one-sided domains, b outside a tightened domain, b=0/C and fixed/zero g are covered by the same construction. Holes must remain separately enforced: on legal $\{1, 3\}$, integer Y=2 would otherwise be added by a breakpoint-plus-bit model. An additional exact state penalty $|Y - 2|$ with b=5 and domain [0,10] cannot use only $\{0, 4, 5, 6, 10\}$, because its legitimate zero at Y=2 is absent. Additional state functions require their own common affine-piece endpoints.

More generally, if an integer state is externally visible only through y,gy and a finite collection of functions affine on common legal integer pieces, retaining all legal piece endpoints preserves that local continuous graph hull. This is a standard disjunctive consequence, specialized here to the joint service interface (Vielma 2018; Huchette and Vielma 2023). When both sides of b have length at least two, the four V=1 endpoints are vertices of their quadrilateral and b is the unique V=0 graph point. Five supports are then necessary *within legal graph-point generator representations*, not among arbitrary extended formulations.

Let $N_i = u_i - l_i + 1$, $k_i = |\mathcal{K}_i|$, $d_i = \max\{1, \lceil \log_2(C_i + 1) \rceil\}$. Excluding common physical columns/rows, B uses 2N columns, N binaries and 2N+6 rows. The implemented C166 uses 2k+2d columns, d binaries and 2k+8+7d rows. The continuous support is bounded by five; total exact encoding still depends logarithmically on capacity. Nonzero formulas and actual counts are retained with the implementation study. These are raw-model projection statements, not ideality of the combined extension, route/objective hull claims, or predictions of native cuts and branch trajectories. Fewer columns or binaries need not reduce complete cost.

A.10 Continuous decision bounds from existing physical fleets

For a fixed physical domain and normalized weight vector, $v(\rho) = \min_x \{G(x) + \rho P(x)/\Omega\}$ is concave: for $0 \le \theta \le 1$, every feasible x has $G(x)+(\theta\rho_a+(1-\theta)\rho_b)p(x) = \theta F_{\rho_a}(x)+(1-\theta)F_{\rho_b}(x) \ge \theta v(\rho_a)+(1-\theta)v(\rho_b)$; minimize over x. Replacing endpoint values by qualified global lower bounds preserves the lower chord on its closed endpoint interval. Taking the maximum of applicable chords is safe. The minimum of the verified archive's objective lines is an upper bound. These facts require no assertion that the sampled incumbents are optimal or Pareto efficient.

All feasible-line intersections, overlapping lower-chord intersections and chord interval endpoints partition the covered parameter range into finitely many pieces on which both envelope expressions are affine. Using every distinct anchor pair also makes the maximum applicable-chord envelope continuous: at an interior anchor, starting/ending chords share its L value with an incoming/outgoing anchor chord, while spanning chords remain continuous. The gap therefore attains a maximum at a partition endpoint (or everywhere on a constant piece). Checking all such points proves the stated continuous-interval regret bounds; a grid would not suffice. Same-coordinate lowers combine by maximum, never by a zero-length chord. Outside a chord's endpoint interval no extrapolation is granted.

The application reconstructs complete fleets, verifies fixed physical/normalized-weight identity and uses actual loaded lambda/omega values. Rational G/P/coordinate arithmetic supplements the inherited numerical lower qualifications; it does not turn native solves into rational proofs. Original lowers are conservatively reduced by 1e-7, and exact feasible objectives receive a 1e-12 upward guard. No source crossing is clipped. The original run objectives, statuses and clocks remain unchanged. Likewise, nested physical time domains give the two-sided difference interval in Table 5; this is an objective-value decision bound, not a monetary resource price.

Appendix B. Executable method specification

Current frozen method. GI-TBC (historical S2, configuration ms2) uses the unchanged H and controller specified below with uniform pair-only support. Historical full-M-B traces and development variants retain their named identity. GI-TBC-R (implementation s2-root, historical S2R) is the diagnostic root-only control.

This appendix defines the controller and finite feasible startup H shared by the adopted GI-TBC method (historical S2, configuration ms2) and its full-M-B predecessor. The current GI-TBC row policy is uniformly pair-only; the underlying H and controller definitions are unchanged. Algorithm 1 appears in Section 3; its two complete subprocedures are given below in B.0; this appendix supplies their data, numerical decisions, decoding and return semantics. Mathematical symbols refer to Appendix A. Historical names are source-map aliases, not additional algorithm variants. The definitions and proofs are retained from R125. The historical Round126 panel used the fixed full-M-B predecessor and cold P-GRB; it is retained under its own identity in the R130 historical account.

The separately evaluated inclusive-root, support and equivalent-expression controls are documented in Supplement S11 with their original evidence identity.

B.0 Complete leaf and cover subprocedures

```
Algorithm 2  ProcessLeaf / ChooseAction
Precondition: selected unit is still represented; no pending native call.
1  Validate/rebuild artifact for current epoch; reuse a qualified same-epoch
   parent LP or request its complete LP relaxation.
   On deadline/invalid LP return OPEN_STOP/ERROR, with parent unchanged.
   On qualified infeasible LP return CLOSE(parent,cutoff evidence).
   Merge a finite optimal parent-LP bound on this same domain.
   If b >= current U-epsilon return FATHOM with its bound source.
2  Apply NEXT rule (M5) in its stated priority order:
       noncontrolling -> REQUEUE;
       strict target -> Native(parent MIP,target NEXT), then RETURN_NATIVE;
       otherwise proceed to 3.
3  If depth>=8 or width<=1e-4+1e-12:
       Native(complete parent MIP,no target), then RETURN_NATIVE.
4  Form midpoint children [alpha,mid],[mid,beta], ids parent.0,parent.1.
   Obtain both complete current LP results or reuse B.2's valid cached pair.
   A child starts with max(parent bound,its qualified finite LP bound),
       but retain raw child LP fields for AM. Children are not active leaves.
   On either incomplete/invalid result return OPEN_STOP/ERROR; keep parent.
5  If either child is qualified infeasible: return SPLIT(children,empty flags).
   Otherwise compute score (B2) in B.3, b+=min(raw child bounds):
       b+<=b+epsilon -> Native(complete parent MIP,no target);
       score+score_tolerance>=.08 -> return SPLIT(both children);
       otherwise -> Native(parent MIP,target b+,kind CHILD).
   For a native action return its actually finalized outcome and source identity.
Postcondition: no unresolved domain removed; no target value admitted as proof
   merely because it was requested; no speculative child counted as active.
```

```
Algorithm 3  FinalizeAndUpdateCover
Input: ProcessLeaf outcome, current cover, own witness/epoch/runtime caches
1  For native outcomes require actual return and request cleanup first.
   On failed engineering qualification: stop ERROR; leave unresolved region.
   Admit any finite qualified native bound only on its recorded domain/cutoff.
   Retain the source cutoff for proof accounting in A.6; do not clip the
       raw stored numerical bound (B.4).
2  Replay a candidate fleet and original objective. If own U improves by >1e-9,
       replace own witness, increment epoch and tighten current cutoffs.
       Keep qualified old scoped floors; invalidate retained models/LP/children
       on next access using B.2; never transfer a child-only floor upward.
3  SPLIT: validate parent identity, both child ids/lineage/endpoints, shared
       midpoint, inherited bounds and full union. Install both in one transaction,
       mark parent Replaced, then mark proved infeasible children Empty.
       Discard replaced/empty backend models; failed transaction retains parent.
4  CLOSE/FATHOM or qualified native OPTIMAL/INFEASIBLE: close only this
       cutoff obligation and keep its complement floor and evidence.
   Target reached + termination requested + bound>=target-epsilon:
       set NEXT milestone only for NEXT, then requeue parent (no forced split).
   REQUEUE: retain all state/coverage, return to selection.
   TimeLimit/interrupted before proof/target: retain eligible partial bound,
       keep unit Open, stop common lifecycle. Unknown/error is never Empty.
5  Recompute full-cover minimum; output unresolved units if any remain.
Postcondition: every potential physical improver is still covered by an open
   obligation or a qualified closed/complement floor.
```

B.1 Active entry and parameters

The inherited settings below originate in the saved R123 full-M-B command. The current GI-TBC command additionally selects `--round127-mode ms2`, so every three-station support predicate is false. Both versions select `gcap-frontier`, preset `research-round83-vds-equal-net-exchange`, `round98-state-service=m-binary`, `round90-lp-g-split=false`, candidate mode off, witness audit on and H verified-zero stop on. The preset recursively selects joint-seeded interroute decoded descent, VD-P and verified Start; the canonical paper configuration supplies the static row package and first-class interval controller. R122 uses this same M-B method with the panel's declared limits/Seeds. Input, lambda, capacities and physical times remain data, not tuned choices in this round.

Item	Frozen active value / interpretation
Initial geometry	One true-G interval $[0, \min(U, (n-1)/n)]$, n>1; n=1 has G=0
Split	Midpoint; two closed children; depth <8 and width $>10^{-4} + 10^{-12}$
Score	Balanced normalized closure, threshold .08; exact formula B.3
Infeasible child policy	Two-child split, then mark proved children empty; contraction_ enabled=false
Native work	Gurobi 13.0.2; one thread; Seed from arm; PresolveAuto; requested MIP gaps 0
Numerical policy	Scheduler epsilon 10^{-7}; FeasibilityTol/OptimalityTol 10^{-6}, IntFeasTol 10^{-5}
Cutoff	Current own U; writer epsilon=0; ObjCon=0
Resource	One process deadline; 30 s shutdown reserve in the saved runs; preparation and H are charged
Products	VD-P; continuous p/d; binary direction retained; A/B on; integer loads retained
Row generation	Uniform two-station support, no three-station support; static physical plus shared interval factory; no dynamic user/lazy cut separation; native Gurobi cuts remain available

Item	Frozen active value / interpretation
Domain option vs execution	Requested iterative/2; operative one budget intersection plus reachability intersection, recomputed by shared factory; no feedback iteration
H orders	24 shuffled chromosomes from mt19937 seed 20260626; appended constructive order; no genetic generations
H decoder	Full compaction mode 1; cache limit 200000 complete decoded orders; no generation/stagnation quota in this active branch

The "interval-mip-core-no-exhaustive-subset-duration" policy is overridden by the VD-P preset to `round55-vd-p`, still excluding exhaustive subset duration. Compiler identity is the frozen MSYS2 UCRT64 g++ binary SHA256 `8cd0aa578687e4182532222c8734439b3f34ac78b6ce23cba1071c5838025fc1`. Library shuffle and equivalent-key sort order are implementation-version details; the paper does not invent a canonical cross-library tie rule absent in the source.

The historical breadth/resource study's GI-TBC source/PE and policy are fixed in candidate_manifest.json; its 120 actual method vectors, inputs, physical horizons, weights, Seeds and caps are in matrix_frozen.json, with the prospectively registered sharing and order in experiment_plan.json. The default vector below uses ms2, tau=.08 and AP off. The three AM values are .04/.08/.16; the explicit `--round137-am-threshold` overrides the actual first-class field after presets. The four research controls are `--round127-mode s2-root`, `--round137-delete-ab`, `--round137-delete-cr`, and `--round137-delete-cg`; each changes only the declared comparison. Actual threshold/deletion readback is checked before qualification closes. The accepted inclusive root is the post-R130 implementation, not the old MD workflow. P and PS use their own complete vectors in the matrix rather than an abbreviated derivation from the GI-TBC vector.

For the later archived-source and three-Seed cohort, the measured C++ is `e920b92e199e825ec89a2932f701861ff158e0d4`; actual method freezes and PE/DLL bindings are in the R164 method freeze and science identity. Those observations were produced by the already measured PE, not by a manuscript build. The latest source includes default-off research paths; the main B vector does not enable them. Historical S2/ms2 and paper-S2 are implementation aliases of the specified main method. E+ remains separately named and off in B. The current document manifest binds the maintained sources and both study generations.

Historical R135 is separately pinned: its candidate manifest, first-stage commands and conditional-stage commands compare S2/AP at lambda=.15. Those observations remain historical; AP is not enabled in the current stage. R134 confirmation and weight observations likewise retain their original identities in the preserved supplement.

INPUT, OUT, physical T, cap B, B_MINUS_6 and SEED take their registered values. H seed20260626 and native settings remain fixed. The zero-stop flag does not assert return before the native lifecycle: an own zero U can produce the degenerate [0,0] root, and the independent proof is finalized after resource release and complete physical verification. The supervisor starts the production clock before admission and seals required output; native Runtime alone is not T_cert.

```
PE --input INPUT --lambda LAMBDA --T T
   --pickup-time 60 --drop-time 60 --time-limit B_MINUS_6
   --process-wall-time-limit B --process-shutdown-margin 30
   --threads 1 --mip-threads 1 --gurobi-seed SEED --gurobi-presolve -1
   --method gcap-frontier
   --algorithm-preset research-round83-vds-equal-net-exchange
   --round90-lp-g-split false --round61-candidate-mode off
   --round65-witness-audit true --round65-hga-zero-stop true
   --out OUT/result.json --log OUT/native.log
   --process-phase-ledger OUT/phases.csv
   --external-gini-artifact-dir OUT/external
   --primal-heuristic-generation-log OUT/hga.csv
```

```
--progress-log OUT/progress.csv --native-evidence-dir OUT/journal
--round98-state-service m-binary --round127-mode ms2
```

B.2 State, identity and order

A coverage unit has id, interval endpoints, parent id, child index, depth, base/inherited bound, current bound and sources, cutoff, status, and replacement flag. Active statuses are Open (Invalid may remain selectable as an unresolved obligation); Closed, Empty and Fathomed retain their proof role. Replaced parents are represented by their committed children. TerminalReady/Coalesced are dormant sibling-coalescing states, not normal M-B actions. Native status is not interchangeable with coverage status.

Runtime state separately contains canonical artifact path/SHA/row signature, generation and incumbent epoch; LP result (terminal-valid, optimal/infeasible, bound available, raw bound), LP epoch/SHA/endpoints; cached speculative child objects; terminal-started state; native phase count; and the NEXT milestone bit. Own witness state contains complete routes, integer operations, inventory, recomputed U and true G. The model's epigraph G never replaces the latter. Epoch starts at zero and increments on an independently verified incumbent improvement exceeding 10^{-9}. Callback observations and physical witnesses retain separate identities.

Selection uses the **current own U** as cutoff, not an old source cutoff. It considers unreplaced Open/Invalid units with α<U−epsilon and b<U−epsilon. Find their minimum bound and form the epsilon plateau $b_I \leq b_{min} + \epsilon$. Sort the plateau by decreasing width, increasing lower endpoint, increasing upper endpoint, then lexicographic id (the first three comparisons use 10^{-12}). Cycle through this order. Reset the cursor when the plateau membership/order changes or its minimum changes by more than epsilon; after a full cycle increment the tie round. Effort, elapsed time and requested_quantum fields do not affect this `selectNextByBoundOnly` call.

On a new epoch, before reusing a selected artifact verify its old saved bytes, discard its retained backend model, clear artifact/LP state, terminal flags and child cache, and build a new generation at the current cutoff. Qualified old-domain lower bounds remain on their covering units: a smaller cutoff does not invalidate a bound already completed by its old cutoff complement. The NEXT milestone bit is initialized false in each newly created runtime and set true only by a returned NEXT target. **It is not reset in the active epoch invalidation block.** Child-target returns do not set it. No stronger child bound is sent upward to the parent merely because the child has a higher value.

Parent LP reuse requires complete evidence and the same incumbent epoch. A retained artifact must exist and match its SHA. The ordinary cached-child reuse gate requires the parent's ready flag, exactly two cached children and complete child runtime LPs; epoch invalidation clears that flag before reuse. The more elaborate endpoint/path/SHA `validRound90LpGCachedChild` check is conditional on round90 and is off here; its existence is not claimed as an active gate. When reusing children, their stored bounds inherit max(old child bound,current parent bound) and their cutoff is refreshed. AM still reads the **raw LP bound fields**, not those inherited maxima. Missing/incomplete cache falls back to constructing and solving both children; it is never interpreted as infeasible.

B.3 NEXT, child target and terminal decisions

Call NEXT after the selected parent has completed its LP and merged any qualified bound; re-read the current bound b. The function first rejects nonfinite bounds, and first requeues if any other relevant bound satisfies $b_j + \epsilon < b$, even if the milestone was already reached. Otherwise, if the milestone is false and any $b_j > b + \epsilon$, return NEXT with $t = \min\{b_j : b_j > b + \epsilon\}$. If there is no such bound, or the milestone is true, allow lookahead. The caller supplies only other **Open/Invalid schedulable units** whose current bound is below current U−epsilon (and whose interval remains relevant). Closed, Empty, Fathomed and replaced units are excluded from NEXT

competitors even though their floors remain in proof coverage. Thus a lone closed unit at .40 does not supply a NEXT target to an open unit at .20. Source-cutoff metadata governs bound scope, never this current scheduling filter. The function does not use a timed quantum.

If geometry is ineligible, proceed to terminal MIP after NEXT permits lookahead. If eligible, form closed midpoint children in index order 0,1. Each is speculative until the complete replacement transaction. Solve both complete LP relaxations, or use the current admissible cache. A terminal valid child means either proved infeasible, or optimal with an available finite bound; TimeLimit/UNKNOWN is not terminal valid. Deadline exits retain the parent; an unexpected nonterminal/invalid LP is an engineering failure with the parent retained, not permission to prune it. The optional UNKNOWN→core-due research branch is off.

If either qualified child LP is infeasible, AM immediately requests a two-child atomic split. With contraction=false this applies also when both are infeasible; only after installing both does the controller mark the infeasible child or children Empty and discard those backend models. The inactive one-child contraction/both-child parent-close code is not part of M-B.

For two finite optimal LPs with raw bounds $\ell 0$,$\ell 1$, use

$$\Delta = \max(U-b, \max(\epsilon, 10^{-12})), \quad v_j = \min(1, \max(0, (\ell_j - b)/\Delta)), \quad \eta = \min(v_0, v_1), \quad \mu = (v_0+v_1)/2. \tag{B1}$$

$$\begin{aligned} s &= \max(1, |b|, |\ell_0|, |\ell_1|, |U|), \\ \delta_b &= \max(\epsilon, 32\epsilon_{mach} s), \\ \delta_{score} &= \min(1, \delta_b/\Delta + 32\epsilon_{mach}), \quad \epsilon_{mach} = 2^{-52}. \end{aligned} \tag{B2}$$

Put $b_+ = \min(\ell_0, \ell_1)$. If $b_+ \le b+\epsilon$, return terminal; else if $\eta\mu+\delta_{score} \ge .08$, split; else request a **parent-domain MIP** with bound target b_+. A child target is an intended stopping threshold, not a bound to merge into the parent before native evidence returns. A returned target requeues the parent and re-evaluates the current rule; it does not force a delayed split. This distinguishes NEXT (competitors), child target (lookahead), and terminal (complete parent MIP without a bound-target stop). The recorded adaptive rho is $\min(1, .08/\max(\mu, \max(\epsilon, 10^{-12})))$; it is diagnostic, not another active score rule.

B.4 Native requests, Starts and returned actions

An LP request relaxes the actual original VTypes, keeps the complete row set, and retains the model when permitted. A MIP request restores the exact saved VTypes before optimization. Targets and terminal requests receive the remaining common deadline after preparation, with native TimeLimit set/read back; no new per-leaf budget is created. Native bound callbacks can request termination when the qualified target is reached. Such a request is not the native return itself.

For enabled verified Start, normalize the current own fleet only among equal-capacity vehicle classes, stable sorting by decreasing number of operations and assigning smaller vehicle ids first. Clear explicit previous Starts even if the replacement is ineligible. Reverify routes, true G and F. Check interval membership with 10^{-8} and non-strict cutoff with $10^{-8}\max(1, |F|, |c|)$. An outside-interval/cutoff fleet is simply ineligible, and the MIP can run without it. Other mapping failures fail the request's engineering gate; they do not establish infeasibility.

For each used route set selected arcs to one, visit z=1, direction to pickup indicator, quantities to its integers, load to each prefix and rank to position. Flow along a q-station route is q,q−1,…,1,0. All absent route columns, including unused vehicles, are zero. Set (Y,r,e,H,G,Z) to physical values, state selector to one at Y, state_g to true G there and zero elsewhere, W_SP=SP, and the unused extrema to actual min/max ratios. Check every actual column bound/type, every actual linear row at 10^{-7}, and actual objective including ObjCon at 10^{-7}; require

minimization and no unexpected nonlinear structure. Then submit a complete Start and read it back. Submission, native-log acceptance, integer-vector observation and a later improved incumbent are different observations.

The outcome object is consumed only after the optimize call returns and request finalization detaches callbacks/settles native data. Retaining the same in-memory model can preserve useful solver state, but this paper does not promise that the entire native branch-and-bound tree survives type changes or later calls. Once returned, merge finite qualified bounds only on the actual interval/cutoff; replay a proposed fleet before accepting an improved own U. This order precedes the next controller transaction.

Returned condition after required identity, finalization, zero-gap-setting and consistency gates	Coverage action
LP optimal with finite qualified bound	Merge into that parent, or save on speculative child; child alone changes no active cover
LP infeasible	Parent Empty, or speculative infeasibility retained until atomic split
Target MIP OPTIMAL with bound / INFEASIBLE	Close selected cutoff obligation; retain cutoff-complement floor; discard its model and speculative child models
Target reached flag, termination-request flag, available bound ≥target−epsilon	Merge returned bound; set milestone only for NEXT; requeue; preserve parent and siblings
MIP interrupted/TimeLimit before target	Keep qualified partial bound if engineering gates passed; leave region open and end the common lifecycle
Terminal MIP OPTIMAL / INFEASIBLE	Close its own cutoff obligation; never certify siblings by this status
Terminal MIP interrupted	Leave region open and stop
Unsupported status, missing optimal bound, failed identity, incomplete LP or native error	Stop with explicit failure; preserve unresolved coverage; dependent unqualified evidence is not admitted
No launch because deadline expired	Leave region and previous evidence unchanged; finalize open result

The frozen implementation merges same-unit bounds with max(old bound,new bound), without clipping to U. It has no general online source-dependency revocation ledger. The actual qualification/finalization fallback rejects dependent native proof and restores the full unresolved physical domain with its independent nonnegative floor; this does not reconstruct or resume a repaired hidden native tree. Such monotonic accumulation does not itself support revocation of a later-refuted source; replacement qualification must audit actual dependent state rather than simply rename the trace. Empty/Fathomed stores max(previous bound,cutoff); Closed keeps its qualified returned floor. The raw returned L is the scheduler's complete-cover minimum, also **without clipping to U**. Tiny negative signed gaps can therefore occur and remain recorded. On the empty relevant-set path the scheduler helper alone returns 0; the enclosing lifecycle/closure logic determines the outcome.

For the exact mathematical proof, each cutoff-bound source has unconditional regional floor min(bound,source cutoff), and the analytic complement contributes its cutoff floor (A.6). This describes proof accounting, rather than an extra min-assignment performed by the frozen scheduler. Raw numerical evidence and exact proof-accounting expressions must not be interchanged. The final implementation retains the R133 source qualification and corrected inclusive-domain writer, as explained in A.7 and B.4.1. Its independent zero proof is separate from native-dependent coverage; the supplement retains the historical correction evidence. Remaining numerical limitations still apply.

B.4.1 Final independent and native proof rules

Every own final fleet is independently checked against the original physical problem. An exact stock proof of equal ratios and zero positive-weight target penalties establishes F=0; the shared production predicate additionally repeats complete per-vehicle physical verification. It does not accept a merely near-zero positive objective. P, PS and GI-TBC use the same predicate. P obtains no H, while PS and GI-TBC pay their complete own startup.

An independently valid full-domain nonnegative floor may prove a zero fleet even after native-source rejection. The rejected native journal and conservative restoration of the full unresolved domain remain unchanged; this is not a successful native proof or a repaired hidden search tree. Without sufficient independent proof, source-rejected positive outcomes retain the restored open domain. Ordinary qualified positive native and outer coverage certificates retain their original policy.

The proof is finalized after the final selected own fleet is known, necessary physical checks have finished and native resources are released. Required outputs and normal process completion are included in the complete production clock. Postproduction verification has its own elapsed time and cannot backfill a proof or an earlier production timestamp. Engineering source anomalies, the finite R133 checks and historical bridge tables are collected in the supplement.

B.5 Teaching states and a separately sourced event

These first numbers are **synthetic teaching states**, not measurements. Take U=1, epsilon=10^{-7}. With selected b=.20 and competitor bounds (.20,.35,.60), the plateau contains the tied .20 units and NEXT=.35. After a qualified NEXT return b=.35 the milestone is true; if all other relevant bounds are at least .35, lookahead is permitted. (If the tied .20 unit still exists, the requeue check wins first.)

For a fresh controlling parent b=.20 with no strict competitor, children (.21,.30) give Δ=.8, v=(.0125,.125), score=.000859375, b+=.21: run parent MIP to .21. Children (.20,.90) instead give b+=b: terminal, regardless of the strong sibling. Children (.50,.60) give v=(.375,.5), score=.1640625: split, install both children, with union floor .50. If the other covering unit has floor .25, global L remains .25. A target TimeLimit at .205 keeps the parent open at its qualified .205 bound; a missing Start changes none of these implications.

The following is an **actual R123 saved event** from M-B's `adaptive_mass_decision_ledger.csv` and `paper_tree_events.csv`, selected as a finite trace excerpt. On L0.0.0=[0,.09308544387476185], depth 2, b=.33371261877766062, raw child LPs (.34112380854511071,.35882784229299913), U=.3723417754990474 give eta=.19185481632186216, mu=.42100858578645295, score=.08077252489598688 and score tolerance=.000002588718179786521 6. The decision is split; the event at telemetry 127.2749697 records atomic replacement and global floor .34112380854511071. Earlier recorded splits at 38.3552841 and 72.829994 used the infeasible-child two-child branch. These times are native-run telemetry, not newly measured clocks or a reconstructed unknown checkpoint. Compact source excerpts and hashes accompany the finite checks.

B.6 H encoding and top-level procedure

Physical routes are labelled lists $0, i_1, \ldots, i_q, 0$ with one signed integer operation $a_i = p_i - d_i \neq 0$ per station; missing vehicle means empty route. H's **order encoding** is different: M ordered lists partition all n stations, including a tail that the decoder may not execute. A chromosome is a permutation of station ids 1..n and M−1 identical separator tokens; splitting at separators preserves empty vehicle lists. Reordering an encoded tail does not itself describe a feasible service plan. Decoding returns signed operations; materialization deletes zero-operation stations, closes used routes at depot and verifies the entire fleet.

```
H(instance, common deadline):
    C := empty physical fleet, verify Y=b
    repeat choose and admit best joint insertion (B.7) until none/deadline
    keep verified C as an own candidate
    generate all 24 shuffled order chromosomes with mt19937(20260626)
    append C's order after deterministic tail completion (below)
    initialize a shared complete-decode cache, empty
    decode all 25 orders in order, publishing verified improvements
    for each seed in order:
```

```
    repeat generate guided candidates (B.10), order by proxy fitness
    fully decode candidates in that order
    accept first fitness improvement >1e-12; restart this seed's pass
    if every candidate checked without improvement: finish this seed
    honor verified-zero/deadline between calls and candidates
take the best independently verified candidate, including C
run strict insertion/quantity closure followed by best neutral block move;
    repeat these two phases (B.11) until zero/no neutral/deadline/failure
return best admitted complete fleet and stop reason
```

Constructive tail completion starts with C's visited order and each vehicle's complete physical duration as a proxy. For each unvisited station i in increasing id, append it to the vehicle minimizing proxy[k]+tau(last,i)+tau(i,0)−tau(last,0), choosing the first vehicle on an exact tie; update that proxy. The remaining operations are decided by the same full decoder. Twenty-four shuffles are generated before appending this extra seed, preserving random draws. `constructive_mode=0` means there are no additional biased population members. The snapshot's C++ shuffle is authoritative for exact seed orders; the algorithm specifies the generator/seed/order and permits cross-library sequence differences. HGA crossover, mutation, education generations, 2000-generation stagnation and obsolete "10 iterations" fields do not run in this decoded-descent branch.

The outer physical candidate store keeps a candidate only after full verification and an improvement greater than 10^{-10}, unless no incumbent exists. Verified-zero can terminate startup early. This publication threshold differs from inner 10^{-12} move thresholds; an internally accepted tiny improvement need not replace the outer witness.

B.7 Joint insertion

At a verified fleet let $L_k(a)$ be load on leg a, numbering the original legs from 0 through the number of visited stations. For each ordered (pickup station i or 0,drop station j or 0), excluding (0,0), i=j, and already visited nonzero stations, enumerate vehicles and positions. Zero denotes an absent side, not depot stock. Both sides use the same integer quantity q. For a pair choose original legs a≤b, inserting i then j; on one leg the sequence is predecessor,i,j,successor. Travel increment is the sum of replaced arc differences (one combined expression when a=b).

The load upper amount is $Q_k - \max_{v=a..b} L_k(v)$ for a pair; $Q_k - \max_{v=a..end} L_k(v)$ for pickup only; $\min_{v=a..end} L_k(v)$ for drop only. Intersect with available inventory at i, room at j and max vehicle capacity. Complete duration increment is travel increment plus hq when a pickup is inserted, and just travel increment for drop only (that drop replaces return unloading). The time test uses T+10^{-7}. For each amount, retain the cheapest feasible travel placement, ties (vehicle,a,b), by a suffix scan of placement amount limits. Evaluate all amounts 1..limit using F on the changed one/two inventories; accept only gain>10^{-12}.

Choose globally: nonpositive added duration before positive; then greatest gain per added duration (compare cross products, or gain for both nonpositive), greater gain, smaller added duration, and lexicographically (i,j,q,k,a,b). Apply and fully replay; require objective agreement within 10^{-10} and verified gain>10^{-12}. Every insertion adds at least one previously unvisited station, so construction has at most n accepted insertions. This finite placement/amount scan is a heuristic neighborhood, not an optimization backend.

B.8 Single and paired quantity modification

Only currently served stations participate. Enumerate a increasing, then b=0 (single) and each served b>a (pair). For every nonzero integer t set $a'_a = a_a + t$, and $a'_b = a_b - t$ if b exists. Station bounds give

$$b_a - C_a - a_a \le t \le b_a - a_a; \qquad a_b - b_b \le t \le a_b - b_b + C_b \quad (b \ne 0). \tag{B3}$$

Intersect these with every affected prefix load $0 \le L + \chi t \le Q_k$, where chi is +1 after a, −1 after b, zero before/beyond the cancelling pair. This includes cross-vehicle modifications; each route has its own capacity. Enumerate all integers in the resulting interval increasing, skip zero. Convert signed operations to pickup=max(a',0), drop=max(−a',0), remove zero stops and shortcut travel. Sign reversal is allowed. Check complete duration, including depot unloading, at 10^{-7}; evaluate F; require gain>10^{-12}. Choose lowest proposed objective, tie (a,b,t). Full replay and objective agreement within 10^{-10} precede acceptance. Missing stations cannot be added by this operator; insertion handles them.

Strict closure computes both the best insertion and best quantity move on the same current fleet, chooses smaller proposed F, insertion on an exact tie, admits the verified strict improvement, and repeats. If neither exists, that union neighborhood is exhausted. Verification failure retains the previous fleet and records failure. This is exactly the Round76 subprocedure called by active exchange descent; the standalone Round75/76 preset entry branches are not separately run by main.

B.9 Complete greedy decoder and its compensating moves

For each encoded route take its maximal prefix whose travel with direct return stays within T+10^{-12}, stopping at the first exceeding station. Fix this travel during that decoder pass. Set the cumulative pickup budget $B_k = \max(0, \lfloor (T - travel + 10^{-12})/h \rfloor)$ (an integer sentinel max-int/4 if $h \le 10^{-12}$); this is a handling budget, not Q. Initialize all operations zero and Y=b. The single-route proxy version instead keeps other-route operations fixed. The active mode is 1: visit vehicles and stations forward, greedily match each current surplus above clipped target to later deficits, as much as remaining supply, demand, station bounds, all intervening load bounds and pickup budget allow; leftover surplus may be collected for depot return. This constructive initialization does not require each step to decrease F.

Define an interval move by vehicle k, positions a<b, sign $\sigma \in \{+1, -1\}$, amount $q \ge 1$. Increase a's signed operation by sigma q and decrease b's by sigma q. The sink may instead be the depot after the last position, in which case only a changes. Loads on [a,b) change by sigma q. Each final inventory must stay in [0,C], loads in [0,Q], and total positive operations in [0,B_k]. Thus an earlier delivery can be reduced/reversed and a pickup compensated elsewhere; there is still only one net one-way operation per physical station. Feasible amount bounds come from station room and the minimum/maximum load on the changed interval; the positive-part pickup change is piecewise linear with breakpoints at operation sign changes. The implementation finds the largest feasible q by these segments, then evaluates every positive integer up to it. The feasible amount sublevel contains q=0 and is an interval, so no integer hole is skipped. Objective arithmetic updates the changed ratios, pairwise absolute sum and penalties; it is not an LP/DP solve.

The active decoder loop is:

```
repeat:
    repeatedly apply the best strict atomic interval move, until none
    if a strict same-route composite exists: apply best; restart
    if a strict two-route composite exists: apply best; restart
    if a strict unit interval polish exists: apply best; restart
    if a strict flow-pair redistribution exists: apply best; restart
    if no atomic move occurred in this pass: return current operations
```

Atomic enumeration is vehicle, source position, later sink positions then depot, sign + then −, amount increasing. Keep the best move and the eight best atoms per route. To update the best, initialize value F−EPS and replace only when candidate+EPS<best, EPS=10^{-12}; this gives an effective initial gain test >2EPS. For each bounded

list, append candidates until size K ($K = 8$ atoms or $K = 6$ local candidates), maintaining a max heap with comparator a.objective<b.objective. Once full, replace its front only if candidate.objective+EPS<front.objective, then restore the heap. Final sorting compares only ascending objective, with no secondary key. Equivalent-key heap positions consequently depend on the frozen standard library. Local candidates comprise each retained atom and each pair of distinct atoms on one route, adding their operation deltas simultaneously. Recheck all combined loads, positive-operation budget and station bounds, then retain at most six best candidates per route using the same bounded-heap objective logic. Candidates can individually worsen F: their combination may compensate that worsening. Same-route best selection uses F−EPS and candidate+EPS<best. Cross-route candidates combine one retained local candidate from each pair of vehicles, recompute the full common Gini/penalty objective for their jointly changed (up to eight) stations, and use the same strict test. Distinct routes have disjoint stations, so combined physical feasibility follows from their checked local feasibility; joint objective evaluation remains necessary.

Unit polish checks amount 1 for every legal atomic interval, with initial best F−10^{-14} and candidate+10^{-14}<best. Flow-pair polish ignores zero operations, partitions the route into consecutive same-sign runs, and pairs each pickup run with its immediately following drop run. For each ordered pair of distinct such run pairs, choose one pickup and drop position in each: subtract one unit from the first pickup/drop flow and add one to the second. Check both interval load changes together, station bounds and original signs; pickup total is unchanged. Its candidate helper still requires gain>10^{-12}, followed by the 10^{-14} best-comparison guard. Residual pair-unit, route-exact and pair-exact neighborhoods return false in this active implementation; they are not hidden optimization oracles.

After a first full decode, if its executed prefix contains zero-operation stations, delete them, keep only its nonzero active order, and run this same full decoder from zero operations **once more** on those compacted routes. Return whichever has smaller F, first decode on exact tie. This does not repeat compaction to a fixed point and does not restore the removed tail. The cached object contains complete signed operations and fitness=−F. Materializing that object removes remaining zero operations and independently checks the original physical route duration.

Decoder cache key is compaction mode plus the ordered lists with separators; it includes tail positions, even if they decode identically. On a hit return the entire stored decode. On a miss at size≥200000 clear the whole map before inserting; this is neither LRU nor a permanent visited-state ban. Internal atomic/local caches are tied to an incremented operation-state epoch and cleared after accepted updates. The static ratio/penalty preprocessing cache keys capacities, targets and weights (including source slice offsets); it affects arithmetic reuse, not candidate admission. No general accepted-state de-duplication is claimed.

B.10 Guided order descent and ties

For each route compute the travel-only executable prefix as above. Within it record first negative-operation position and last positive-operation position. A station's role is pickup if its decoded operation>0, drop if <0; if zero, use surplus/shortage of decoded final inventory relative to target, otherwise neutral. Supply anchor is first drop, or position 0; demand anchor is immediately after last pickup, otherwise prefix end.

Generate, in vehicle order: move the last zero-operation prefix station to that route's end; collect every nonneutral prefix position plus the first supply and first demand in its tail. Move a supply lying after first drop, or in tail, to the supply anchor; move a demand before last pickup, or in tail with a last pickup present, to the demand anchor. Duplicate generated candidates are not globally removed. Same-route erase/insert decrements destination position if it originally lay after the erased position; skip unchanged order. For interroute proposals take only the first supply/demand in each source tail, each different destination in order: insert supply at destination's supply anchor if that route contains any demand-role station; insert demand at its demand anchor if it has an executed pickup.

The proxy fully runs the single-route incremental decoder with other-route operations fixed. For a two-route change try both route decoding orders and take the larger fitness (smaller F). Proxies only order proposals: sort decreasing proxy fitness, then fully decode in that order and accept the first fitness increase>10^{-12}. An unsuccessful pass evaluates every generated proposal, including a poor proxy. There is no top-k rejection here.

The guided comparator has no secondary key: equal proxy values are equivalent to C++ `std::sort`, which is not stable. Likewise internal bounded-heap/objective-only sorts have implementation-dependent equivalent-key order. For the frozen compiler/library they supply the recorded run's repeatable behavior; a cross-language implementation may choose a different equivalent-key order and consequently a different heuristic path. Specifying lexicographic ties here would change the frozen algorithm. By contrast B.7/B.8 and the physical block operators do have explicit deterministic ties. This limitation affects path-level reproduction, not feasibility, exact model scope or native lower-bound validity.

B.11 Neutral block moves and exit argument

Strict closure is followed by one best neutral move from the union below. The potential is the **complete** vector of all vehicle durations, sorted decreasingly, including zeros for unused vehicles; compare it with exact C++ lexicographic <, never by an aggregate sum or a tolerance that ignores an earlier increase.

Balanced relocation enumerates source vehicle, all nonempty contiguous half-open position blocks [a,b), other target vehicle and every insertion leg. Require net signed operation zero. If relative prefix load extrema inside the block are lo,hi, require target load+lo≥0 and target load+hi≤Q_target. Removing a net-zero block leaves source suffix loads unchanged; inserting it leaves target suffix loads unchanged. Keep operation quantities and order inside the block; recompute both full durations and accept only if each≤T+10^{-7} and the sorted vector strictly improves. Choose smallest potential, tie (source,a,b,target,leg).

Equal-net exchange enumerates every contiguous nonempty block per route, bucketed by integer net operation in increasing net order; pair vehicles s<t and blocks from equal-net buckets. At each insertion prefix require its old load plus the incoming block's relative extrema in that vehicle's [0,Q]. Equal net preserves all suffix loads, even when the common net is nonzero. Replace the two blocks in their original internal order, preserve all station operations, recompute complete durations and compare the same potential. Choose smallest potential, tie $kind, source, a, b, target, target_a, target_b$, with kind 0 relocation before kind 1 exchange. `bestRound83Neutral` evaluates the whole relocation neighborhood first and then exchanges.

Before accepting a neutral candidate, independent replay requires identical final-inventory vector, **exactly equal recomputed objective**, and exact equality between recomputed duration potential and the proposed potential, which must strictly improve the prior one. Failed admission retains the prior fleet. After an accepted neutral move, run strict closure again. Stop on exact verified objective zero, common deadline, failed verification, or closure plus no improving neutral move. A selected no-move event is an exhaustion claim only for these enumerated neighborhoods.

In ideal arithmetic, after the finite construction the accepted physical phases strictly decrease (F,sorted durations) lexicographically, and the finite space of labelled routes/integer quantities excludes cycles. The order-descent phase strictly increases its deterministic decoded fitness on a finite set of orders. The implementation uses incremental floating arithmetic and tolerances in the decoder; these comparisons are not a proof of exact rational monotonicity or an accumulated error bound. The physical block phases have exact inventory/objective equality for neutral steps, unlike a merely tolerance-neutral rule. There is no fabricated de-duplication argument. The common deadline and external lifecycle cap are the operational stopping boundary; expensive decoder calls are finite routines and do not have a separate native optimization timeout. H neighborhood closure never certifies the original optimum.

References

Boyd, Stephen, and Lieven Vandenberghe. 2004. *Convex Optimization*. Cambridge University Press. https://web.stanford.edu/~boyd/cvxbook/bv_cvxbook.pdf.

Bruck, Bruno P., Walton P. Coutinho, and Pedro Munari. 2025. "The Robust Bike Sharing Rebalancing Problem: Formulations and a Branch-and-Cut Algorithm." *European Journal of Operational Research* 325 (1): 67–80. https://doi.org/10.1016/j.ejor.2025.02.029.

Bruck, Bruno, Fabio Cruz, Manuel Iori, and Anand Subramanian. 2019. "The Static Bike Sharing Rebalancing Problem with Forbidden Temporary Operations." *Transportation Science* 53 (3): 882–96. https://doi.org/10.1287/trsc.2018.0859.

Bulhões, Teobaldo, Anand Subramanian, Güneş Erdoğan, and Gilbert Laporte. 2018. "The Static Bike Relocation Problem with Multiple Vehicles and Visits." *European Journal of Operational Research* 264 (2): 508–23. https://doi.org/10.1016/j.ejor.2017.06.028.

Caggiani, Leonardo, Simona De Bartolomeo, Luigi De Giovanni, Michele Ottomanelli, Claudio Enrico Palazzi, and Lorenzo Perinello. 2026. "An Equity-Based Static Relocation and Battery Swapping Optimisation Model for Free-Floating Micromobility Sharing Systems." *Transportation Research Part C: Emerging Technologies* 188: 105691. https://doi.org/10.1016/j.trc.2026.105691.

Chemla, Daniel, Frédéric Meunier, and Roberto Wolfler Calvo. 2013. "Bike Sharing Systems: Solving the Static Rebalancing Problem." *Discrete Optimization* 10 (2): 120–46. https://doi.org/10.1016/j.disopt.2012.11.005.

Equity-Aware Bike Repositioning in Station-Based Bike-Sharing Systems. 2026. HGA–TGBC project manuscript, local draft available May 2026.

Erdoğan, Güneş, Maria Battarra, and Roberto Wolfler Calvo. 2015. "An Exact Algorithm for the Static Rebalancing Problem Arising in Bicycle Sharing Systems." *European Journal of Operational Research* 245 (3): 667–79. https://doi.org/10.1016/j.ejor.2015.03.043.

Erdoğan, Güneş, Gilbert Laporte, and Roberto Wolfler Calvo. 2014. "The Static Bicycle Relocation Problem with Demand Intervals." *European Journal of Operational Research* 238 (2): 451–57. https://doi.org/10.1016/j.ejor.2014.04.013.

Gupte, Akshay, Shabbir Ahmed, Myun Seok Cheon, and Santanu Dey. 2013. "Solving Mixed Integer Bilinear Problems Using MILP Formulations." *SIAM Journal on Optimization* 23 (2): 721–44. https://doi.org/10.1137/110836183.

Huchette, Joey, and Juan Pablo Vielma. 2023. "Nonconvex Piecewise Linear Functions: Advanced Formulations and Simple Modeling Tools." *Operations Research* 71 (5): 1835–56. https://doi.org/10.1287/opre.2019.1973.

Ikonen, Teemu J., Keijo Heljanko, and Iiro Harjunkoski. 2025. "A Generalized Disjunctive Programming Model for the Static Bike Sharing Rebalancing Problem with Demand Intervals." *Optimization and Engineering* 26: 1781–813. https://doi.org/10.1007/s11081-024-09942-z.

Köppe, Matthias, Quentin Louveaux, and Robert Weismantel. 2008. "Intermediate Integer Programming Representations Using Value Disjunctions." *Discrete Optimization* 5 (2): 293–313. https://doi.org/10.1016/j.disopt.2006.12.003.

Matl, Piotr, Richard F. Hartl, and Thibaut Vidal. 2018. "Workload Equity in Vehicle Routing Problems: A Survey and Analysis." *Transportation Science* 52 (2): 239–60. https://doi.org/10.1287/trsc.2017.0744.

McCormick, Garth P. 1976. "Computability of Global Solutions to Factorable Nonconvex Programs: Part i—Convex Underestimating Problems." *Mathematical Programming* 10: 147–75. https://doi.org/10.1007/BF01580665.

Qiao, Jian, Zhengjie Cui, Niannian Sun, and Ying Fan. 2026. "A Fairness-Aware Coordinated Two-Echelon Static Rebalancing Approach for Large-Scale Bike-Sharing Systems." *Transportation Research Part E: Logistics and Transportation Review* 213: 104984. https://doi.org/10.1016/j.tre.2026.104984.

Raviv, Tal, Michal Tzur, and Iris A. Forma. 2013. "Static Repositioning in a Bike-Sharing System: Models and Solution Approaches." *EURO Journal on Transportation and Logistics* 2 (3): 187–229. https://doi.org/10.1007/s13676-012-0017-6.

Schuijbroek, Jasper, Robert C. Hampshire, and Willem-Jan van Hoeve. 2017. "Inventory Rebalancing and Vehicle Routing in Bike Sharing Systems." *European Journal of Operational Research* 257 (3): 992–1004. https://doi.org/10.1016/j.ejor.2016.08.029.

TailoredExact project. 2026. *Frozen Implementation of the Inventory–Gini Routing Model and Integrated Exact Methods*. Frozen E3 production source base 7564a5415331b380e24d1ec06936dcfd56557e67. https://github.com/yifanXovo/TailoredExact/tree/7564a5415331b380e24d1ec06936dcfd56557e67.

Vielma, Juan Pablo. 2018. "Embedding Formulations and Complexity for Unions of Polyhedra." *Management Science* 64 (10): 4721–34. https://doi.org/10.1287/mnsc.2017.2856.