

OPSC37 产品规格书





产品概述

德晟达 OPSC37 是一款标准 OPS-C 产品，基于瑞芯微 RK3588 平台打造，广泛应用于教育、交互式会议白板、数字标牌等场景。

- 搭载瑞芯微 RK3588 平台
- 支持 LPDDR4 内存，双通道设计，最大容量 16GB
- 支持 Wi-Fi 6 及蓝牙 5.0
- HDMI® 输出接口支持 4K@60Hz 分辨率，具备 CEC 功能
- HDMI® 输入接口支持 4K@60Hz 分辨率


接口示意图

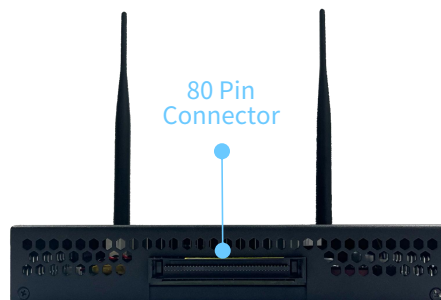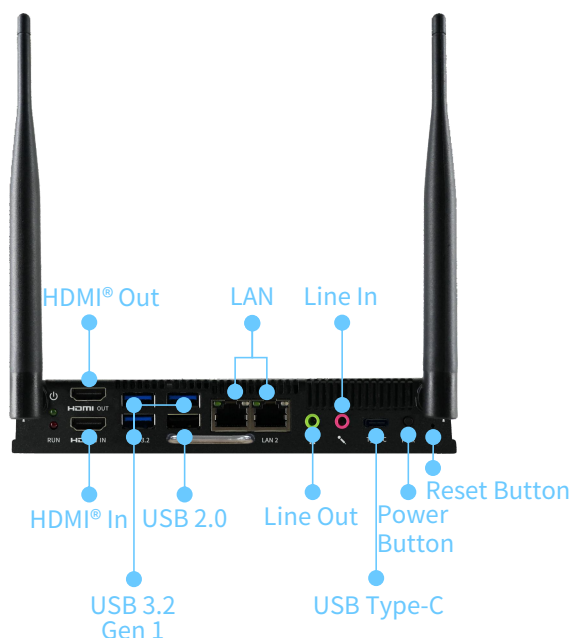

产品规格书

Model			S25-RK3588-OPSC37
Processor	CPU		Quad Cores A76+Quad Cores A55,Max. 2.6GHz
	Platform		Rockchip RK3588
Memory	Type		On-board LPDDR4, Dual Channel
	Capacity		Max.16GB
Graphic	GPU		G610 MC4
	Connector		HDMI®
Storage	eMMC		128GB
	SSD		1x M.2 M-Key 2242/2280 Slot, Support PCIe 3.0 X2 Mode or PCIe 2.0 X2/SATA Mode, Reserved
Network	Ethernet		Realtek 8111H
	Switch		RTL8366SD
	Wi-Fi		Wi-Fi 6+ BT5.0 Module, AP6275
Audio	Controller		ES8388
I/O	Front	LAN	2x RJ45
		USB 3.2 Gen 1	3
		USB 2.0	1
		USB Type-C	1, with USB 2.0 signal
		HDMI® In	1, 4K@60Hz
		HDMI® Out	1, 4K@60Hz, CEC Support
		Power Button	1
		Reset Button	1
		LED	2 (Power_LED_Red; Power on: Solid Red, S3: Blinking Red, S4/S5: Off RUN_LED_Green; System startup: Blinking Green,System Complete: Solid Green,System Off: off)
		Line In	1x 3.5mm Audio Jack
		Line Out	1x 3.5mm Audio Jack
		Antenna	2
	Rear	80Pin Connector	1, 4K@60Hz HDMI® out
		DC Jack	1, Reserved
	Internal	Fan Header	1x 4Pin Header
		RTC	1x 2Pin, Co-lay with Super capacitor
	Environment	Temperature	Operating
Non-operating			-20°C-60°C
Humidity		Operating	5%~95% RH non-condensing
		Non-operating	5%~95% RH non-condensing
Cooling System			Active cooling system
Software			File Management System Settings Chrome Sophos Multi-language(Valencian & EN)
Noise Value			Below 35dB@1m
Power			19V DC
OS			Android 14.0 & Above
Dimensions (Length x Width x Height)			195mm x 180mm x 30mm

产品尺寸 (单位: mm)

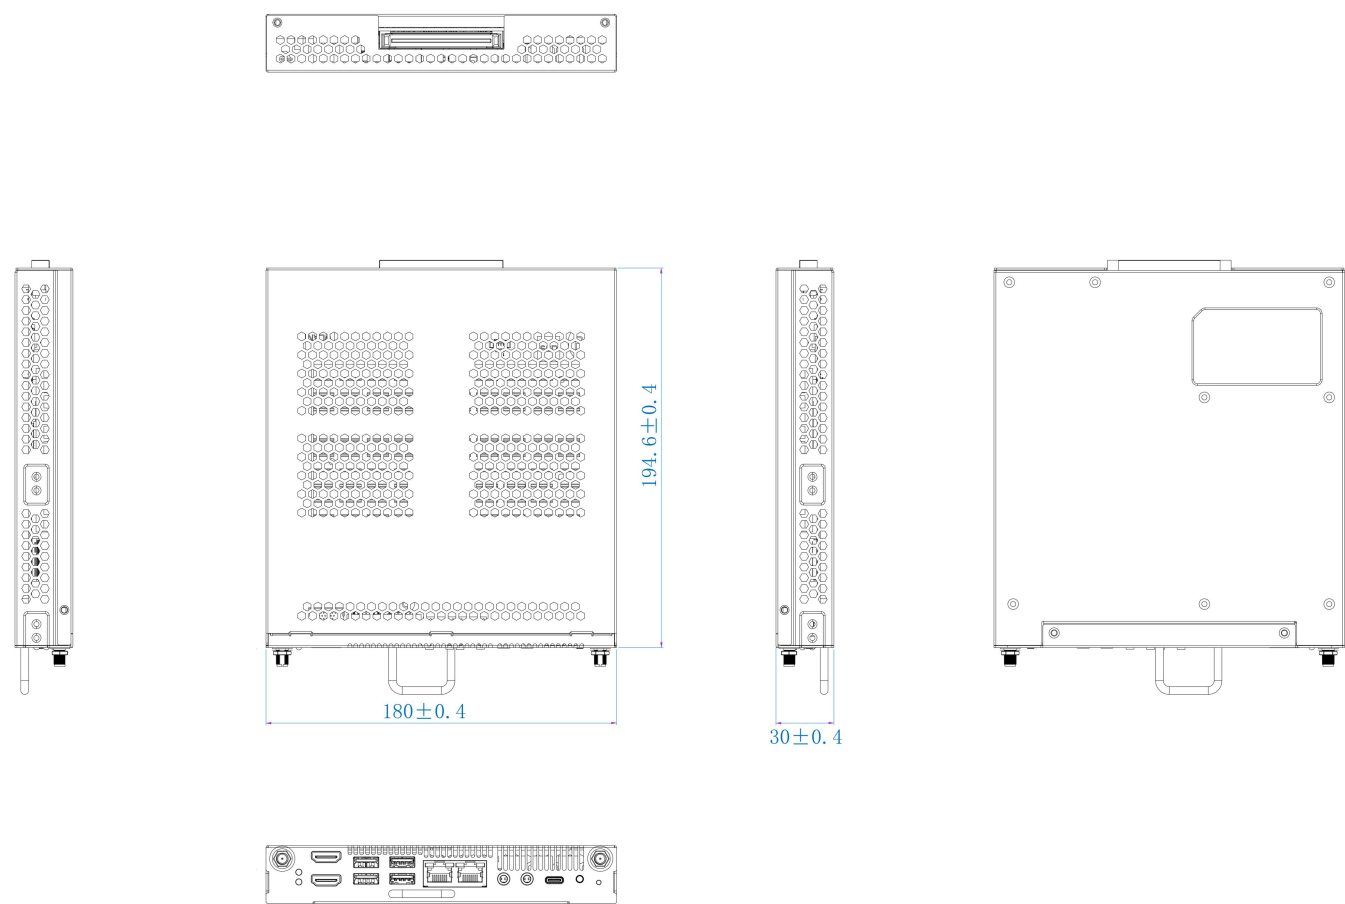

*本文件中包含的规格和信息仅供参考，可随时更改，恕不另行通知，请予以关注。