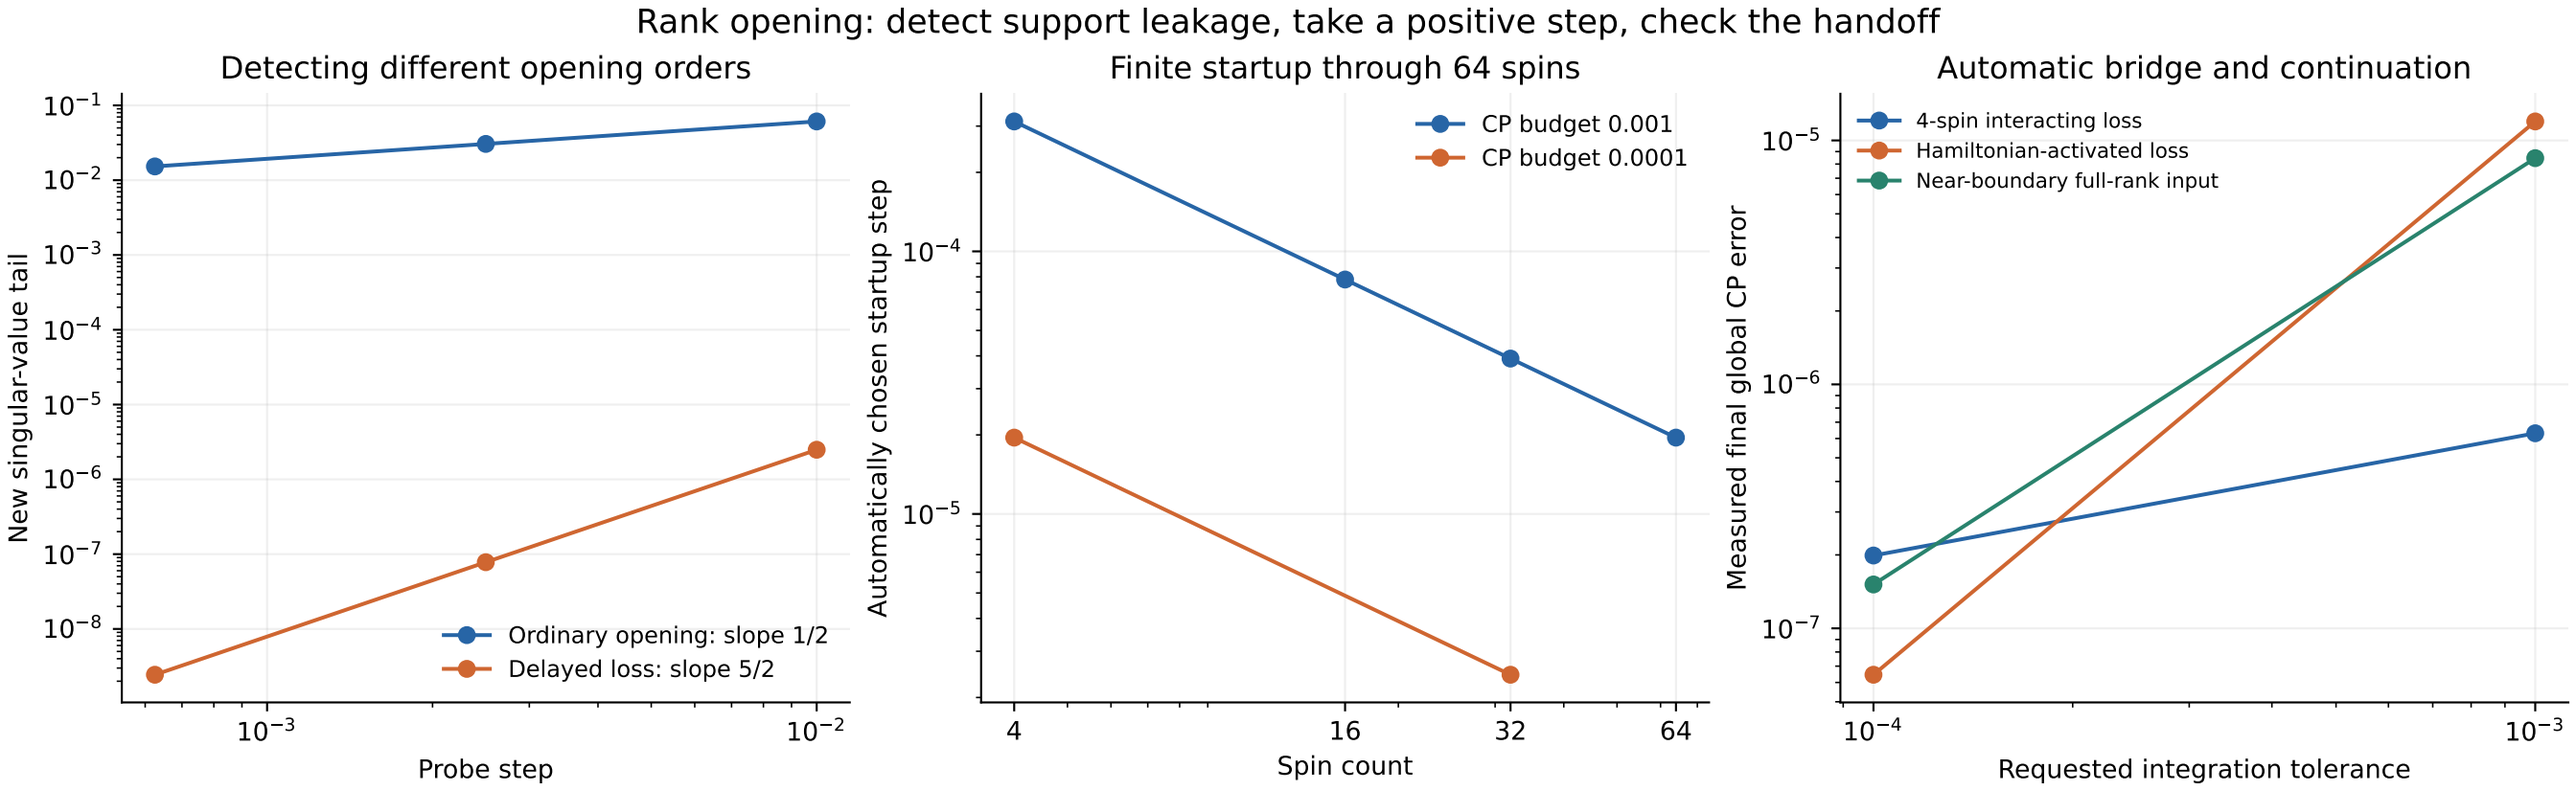
Rank opening: detect support leakage, take a positive step, check the handoff
Detecting different opening orders
New singular-value tail
Probe step
Ordinary opening: slope 1/2
Delayed loss: slope 5/2
Finite startup through 64 spins
Automatically chosen startup step
Spin count
CP budget 0.001
CP budget 0.0001
Automatic bridge and continuation
Measured final global CP error
Requested integration tolerance
4-spin interacting loss
Hamiltonian-activated loss
Near-boundary full-rank input