# CS 498 Internet of Things Lab 3

# **Team Ace**

Alexey Burlakov (NetID: alexeyb2)

Christopher Lewis (NetID: calewis4)

Li Yi (NetID: liyi2)

Pui Sze Pansy Ng (NetID: ppn2)

Zhijie Wang (NetID: zhijiew2)

Introduction	4
Task 1: Deploy the Network	4
GNS3 Installation and GNS3 VM configurations	4
Implementation of OpenWRT Access points	4
Implementation of OpenWISP2 wireless controller	8
Implementation of IOT Gateway (MQTT Broker)	9
Implementation of Data warehouse (SQLite + Flask)	10
Installing Flask:	12
GNS3 Topology	13
Task 2: Deploy the Application	15
Implementation of Shopper Gaze application	15
Implementation of MQTT publisher and MQTT gateway	17
Problems that encountered	19
Contribution	19

## Introduction

In this lab, we will build an infrastructure management for IoT devices. We leverage GNS3 to run real router images on the local computer. We will design and create a large IoT infrastructure for large retailers, and simulate deploying a large number of sensors to track and monitor goods in the store, as well as gaze tracking to monitor shopper behavior and collect datasets to analyze how the product placement is doing. We will deploy a set of access points to communicate with your IoT devices and develop infrastructure to store this data locally in a data warehouse.

# Task 1: Deploy the Network

## GNS3 Installation and GNS3 VM configurations

We have downloaded VMware Player and VirtualBox to setup virtualization software. Then, we downloaded GNS3 for the GUI and import GNS3 image into VirtualBox

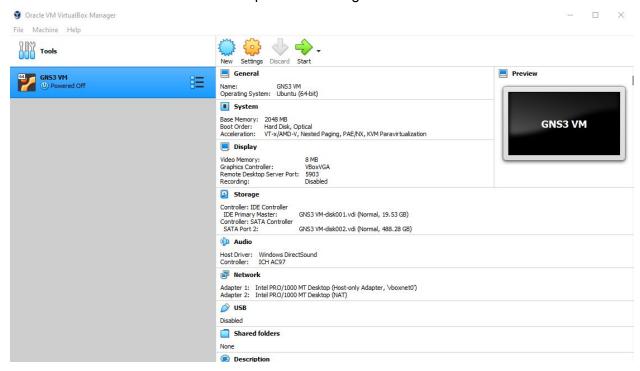


Figure 1.1: Screenshot of VirtualBox after import GNS3 image

# Implementation of OpenWRT Access points

We followed <a href="https://openwrt.org/docs/guide-user/virtualization/virtualbox-vm">https://openwrt.org/docs/guide-user/virtualization/virtualbox-vm</a> to install and build OpenWRT VMs

First, we installed VirtualBox in Ubuntu 18.04 environment. After it, we selected combined-ext.img as OpenWrt image, and converted it to VBox drive.

```
VBoxManage convertfromraw --format VDI \ openwrt-18.06.1-x86-64-combined-ext4.img \ openwrt-18.06.1-x86-64-combined-ext4.vdi
```

uci set network.lan.ipaddr='192.168.56.2'

We created a new VM by importing the VBOx drive file, and assigned 512MB RAM.

After the VM is successfully created, We changed Network settings for OpenWrt VM, added an additional network adapter (adapter 1) and attached it to Host-Only Adapter. The Adaptor Type is: Intel PRO/1000 MT Desktop (82540EM).

Starting the VM, change IP address to 192.168.56.2 by issuing

```
uci batch <<EOF
set network.mng=interface
set network.mng.type='bridge'
set network.mng.proto='static'
set network.mng.netmask='255.255.255.0'
set network.mng.ifname='eth0'
set network.mng.ipaddr='192.168.56.2'
delete network.lan
delete network.wan6
set network.wan=interface
set network.wan.ifname='eth1'
set network.wan.proto='dhcp'
EOF
```

uci setAfter Ip address and network configuration, we can SSH to OpenWrt VM by

```
Ssh root@192.168.56.2
```

Uci commit && reboot

The last step is: installing VM's luci: opkg update && opkg install luci

After all, we can verify the installation by open browser and connect to <a href="http://192.168.56.2/cgi-bin/luci">http://192.168.56.2/cgi-bin/luci</a>

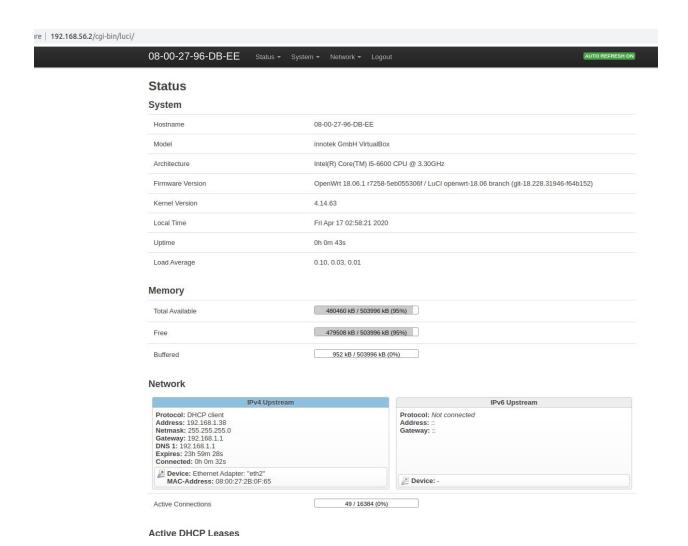


Figure 1.2: screenshot of 192.168.56.2

Next, we need to install OpenWisp-config on OpenWrt instances.

## First, issuing command

opkg update

opkg install

http://downloads.openwisp.io/openwisp-config/latest/openwisp-config-openssl\_0.4.6a-1\_a ll.ipk

After OpenWisp-config has been installed with no errors, we can proceed to configure OpenWisp on OpenWrt instances.

vi /etc/config/openwisp

```
# For more information about the config options please see the README
# or https://github.com/openwisp/openwisp-config#configuration-options
config controller 'http'
    #option url 'https://openwisp2.mynetwork.com'
    #option interval '120'
    #option verify ssl '1'
    #option shared secret ''
    #option consistent_key '1'
    #option mac interface 'eth0'
    #option merge config '1'
    #option test config '1'
    #option test_script '/usr/sbin/mytest'
    #option uuid ''
    #option key ''
   list unmanaged 'system.@led'
   list unmanaged 'network.loopback'
   list unmanaged 'network.@switch'
   list unmanaged 'network.@switch_vlan'
    # curl options
    #option connect_timeout '15'
    #option max_time '30'
    #option capath '/etc/ssl/certs'
```

We changed the url to 'https://192.168.56.5', changed shared\_secret to the one shown in Organization settings. The list of organizations is at /admin/openwisp\_users/organization/.

Run "/etc/init.d/openwisp\_config start" to start OpenWISP agent

After the above configurations, we can verify devices are added under Devices.

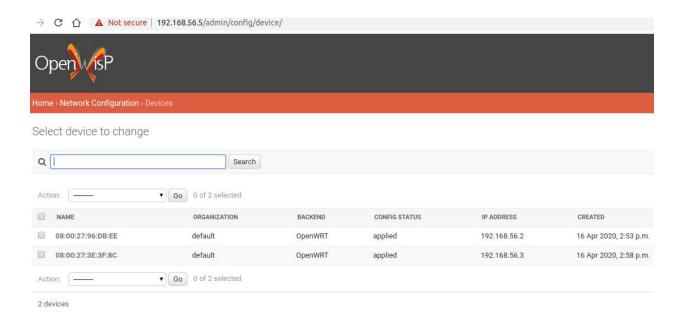


Figure 1.3: screenshot of OpenWISP

# Implementation of OpenWISP2 wireless controller

We followed <a href="https://github.com/openwisp/vagrant-openwisp2">https://github.com/openwisp/vagrant-openwisp2</a> to create and install OpenWISP2 VM.

First, we downloaded and installed VirtualBox. After it, we installed Vagrant 2.2.6. The last step is installing Ansible

```
$ sudo apt update
$ sudo apt install software-properties-common
$ sudo apt-add-repository --yes --update ppa:ansible/ansible
$ sudo apt install ansible
```

After installing Ansible, we cloned the repository from Github. The vagrantfile and requirements.yml for is in the vagrant-openwisp2 directory.

Issuing command to install Ansible roles for this profile:

```
ansible-galaxy install -r requirements.yml
```

At last, issue command vagrant up to create and configure OpenWisp2 VM.

We verified the result by logging in https://192.168.56.5/admin

# Implementation of IOT Gateway (MQTT Broker)

First of all, we use Vagrant to create a Ubuntu 14.04 virtual environment to install Mosquitto broker.

After Ubuntu 14.04 VM is created, issue command:

```
$ sudo apt-add-repository ppa:mosquitto-dev/mosquitto-ppa
```

\$ sudo apt-get update

Issue command to install mosquitto

\$ sudo apt-get install -y mosquitto lobmosquitto-dev mosquitto-clients

We can verify the service status by:

\$ sudo service mosquitto status

```
ubuntu_MQTT_default_1587009950108_99063 (Snapshot 1) [Running] - Oracle VM Virtual... 🦲 🗊
File Machine View Input Devices Help
Jbuntu 14.04.6 LTS vagrant–ubuntu–trusty–64 tty1
vagrant–ubuntu–trusty–64 login: vagrant
assword:
ast login: Thu Apr 16 19:04:26 UTC 2020 on tty1
welcome to Ubuntu 14.04.6 LTS (GNU/Linux 3.13.0–170–generic x86_64)
* Documentation: https://help.ubuntu.com/
 System information as of Fri Apr 17 04:44:07 UTC 2020
                                Memory usage: 9%
                                                   Processes:
 System load: 0.0
 Usage of /: 3.9% of 39.34GB
                               Swap usage: 0%
                                                  Users logged in: 0
 Graph this data and manage this system at:
   https://landscape.canonical.com/
vagrant@vagrant–ubuntu–trusty–64:~$ sudo service mosquitto status
mosquitto start/running, process 570
agrant@vagrant-ubuntu-trusty-64:~$ 🔔
```

Figure 1.4: Screenshot of Ubuntu

## Implementation of Data warehouse (SQLite + Flask)

We used a vagrantfile to create a ubuntu 18.04 VM hosted by VirtualBox. After it, we installed SQLite3 and Flask on Ubuntu VM. Here are commands:

First, update all packages on the VM. The **apt** package repository cache should be updated.

```
$ sudo apt-get update
```

Now to install SQLite 3, run the following command:

```
$s$ sudo apt-get install sqlite3
```

Now you can check whether **SQLite 3** is working with the following command:

```
$ sqlite3 --version
```

Figure 1.5: Screenshot of vagrant-VirtualBox

Installing SQLite Browser

Run the following command to install SQLite Browser:

```
$ sudo apt-get install sqlitebrowser
```

After installed SQLite broswer, we can create a database and table on GUI or by SQL command:

Installing Flask on Ubuntu 18.04 VM

First verify Python3 is installed on VM by:

```
python3 --version
```

The output should look like this:

```
Python 3.6.9
```

Second, install python3-venv package that provides the venv module:

```
sudo apt install python3-venv
```

Once the module is installed we created a virtual environment for Flask applications.

```
mkdir my_flask_app
```

```
cd my flask app
```

After in my\_flask\_app directory, creating a virtual environment:

```
python3 -m venv venv
```

And activate the virtual environment by:

```
source venv/bin/activate
```

Installing Flask:

After the virtual environment is activated, we installed Flask by:

```
pip install Flask
```

Verify the installation by command:

```
python -m flask --version
```

The result is:

```
Flask 1.1.2
Python 3.6.9 (default, Sep 12 2018, 18:26:19)
```

```
vagrant@vagrant-VirtualBox: ~/my_flask_app
                                                                           File Edit View Search Terminal Help
ges (from Flask)
Requirement already satisfied: Jinja2>=2.10.1 in ./venv/lib/python3.6/site-packa
ges (from Flask)
Requirement already satisfied: click>=5.1 in ./venv/lib/python3.6/site-packages
(from Flask)
Requirement already satisfied: MarkupSafe>=0.23 in ./venv/lib/python3.6/site-pac
kages (from Jinja2>=2.10.1->Flask)
(venv) vagrant@vagrant-VirtualBox:~/my_flask_app$ pip install Flask
Requirement already satisfied: Flask in ./venv/lib/python3.6/site-packages
Requirement already satisfied: click>=5.1 in ./venv/lib/python3.6/site-packages
(from Flask)
Requirement already satisfied: Werkzeug>=0.15 in ./venv/lib/python3.6/site-packa
ges (from Flask)
Requirement already satisfied: itsdangerous>=0.24 in ./venv/lib/python3.6/site-p
ackages (from Flask)
Requirement already satisfied: Jinja2>=2.10.1 in ./venv/lib/python3.6/site-packa
ges (from Flask)
Requirement already satisfied: MarkupSafe>=0.23 in ./venv/lib/python3.6/site-pac
kages (from Jinja2>=2.10.1->Flask)
(venv) vagrant@vagrant-VirtualBox:~/my_flask_app$ python -m flask --version
Python 3.6.9
lask 1.1.2
Werkzeug 1.0.1
(venv) vagrant@vagrant-VirtualBox:~/my_flask_app$
```

Figure 1.6: Screenshot of vagrant-VirtualBox after installing my flask app

# **GNS3** Topology

Please see the figures below:

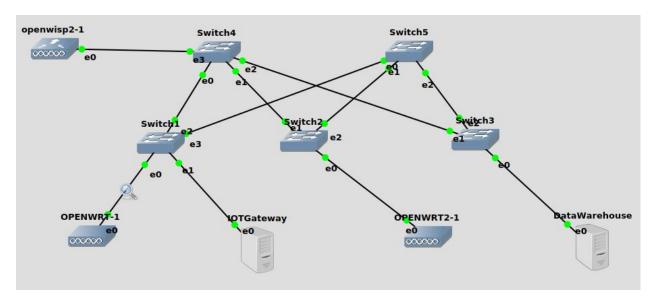


Figure 1.7

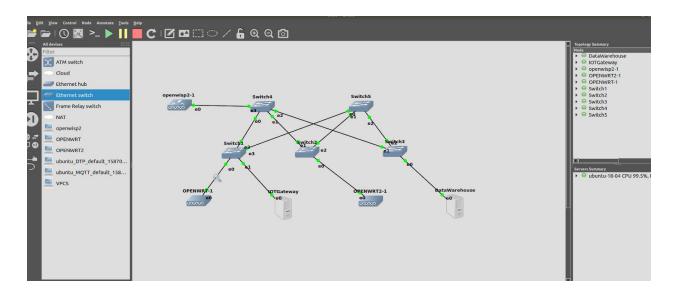


Figure 1.8

# Task 2: Deploy the Application

# Implementation of Shopper Gaze application

OpenVINO installation

# Register and obtain serial number SSH into Ubuntu VM

```
$ wget
```

http://registrationcenter-download.intel.com/akdlm/irc\_nas/16612/l\_openvino\_toolkit\_p\_ 2020.2.120.tgz

```
$ tar -xvzf l_openvino_toolkit_p_2020.2.120.tgz
$ sudo ./l_openvino_toolkit_p_2020.2.120/install.sh
Follow the command prompt and install OpenVINO tool kit
```

#### Install Gaze Monitor

```
$ git clone https://github.com/intel-iot-devkit/shopper-gaze-monitor-python
$ cd shopper-gaze-monitor-python
$ chmod +x setup.sh
$ setup.sh
```

Setup USB passthrough from host device to VM

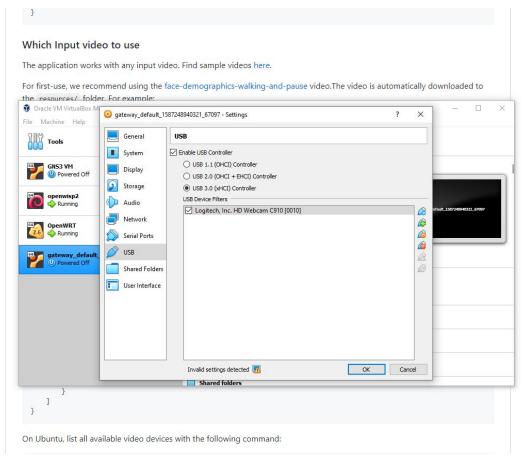


Figure 2.1

### Verify Video Input, Verify Python Version, Initialize OpenVino Env with Correct Python

### Create run.sh in `~/shopper-gaze-monitor-python/application`

source /opt/intel/openvino/bin/setupvars.sh -pyvaer 3.6

```
python3 shopper_gaze_monitor.py -m
/opt/intel/openvino/deployment_tools/open_model_zoo/tools/downloader/intel/face-detect
ion-adas-0001/FP32/face-detection-adas-0001.xml -pm
/opt/intel/openvino/deployment_tools/open_model_zoo/tools/downloader/intel/head-pose-e
stimation-adas-0001/FP32/head-pose-estimation-adas-0001.xml -d CPU
```

#### Make the Script executable.

```
$ chmod +x run.sh
Now to run the Application `./.run.sh`
```

# Implementation of MQTT publisher and MQTT gateway

After shopper gaze application is successfully installed and run. We added a MQTT server to publish data.

First, we set environment variables:

```
export MQTT_SERVER=localhost:1883
export MQTT CLIENT ID=lee1234
```

Second, we downloaded the Paho Python MQTT Software from <a href="https://github.com/eclipse/paho.mqtt.python">https://github.com/eclipse/paho.mqtt.python</a>

And Installed it by:

```
Python setup.py
```

Now Paho Python MQTT software is installed on the server.

Starting Shopper gaze application, we modified client\_sub.py in example folder to subscribe the topic that is published by shopper gaze application.

```
# mqttc.on_log = on_log
mqttc.connect("localhost", 1883, 60)
mqttc.subscribe("retail/traffic", 0)
```

```
print(string)

# If you want to use a specific client id, use
# mqttc = mqtt.Client("client-id")
# but note that the client id must be unique on the broker. Leaving the client
# id parameter empty will generate a random id for you.
mqttc = mqtt.Client()
mqttc.on_message = on_message
mqttc.on_connect = on_connect
mqttc.on_publish = on_publish
mqttc.on_subscribe = on_subscribe
# Uncomment to enable debug messages
# mqttc.on_log = on_log
mqttc.connect("localhost", 1883, 60)
mqttc.subscribe("retail/traffic", 0)

mqttc.loop_forever()
```

Figure 2.2

The following screenshot (Figure 2.3) shows the shopper gaze application open webcam and publishing MQTT messages

retail /traffic 0 {"shoppers": "1", "lookers": "1"}

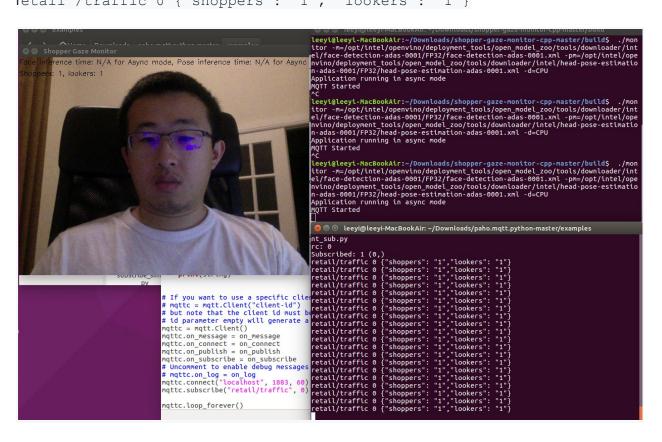


Figure 2.3

# Problems that encountered

- 1. Installing the OpenVINO toolkit was not discovered by the Shopper Gaze App **Solution**: run installation with `sudo`
- 2. Default run command of the Shopper Gaze App used obsolete CPU extension library **Solution**: remove the argument from run command
- GNS3 Application couldn't manage VirtualBox VM network interfaces
   Solution: Go to GNS3 Preferences->VirtualBox VM, select individual VMs and check
   `Allow GNS3 uses configured adapter`
- 4. OpenWISP Vagrant depends on Ansible for provisioning, yet Ansible is not very compatible with Windows.
  - **Solution**: Some team members dual booted their PC with Ubuntu, some used a Mac laptop to provision and export.
- 5. Webcam laptop: For task 1, Li Yi is working on a desktop PC which does not have a connection to a webcam. For task 2, a Macbook Air is used to install Ubuntu 16.04, install Shopper Gaze app, install OpenVINO and install Mosquitto server etc.
- 6. Cloning Existing OpenWRT VM to be used with different IP address causes problem Situation: After provisioning 1 OpenWRT VM, cloning it to be used with a different IP address, it will not be recognized as a new device for OpenWISP. This is due to how automatic checksum and UUIDs are calculated for OpenWISP.

Solution: Provision a new VM from ground up.

# Contribution

Due to different locations of our team members, we worked on the project individually but shared findings and progress.

Alexey Burlakov - Alexey has implemented task 1 and task 2. On task 1, Cisco switches have been used instead of GNS switches.

Li Yi - Li has completed on task1 and task 2 using GNS3 switches, OpenWRT as APs, OpenWisp2 as wireless controllers, Mosquitto MQTT broker and Ubuntu 18.04/16.04 OS.

Pui Ng - Pui has implemented task1 and task2 with the guidance provided by lab 3 document. Vmware Workstation is used to host VMs. She also managed team communications including technical writing, structuring reports, and Slack communications.

Zhijie Wang - Zhijie has done on task1 and task 2. He worked on Mac environments, and installed VirtualBox to host GNS3 VM and other infrastructure VMs. He wrote the first half of the Task 2 steps.