

## Data Sheet



### SCA610-C28H1A 1-AXIS ANALOG ACCELEROMETER

#### Features

- Single +5 V supply; ratiometric voltage output in the range 4.75...5.25 V
- $\pm 1.7g$  Range
- 8-pin plastic surface mount package with gull wing legs, mountable with pick and place machine
- Enhanced failure detection
- Digitally activated electrostatic self test
- Calibration memory parity check
- Continuous connection failure detection
- Bi-directional acceleration measurement
- Controlled frequency response in the sensing element
- RoHS compliant suitable for lead free soldering process and SMD mounting
- Proven capacitive 3D-MEMS technology

#### Applications

SCA6X0-series is targeted to automotive applications. Typical applications include:

- Acceleration measurement
- Inclination measurement
- Motion measurement
- Vibration measurement

#### General Description

SCA610-C28H1A is a one axis accelerometer component based on proven VTI capacitive 3D-MEMS technology. It has exceptional reliability, unprecedented accuracy and excellent stability over temperature and time.

SCA6X0-series is designed, manufactured for high stability and reliability and tested against tough quality requirements of automotive applications. The accelerometer has outstanding overload and shock durability. There is no need for additional components.

SCA610-C28H1A is a part of VTI analog accelerometer family and fully compatible with other SCA610 and SCA620 - series accelerometers.

## Absolute maximum ratings

Parameter	Value	Units
Supply voltage	-0.3 to 7.0	V
Voltage to input/output pins	-0.3 to Vdd+0.3	V
Temperature range	-40 to +125	°C
Mechanical shock	20000	g

## Performance Characteristics

Vdd=5 V and ambient temperature unless otherwise specified.

Parameter	Condition				
		Min	Typ	Max	Units
Supply Voltage Vdd		4.75		5.25	V
Current consumption	Vdd=5V; No load		2	4	mA
Measurement range	Measurement Direction Horizontal	-1.7		+1.7	g
Operating temperature		-40		125	°C
Offset	Output at 0g position		Vdd/2		V
Sensitivity <sup>A)</sup>	V <sub>dd</sub> =5V		1.2		V/g
Offset error	-40...+125 °C (max)	-125		+125	mg
Sensitivity error	-40...+125 °C (max)	-5		+5	%
	-25...+85 °C	-3		+3	%
Non-Linearity			±20		mg
Cross axis sensitivity			4		%
Amplitude response <sup>B)</sup>	-3dB frequency	20		80	Hz
Output noise	Noise density		20		µg/√Hz
	DC...4kHz			5	mV <sub>rms</sub>
Ratiometric error <sup>C)</sup>	Vdd=4.75...5.25 V			2	%
Resistive output load		20			kΩ
Capacitive load				20	nF

A) Sensitivity specified as [Vout(+1g)-Vout(-1g)]/2g [V/g]


B) Output has true DC response

C) Ratiometric error is specified as:


$$RE = 100\% \times \left( 1 - \frac{V_{out}(@ V_s) \times \frac{5.00V}{V_s}}{V_{out}(@ 5V)} \right)$$

## Electrical connections


PIN #	Pin Name	Connection
1		Open or capacitively connected to GND
2		Open or capacitively connected to GND
3		Open or capacitively connected to GND
4	GND	Negative supply voltage(VSS)
5		Open or capacitively connected to GND
6	ST	Self-test control
7	VOUT	Sensor analog output
8	VDD	Positive supply voltage (VDD)

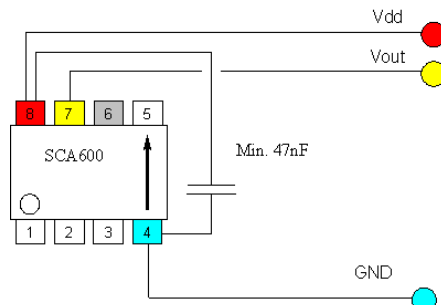

## Dimensions

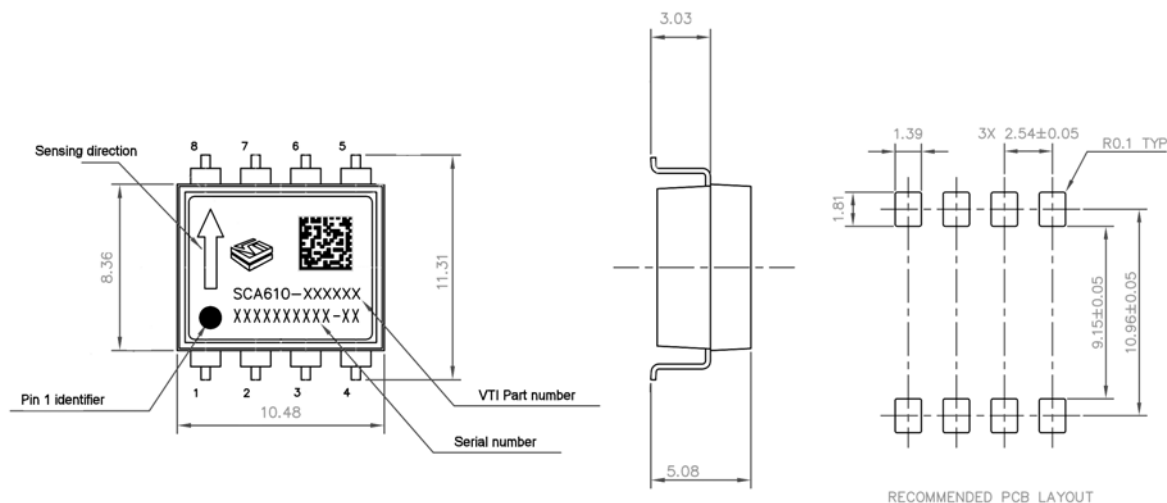

## Measuring directions

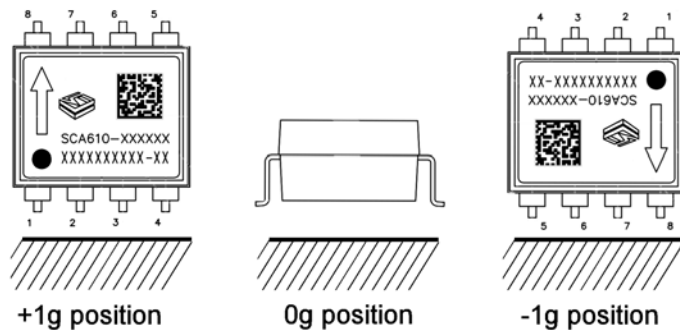

深圳市铭之光电子有限公司

E-mail: support@sinocomopto.com

Web : www.sinocomopto.com

深圳

地址：深圳市福田区天安数码城创新科技广场1期A座401

电话：(86)0755-83439588

传真：(86)0755-83433488

上海

地址：上海市普陀区江宁路1165号圣天地商务中心705室

电话：(86)021-52527755

传真：(86)021-52522211

传感器专家网

Tel: 400-883-3391

Web : www.sensorexpert.com.cn

北京

地址：北京海淀区中关村东路66号世纪科贸大厦C座1003室

电话：(86)010-62672430

传真：(86)010-62672433

香港

地址：香港葵涌嘉庆路12号港美中心1004室

电话：(852)24208555

传真：(852)24200055