
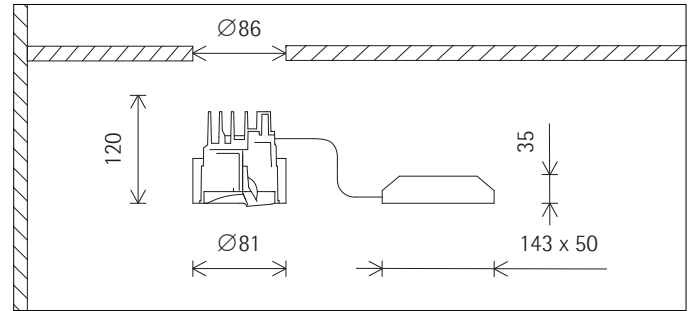
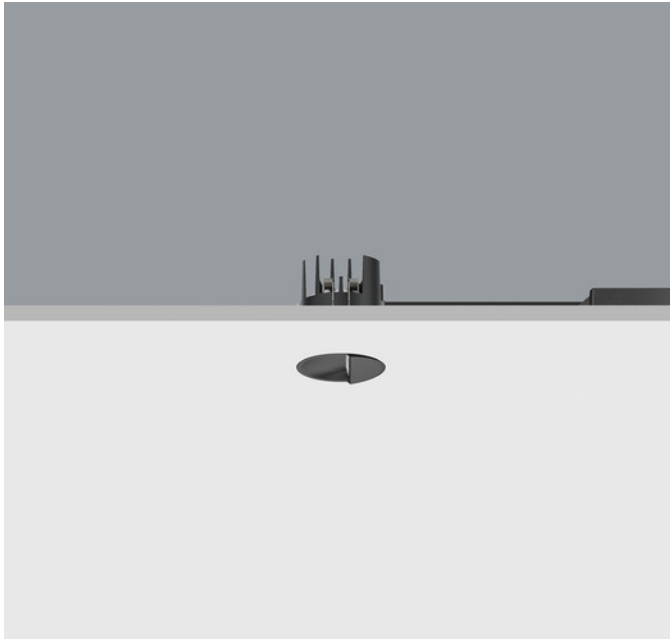


A2000001 Black (RAL9011)
LED module: 6.2W 657lm 2700K warm white
DALI-2
Version 3
Construction size 2
Flush mounting detail
Lens system, wallwash

Product description
Housing: cast aluminium, coated, designed as heat sink, with connection cable L 500mm.
Mounting ring: polymer, white (RAL9002). Mounting for ceiling thicknesses of 12.5-25mm.
4-pole terminal block.
Includes ERCO DALI control gear.
LED module: high-power LEDs.
Lens system made of optical polymer.
Reflector: polymer, silver vaporised, mirror-finish. Softec lens.
Anti-glare cone: polymer, coated black (RAL9005), matt.
Cut-off angle 70°.
Dimming possible via commercially available push-buttons (Push Dim).
Approved for use as emergency lighting according to IEC / EN 60598-2-22.
Safety class II
Weight 0.43kg
Through-wiring possible on request.



Mean illuminance E_n (wall)

Wall height (m)	2
Offset from wall (m)	0.90 0.90
Luminaire spacing (m)	0.90 1.20
Illuminance E_n (lx)	160 125

Technical data

Luminous flux of the luminaire	374lm
Connected load	8.7W
Luminaire efficacy	43lm/W
Colour deviation	1.5 SDCM
Colour rendition index	CRI 92
Lumen maintenance	L90/B10 >50000h L90 >100000h
LED failure rate	0.1% >50000h
Dimming range	1%-100%
Dimming method	CCR
TLA (Temporal Light Artefacts)	SVM ≤ 0.1; PstLM ≤ 1
LMF	D
Standby power per control gear	0.3W
Luminaires per circuit breaker B16	364

Planning data

Melanopic light effect

Art. no.	Spectrum	MR	MDER
A2000001 (direct)	2700K CRI 92	0.48	0.43

MR	Melanopic factor (of luminous radiation) a _{mel,v}
MDER	Melanopic Daylight Efficacy Ratio [gamma] _{mel,v,D65}

Multiplying the illuminance with the melanopic daylight efficacy ratio MDER gives the melanopic equivalent daylight illuminance MEDl. (MEDl = Melanopic Equivalent Daylight Illuminance [lx] E_{v, mel, D65} [lx]).

Extract from the Environmental Product Declaration (EPD)

The entire EPD can be found at: www.ercos.com/A2000001

Extrapolation coefficients to convert the reference data from the EPD document for the declared unit

Lighting output	Manufacturing	Distribution	Installation	Use	End of Life	Benefits and loads
326	0.904	0.609	0.774	0.465	0.538	0.904

Frequently used EPD data that have already been converted for this article number.

Parameter	Unit	A1-A3	A4	A5	B6	C1	C2	C3	C4	D	Total, excl. D
Results per functional unit											
GWP	kg CO ₂ -eq.	1.20E01	2.59E-01	6.15E-01	3.03E02	0.00E00	6.69E-03	5.50E-01	6.33E-03	-5.44E-01	3.16E02
GWP-biogenic	kg CO ₂ -eq.	-6.62E-01	0.00E00	5.67E-01	0.00E00	0.00E00	0.00E00	0.00E00	0.00E00	0.00E00	-9.50E-02
Results per declared unit											
GWP	kg CO ₂ -eq.	8.40E00	1.81E-01	4.30E-01	2.11E02	0.00E00	4.68E-03	3.85E-01	4.42E-03	-3.80E-01	2.20E02
GWP-biogenic	kg CO ₂ -eq.	-4.61E-01	0.00E00	3.95E-01	0.00E00	0.00E00	0.00E00	0.00E00	0.00E00	0.00E00	-6.60E-02

A1-A3	Manufacturing
A4	Distribution
A5	Installation
B6	Use
C1-C4	End of Life
D	Benefits and loads

The data for operating the light (Use B6) refer to the European power source mix. You will find the ERCO EPD Help under Downloads/General planning data.

Cleaning (a)	1				2				3			
Ambient conditions	P	C	N	D	P	C	N	D	P	C	N	D
LMF	0.94	0.88	0.82	0.77	0.91	0.83	0.77	0.71	0.89	0.79	0.73	0.65

Hours of operation (h)	1000	5000	10000	20000	30000	40000	50000
LLMF	1.00	0.99	0.98	0.96	0.94	0.92	0.90
LSF	1	1	1	1	1	1	1

MF	LMFxRSMFxLLMFxLSF
MF	Maintenance Factor
LMF	Luminaire Maintenance Factor
RSMF	Room Surface Maintenance Factor
LLMF	Lamp Lumens Maintenance Factor
LSF	Lamp Survival Factor
P	Room pure
C	Room clean
N	Room normal
D	Room dirty

Data according to regulations

2019/2020/EU supplemented by 2021/341/EU and 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance

This product contains a light source of efficiency class E
Due to thermal and photometric properties as well as to protect electronic components from ESD (electrostatic discharge) the light source cannot be changed by the customer.

ID EPREL: 1708812

Model identifier: 3000068427

Download data sheets for control gear and disassembly instructions at www.ercos.com/slr

Planning data

Technical data in accordance with international norms and standards

IEC 60598	Luminaires – Part 1+2: general requirements, specific requirements and tests
IEC 62031	LED modules for general lighting – safety requirements
IEC 62471	Photobiological safety of lamps and lamp systems
EN 13032-4	Light and lighting – measurement and representation of photometric data
CIE 13	Method of measuring and specifying colour rendering properties of light sources

All technical data is subject to industry-standard tolerances.

Also see www.erco.com/erco-led

For explanations of the symbols and abbreviations used and other general information, see www.erco.com/symbols