

Smart Lock User Manual

SL-500 SecureConnect Smart Lock

Model: SL500-SC-US

Category: Smart Lock | Smart Home Ecosystem

Front Assembly

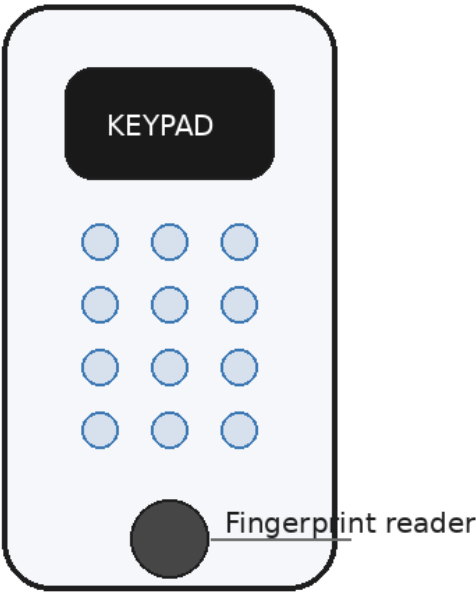


Figure: exterior keypad, fingerprint sensor, status light, and key cylinder.

Installation, setup, daily operation, troubleshooting, maintenance, technical specifications, and warranty support.

Document Version: 1.0 | Last Updated: July 2026 | Prepared for Basic RAG product knowledge base

Table of Contents


- **1. Product Overview** - What the SL-500 does and when to use it
- **2. Safety and Compliance** - Warnings before installation and use
- **3. Package Contents** - Parts, hardware, and tools
- **4. Door Compatibility** - Measurements and pre-installation checks
- **5. Installation Guide** - Step-by-step physical installation
- **6. Initial Power-On** - Battery and first startup
- **7. App Setup and Pairing** - Account, Wi-Fi, Bluetooth, and hub connection
- **8. Credential Management** - PINs, fingerprints, app keys, and backup keys
- **9. Daily Operation** - Locking, unlocking, auto-lock, privacy mode
- **10. Guest Access** - Temporary, recurring, and scheduled access
- **11. Security Features** - Tamper alerts, lockout, audit logs, encryption
- **12. Smart Home Integration** - Voice assistants, scenes, routines, and hubs
- **13. Notifications and Event History** - Alerts, logs, and user activity
- **14. Maintenance** - Battery, cleaning, calibration, and firmware
- **15. Troubleshooting** - Symptoms, causes, corrective actions
- **16. Technical Specifications** - Hardware, power, radio, and environmental data
- **17. Warranty and Support** - Coverage, claims, and service process
- **18. Appendices** - Templates, checklists, glossary, and support scripts

1. Product Overview

The SL-500 SecureConnect Smart Lock is a connected deadbolt designed for residential doors, rental units, small offices, and smart home environments. It combines a motorized deadbolt, illuminated keypad, fingerprint reader, mobile app control, guest access scheduling, event history, tamper detection, and mechanical backup access. This manual explains how to install the lock, enroll credentials, operate the lock every day, maintain reliable performance, and resolve common issues before contacting support.

This product belongs to the Smart Lock category in the smart home ecosystem. Smart locks are security devices, but they are also connected electronics. Safe use requires both proper physical installation and responsible digital administration. A lock that is installed incorrectly may bind, drain batteries, fail to lock completely, or create a false sense of security. A lock that is configured poorly may expose access codes, leave outdated guest users active, or generate confusing event history.

Read the entire safety and installation sections before removing your existing lock. Keep this manual available during setup. The customer help center, return policy, refund policy, shipping policy, warranty policy, privacy policy, and terms of service may contain additional rules that apply to purchases, service requests, replacement parts, returns, refunds, and data handling. Where this manual describes operation, it is intended as product guidance rather than a legal policy.

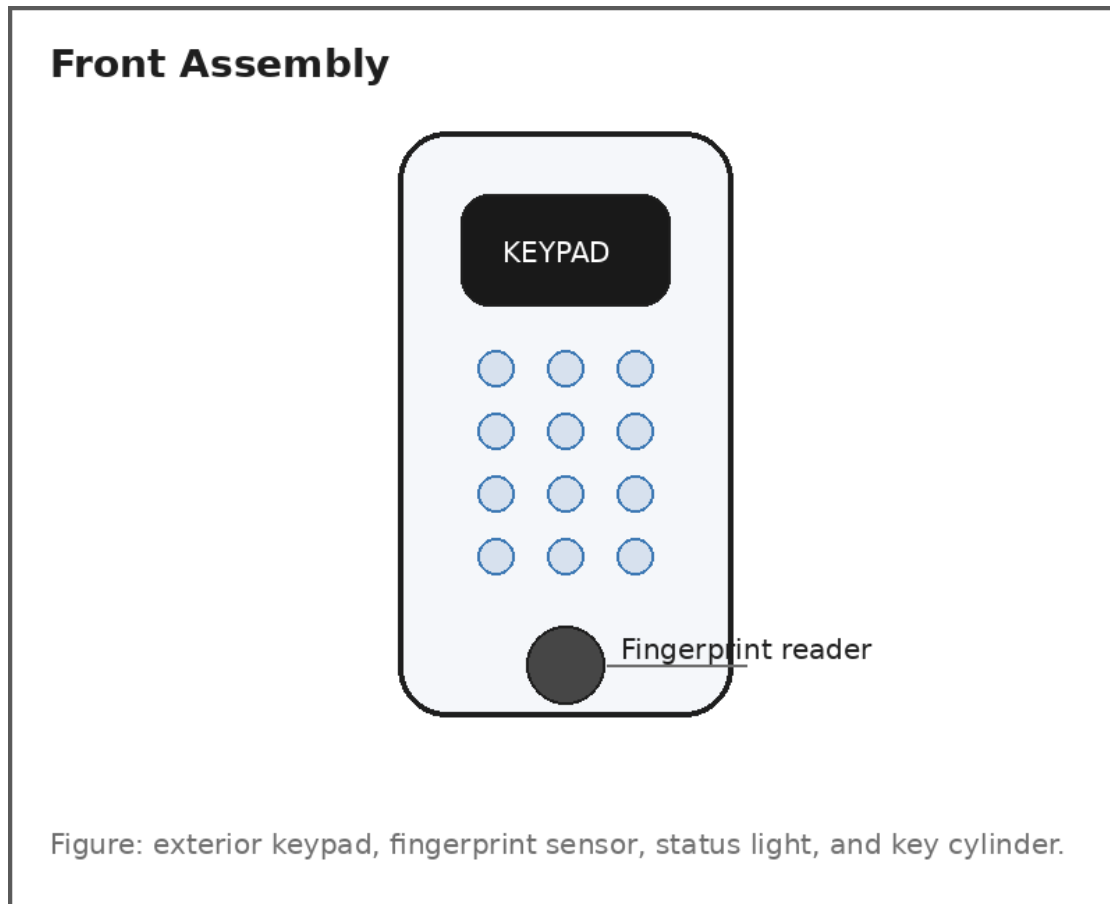

The exterior assembly includes the touchscreen or button keypad, status light, fingerprint reader, emergency key cylinder, and weather-resistant housing. The interior assembly contains the motor, battery compartment, pairing button, reset button, thumb turn, and removable cover. A precision deadbolt latch connects both sides through the door. The strike plate and reinforcement screws secure the door frame side of the installation.

- Keyless entry using PIN codes, fingerprints, the mobile app, or scheduled guest access.
- Auto-lock and one-touch locking for everyday convenience.
- Local mechanical backup key access if batteries are depleted or phone access is unavailable.
- Event history and alerts for lock, unlock, failed attempt, low battery, and tamper events.

- Optional hub-based remote control and smart home integrations when supported by the customer setup.

Feature	Purpose	Customer Benefit
PIN code access	Unlock by entering a code on the keypad	Useful for family members, cleaners, and guests
Fingerprint access	Unlock with enrolled fingerprints	Fast access without carrying keys
Auto-lock	Relocks after a configured delay	Reduces accidental unlocked-door events
Guest scheduling	Creates temporary or recurring access windows	Supports rentals, service visits, and deliveries
Event history	Records lock activity	Helps administrators understand access activity
Tamper alert	Detects forced removal or repeated failed attempts	Improves awareness of security events

2. Safety and Compliance

Always treat door hardware as part of a larger security system. A smart lock can improve convenience and visibility, but it does not replace a strong door, properly installed strike plate, functional hinges, adequate lighting, safe account practices, or appropriate insurance. The lock must be installed on a structurally sound door and frame. Do not install it on emergency exits where local rules require panic hardware or unlatched egress unless your authority having jurisdiction confirms that the installation is permitted.

Installation involves small parts, screws, batteries, and a motorized mechanism. Keep parts away from children and pets. Do not allow children to play with the lock, keypad, app controls, spare keys, or installation hardware. If the lock is used in a household with children, explain when and how doors should remain locked and how to use emergency exit methods.

Use only the battery type specified in this manual. Mixing old and new batteries, using damaged batteries, using rechargeable cells with incompatible voltage behavior, or installing batteries backward may cause unreliable operation. Remove batteries if the lock will be stored for an extended period. Dispose of batteries according to local recycling rules.

Warning Type	Instruction	Reason
Installation safety	Do not drill unless required by the door compatibility section	Unnecessary drilling may damage the door or void warranty coverage
Electrical safety	Do not expose the interior assembly to water, solvents, or steam	Moisture can damage electronics and battery contacts
Access safety	Keep backup keys in a secure location outside the locked room	Backup keys are needed if the lock cannot be powered
Privacy safety	Do not share screenshots of PIN codes or access logs publicly	Access data can reveal household patterns
Account safety	Use a strong app password and enable multi-factor authentication when available	Compromised accounts can lead to unauthorized control

Important: If installation conditions differ from the illustrations in this manual, stop and consult a qualified locksmith or door professional before modifying the door. Forced installation can cause binding, poor alignment, and repeated lock failure.

3. Package Contents


Before installation, place all parts on a clean surface and compare them with the package list. Do not discard packaging until the lock is installed, paired, and tested. Packaging may contain the QR code, serial number label, support reference, spare screws, and warranty information. Missing parts should be reported to customer support before installation begins.

- Exterior keypad assembly
- Interior motor assembly with battery cover
- Adjustable deadbolt latch
- Strike plate and reinforced strike box
- Mounting plate
- Tailpiece adapter and spindle components
- Short and long mounting screws
- Wood screws and frame reinforcement screws
- Mechanical backup keys
- Door sensor or magnet, if included
- Installation template
- Quick start card and QR code label
- Four AA alkaline batteries, if included in the region

Part	Use	Handling Guidance
Exterior keypad assembly	Supports installation and normal operation	Keep clean and do not bend or force during installation
Interior motor assembly with battery cover	Supports installation and normal operation	Keep clean and do not bend or force during installation
Adjustable deadbolt latch	Supports installation and normal operation	Keep clean and do not bend or force during installation
Strike plate and reinforced strike box	Supports installation and normal operation	Keep clean and do not bend or force during installation
Mounting plate	Supports installation and normal operation	Keep clean and do not bend or force during installation
Tailpiece adapter and spindle components	Supports installation and normal operation	Keep clean and do not bend or force during installation
Short and long mounting screws	Supports installation and normal operation	Keep clean and do not bend or force during installation
Wood screws and frame reinforcement screws	Supports installation and normal operation	Keep clean and do not bend or force during installation

4. Door Compatibility

The SL-500 is designed for standard hinged doors with a single-cylinder deadbolt position. It is not designed for sliding doors, double-cylinder deadbolts that require a key on both sides, rim locks, mortise lock bodies, glass-only doors, cabinet doors, gates exposed to direct weather on both sides, or fire-rated commercial doors unless the lock is specifically approved for that use.

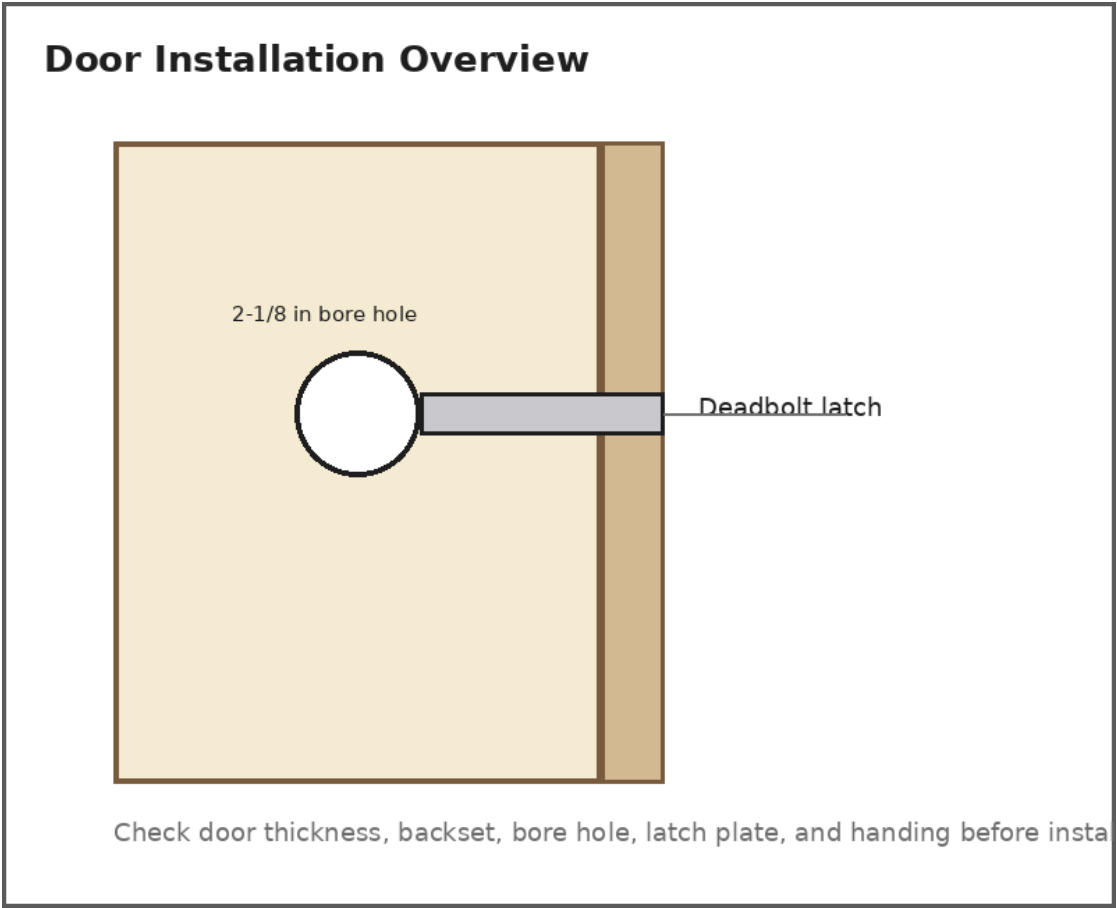

Measurement	Supported Range	How to Check
Door thickness	1-3/8 in to 2 in, depending on hardware kit	Measure the door edge at the deadbolt location
Backset	2-3/8 in or 2-3/4 in	Measure from door edge to center of bore hole
Bore hole	2-1/8 in recommended	Measure the main circular opening
Edge bore	1 in recommended	Measure the latch opening on the door edge
Door handing	Left or right hinged	Stand outside and note hinge side
Frame condition	Solid strike mounting surface	Check for cracks, loose trim, and soft wood

A smart lock works best when the door closes smoothly before the lock is installed. The deadbolt should extend into the strike plate without lifting, pulling, pushing, or slamming the door. If your existing deadbolt is difficult to turn by hand, correct the door alignment first. Motorized locks are not designed to overcome a warped door or misaligned strike.

- Open and close the door at least five times before installation.
- Turn the existing deadbolt by hand with the door open and closed.
- Confirm the latch enters the strike hole without rubbing.
- Tighten hinge screws and check weather stripping if the door springs back.
- Do not use the lock motor as a clamp to pull the door shut.

5. Installation Guide

This section explains a standard retrofit installation. If your door is new and has no bore holes, use the supplied template and consult a qualified installer. Work slowly, keep screws organized, and test each stage before moving

on. Installation should normally be completed with a Phillips screwdriver. A drill may be needed only for new holes, deeper pilot holes, or strike reinforcement screws.

Remove the existing deadbolt only after confirming that the door is compatible and that all package contents are present. Keep your existing hardware until the SL-500 is fully tested. If you rent your home or are subject to building rules, obtain permission before replacing door hardware.

1. Open the door and keep it open throughout installation.
2. Remove the interior thumb turn screws from the existing deadbolt.
3. Remove the exterior cylinder and interior thumb turn.
4. Remove the old latch from the door edge.
5. Clean the bore hole and remove loose debris.
6. Insert the adjustable latch with the word TOP facing upward, if marked.
7. Secure the latch using the latch screws without overtightening.
8. Place the exterior assembly on the outside of the door and route the cable under the latch.
9. Install the mounting plate on the interior side and tighten evenly.
10. Connect the cable to the interior assembly until the connector is fully seated.
11. Attach the interior assembly to the mounting plate.
12. Insert batteries and wait for startup tones or lights.
13. Run the door handing calibration before closing the door.
14. Test lock and unlock with the door open at least five times.
15. Close the door and test again, watching for rubbing or incomplete extension.

Step	Common Error	Correction
Latch insertion	Latch is installed upside down	Remove and reinstall with correct orientation
Cable routing	Cable is pinched between plate and door	Route cable through the intended opening and retighten
Mounting plate	Screws are unevenly tightened	Loosen, align, and tighten both sides gradually
Interior assembly	Tailpiece does not engage motor slot	Reposition thumb turn and tailpiece according to handing
Calibration	Door is closed during first calibration	Recalibrate with door open, then test closed

When tightening screws, firm contact is sufficient. Overtightening can deform the door surface, bind the tailpiece, crack plastic guides, or create motor strain. If the thumb turn is difficult to rotate after tightening, loosen the mounting screws slightly and retest. The thumb turn should operate smoothly with consistent resistance.

Installation Warning: Do not close the door until the lock has been powered, calibrated, and tested with the door open. If the lock is incorrectly installed, closing the door may trap the bolt in the frame.

6. Initial Power-On and Calibration

The first power-on establishes motor direction, bolt travel, and lock status. Install four fresh AA alkaline batteries in the orientation shown inside the battery compartment. The lock may beep, flash, or rotate briefly. These behaviors are normal during startup. Keep fingers clear of the thumb turn and bolt while the motor is moving.


16. Install batteries with the door open.
17. Wait until the status light stops flashing rapidly.
18. Press and hold the pairing or setup button as directed by the quick start card.
19. Allow the lock to extend and retract the bolt automatically.
20. Confirm that the app or keypad reports the correct locked and unlocked status.
21. Repeat calibration if the lock status is reversed or the bolt stops early.

Battery life varies by door alignment, temperature, usage frequency, radio signal strength, firmware version, and alert settings. A properly aligned door generally uses less power than a door that requires the motor to push against friction. Low-battery warnings should be addressed promptly. Keep backup keys accessible so the home is not dependent on battery power.

Battery Indicator	Meaning	Recommended Action
Green or normal status	Battery level sufficient	Continue normal use
Yellow, amber, or app warning	Battery level declining	Replace batteries soon
Red, repeated beeps, or failed motor cycle	Battery level low or voltage unstable	Replace all batteries immediately
No response	Batteries depleted or contacts obstructed	Use backup key or emergency power method if supported

7. App Setup and Pairing

The mobile app provides owner administration, credential management, event history, notifications, firmware updates, and optional remote features. Local Bluetooth setup may be available without a hub, while remote lock control normally requires a compatible Wi-Fi bridge, home hub, or integrated connectivity model. App screens may vary by region and software version, but the workflow remains similar.

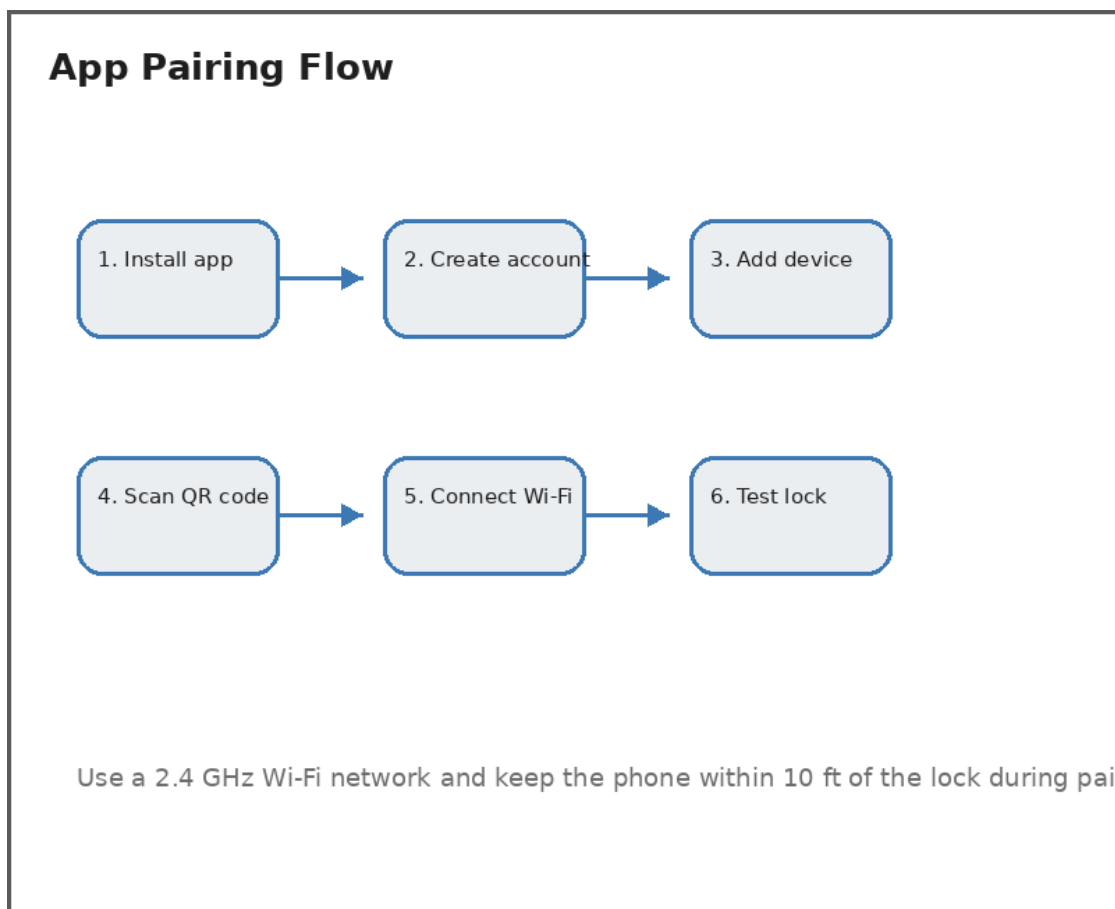

22. Download the official app from the supported app store or the QR code on the quick start card.
23. Create an account using an email address or phone number that you control.
24. Verify the account using the confirmation code sent by the app.
25. Turn on Bluetooth and allow nearby device permissions when prompted.
26. Select Add Device and choose Smart Lock or SL-500 from the device list.
27. Scan the QR code on the lock, manual, or interior battery cover label.
28. Connect to a 2.4 GHz Wi-Fi network if the model or hub requires Wi-Fi during setup.

- 29. Name the lock using a clear location name, such as Front Door or Office Entry.
- 30. Run a test unlock and lock command while standing near the door.
- 31. Enable notifications for low battery, tamper, lockout, and guest access events.

Use a stable 2.4 GHz network for pairing. Many routers broadcast both 2.4 GHz and 5 GHz networks using the same name. If pairing fails, temporarily separate the network names, move the phone and lock closer to the router, disable VPN software, and confirm that the Wi-Fi password is entered correctly. Captive portals, enterprise Wi-Fi, and networks requiring browser sign-in are not supported for direct pairing.

Pairing Issue	Likely Cause	Resolution
Device not found	Bluetooth permission disabled	Enable Bluetooth and nearby device permission
Wi-Fi password error	Incorrect password or unsupported network	Re-enter password and use 2.4 GHz Wi-Fi
QR code invalid	Wrong code scanned or already bound	Scan the interior label or perform owner transfer
Pairing times out	Phone too far from lock or router	Move within 10 ft of lock and improve signal
Remote control unavailable	Hub not installed or offline	Pair compatible hub and confirm internet access

8. Credential Management

Credentials are the methods that allow a person to unlock the door. The SL-500 supports multiple credential types so owners can balance convenience and control. Administrators should create separate credentials for each person whenever possible. Shared codes make it difficult to understand who entered and should be avoided for long-term use.

Keypad and Credential Types

123

456

789

*0#

PIN Code4-10 digits

Fingerprintup to 100 profiles

App Unlockowner or guest

Mechanical Keybackup access

Credential Type	Recommended Use	Risk Control
Owner account	Primary administrator and household manager	Protect with strong password and account recovery
PIN code	Family members and trusted regular users	Use unique codes and avoid birthdays or addresses
Temporary PIN	Short visits, service providers, deliveries	Set expiration and delete after use
Recurring access	Cleaners, caregivers, office staff	Restrict by day and time window
Fingerprint	Fast daily access for residents	Enroll more than one finger and update if recognition changes
App key	Remote or local app unlock	Remove access when phone is lost or user leaves
Mechanical key	Emergency backup	Store securely and do not label with address

When creating PIN codes, choose codes that are difficult to guess. Avoid repeated digits, simple sequences, address numbers, phone endings, birthdays, or codes displayed in photos. If the keypad supports anti-peep entry, users may enter extra digits before or after the real code, but this feature should not replace good code selection.

32. Open the app and select the lock.
33. Choose Users, Members, or Access Management.
34. Select Add User or Add Credential.
35. Choose PIN, fingerprint, app key, or schedule-based guest access.
36. Assign the credential to a named person or service role.
37. Set start and end dates when access is temporary.
38. Save the credential and perform a test unlock.
39. Review event history to confirm the credential is recorded correctly.

Fingerprint performance depends on skin condition, placement, sensor cleanliness, and enrollment quality. Enroll fingerprints when fingers are clean and dry. Capture multiple angles of the same finger if the app requests repeated placement. If a user often has wet hands, worn fingerprints, gloves, or occupational skin changes, maintain a PIN code or mechanical key backup.

9. Daily Operation

Daily operation should be simple: close the door, lock the door, and confirm that the bolt fully extends. The lock can be operated from the exterior keypad, fingerprint reader, mobile app, interior thumb turn, auto-lock schedule, and smart home routines if enabled. Always verify critical lock events visually when leaving the property, especially after installation, battery replacement, firmware update, or door adjustment.

Action	Method	Expected Result
Lock from outside	Press lock icon, one-touch key, or wait for auto-lock	Bolt extends and status shows locked
Unlock by PIN	Wake keypad, enter code, press confirm if required	Bolt retracts and entry is allowed
Unlock by fingerprint	Place enrolled finger on sensor	Bolt retracts after successful recognition
Unlock by app	Open app and tap unlock	Bolt retracts locally or remotely
Lock from inside	Turn thumb turn or use app	Bolt extends
Emergency entry	Use mechanical key	Cylinder retracts bolt manually

Auto-lock can reduce accidental unlocked-door events, but it should be configured carefully. If auto-lock is too short, residents may be locked out while carrying packages or moving between indoor and outdoor areas. If auto-lock is too long, the door may remain unlocked longer than expected. Many households start with a 30-second or 60-second delay and adjust after observing daily use.

Privacy mode, vacation mode, or do-not-disturb mode may disable some exterior credentials while allowing interior exit. Use these modes only after all household members understand their effect. If a guest cannot enter because privacy mode is active, customer support may be unable to override the lock remotely for security reasons.

10. Guest Access


Guest access is useful for family visits, cleaners, pet sitters, contractors, rental guests, office staff, and emergency contacts. Each guest access record should include a clear user name, purpose, start time, end time, and credential type. Do not create permanent guest codes for temporary users. Expired access should be reviewed and removed regularly.

Guest Scenario	Best Credential	Recommended Expiration
Same-day delivery requiring entry	One-time PIN	Same day after delivery window
Weekend visitor	Temporary PIN or app key	End of final visit day
Weekly cleaner	Recurring scheduled PIN	Review monthly
Short-term rental guest	Temporary PIN	Checkout time plus small buffer
Contractor project	Temporary PIN with business hours only	End of project or daily renewal
Emergency neighbor	PIN with limited use or app key	Review every quarter

When communicating a guest code, use a secure channel and avoid posting codes in shared calendars, public notes, unsecured rental listings, or visible messages near the door. If a code is accidentally exposed, delete it and create a new one. Event history can help verify that a guest entered during the expected time window, but it should be used responsibly and in accordance with privacy expectations and applicable law.

11. Security Features and Best Practices

Smart lock security includes physical resistance, credential controls, software security, network security, and administrative discipline. The strongest configuration uses a properly aligned deadbolt, unique credentials, limited guest access, account protection, firmware updates, and routine review of event history.

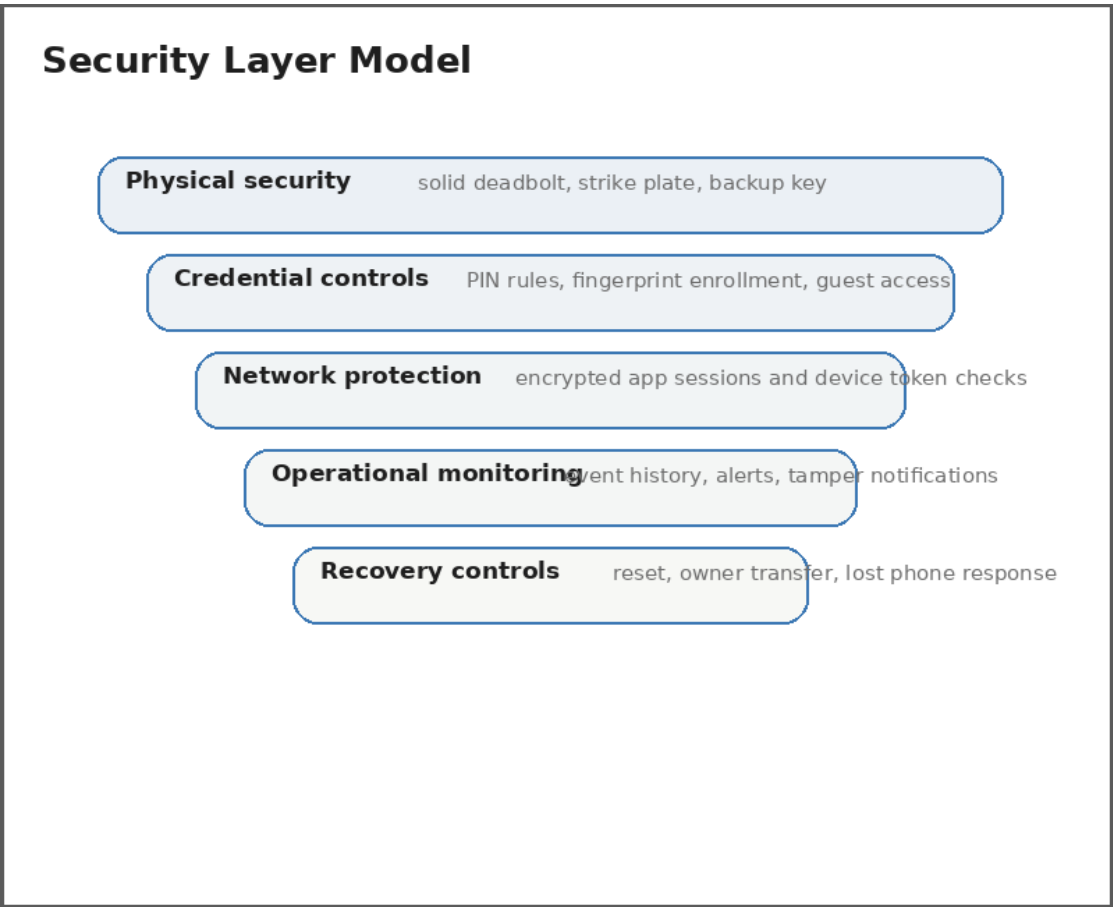

- Use a unique PIN for each user rather than one household code.

- Delete temporary access when it is no longer needed.
- Enable low-battery, tamper, lockout, and failed-attempt alerts.
- Review event history after guests, service visits, and unexpected notifications.
- Store mechanical keys securely and separately from address information.
- Do not share app owner access unless the person should administer the lock.
- Change credentials after moving into a new home, ending a rental, or changing staff.
- Keep the app and firmware updated to receive security and reliability improvements.

The lockout feature may temporarily disable keypad entry after repeated incorrect attempts. This helps slow guessing attacks, but it can also affect legitimate users who forget a code. Administrators should confirm the person, reset the code if appropriate, and look for patterns in event history. Repeated failed attempts at unusual times should be treated as a security event.

Security Event	Immediate Action	Follow-Up
Repeated failed PIN attempts	Check event history and camera if available	Change exposed codes and monitor alerts
Tamper alert	Inspect lock exterior and mounting screws	Contact support if housing is loose or damaged
Lost phone with app access	Remove or suspend the user account key	Change account password and review logs
Former resident or staff member	Delete credentials immediately	Review guest access and backup keys
Suspected account compromise	Change password and enable MFA	Contact support for account security review

12. Smart Home Integration

The SL-500 may support smart home platforms through a compatible hub, app integration, or cloud service. Available features vary by region, firmware version, platform certification, and customer configuration. Common integrations include voice assistant status checks, lock commands, arrival routines, security scenes, and notifications. For safety, some platforms require voice PIN confirmation before unlocking by voice.

Integration	Typical Use	Safety Guidance
Voice assistant	Ask whether the door is locked or lock the door	Require voice PIN for unlock if available
Home hub	Coordinate routines with sensors and lights	Keep hub online and updated
Security system	Arm system when door is locked	Test routines before relying on them
Smart display	View lock status and entry notifications	Do not expose access logs on shared screens
Automation scenes	Turn on lights after unlock	Avoid routines that unlock based only on weak triggers

Avoid creating automations that unlock the door automatically based only on location, Wi-Fi connection, or a single sensor event. Phones can be misplaced, location can be inaccurate, and sensors can misfire. If an automation includes unlocking, use additional confirmation steps and test carefully.

13. Notifications and Event History

Notifications help administrators understand lock status, guest access, and abnormal conditions. Event history may include timestamps, credential names, lock and unlock methods, failed attempts, tamper events, low-battery warnings, firmware updates, and connectivity changes. The exact fields shown depend on app version and privacy settings.

Notification	Meaning	Recommended Response
Door locked	Bolt extended successfully	No action unless unexpected

Door unlocked	A credential or command unlocked the door	Review if unexpected
Failed attempt	A code, fingerprint, or command failed	Monitor for repeated failures
Low battery	Battery voltage is declining	Replace all batteries soon
Tamper detected	Movement or removal attempt detected	Inspect lock and surroundings
Offline	Lock or hub lost connection	Check batteries, Wi-Fi, and hub power
Firmware updated	Software changed successfully	Test lock after update

Event history should be interpreted carefully. Network delay may affect when a notification is received. A door sensor may report open or closed separately from the deadbolt status. A manual thumb turn may appear differently from keypad or app unlock. If records appear inconsistent, test the lock while observing the app and contact support with timestamps, screenshots, and a description of the door state.

14. Maintenance and Care

Routine maintenance keeps the lock reliable. Most issues are caused by battery depletion, door misalignment, dirty sensors, loose screws, poor Wi-Fi signal, or outdated credentials. A short monthly inspection is recommended for primary entry doors and high-use rental properties.

Frequency	Task	Details
Weekly	Check physical operation	Confirm thumb turn and keypad locking feel smooth
Monthly	Inspect alignment	Verify bolt enters strike without rubbing
Monthly	Review access list	Remove expired guest users and old codes
Quarterly	Clean keypad and sensor	Use soft dry cloth; avoid solvents
Quarterly	Check screws	Tighten loose mounting and strike screws
Every 6 months	Replace batteries if usage is high	Use fresh alkaline batteries
As available	Install firmware updates	Update during a low-traffic time and test afterward

Clean the exterior with a soft, slightly damp cloth, then dry immediately. Do not use abrasive pads, bleach, ammonia, solvents, pressure washers, or spray cleaners directly on the lock. For fingerprint sensor cleaning, use a dry microfiber cloth. If the keypad is exposed to rain, wipe away standing water before repeated use.

Cold weather can reduce battery performance and stiffen door seals. In winter, check door alignment more often and replace batteries before they become weak. Hot direct sunlight may make the exterior housing warm to the touch, but the lock should remain within the operating temperature range listed in the specifications.

15. Troubleshooting

Use the troubleshooting tables before requesting service. Many symptoms can be resolved by replacing batteries, recalibrating the lock, adjusting the strike plate, improving Wi-Fi signal, cleaning the fingerprint reader, or deleting and recreating a credential. Record what you tried, the time of the issue, and any app messages before contacting support.

Symptom	Likely Cause	Corrective Action
Lock does not respond	Batteries depleted, installed incorrectly, or contacts dirty	Replace all batteries, confirm polarity, clean contacts with dry cloth
Motor runs but bolt does not move	Tailpiece or spindle not engaged	Remove interior assembly and reinstall tailpiece correctly
Bolt extends then retracts	Door hanging or calibration	Run calibration with door open and

	incorrect	retest
Bolt rubs or stops early	Strike plate misaligned or door warped	Adjust strike, hinges, or weather stripping
Keypad does not light	Battery issue or keypad sleep mode	Wake keypad, replace batteries, check cable connection
PIN code fails	Wrong code, expired schedule, privacy mode active	Check access schedule, recreate PIN, disable privacy mode if appropriate
Fingerprint fails	Dirty sensor, dry or wet finger, poor enrollment	Clean sensor and re-enroll finger
App cannot connect nearby	Bluetooth disabled or permission denied	Enable Bluetooth and app permissions
Remote control unavailable	Hub offline or Wi-Fi disconnected	Check hub power, router, internet, and signal
Notifications delayed	Network delay or phone notification settings	Check app permissions and router connection
Lock reports jammed	Door alignment or motor obstruction	Operate with door open; fix alignment if open-door test passes
Batteries drain quickly	Misalignment, frequent use, weak signal, mixed battery types	Align door, replace all batteries with same fresh type
Backup key hard to turn	Cylinder under pressure or wrong key	Push/pull door slightly, verify correct key, contact locksmith if needed
Cannot add device	Already bound to another account	Use owner transfer or factory reset with proof of ownership
Factory reset not working	Button sequence incomplete	Follow timing exactly and keep batteries installed

Lock does not respond

Likely cause: Batteries depleted, installed incorrectly, or contacts dirty. Start with the least invasive correction: Replace all batteries, confirm polarity, clean contacts with dry cloth. If the issue happens only when the door is closed, the lock hardware is probably functioning and the door or strike alignment needs adjustment. If the same issue happens with the door open, inspect installation, power, calibration, and the relevant credential setting.

- Test with the door open before testing with the door closed.
- Observe whether the thumb turn moves freely by hand.
- Check app event history for error labels or timestamps.
- Do not repeatedly force the motor if the bolt is jammed.

Motor runs but bolt does not move

Likely cause: Tailpiece or spindle not engaged. Start with the least invasive correction: Remove interior assembly and reinstall tailpiece correctly. If the issue happens only when the door is closed, the lock hardware is probably functioning and the door or strike alignment needs adjustment. If the same issue happens with the door open, inspect installation, power, calibration, and the relevant credential setting.

- Test with the door open before testing with the door closed.
- Observe whether the thumb turn moves freely by hand.
- Check app event history for error labels or timestamps.
- Do not repeatedly force the motor if the bolt is jammed.

Bolt extends then retracts

Likely cause: Door hanging or calibration incorrect. Start with the least invasive correction: Run calibration with door open and retest. If the issue happens only when the door is closed, the lock hardware is probably functioning and the door or strike alignment needs adjustment. If the same issue happens with the door open, inspect installation, power, calibration, and the relevant credential setting.

- Test with the door open before testing with the door closed.
- Observe whether the thumb turn moves freely by hand.

- Check app event history for error labels or timestamps.
- Do not repeatedly force the motor if the bolt is jammed.

Bolt rubs or stops early

Likely cause: Strike plate misaligned or door warped. Start with the least invasive correction: Adjust strike, hinges, or weather stripping. If the issue happens only when the door is closed, the lock hardware is probably functioning and the door or strike alignment needs adjustment. If the same issue happens with the door open, inspect installation, power, calibration, and the relevant credential setting.

- Test with the door open before testing with the door closed.
- Observe whether the thumb turn moves freely by hand.
- Check app event history for error labels or timestamps.
- Do not repeatedly force the motor if the bolt is jammed.

Keypad does not light

Likely cause: Battery issue or keypad sleep mode. Start with the least invasive correction: Wake keypad, replace batteries, check cable connection. If the issue happens only when the door is closed, the lock hardware is probably functioning and the door or strike alignment needs adjustment. If the same issue happens with the door open, inspect installation, power, calibration, and the relevant credential setting.

- Test with the door open before testing with the door closed.
- Observe whether the thumb turn moves freely by hand.
- Check app event history for error labels or timestamps.
- Do not repeatedly force the motor if the bolt is jammed.

PIN code fails

Likely cause: Wrong code, expired schedule, privacy mode active. Start with the least invasive correction: Check access schedule, recreate PIN, disable privacy mode if appropriate. If the issue happens only when the door is closed, the lock hardware is probably functioning and the door or strike alignment needs adjustment. If the same issue happens with the door open, inspect installation, power, calibration, and the relevant credential setting.

- Test with the door open before testing with the door closed.
- Observe whether the thumb turn moves freely by hand.
- Check app event history for error labels or timestamps.
- Do not repeatedly force the motor if the bolt is jammed.

Fingerprint fails

Likely cause: Dirty sensor, dry or wet finger, poor enrollment. Start with the least invasive correction: Clean sensor and re-enroll finger. If the issue happens only when the door is closed, the lock hardware is probably functioning and the door or strike alignment needs adjustment. If the same issue happens with the door open, inspect installation, power, calibration, and the relevant credential setting.

- Test with the door open before testing with the door closed.
- Observe whether the thumb turn moves freely by hand.
- Check app event history for error labels or timestamps.
- Do not repeatedly force the motor if the bolt is jammed.

App cannot connect nearby

Likely cause: Bluetooth disabled or permission denied. Start with the least invasive correction: Enable Bluetooth and app permissions. If the issue happens only when the door is closed, the lock hardware is probably functioning and the door or strike alignment needs adjustment. If the same issue happens with the door open, inspect installation, power, calibration, and the relevant credential setting.

- Test with the door open before testing with the door closed.
- Observe whether the thumb turn moves freely by hand.
- Check app event history for error labels or timestamps.
- Do not repeatedly force the motor if the bolt is jammed.

16. Technical Specifications

Specifications are provided for product identification and support. Exact values may vary by region, production run, finish, and bundled accessories. Use the model number and serial number printed on the interior label when contacting support.

Specification	Value
Product category	Smart Lock
Model	SL-500 SecureConnect Smart Lock
SKU	SL500-SC-US
Lock type	Motorized single-cylinder deadbolt
Access methods	PIN, fingerprint, app, mechanical key, scheduled guest access
Power	Four AA alkaline batteries
Emergency power	Region-dependent external 9V or USB emergency contact if equipped
Wireless	Bluetooth Low Energy; optional 2.4 GHz Wi-Fi via hub or integrated model
Door thickness	1-3/8 in to 2 in with supported hardware
Backset	2-3/8 in or 2-3/4 in
PIN length	4 to 10 digits recommended
Fingerprint capacity	Up to 100 profiles, region and firmware dependent
Operating temperature	Exterior: approx. -4 F to 131 F; interior should remain dry
Weather resistance	Exterior weather-resistant; interior not waterproof
Finish options	Matte black, satin nickel, bronze, or region-specific finish
Warranty	Limited warranty as described in warranty policy and purchase documentation

17. Warranty, Returns, and Support

Warranty coverage is intended to address defects in materials or workmanship under normal use during the applicable warranty period. Warranty service does not cover improper installation, door misalignment, unauthorized modification, cosmetic wear, lost keys, battery leakage caused by misuse, water damage to the interior assembly, damage from forced entry, or problems caused by unsupported third-party integrations. Refer to the warranty policy for legally controlling terms.

If you believe the lock is defective, gather the order number, model number, serial number, installation photos, app screenshots, event timestamps, and a description of troubleshooting steps already completed. Support may ask you to test the lock with the door open, replace batteries, recalibrate, or provide a short video showing the issue. These steps help determine whether the issue is product-related, installation-related, or environment-related.

Support Request	Information to Provide	Why It Matters
Installation help	Door measurements and photos of latch, strike, interior, exterior	Helps identify compatibility or alignment problems
App pairing issue	Phone model, app version, router type, Wi-Fi band	Helps diagnose connectivity restrictions
Battery drain	Battery brand, replacement date, usage frequency, alignment test	Separates battery quality from motor strain
Credential failure	Credential type, schedule, user role, event history	Identifies expired access or configuration issues
Warranty claim	Order number, serial number, proof of purchase, photos	Confirms eligibility and correct replacement part

Returns and refunds are handled according to the return policy and refund policy. A product that has been installed may require inspection before refund approval. Missing parts, damaged packaging, altered serial numbers, or

unauthorized modifications can affect eligibility. Replacement parts shipped under warranty may be refurbished or new depending on availability and applicable rules.

18. Appendices

Appendix A: Pre-Installation Checklist

- I have confirmed door thickness, backset, bore hole, and latch opening.
- The existing deadbolt turns smoothly with the door open and closed.
- The door does not need to be lifted, pushed, or pulled to latch.
- All package contents are present.
- I have a screwdriver and fresh batteries available.
- I have permission to replace hardware if the property is rented or managed.
- I have saved the serial number and QR code before installation.

Appendix B: Access Review Checklist

- Review all owner, admin, household, guest, and service users.
- Delete expired or unused PIN codes.
- Confirm temporary schedules end at the correct time.
- Change shared or exposed codes.
- Verify backup keys are stored securely.
- Enable important notifications.
- Review event history for unexpected failed attempts.

Appendix C: Glossary

Term	Meaning
Administrator	A user who can manage lock settings and credentials
Auto-lock	A feature that locks after a configured delay
Backset	Distance from door edge to center of bore hole
Deadbolt	The metal bolt that extends into the door frame
Door handing	Whether the door is left-handed or right-handed
Event history	A log of lock activity and system events
Guest access	Temporary or limited access for a non-owner
Lockout	Temporary restriction after repeated failed attempts
Pairing	Process of adding the lock to the app
Strike plate	Metal plate on the door frame that receives the bolt

Appendix D: Customer Support Script

When contacting support, use this concise script to speed diagnosis: My product is the SL-500 SecureConnect Smart Lock. My order number is [order number]. My serial number is [serial number]. The issue is [short description]. It happens when the door is [open/closed/both]. I have already tried [battery replacement/calibration/app restart/strike alignment/credential reset]. The app shows [message], and the event occurred at [date and time]. I can provide photos or a video if needed.

Appendix E: Manual Revision Notes

Version 1.0 is prepared as a customer-facing product manual for a smart home e-commerce knowledge base. It is written to support Basic RAG retrieval, help center answers, customer service workflows, product support, and troubleshooting automation. Future revisions may add device-specific screenshots, region-specific compliance statements, updated app flows, new integration options, and revised warranty references.

Credential Governance for Households

Household administrators should treat lock access like account access. A person who has a credential can enter a protected space, so credentials should be assigned intentionally, named clearly, and reviewed regularly. When household routines change, such as a roommate moving out, a caregiver schedule ending, a rental checkout completing, or a contractor finishing work, update the access list immediately. If codes were shared verbally, assume they may be remembered and create new ones for continued users. This guidance is operational rather than legal. For purchase eligibility, refund timing, warranty eligibility, shipping procedures, privacy rights, and terms of service, use the corresponding company policy documents. For technical diagnosis, use this manual together with the help center article that matches the observed symptom.

Household administrators should treat lock access like account access. A person who has a credential can enter a protected space, so credentials should be assigned intentionally, named clearly, and reviewed regularly. When household routines change, such as a roommate moving out, a caregiver schedule ending, a rental checkout completing, or a contractor finishing work, update the access list immediately. If codes were shared verbally, assume they may be remembered and create new ones for continued users. This guidance is operational rather than legal. For purchase eligibility, refund timing, warranty eligibility, shipping procedures, privacy rights, and terms of service, use the corresponding company policy documents. For technical diagnosis, use this manual together with the help center article that matches the observed symptom.

Household administrators should treat lock access like account access. A person who has a credential can enter a protected space, so credentials should be assigned intentionally, named clearly, and reviewed regularly. When household routines change, such as a roommate moving out, a caregiver schedule ending, a rental checkout completing, or a contractor finishing work, update the access list immediately. If codes were shared verbally, assume they may be remembered and create new ones for continued users. This guidance is operational rather than legal. For purchase eligibility, refund timing, warranty eligibility, shipping procedures, privacy rights, and terms of service, use the corresponding company policy documents. For technical diagnosis, use this manual together with the help center article that matches the observed symptom.

Rental Property Deployment

For rental properties, create a turnover checklist. Before each guest arrives, create a unique temporary code, verify that it starts at check-in time, and verify that it expires after checkout. Avoid reusing codes across guests. After checkout, review event history for late exits or unexpected entries. Keep mechanical backup keys in accordance with local law and platform rules. Provide guests with simple instructions but do not provide owner account access. This guidance is operational rather than legal. For purchase eligibility, refund timing, warranty eligibility, shipping procedures, privacy rights, and terms of service, use the corresponding company policy documents. For technical diagnosis, use this manual together with the help center article that matches the observed symptom.

For rental properties, create a turnover checklist. Before each guest arrives, create a unique temporary code, verify that it starts at check-in time, and verify that it expires after checkout. Avoid reusing codes across guests. After checkout, review event history for late exits or unexpected entries. Keep mechanical backup keys in accordance with local law and platform rules. Provide guests with simple instructions but do not provide owner account access. This guidance is operational rather than legal. For purchase eligibility, refund timing, warranty eligibility, shipping procedures, privacy rights, and terms of service, use the corresponding company policy documents. For technical diagnosis, use this manual together with the help center article that matches the observed symptom.

For rental properties, create a turnover checklist. Before each guest arrives, create a unique temporary code, verify that it starts at check-in time, and verify that it expires after checkout. Avoid reusing codes across guests. After checkout, review event history for late exits or unexpected entries. Keep mechanical backup keys in accordance with local law and platform rules. Provide guests with simple instructions but do not provide owner account access. This guidance is operational rather than legal. For purchase eligibility, refund timing, warranty eligibility, shipping procedures, privacy rights, and terms of service, use the corresponding company policy documents. For technical diagnosis, use this manual together with the help center article that matches the observed symptom.

Small Office Deployment

For small offices, assign credentials according to role. Permanent employees may receive named PINs or app keys. Vendors should receive scheduled access limited to service windows. Departing staff must be removed during offboarding. If the lock protects sensitive records, cash handling areas, equipment rooms, or regulated spaces, use additional access control measures and maintain written access logs outside the consumer app. This

guidance is operational rather than legal. For purchase eligibility, refund timing, warranty eligibility, shipping procedures, privacy rights, and terms of service, use the corresponding company policy documents. For technical diagnosis, use this manual together with the help center article that matches the observed symptom.

For small offices, assign credentials according to role. Permanent employees may receive named PINs or app keys. Vendors should receive scheduled access limited to service windows. Departing staff must be removed during offboarding. If the lock protects sensitive records, cash handling areas, equipment rooms, or regulated spaces, use additional access control measures and maintain written access logs outside the consumer app. This guidance is operational rather than legal. For purchase eligibility, refund timing, warranty eligibility, shipping procedures, privacy rights, and terms of service, use the corresponding company policy documents. For technical diagnosis, use this manual together with the help center article that matches the observed symptom.

For small offices, assign credentials according to role. Permanent employees may receive named PINs or app keys. Vendors should receive scheduled access limited to service windows. Departing staff must be removed during offboarding. If the lock protects sensitive records, cash handling areas, equipment rooms, or regulated spaces, use additional access control measures and maintain written access logs outside the consumer app. This guidance is operational rather than legal. For purchase eligibility, refund timing, warranty eligibility, shipping procedures, privacy rights, and terms of service, use the corresponding company policy documents. For technical diagnosis, use this manual together with the help center article that matches the observed symptom.

Data and Privacy Considerations

Smart lock event history may reveal when people arrive, leave, fail to enter, or access a property. Administrators should use this information responsibly. Do not publish access logs, do not use them for purposes unrelated to property safety and operations, and follow applicable privacy obligations. If a user requests information about stored data, account deletion, or data rights, refer to the privacy policy and customer support process. This guidance is operational rather than legal. For purchase eligibility, refund timing, warranty eligibility, shipping procedures, privacy rights, and terms of service, use the corresponding company policy documents. For technical diagnosis, use this manual together with the help center article that matches the observed symptom.

Smart lock event history may reveal when people arrive, leave, fail to enter, or access a property. Administrators should use this information responsibly. Do not publish access logs, do not use them for purposes unrelated to property safety and operations, and follow applicable privacy obligations. If a user requests information about stored data, account deletion, or data rights, refer to the privacy policy and customer support process. This guidance is operational rather than legal. For purchase eligibility, refund timing, warranty eligibility, shipping procedures, privacy rights, and terms of service, use the corresponding company policy documents. For technical diagnosis, use this manual together with the help center article that matches the observed symptom.

Smart lock event history may reveal when people arrive, leave, fail to enter, or access a property. Administrators should use this information responsibly. Do not publish access logs, do not use them for purposes unrelated to property safety and operations, and follow applicable privacy obligations. If a user requests information about stored data, account deletion, or data rights, refer to the privacy policy and customer support process. This guidance is operational rather than legal. For purchase eligibility, refund timing, warranty eligibility, shipping procedures, privacy rights, and terms of service, use the corresponding company policy documents. For technical diagnosis, use this manual together with the help center article that matches the observed symptom.

Reliability Planning

Reliable access requires redundancy. Keep backup keys available, replace batteries before they fail, maintain at least two administrator accounts when appropriate, and avoid relying on a single phone. In households with elderly residents, children, or medical needs, make sure trusted people understand emergency access procedures. Test the backup key twice a year so it does not become forgotten or misplaced. This guidance is operational rather than legal. For purchase eligibility, refund timing, warranty eligibility, shipping procedures, privacy rights, and terms of service, use the corresponding company policy documents. For technical diagnosis, use this manual together with the help center article that matches the observed symptom.

Reliable access requires redundancy. Keep backup keys available, replace batteries before they fail, maintain at least two administrator accounts when appropriate, and avoid relying on a single phone. In households with elderly residents, children, or medical needs, make sure trusted people understand emergency access procedures. Test the backup key twice a year so it does not become forgotten or misplaced. This guidance is operational rather than legal. For purchase eligibility, refund timing, warranty eligibility, shipping procedures, privacy rights, and terms of

service, use the corresponding company policy documents. For technical diagnosis, use this manual together with the help center article that matches the observed symptom.

Reliable access requires redundancy. Keep backup keys available, replace batteries before they fail, maintain at least two administrator accounts when appropriate, and avoid relying on a single phone. In households with elderly residents, children, or medical needs, make sure trusted people understand emergency access procedures. Test the backup key twice a year so it does not become forgotten or misplaced. This guidance is operational rather than legal. For purchase eligibility, refund timing, warranty eligibility, shipping procedures, privacy rights, and terms of service, use the corresponding company policy documents. For technical diagnosis, use this manual together with the help center article that matches the observed symptom.

Firmware Update Practices

Firmware updates can improve reliability, add features, correct bugs, and patch security issues. Install updates when the door is not in heavy use. Keep the phone near the lock, maintain battery level, and do not remove batteries during an update. Afterward, test keypad entry, fingerprint entry, app lock and unlock, auto-lock, guest access, and notifications. Report repeated update failures with app version and firmware version details. This guidance is operational rather than legal. For purchase eligibility, refund timing, warranty eligibility, shipping procedures, privacy rights, and terms of service, use the corresponding company policy documents. For technical diagnosis, use this manual together with the help center article that matches the observed symptom.

Firmware updates can improve reliability, add features, correct bugs, and patch security issues. Install updates when the door is not in heavy use. Keep the phone near the lock, maintain battery level, and do not remove batteries during an update. Afterward, test keypad entry, fingerprint entry, app lock and unlock, auto-lock, guest access, and notifications. Report repeated update failures with app version and firmware version details. This guidance is operational rather than legal. For purchase eligibility, refund timing, warranty eligibility, shipping procedures, privacy rights, and terms of service, use the corresponding company policy documents. For technical diagnosis, use this manual together with the help center article that matches the observed symptom.

Firmware updates can improve reliability, add features, correct bugs, and patch security issues. Install updates when the door is not in heavy use. Keep the phone near the lock, maintain battery level, and do not remove batteries during an update. Afterward, test keypad entry, fingerprint entry, app lock and unlock, auto-lock, guest access, and notifications. Report repeated update failures with app version and firmware version details. This guidance is operational rather than legal. For purchase eligibility, refund timing, warranty eligibility, shipping procedures, privacy rights, and terms of service, use the corresponding company policy documents. For technical diagnosis, use this manual together with the help center article that matches the observed symptom.

Environmental Use

Exterior components are designed for normal outdoor exposure, but the interior assembly is intended for indoor use. Covered entries generally provide better long-term performance than doors exposed to driving rain, salt spray, direct sprinkler contact, or severe dust. If the lock is installed near the ocean, clean the exterior more often and inspect screws and moving parts for corrosion. Do not paint the keypad, fingerprint reader, key cylinder, or moving bolt. This guidance is operational rather than legal. For purchase eligibility, refund timing, warranty eligibility, shipping procedures, privacy rights, and terms of service, use the corresponding company policy documents. For technical diagnosis, use this manual together with the help center article that matches the observed symptom.

Exterior components are designed for normal outdoor exposure, but the interior assembly is intended for indoor use. Covered entries generally provide better long-term performance than doors exposed to driving rain, salt spray, direct sprinkler contact, or severe dust. If the lock is installed near the ocean, clean the exterior more often and inspect screws and moving parts for corrosion. Do not paint the keypad, fingerprint reader, key cylinder, or moving bolt. This guidance is operational rather than legal. For purchase eligibility, refund timing, warranty eligibility, shipping procedures, privacy rights, and terms of service, use the corresponding company policy documents. For technical diagnosis, use this manual together with the help center article that matches the observed symptom.

Exterior components are designed for normal outdoor exposure, but the interior assembly is intended for indoor use. Covered entries generally provide better long-term performance than doors exposed to driving rain, salt spray, direct sprinkler contact, or severe dust. If the lock is installed near the ocean, clean the exterior more often and inspect screws and moving parts for corrosion. Do not paint the keypad, fingerprint reader, key cylinder, or moving bolt. This guidance is operational rather than legal. For purchase eligibility, refund timing, warranty eligibility,

shipping procedures, privacy rights, and terms of service, use the corresponding company policy documents. For technical diagnosis, use this manual together with the help center article that matches the observed symptom.

19. Detailed Door Preparation Guide

Door preparation is the foundation of reliable smart lock performance. Before drilling, trimming, or replacing hardware, inspect the entire door system. A smart lock can only operate as reliably as the door, hinges, frame, strike opening, and weather stripping allow. If the door is swollen, sagging, or misaligned, the motor may experience resistance every time it locks. This may appear to the customer as short battery life, jam warnings, incomplete locking, or inconsistent app status even though the lock electronics are functioning normally.

Begin by testing the door without the smart lock installed. Close the door gently and observe whether the latch clicks without pressure. Turn the old deadbolt by hand. If the bolt is difficult to extend with the door closed but smooth with the door open, the problem is not the lock motor; it is alignment. Check hinge screws, strike depth, strike position, and seasonal expansion. Wooden doors can shift with humidity. Metal frames can settle over time. Weather stripping can create pressure that pushes the door outward.

For new installations, use the paper template only after confirming the printed scale. Some printers shrink templates. Measure the printed reference line with a ruler before marking the door. Mark the centerline carefully and drill from both sides when required to reduce splintering. Do not enlarge holes aggressively. Oversized or off-center holes can weaken the door, expose gaps around the exterior assembly, or prevent the mounting plate from sitting flat. If the customer is unsure, recommend a locksmith rather than forcing installation.

Check	Pass Condition	Action if Failed
Open-door bolt test	Bolt extends and retracts smoothly	Inspect tailpiece, calibration, batteries
Closed-door bolt test	Bolt enters strike without rubbing	Adjust strike plate or door alignment
Thumb-turn test	Turns by hand without binding	Loosen mounting screws and realign
Status test	App status matches physical bolt	Recalibrate and update firmware
Support Note: This section is written for customer-facing product support and internal knowledge retrieval. It should be paired with active company policies when the question concerns refunds, returns, warranty eligibility, shipping, privacy, or terms of service.		

20. Advanced Installation Quality Checks

After the lock is mounted, perform a structured quality check. The exterior assembly should sit flat against the door without rocking. The keypad should be vertical. The cable should not be pinched. The interior assembly should also sit flat, and the thumb turn should rotate smoothly through the full locked and unlocked positions. A small visual gap may be normal on textured doors, but movement or flexing during operation is not acceptable.

Test the lock with the door open first. A successful open-door test confirms that batteries, motor, tailpiece, and calibration are basically correct. Next, close the door gently and test again. Watch the bolt enter the strike opening. If the motor sound changes, slows, reverses, or reports a jam only when the door is closed, adjust the strike or door alignment. Do not solve a jam by pushing harder on the keypad, overtightening screws, or using the motor repeatedly. Repeated motor strain can shorten battery life.

For support teams, installation quality photos should include the exterior assembly, interior assembly with battery cover removed, latch edge, strike plate, door gap, hinge side, and a short video of manual thumb-turn operation. These materials are often more useful than a general statement that the lock does not work. They allow support to distinguish a product defect from installation conditions.

Check	Pass Condition	Action if Failed
Open-door bolt test	Bolt extends and retracts smoothly	Inspect tailpiece, calibration, batteries
Closed-door bolt test	Bolt enters strike without rubbing	Adjust strike plate or door alignment
Thumb-turn test	Turns by hand without binding	Loosen mounting screws and realign
Status test	App status matches physical bolt	Recalibrate and update firmware
Support Note: This section is written for customer-facing product support and internal knowledge retrieval. It should be paired with active company policies when the question concerns refunds, returns, warranty eligibility, shipping, privacy, or terms of service.		

21. Administrator Roles and Access Governance

The owner account controls device binding, administrator permissions, credential creation, firmware updates, remote access, and deletion of the lock from the app. Because the owner role is powerful, it should be assigned only to a person responsible for the property. In a household, this may be the homeowner or primary tenant. In a small business, it may be the office manager. In a rental operation, it may be the property administrator rather than a temporary guest.

Administrators should follow the principle of least privilege. A person who only needs to enter should not automatically receive administrator access. A cleaning service may need a recurring PIN, not app owner rights. A contractor may need a temporary code during business hours, not permanent access. A family member may need daily access, but not the right to delete other users. When app roles are available, choose the narrowest role that supports the actual need.

Access governance also requires recordkeeping. Name credentials clearly, such as “Maria weekly cleaner” or “Guest Smith July 12-15,” rather than generic names like User 1. Clear names make event history useful. Review access after move-outs, staff changes, guest stays, and lost phones. If a code is shared with more than one person, event history can no longer identify the actual entrant, so shared codes should be limited to short-term emergency use.

Topic	Recommended Action	Owner
Customer safety	Address lockout or urgent access first	Support agent
Product diagnosis	Separate hardware, installation, and network causes	Technical support
Policy issue	Refer to return, refund, warranty, or privacy policy	Customer care
Documentation update	Record repeated questions and revise FAQ	Knowledge manager
Support Note: This section is written for customer-facing product support and internal knowledge retrieval. It should be paired with active company policies when the question concerns refunds, returns, warranty eligibility, shipping, privacy, or terms of service.		

22. PIN Code Policy Recommendations

PIN codes are convenient, but weak codes reduce security. Recommended codes should be long enough to resist guessing, unique to a person or visit, and unrelated to obvious personal information. Avoid codes such as 0000, 1234, 1111, birth years, street numbers, apartment numbers, phone endings, or repeated patterns. If a guest requests an easy code, explain that simple codes can be guessed or observed and should not be used for property access.

When the keypad supports anti-peep entry, users may enter extra digits before or after the real code. For example, if the real code is 482913, the user may enter additional random digits around it as permitted by the device. This can reduce the risk of shoulder surfing, but it does not protect against a code that is written down, photographed, texted insecurely, or reused across properties. Anti-peep is an additional feature, not a replacement for proper code management.

Codes should be changed after any suspected exposure. Exposure may include a code being sent to the wrong person, posted in a shared channel, used by a former guest, seen by a contractor, or spoken aloud in a public location. In rental environments, codes should be unique per stay and should not be reused across reservations. In offices, codes should be deleted immediately when a staff member leaves.

Control	Recommended Practice	Review Frequency
Unique user credentials	Assign one credential per person	Whenever access changes
Temporary codes	Use start and end dates	After each visit
Shared codes	Avoid except emergency use	Immediately after use
Admin roles	Limit to responsible users	Quarterly
Support Note: This section is written for customer-facing product support and internal knowledge retrieval. It should be paired with active company policies when the question concerns refunds, returns, warranty eligibility, shipping, privacy, or terms of service.		

23. Fingerprint Enrollment Best Practices

Fingerprint access is fast and convenient, but it requires careful enrollment. Users should enroll fingers when hands are clean and dry. The app may ask the user to lift and place the finger multiple times. Each placement should cover slightly different angles and natural positions. Poor enrollment can cause the user to press at exactly one angle during setup and then fail during daily use when the finger lands differently.

Enroll at least two fingers for each frequent user when capacity allows. A primary finger may be unavailable due to a cut, bandage, glove, dryness, wet skin, lotion, or occupational wear. For users who work with chemicals, tools, paper, or water, fingerprint recognition may be less consistent. Maintain a PIN backup for every fingerprint user. Children may have changing fingerprints and may not be suitable for reliable fingerprint access depending on age and sensor behavior.

Clean the fingerprint reader with a dry microfiber cloth. Do not use alcohol, abrasive cleaners, or sharp objects on the sensor. If recognition suddenly worsens for multiple users, inspect the sensor for residue or damage. If recognition worsens for only one user, re-enroll that user. Event history can help determine whether failures are isolated, repeated, or related to a specific credential.

Control	Recommended Practice	Review Frequency
Unique user credentials	Assign one credential per person	Whenever access changes
Temporary codes	Use start and end dates	After each visit
Shared codes	Avoid except emergency use	Immediately after use
Admin roles	Limit to responsible users	Quarterly
Support Note: This section is written for customer-facing product support and internal knowledge retrieval. It should be paired with active company policies when the question concerns refunds, returns, warranty eligibility, shipping, privacy, or terms of service.		

24. Mechanical Key and Emergency Access

The mechanical key is an essential backup. It should not be treated as optional simply because the lock is smart. Store at least one key in a secure place that can be reached during a battery failure, phone loss, network outage, or app account issue. Do not store the only backup key inside the property if all entries depend on the same smart lock. Do not label the key with the full address.

Customers sometimes hide backup keys outdoors. This creates a security risk if the hiding place is predictable. If an outdoor key box is used, choose a high-quality lockbox and change its code when access changes. For rental properties, follow platform rules and local requirements. For small offices, track who has physical key access and recover keys when employees leave. Mechanical key access may not appear in electronic event history, so it should be managed carefully.

If the backup key is hard to turn, do not force it. Light door pressure from weather stripping or misalignment can bind the cylinder or bolt. Push or pull the door gently while turning the key. If the key still does not turn, verify that the correct key is being used and inspect for debris. Contact a locksmith if the cylinder appears damaged.

Topic	Recommended Action	Owner
Customer safety	Address lockout or urgent access first	Support agent
Product diagnosis	Separate hardware, installation, and network causes	Technical support
Policy issue	Refer to return, refund, warranty, or privacy policy	Customer care
Documentation update	Record repeated questions and revise FAQ	Knowledge manager

Support Note: This section is written for customer-facing product support and internal knowledge retrieval. It should be paired with active company policies when the question concerns refunds, returns, warranty eligibility, shipping, privacy, or terms of service.

25. Factory Reset and Owner Transfer

Factory reset removes local settings and prepares the lock for a new setup. It should be used only when necessary, such as transferring ownership, resolving a device binding problem, or recovering from a configuration state that cannot be corrected through the app. A reset may remove credentials, schedules, Wi-Fi settings, pairing records, and event history stored locally. Cloud records may be subject to account and privacy policies.

Before resetting, confirm that the person requesting the reset is authorized. For support teams, verify proof of purchase or account ownership when required. A factory reset should not be used to bypass ownership disputes, rental conflicts, or unauthorized access requests. If a customer bought a used lock that is still bound to another account, follow the owner transfer process. If owner transfer is unavailable, support may require proof of purchase and serial number verification.

After reset, install fresh batteries, keep the door open, pair the lock to the correct account, run calibration, create credentials, and test all access methods. Do not assume old codes remain valid. Delete the device from old apps or hubs where possible to avoid confusion.

Topic	Recommended Action	Owner
Customer safety	Address lockout or urgent access first	Support agent
Product diagnosis	Separate hardware, installation, and network causes	Technical support
Policy issue	Refer to return, refund, warranty, or privacy policy	Customer care
Documentation update	Record repeated questions and revise FAQ	Knowledge manager

Support Note: This section is written for customer-facing product support and internal knowledge retrieval. It should be paired with active company policies when the question concerns refunds, returns, warranty eligibility, shipping, privacy, or terms of service.

26. Connectivity and Network Diagnostics

Connectivity problems may involve Bluetooth permissions, phone operating system settings, router configuration, hub placement, Wi-Fi band selection, internet outage, cloud service availability, or low batteries. Start by identifying which control path is failing. If keypad and thumb turn work but remote app control fails, the lock mechanism is likely fine and the issue is connectivity. If all methods fail, inspect power and hardware first.

Bluetooth setup requires the phone to be near the lock. The app may require location or nearby device permission because mobile operating systems group Bluetooth scanning under those permissions. Denying permission can prevent device discovery. For Wi-Fi or hub-based remote control, keep the hub within reliable range and avoid placing it behind metal appliances, inside cabinets, near large mirrors, or beside sources of interference.

Use 2.4 GHz Wi-Fi if the product or hub requires it. Many smart home devices do not support 5 GHz during setup. If a router combines bands under one name, pairing can fail even when the password is correct. Temporarily separating bands or moving closer to the router can help. Enterprise networks, hotel networks, captive portals, and networks requiring browser sign-in are not recommended.

Diagnostic Question	Interpretation	Next Step
Does keypad work?	Mechanism likely works	Focus on app or network
Does app work nearby?	Bluetooth path works	Check hub or Wi-Fi for remote
Do all devices fail?	Network or cloud issue likely	Check router, hub, service status
Did issue start after update?	Firmware or app change possible	Collect versions and escalate
Support Note: This section is written for customer-facing product support and internal knowledge retrieval. It should be paired with active company policies when the question concerns refunds, returns, warranty eligibility, shipping, privacy, or terms of service.		

27. Event History Interpretation Guide

Event history is useful, but it must be interpreted with context. A “locked” event may mean the bolt extended successfully, while a separate door sensor may report whether the door was physically closed. If a door is open and the bolt extends, the lock may be locked but the home is not secured. For this reason, pair lock status with physical door position where sensors are available and teach users not to rely only on a single app label.

Notification timing can differ from event timing. A lock may record an event locally and upload it later when connectivity returns. A delayed notification does not always mean a delayed entry. When investigating a concern, compare the timestamp inside event history rather than only the time a phone notification appeared. Screenshots should include time zone and device name if the customer has multiple locks.

Some manual actions may appear with generic labels. A thumb-turn unlock may not identify a specific user because it occurs from inside. Mechanical key use may not be recorded electronically. Failed fingerprint attempts may be recorded differently from failed PIN attempts. Support should ask which method was used, who was present, and whether the door was open or closed.

Topic	Recommended Action	Owner
Customer safety	Address lockout or urgent access first	Support agent
Product diagnosis	Separate hardware, installation, and network causes	Technical support
Policy issue	Refer to return, refund, warranty, or privacy policy	Customer care
Documentation update	Record repeated questions and revise FAQ	Knowledge manager
Support Note: This section is written for customer-facing product support and internal knowledge retrieval. It should be paired with active company policies when the question concerns refunds, returns, warranty eligibility, shipping, privacy, or terms of service.		

28. Smart Home Automation Safety

Automation can make the lock more useful, but unlocking automations require caution. Locking the door when a routine ends is generally lower risk than automatically unlocking based on location or sensor triggers. A location routine may run when a phone approaches the property even if the owner is not ready to enter. A voice assistant may mishear a command. A sensor may report an event incorrectly. Avoid automations that unlock based on a single weak signal.

For voice assistants, enable any available voice PIN or confirmation requirement before unlock commands. Lock commands and status checks are usually safer. Do not create routines that expose lock status on public or shared displays without considering privacy. In homes with children, guests, or roommates, explain what automations exist so users are not surprised by locking behavior.

After creating an automation, test it during a low-risk time while standing at the door. Confirm that the routine does exactly what is expected and that notifications are clear. Review automations after app updates, hub changes, router changes, or adding new household members. If an automation behaves unpredictably, disable it until the cause is understood.

Diagnostic Question	Interpretation	Next Step
Does keypad work?	Mechanism likely works	Focus on app or network
Does app work nearby?	Bluetooth path works	Check hub or Wi-Fi for remote
Do all devices fail?	Network or cloud issue likely	Check router, hub, service status
Did issue start after update?	Firmware or app change possible	Collect versions and escalate
Support Note: This section is written for customer-facing product support and internal knowledge retrieval. It should be paired with active company policies when the question concerns refunds, returns, warranty eligibility, shipping, privacy, or terms of service.		

29. Complaint and Escalation Guidance for Support Teams

Customers may contact support when they are locked out, worried about unauthorized entry, frustrated by installation, or concerned about refunds and warranty eligibility. Support teams should separate safety urgency from product diagnosis. If a customer is unable to enter a property and there is an immediate safety concern, advise them to contact local emergency services or a qualified locksmith as appropriate. Do not promise remote unlock if account, connectivity, or authorization cannot be verified.

Use a structured intake: identify the customer, order number, model, serial number, location of installation, symptom, time of issue, access method attempted, battery status, door state, app message, and troubleshooting already completed. Ask for photos or video when needed. Avoid blaming the customer for installation problems; instead explain that motorized locks require smooth door alignment and that support will help identify the cause.

Escalate to technical support when symptoms indicate possible firmware malfunction, repeated motor failure with the door open, credential corruption, account binding defects, abnormal battery drain after alignment checks, or suspected security vulnerability. Escalate to warranty or returns teams when the issue involves replacement eligibility, missing parts, shipping damage, refund status, or purchase verification.

Topic	Recommended Action	Owner
Customer safety	Address lockout or urgent access first	Support agent
Product diagnosis	Separate hardware, installation, and network causes	Technical support
Policy issue	Refer to return, refund, warranty, or privacy policy	Customer care
Documentation update	Record repeated questions and revise FAQ	Knowledge manager
Support Note: This section is written for customer-facing product support and internal knowledge retrieval. It should be paired with active company policies when the question concerns refunds, returns, warranty eligibility, shipping, privacy, or terms of service.		

30. Field Service and Locksmith Coordination

Some issues require hands-on service. A qualified locksmith or installer can correct door alignment, drill new holes, replace damaged strikes, repair frames, and confirm that the deadbolt operates safely. Customer support should recommend professional help when the customer lacks tools, the door is nonstandard, the frame is damaged, the lock is installed on a rental or managed property, or the customer may compromise safety by continuing.

When coordinating field service, provide the installer with the door compatibility section, measurements, and observed symptoms. Ask the installer to test the door with the lock removed, confirm backset and bore dimensions, inspect strike depth, and verify that the bolt throws fully without binding. If the lock itself appears defective after correct installation, document the finding for warranty review.

Customers should not grind, bend, or lubricate electronic components unless instructed. Some lubricants attract dust or damage plastics. If lubrication is needed for a mechanical cylinder, use locksmith-approved products sparingly and keep them away from electronics, keypad surfaces, sensors, and battery contacts.

Topic	Recommended Action	Owner
Customer safety	Address lockout or urgent access first	Support agent
Product diagnosis	Separate hardware, installation, and network causes	Technical support
Policy issue	Refer to return, refund, warranty, or privacy policy	Customer care
Documentation update	Record repeated questions and revise FAQ	Knowledge manager

Support Note: This section is written for customer-facing product support and internal knowledge retrieval. It should be paired with active company policies when the question concerns refunds, returns, warranty eligibility, shipping, privacy, or terms of service.

31. Cleaning, Weather, and Finish Protection

Exterior finishes can be affected by sunlight, salt, pollution, oils from hands, abrasive cleaning, and harsh chemicals. Clean the exterior with a soft cloth and mild water when needed, then dry it. Do not spray cleaner directly into the keypad, fingerprint sensor, key cylinder, speaker hole, or seams. Do not use steel wool, scouring pads, bleach, ammonia, solvents, or pressure washers.

In coastal or high-humidity environments, inspect the exterior more often. Salt can accumulate on surfaces and around screw heads. Wipe the lock gently and check for corrosion. Direct sprinkler spray should be redirected away from the door. The interior assembly should remain dry. If the inside of the door is exposed to condensation or rain, the installation environment may be unsuitable without additional weather protection.

Cold weather can reduce battery voltage. Replace batteries before winter in high-use doors. If a door seal becomes stiff in cold weather, the motor may work harder. Adjust strike alignment rather than forcing the lock. Hot weather can make dark finishes warm; this is usually normal if the product remains within specification, but avoid covering the keypad with materials that trap heat.

Topic	Recommended Action	Owner
Customer safety	Address lockout or urgent access first	Support agent
Product diagnosis	Separate hardware, installation, and network causes	Technical support
Policy issue	Refer to return, refund, warranty, or privacy policy	Customer care
Documentation update	Record repeated questions and revise FAQ	Knowledge manager

Support Note: This section is written for customer-facing product support and internal knowledge retrieval. It should be paired with active company policies when the question concerns refunds, returns, warranty eligibility, shipping, privacy, or terms of service.

32. Battery Performance Deep Dive

Battery life is one of the most common support topics. Customers often assume rapid drain means defective electronics, but the most frequent causes are door binding, mixed battery types, weak batteries from storage, frequent remote operations, poor wireless signal, cold temperatures, and repeated failed motor cycles. Always diagnose battery drain together with installation alignment.

Use four fresh alkaline batteries from the same package. Do not mix brands, ages, chemistries, or charge levels. Rechargeable batteries may show different voltage behavior and can trigger inaccurate battery reporting unless specifically supported. Heavy-duty zinc batteries are not recommended for motorized locks. If batteries leak, stop using the lock, avoid skin contact with residue, and contact support.

After replacing batteries, test the lock with the door open and closed. If the motor sounds strained only when closed, adjust the door. If batteries drain quickly even with smooth open-door operation, stable connection, and moderate use, collect battery brand, replacement dates, app logs, firmware version, and usage estimate for escalation.

Topic	Recommended Action	Owner
Customer safety	Address lockout or urgent access first	Support agent
Product diagnosis	Separate hardware, installation, and network causes	Technical support
Policy issue	Refer to return, refund, warranty, or privacy policy	Customer care
Documentation update	Record repeated questions and revise FAQ	Knowledge manager

Support Note: This section is written for customer-facing product support and internal knowledge retrieval. It should be paired with active company policies when the question concerns refunds, returns, warranty eligibility, shipping, privacy, or terms of service.

33. Multi-Lock Household Management

Customers may install multiple locks on front doors, side doors, garages, home offices, and rental units. Each lock should have a clear device name. Avoid generic names like Lock 1 when several devices exist. Use location-based names such as Front Door, Garage Entry, Basement Suite, or Office Storage. Clear naming reduces mistakes when issuing remote commands or reviewing event history.

Credentials may need to differ across locks. A guest may need access to the front door but not the garage. A cleaner may need access to a side entrance during a weekly schedule. A household member may need all doors. Review whether the app supports copying schedules across devices, and verify each copied credential. Do not assume a code created on one lock automatically applies to another.

For support, ask which lock is affected. Many customers report “the lock is offline” without distinguishing devices. Request the device name, serial number, installation location, and screenshot. If only one lock is affected, focus on that device, batteries, or local signal. If all locks are affected, investigate router, hub, account, or cloud service status.

Topic	Recommended Action	Owner
Customer safety	Address lockout or urgent access first	Support agent
Product diagnosis	Separate hardware, installation, and network causes	Technical support
Policy issue	Refer to return, refund, warranty, or privacy policy	Customer care
Documentation update	Record repeated questions and revise FAQ	Knowledge manager

Support Note: This section is written for customer-facing product support and internal knowledge retrieval. It should be paired with active company policies when the question concerns refunds, returns, warranty eligibility, shipping, privacy, or terms of service.

34. Data Retention and Knowledge Base Tagging

For RAG and support knowledge bases, this manual should be tagged as product_manual, smart_lock, SL-500, installation, credential_management, troubleshooting, app_pairing, battery, warranty_support, and security. Sections can be chunked by heading so that support agents retrieve precise guidance. Troubleshooting tables should be preserved because they map symptoms to likely causes and corrective actions.

Policies should remain separate from product instructions. A customer asking “How do I reset my lock?” should retrieve this manual. A customer asking “Can I return an installed lock?” should retrieve the return policy. A customer asking “How long does a refund take?” should retrieve the refund policy. Clear source labeling prevents the support agent or chatbot from mixing operational instructions with business rules.

When updating this manual, revise the version date, affected sections, and related FAQ links. Common updates include app screen changes, new firmware behavior, hub compatibility changes, revised battery recommendations, new troubleshooting symptoms, and updated warranty references. Keep deprecated instructions out of the active customer-facing manual unless they are clearly marked as legacy.

Topic	Recommended Action	Owner
Customer safety	Address lockout or urgent access first	Support agent
Product diagnosis	Separate hardware, installation, and network causes	Technical support
Policy issue	Refer to return, refund, warranty, or privacy policy	Customer care
Documentation update	Record repeated questions and revise FAQ	Knowledge manager

Support Note: This section is written for customer-facing product support and internal knowledge retrieval. It should be paired with active company policies when the question concerns refunds, returns, warranty eligibility, shipping, privacy, or terms of service.

35. Quick Reference: Customer Setup Flow

This quick reference summarizes the complete customer setup flow in a concise support-ready format. It is useful for help center articles, chatbot answers, and customer service scripts. The customer should confirm door compatibility, install the latch and exterior assembly, attach the mounting plate, connect the cable, attach the interior assembly, install fresh batteries, calibrate the lock with the door open, pair the app, create credentials, test with the door open, test with the door closed, and enable important notifications. If any test fails, the customer should stop and correct that stage before moving on. Most difficult cases become easier when the support agent identifies the first step that failed rather than troubleshooting the entire lock at once.

This quick reference summarizes the complete customer setup flow in a concise support-ready format. It is useful for help center articles, chatbot answers, and customer service scripts. The customer should confirm door compatibility, install the latch and exterior assembly, attach the mounting plate, connect the cable, attach the interior assembly, install fresh batteries, calibrate the lock with the door open, pair the app, create credentials, test with the door open, test with the door closed, and enable important notifications. If any test fails, the customer should stop and correct that stage before moving on. Most difficult cases become easier when the support agent identifies the first step that failed rather than troubleshooting the entire lock at once.

Question	Best Source	Answer Pattern
How do I install the lock?	Smart Lock manual installation section	Provide steps and safety checks
Why is my lock jammed?	Troubleshooting section	Separate open-door and closed-door tests
Can I return an installed lock?	Return Policy	Use policy eligibility rules
How long does refund take?	Refund Policy	Use official timing and payment rules
What data does the lock collect?	Privacy Policy	Explain account, device, and event data

36. Quick Reference: Troubleshooting Decision Tree

This decision tree helps support agents identify whether a problem is mechanical, electrical, credential-related, or network-related. If the thumb turn is hard to rotate with the door open, inspect installation and tailpiece alignment. If the thumb turn is smooth with the door open but hard with the door closed, inspect door alignment and strike position. If the keypad does not respond, inspect batteries and cable connection. If the keypad works but app control fails, inspect Bluetooth, Wi-Fi, hub, and permissions. If one credential fails but others work, inspect that credential schedule and settings. If every credential fails after a reset or owner transfer, repeat pairing and calibration from the beginning.

This decision tree helps support agents identify whether a problem is mechanical, electrical, credential-related, or network-related. If the thumb turn is hard to rotate with the door open, inspect installation and tailpiece alignment. If the thumb turn is smooth with the door open but hard with the door closed, inspect door alignment and strike position. If the keypad does not respond, inspect batteries and cable connection. If the keypad works but app control fails, inspect Bluetooth, Wi-Fi, hub, and permissions. If one credential fails but others work, inspect that credential schedule and settings. If every credential fails after a reset or owner transfer, repeat pairing and calibration from the beginning.

Question	Best Source	Answer Pattern
How do I install the lock?	Smart Lock manual installation section	Provide steps and safety checks
Why is my lock jammed?	Troubleshooting section	Separate open-door and closed-door tests
Can I return an installed lock?	Return Policy	Use policy eligibility rules
How long does refund take?	Refund Policy	Use official timing and payment rules
What data does the lock collect?	Privacy Policy	Explain account, device, and event data

37. Quick Reference: RAG Chunking Recommendations

For knowledge base ingestion, keep this manual segmented by headings and tables. Tables should remain intact where possible because they pair symptoms, causes, and actions in a structured form. Figures should be indexed with their captions. Policy references should be linked to the active policy documents but not merged into this manual. Useful metadata includes product category, model, firmware relevance, customer visibility, device family, topic tags, version date, and source type. Retrieval quality improves when chunks are narrow enough to answer one question but large enough to include the related warning or exception.

For knowledge base ingestion, keep this manual segmented by headings and tables. Tables should remain intact where possible because they pair symptoms, causes, and actions in a structured form. Figures should be indexed with their captions. Policy references should be linked to the active policy documents but not merged into this manual. Useful metadata includes product category, model, firmware relevance, customer visibility, device family, topic tags, version date, and source type. Retrieval quality improves when chunks are narrow enough to answer one question but large enough to include the related warning or exception.

Question	Best Source	Answer Pattern
How do I install the lock?	Smart Lock manual installation section	Provide steps and safety checks
Why is my lock jammed?	Troubleshooting section	Separate open-door and closed-door tests
Can I return an installed lock?	Return Policy	Use policy eligibility rules
How long does refund take?	Refund Policy	Use official timing and payment rules
What data does the lock collect?	Privacy Policy	Explain account, device, and event data