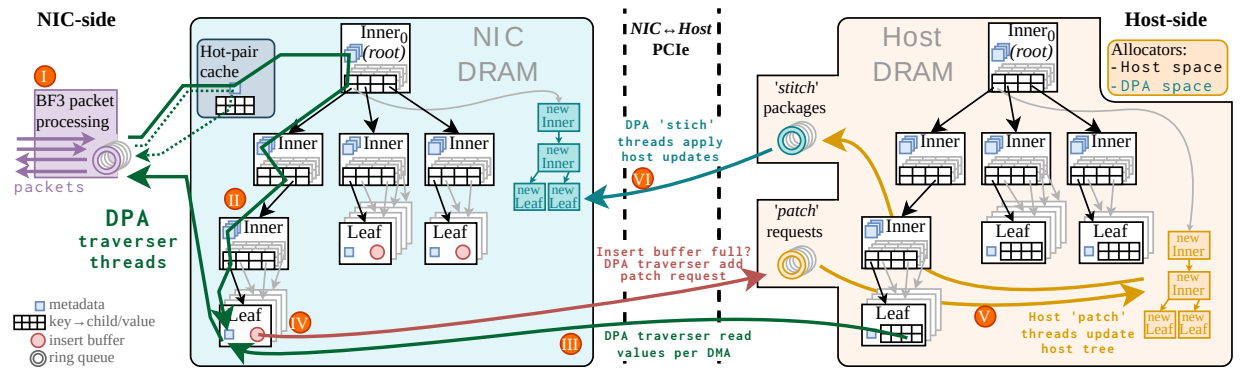

NIC-side
Host-side
NIC DRAM
Host DRAM
NIC ↔ Host PCIe
Hot-pair cache
Inner0 (root)
Inner
Leaf
new Inner
new Leaf
I
BF3 packet processing
packets
DPA traverser threads
metadata
key → child/value
insert buffer
ring queue
II
III
IV
V
VI
'stitch' packages
'patch' requests
DPA 'stich' threads apply host updates
Insert buffer full? DPA traverser add patch request
DPA traverser read values per DMA
Host 'patch' threads update host tree
Allocators:
- Host space
- DPA space