
XIAO ESP32S3 + Wio-SX1262

Assembly guide


Antennas first. USB power last.

1 Parts

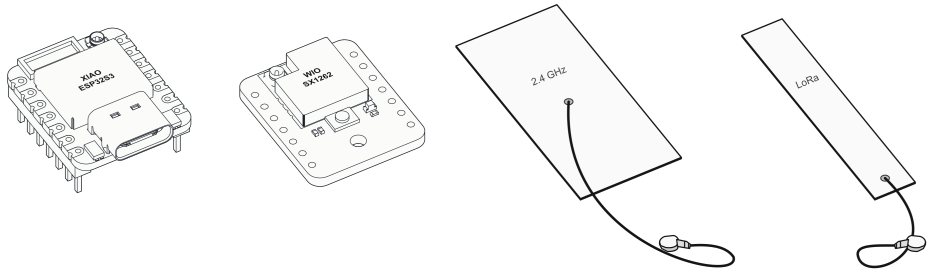

1x XIAO	1x Wio	1x 2.4 GHz	1x LoRa
ESP32S3	SX1262	Wi-Fi / Bluetooth	Narrow strip


2 Wi-Fi / Bluetooth antenna

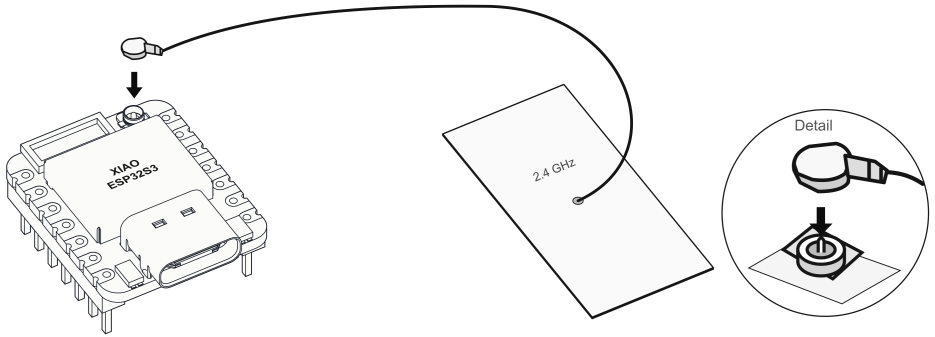

Broad 2.4 GHz antenna connects to XIAO.

Align the plug. Press gently until seated.


3 LoRa antenna

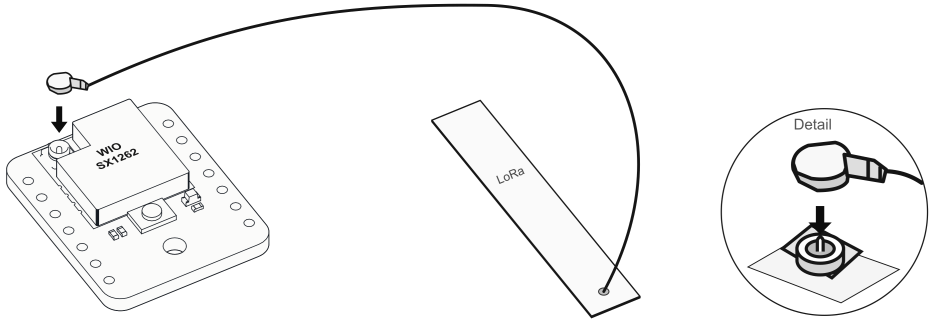

Slim LoRa antenna connects to Wio.

Align the plug. Press gently until seated.

4 Join the boards

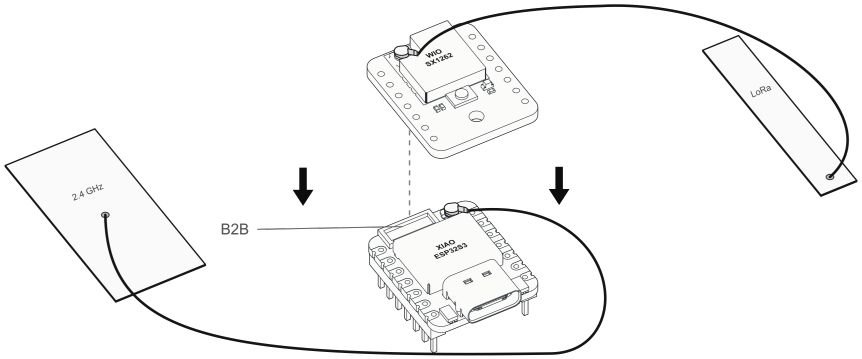

Wio above XIAO. Align the small B2B connector.

Press evenly. Keep both cables outside the gap.

Illustrated assembly guide. Exploded gap enlarged. Headers are already fitted to the XIAO.

Sources: Seeed Studio