MESH KIT


XIAO ESP32S3 + Wio-SX1262

ASSEMBLY GUIDE


Keep USB unplugged
until assembly is complete.

1 Check the parts


Match the letters throughout the guide.

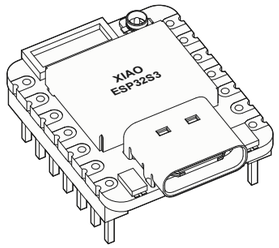


A 1×
XIAO ESP32S3
Main board

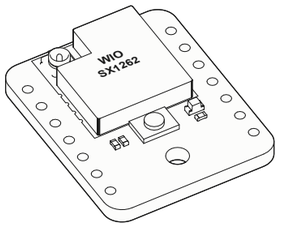

B 1×
Wio-SX1262
Radio board

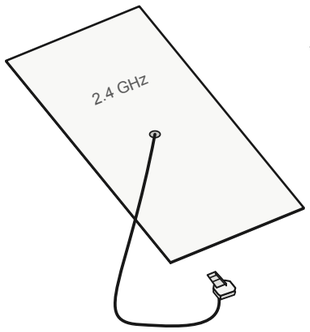


C 1×
2.4 GHz antenna
Wide strip

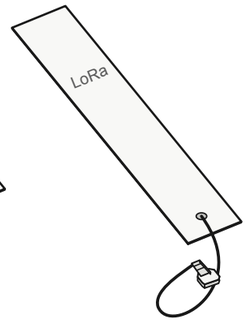

D 1×
LoRa antenna
Narrow strip

2 Connect the 2.4 GHz antenna

XIAO ESP32S3 • Wi-Fi / Bluetooth

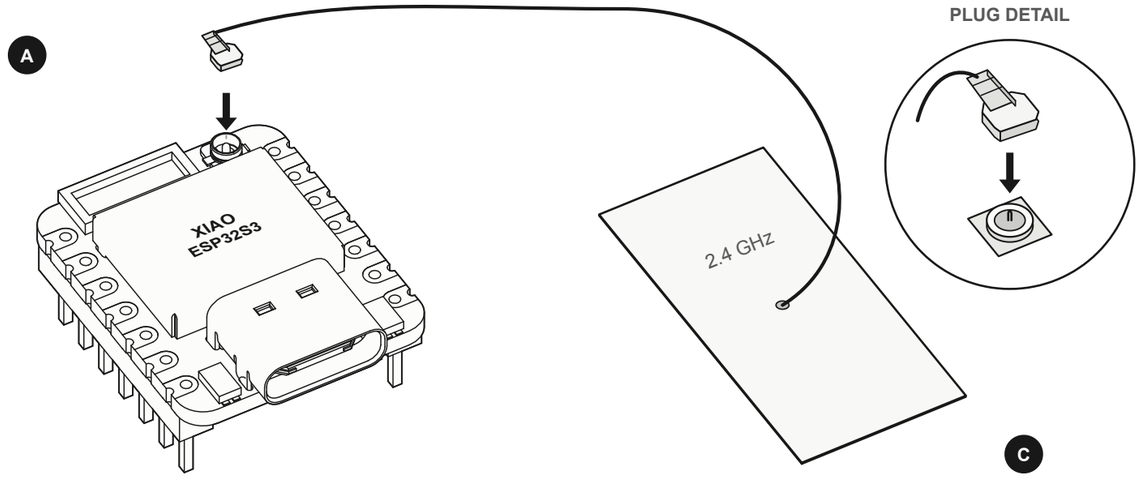


Wide strip → XIAO

Align the metal plug. Press gently until seated.

3 Connect the LoRa antenna

Wio-SX1262 • LoRa radio

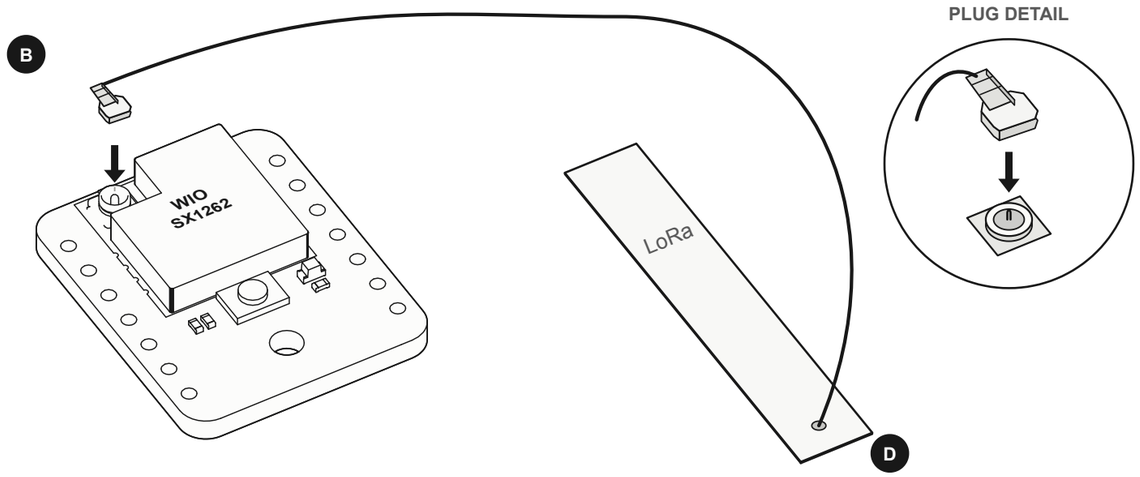



Narrow strip → Wio

Align the metal plug. Press gently until seated.

4 Join the boards

Both component sides face up.

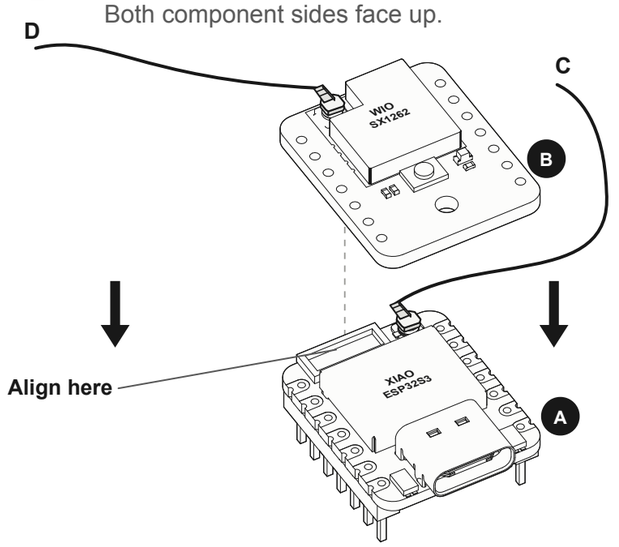

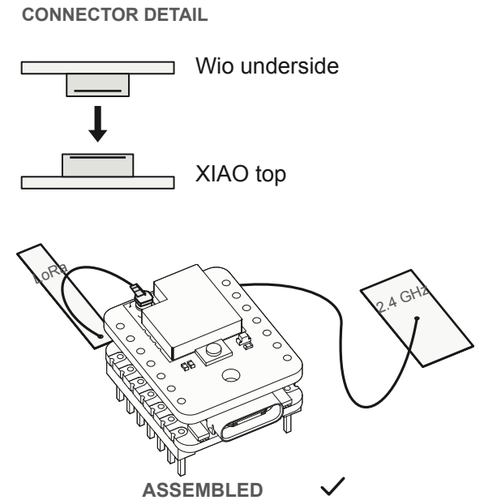

Wio above XIAO. Press evenly at the connector.

Keep both antenna cables outside the gap.

Match the small board connector. The side pins do not join the boards.

Seeed CAD + kit photos · simplified assembly views