

(a) Node organization

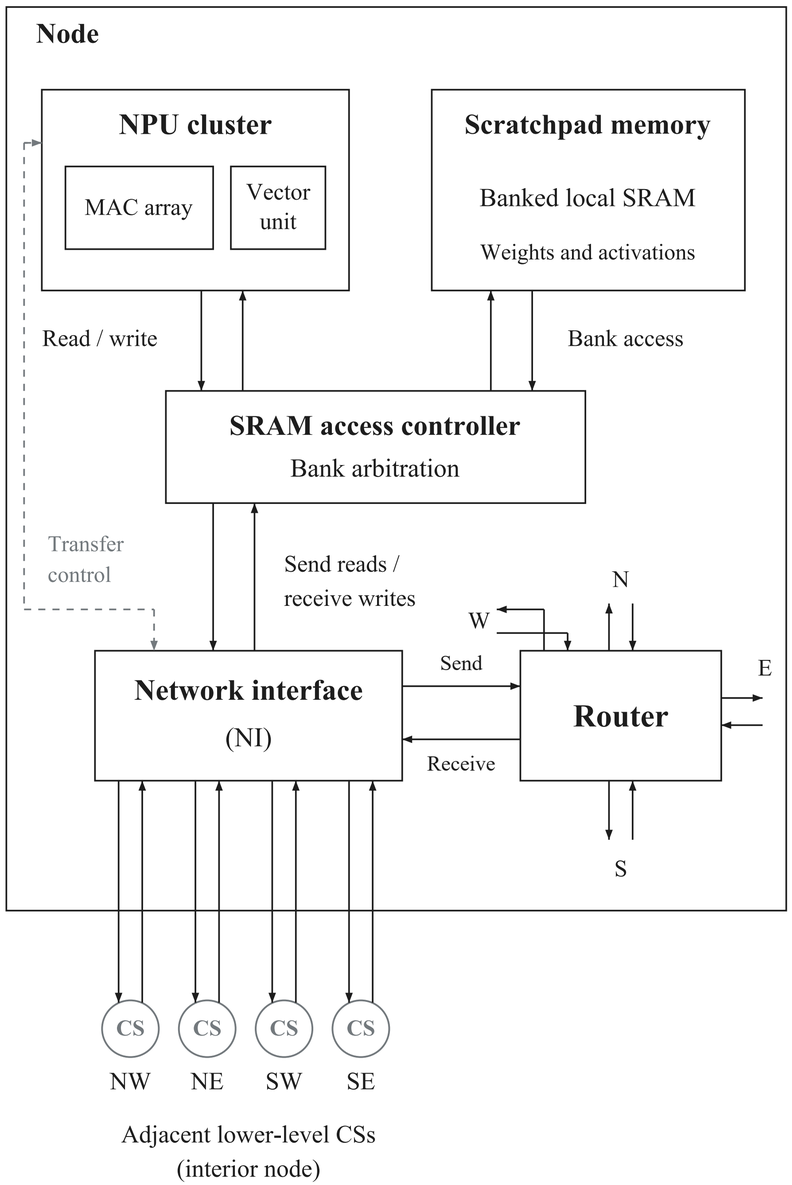

Adjacent lower-level CSs (interior node)

CS data links shown; configuration interface in (b).

(b) Network interface and CS configuration

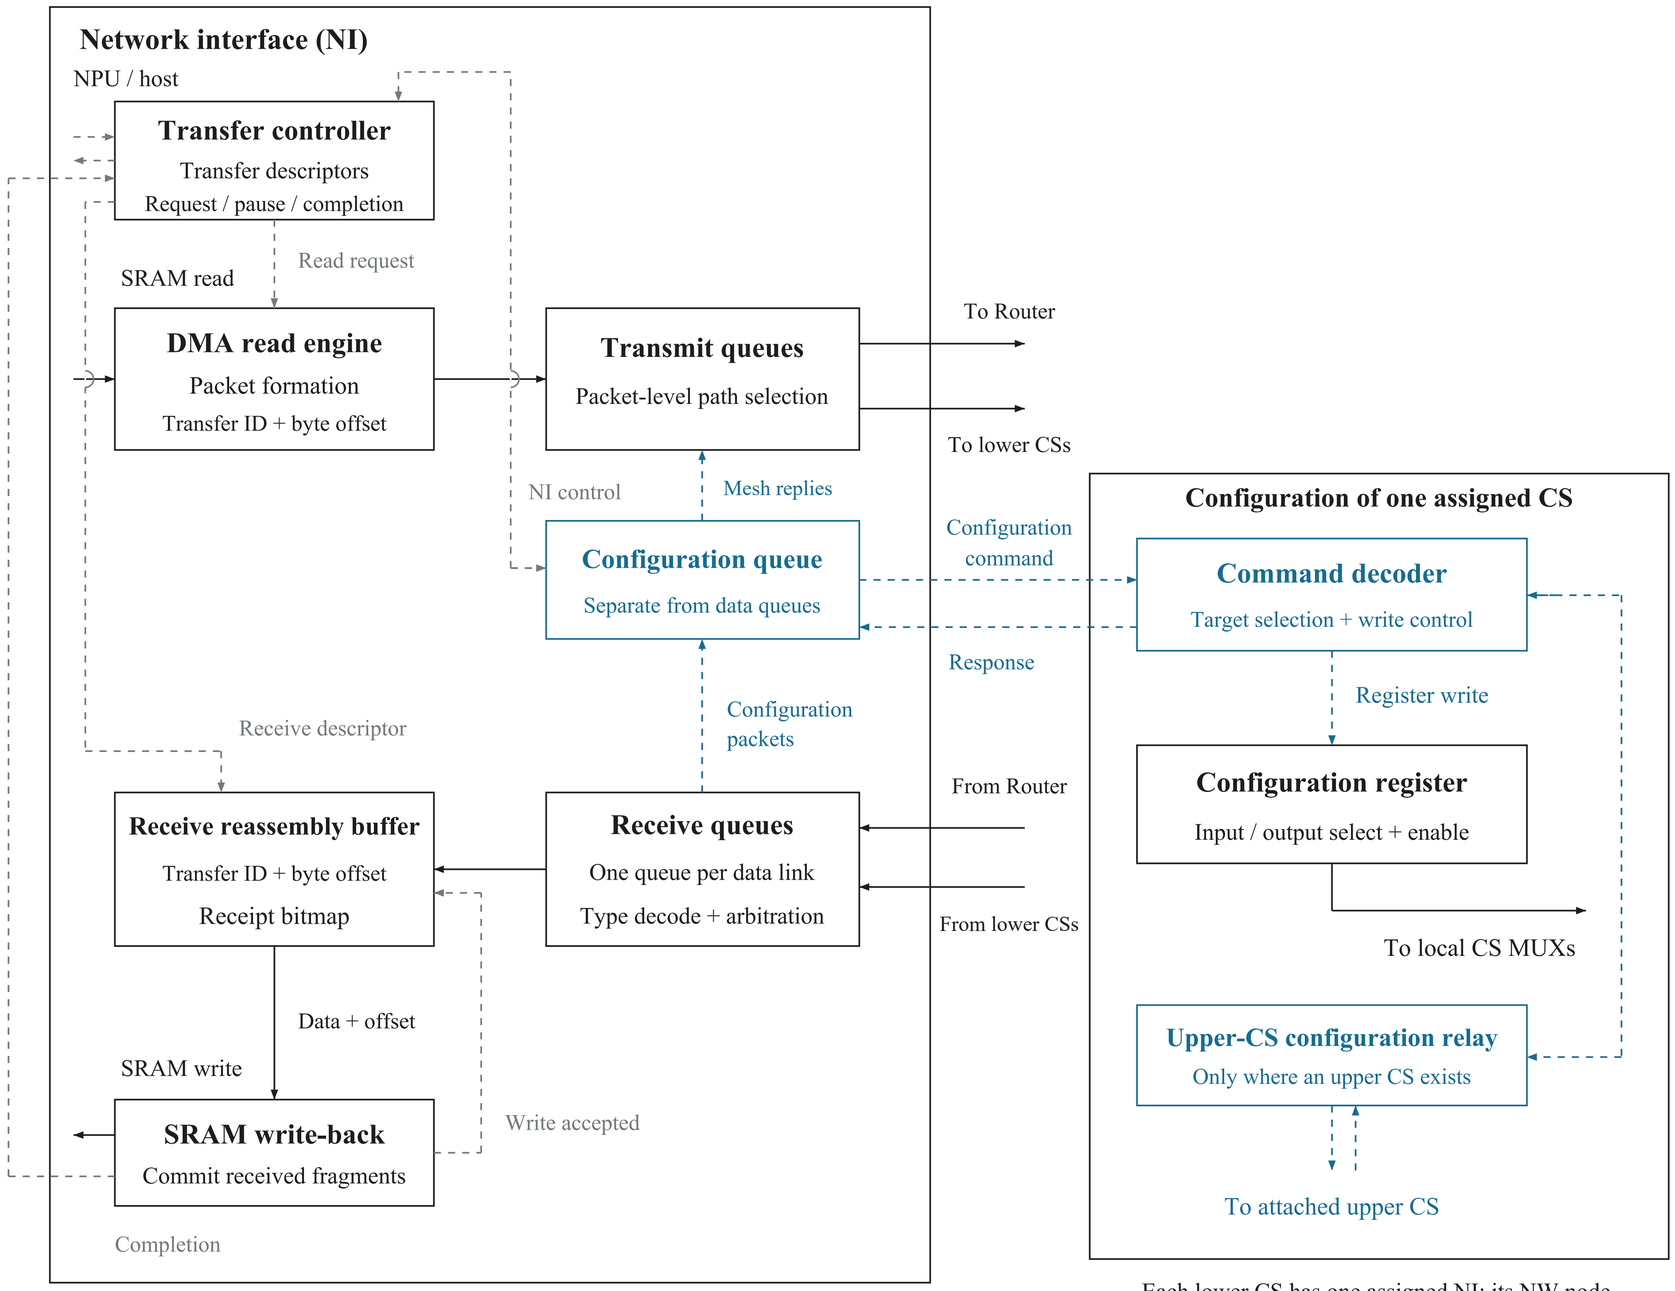

Each lower CS has one assigned NI: its NW node.

All fragments are placed by offset; completion follows the final SRAM write.

Data stream — Configuration - - - - - Transfer control / status - - - - -

Each stream carries data and valid; ready returns in the reverse direction.

DMA: direct memory access. ID: identifier. CS: configurable switch.

Design of a node and its configuration interface.