EVEREST
construction group

HYBRID ALUMINIUM/ PVC PROFILE

for doors and windows

Environmental Product Declaration

EPD
INTERNATIONAL EPD SYSTEM

EPD OWNER:
EVEREST

PROGRAMME:
THE INTERNATIONAL EPD SYSTEM, www.environdec.com

PROGRAMME OPERATOR:
EPD INTERNATIONAL AB

TYPE OF EPD:
EPD OF SINGLE PRODUCT

EPD REGISTRATION NUMBER:
EPD-IES-0026336

VERSION DATE:
2025-10-08

VALIDITY DATE:
2030-10-07



In accordance with ISO 14025:2006 and EN 15804:2012+A2:2019/AC:2021

An EPD may be depublished if conditions change. To find the latest version of the EPD and to confirm its validity, see www.environdec.com

ECO PLATFORM
EPD
VERIFIED

GENERAL INFORMATION

PROGRAMME INFORMATION

PROGRAMME: The International EPD System
ADDRESS: EPD INTERNATIONAL AB, box 21060, Se-100 31 Stockholm, Sweden
WEBSITE: www.environdec.com
EMAIL: support@environdec.com

PRODUCT CATEGORY RULES (PCR)

CEN STANDARD EN 15804 serves as the Core Product Category Rules (PCR)

PRODUCT CATEGORY RULES (PCR): PCR 2019:14 Construction Products (EN 15804+A2) (VERSION 2.0.1), UN PC CODE 4212

PCR REVIEW WAS CONDUCTED BY: The Technical Committee Of The International Epd System. See www.environdec.com for a list of members. The review panel may be contacted via the secretariat www.environdec.com/contact.

THIRD-PARTY VERIFICATION

Independent third-party verification of the declaration and data, according to ISO 14025:2006, via:

☑ **Individual EPD verification without a pre-verified LCA/EPD tool**

Third-party verifier: Luca Giacomello – Green&Care S.a.s.
Approved by: International EPD System

Procedure for follow-up of data during EPD validity involves third party verifier:

☐ YES ☑ NO

LCA ACCOUNTABILITY

COMPANY: Life Cycle Engineering
LCA PRACTITIONERS: Davide Burlon, Stefano Donati
CONTACT: burlon@studiolce.it, donati@studiolce.it

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but published in different EPD programmes, may not be comparable. For two EPDs to be comparable, they shall be based on the same PCR (including the same first-digit version number) or be based on fuly aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical delcared/ functional units); have identical scope in terms of included life-cycle stages (unless the excluded life-cycle stage is demonstrated to be insignificant); apply identical impact assessment methods (including the same version of characterisation factors); and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.

Information about the EPD owner

THE EPD OWNER

EPD OWNER: EVEREST

ADDRESS: Rruga Bulevardi Blu, Nr. 544

CONTACT: Ermil Sita, ermil.sita@everest.al

DESCRIPTION OF THE ORGANIZATION: Everest is one of Europe's leading manufacturers of aluminium and hybrid profile systems, with over 25 years of experience in the industry. The company continues to expand its production capacity, driven by advanced technology, highly skilled personnel, and a strong commitment to innovation.

Everest designs and delivers tailored solutions for the construction and industrial sectors, offering aluminium and hybrid profiles for doors, windows, façades, and a wide range of applied systems.

With its proven reliability, superior product quality, and customer-oriented approach, Everest is recognized as a trusted partner across international markets.

PRODUCT-RELATED OR MANAGEMENT SYSTEM-RELATED CERTIFICATIONS: ISO 14001:2015



PRODUCT INFORMATION

PRODUCT: HYBRID ALUMINIUM+PVC PROFILE (PROFILE 67 000)

Product Description

The 67 000 profile is an **advanced framing system** that combine the mechanical strength and **durability of aluminium** with the **thermal and acoustic insulation properties** of PVC. It is primarily used in **residential**, **commercial**, and **industrial buildings**, especially in windows, doors, and façade elements that require energy efficiency, weather resistance, and long service life.

One of the most distinctive features of the system is its **certification by the Passive House Institute**, which is one of the highest standards for low-energy buildings. This certification demonstrates that EVEREST delivers **outstanding thermal performance**, significantly reducing energy losses through windows.

Key technical features include:

1. Structural stability provided by aluminium, ensuring mechanical resistance and dimensional accuracy.

2.Thermal and acoustic insulation from PVC, contributing to energy savings and indoor comfort.

3.Recyclability of both materials, supporting circular economy principles.

4. Thermal break technology, which reduces heat transfer and enhances energy performance.

CERTIFIED ACCORDING TO:

Energy efficiency class PH B (certified by Passive House), Class C4 (according to EN 12211:2016) ,Class E1350 (according to EN 1027:2016) , Class 4 (according to EN 1026:2016)

PRODUCT INFORMATION



67 000 PROFILE

UN CPC code: 4212 - Doors, windows and their frames and thresholds for doors, of iron, steel or aluminium

Production site: Rruga Bulevardi Blu, Nr.544
More information available at https://www.everest.al/

CONTENT DECLARATION

Declared unit: 1kg

The content declaration indicates the composition of the product and its packaging.

PRODUCT CONTENT	MASS [KG]	POST-CONSUMER RECYCLED MATERIAL, MASS-% OF PRODUCT	PRE-CONSUMER RECYCLED MATERIAL, MASS-% OF PRODUCT	BIOGENIC MATERIAL, MASS-% OF PRODUCT	BIOGENIC MATERIAL, KG C/PRODUCT OR DECLARED UNIT
ALUMINIUM	0.46	16	0	0	0
PVC	0.52	0	0	0	0
PAINT	0.03	0	0	0	0
TOTAL	1.00	16	0	0	0

PACKAGING MATERIALS	MASS [KG]	MASS-% (VERSUS THE PRODUCT)	BIOGENIC MATERIAL, KG C/PRODUCT OR DECLARED UNIT*
PE (100% RECYCLED)	0.01	1.00	0
WOOD	0.02	1.90	0.009
CARDBOARD	0.003	0.30	0.001
POLYESTER	0.002	0.20	0

No Substances of Very High Concern (SVHCs) are present in the product exceeding the 0.1% limit as set by the European Chemicals Agency

**Biogenic carbon uptake and emission for packaging production in module A3 has been balanced.*



LCA INFORMATION

GEOGRAPHICAL SCOPE: Albania, global

DECLARED UNIT: 1 kg of profile


EPD SYSTEM BOUNDARIES: Cradle-to-gate with options, modules C1-C4, module D and optional modules

LCA SOFTWARE: Simapro v 10.2

DATABASE: Ecoinvent 3.11

ELECTRICITY USED IN MODULE A3: Approximately 70% of the electricity used in the production process comes from the Albanian power grid (80% from hydroelectric sources and 20% import from neighboring countries), while the remaining 30% is supplied by photovoltaic panels installed at the production facilities. The GWP-GHG of electricity is equal to 0.138 kg CO_2e/kWh for the PVC production plant and 0.147 kg CO_2e/kWh for the aluminium profiles manufacturing plant.

SYSTEM BOUNDARIES FLOW DIAGRAM:

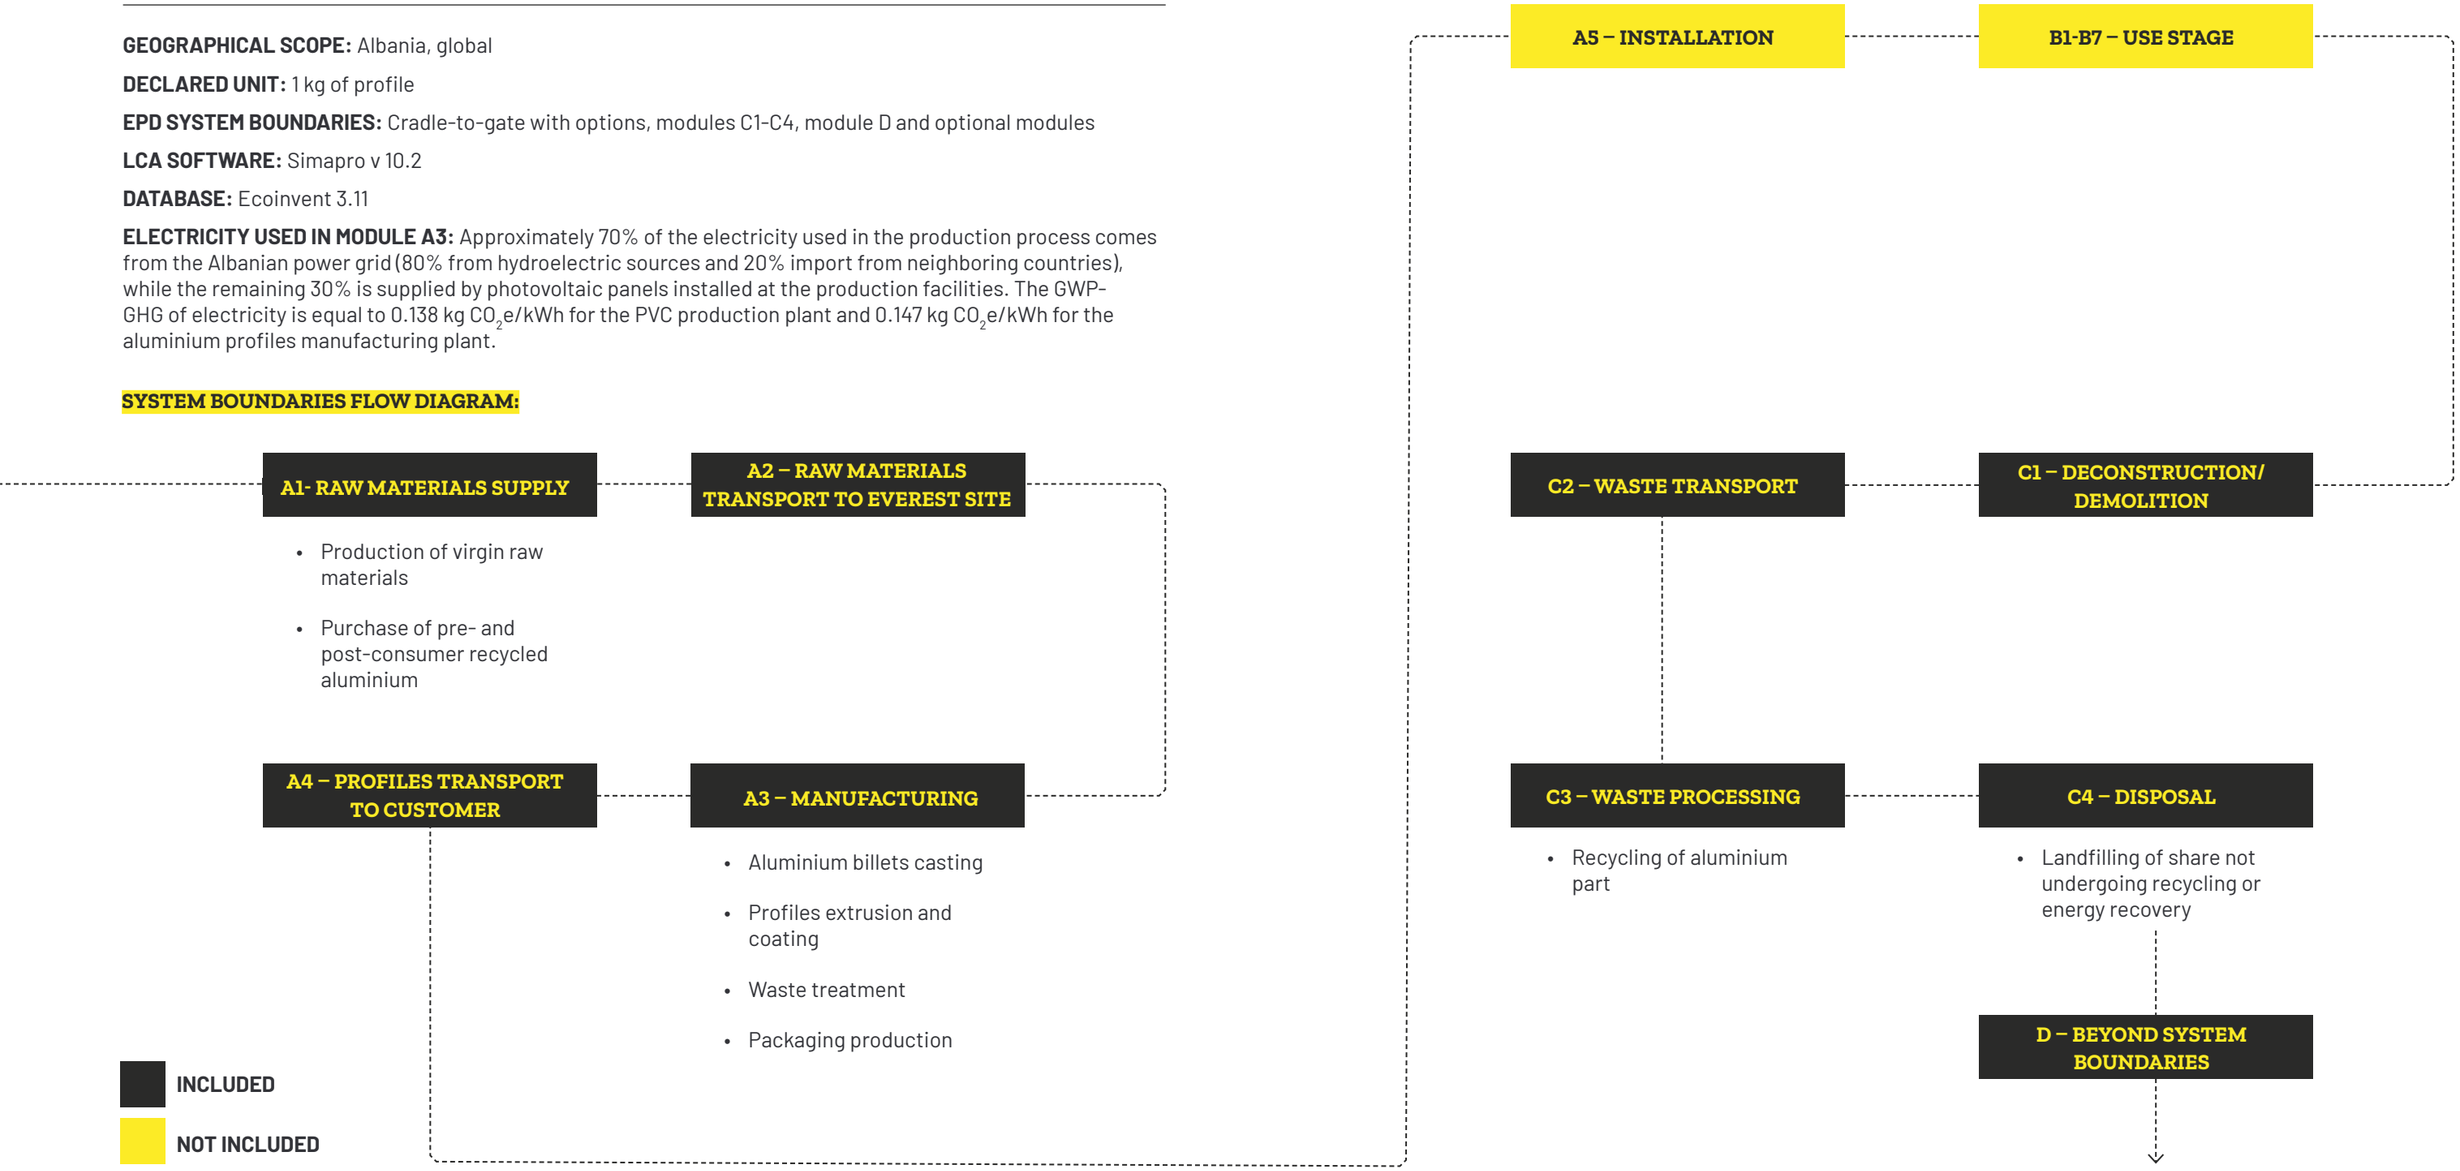

LCA INFORMATION

Modules declared, geographical scope, share of primary data (in GWP-GHG results) and data variation (in GWP-GHG results):

	PRODUCT STAGE			CONSTRUCTION PROCESS STAGE		USE STAGE							END OF LIFE STAGE				BENEFITS AND LOADS BEYOND THE SYSTEM BOUNDARIES
	Raw material supply	Transport	Manufacturing	Transport from the gate to the site	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling potential
MODULE	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
MODULES DECLARED	✓	✓	✓	✓	ND	ND	ND	ND	ND	ND	ND	ND	✓	✓	✓	✓	✓
GEOGRAPHY	GLO	GLO	AL	GLO	ND	ND	ND	ND	ND	ND	ND	ND	GLO	GLO	GLO	GLO	GLO
PRIMARY DATA USED		31%		-	-	-	-	-	-	-	-	-	-	-	-	-	-
VARIATION - PRODUCTS		0%		-	-	-	-	-	-	-	-	-	-	-	-	-	-
VARIATION - SITES		0%		-	-	-	-	-	-	-	-	-	-	-	-	-	-

✓ = module included in the analysis **ND** = module not included in the analysis **GLO** = Globe **AL** = Albania

LCA INFORMATION

Allocation procedures

The casting process, occurring in Everest plant, generates a **slag by-product** that is sold externally. An economic allocation was used to split the process natural gas consumption between the two outputs of the casting process: billets and the slag. The prices of the two different flows were provided directly by Everest. The economic allocation was performed considering also the production volumes of the two output products.

No economic allocation of flows was applied to distribute the impacts between the production of aluminium profile and the waste generated by the same extrusion process, since discarded profiles are internally recycled in the casting process.

Post-consumer recycled aluminum is treated as burden-free, meaning that only the environmental impact associated with scrap processing and transportation to the production facility is accounted for. Internally recycled aluminum carries no associated impact, as it undergoes no additional treatment and is directly reintegrated into the manufacturing process.



LCA INFORMATION

Data quality assessment

The data quality assessment was carried out based on the PCR 2019:14 v2.0.1 and the EN 15941 standard "Data quality for environmental assessment of products and construction works". The parameters analysed include accuracy, completeness, and the degree of technological, geographical, and temporal coverage of all datasets that account for up to 80% of the environmental impact indicators.

Data on raw material consumption, processes, and transport to and from the factory come from primary sources, as they were obtained directly from the company. The degrees of geographical, temporal, and technological coverage were evaluated using the assessment table from the EN 15804:2012+A2:2019 standard. To obtain an overall evaluation for each of the three criteria analysed, a score from 1 to 5 was assigned, where 1 indicates "very poor" and 5 indicates "very good".

The evaluation of the three aspects is shown in the table below. Overall, the data quality was assessed as "Good", based on the information collected and the datasets used. Only one dataset received "poor" evaluation, the one adopted for the modelling of the LPG combustion, since the represented technology and geography are different from the ones under study, but no other dataset was available; the contribution of the dataset to the GWP-GHG is 18% and between 6% and 19% for all other environmental impact indicators.

The share of primary data is calculated based on GWP-GHG results. It is a simplified indicator for data quality that supports the use of more primary data, to increase the representativeness of and comparability between EPDs. Note that the indicator does not capture all relevant aspects of data quality and is not comparable across product categories.

GEOGRAPHICAL REPRESENTATIVENESS SCORE	TECHNOLOGICAL REPRESENTATIVENESS SCORE	TEMPORAL REPRESENTATIVENESS SCORE
3.8	3.9	4.8

PROCESS	SOURCE TYPE	SOURCE	REFERENCE YEAR	DATA CATEGORY	SHARE OF PRIMARY DATA, OF GWP-GHG RESULTS FOR A1-A3
RAW MATERIAL TRANSPORT	Collected Data	EPD OWNER	2024	Primary Data	4%
ELECTRICITY CONSUMPTION FOR MANUFACTURING PROCESS	Collected Data	EPD OWNER	2024	Primary Data	8%
GAS CONSUMPTION FOR MANUFACTURING PROCESS	Collected Data	EPD OWNER	2024	Primary Data	19%
TOTAL SHARE OF PRIMARY DATA	-	-	-	-	31%



LCA INFORMATION

Modelling of infrastructures

power plants for the generation of electricity and casting furnace, both present in module A3, were included in the LCA model as relevant infrastructures.

No economic allocation of flows was applied to distribute the impacts between the production of aluminium profiles and the waste generated by the same extrusion process, since discarded profiles are internally recycled in the casting process.

Downstream stages and module D

C1
DECONSTRUCTION

The demolition process is not directly managed by Everest; therefore, no primary data is available regarding the material flows required for dismantling the profiles.
As a result, a default value provided by PCR 2019:14 v2.0.1 was used, which indicates a diesel consumption of 0.0011 kWh per kg of dismantled material. The module includes both the production of diesel and the direct emissions resulting from its combustion.

C2
WASTE TRANSPORT

As this phase is also outside Everest's direct control, both the transport distance and the mode of transportation were taken from 2019:14 v2.0.1, which specifies a default distance of 80 km. The dataset used for land transport corresponds to Transport, freight, lorry 16-32 metric ton, EURO5 {RER}| transport, freight, lorry 16-32 metric ton, EURO5 | Cut-off, U.

C3
WASTE TREATMENT

A representative end-of-life scenario was derived from standard EN 17213 'Windows and doors – Environmental Product Declarations – Product category rules for windows and pedestrian doorsets' (March 2020). Although this standard is now expired, it was considered representative due to its specific focus on windows. The standard indicates that 95% of the product undergoes recycling/incineration with energy recovery. It was therefore assumed that 95% of the aluminium content and 95% is effectively recycled. According to PCR 2019:14, default energy consumption values are assigned to the sorting phase, equal to 0.0018 kWh/kg of diesel and 0.0022 kWh/kg of electricity. The PVC, being primarily composed of chlorine, releases harmful substances such as dioxins and furans when incinerated. Therefore, no incineration with energy recovery is considered and landfill disposal was assumed as realistic end-of-life scenario.

C4
DISPOSAL

As indicated by the EN 17213 standard, 5% by mass of the product is destined for disposal. Accordingly, 5% of the aluminium is assumed to be landfilled. As mentioned in the previous paragraph, all other raw materials (such as paint) are considered to be fully disposed and are therefore entirely accounted for in Module C4:

- It is realistically assumed that the paint follows the treatment of the aluminium, as it is adhered to it. Therefore, 95% of the paint is modeled as incinerated without energy recovery, based on the assumption that it degrades due to the high temperatures involved in remelting.
- The remaining 5% follows the profile to landfill and is modeled accordingly through landfill disposal operations.
- PVC, being primarily composed of chlorine, releases harmful substances such as dioxins and furans when incinerated. Therefore, 100 % landfill disposal was assumed as the end-of-life scenario this component.

Unlike Module C3, the environmental impacts of these treatments are fully allocated to the system under study.

D
BENEFITS AND LOADS BEYOND THE SYSTEM BOUNDARY

The additional Module D allows for the assessment of potential benefits resulting from the recycling and energy recovery operations carried out at the product's end of life, as described in Module C3. These potential benefits are evaluated by comparing the end-of-life treatments with the processes they offset. In this study, the avoided processes are the production of primary aluminium, due to the use of post-consumer aluminium. To assess the benefits from aluminium recycling, the amount of post-consumer recycled aluminium already present in the profiles at the end-of-life was excluded from the calculation to ensure a consistent mass balance. Moreover, only the benefit related to the primary aluminium content in the product was considered.

Environmental impact assessment

The environmental impact was assessed using a dedicated method, in accordance with the EN 15804 standard and third-party verified and certified. The method is based on EF 3.1 package.



ENVIRONMENTAL PERFORMANCE

The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks.

The results of the end-of-life stage (modules C1-C4) should be considered when using the results of the product stage (modules A1-A3).

Mandatory impact category indicators according to EN 15804

IMPACT CATEGORY	UNIT	A1-3	A4	C1	C2	C3	C4	D
GWP,t	kg CO_2 eq	3.3E+00	1.1E-01	3.7E-04	1.2E-02	1.3E-03	9.3E-02	-5.1E+00
GWP,f	kg CO_2 eq	3.3E+00	1.1E-01	3.7E-04	1.2E-02	1.3E-03	9.3E-02	-5.0E+00
GWP,b	kg CO_2 eq	7.2E-03	3.4E-06	1.7E-08	3.9E-07	1.5E-06	1.5E-05	-1.1E-03
GWP,luluc	kg CO_2 eq	2.6E-03	1.7E-06	1.5E-08	1.9E-07	2.2E-06	3.0E-06	-7.0E-04
GWP - GHG	kg CO_2 eq	3.3E+00	1.1E-01	3.7E-04	1.2E-02	1.3E-03	9.3E-02	-5.1E+00
AP	mol H+ eq	1.6E-02	2.9E-04	3.5E-06	3.2E-05	9.1E-06	4.4E-05	-4.9E-02
EPf	kg P eq	1.0E-04	6.7E-08	3.5E-10	7.6E-09	7.1E-08	4.6E-08	-3.5E-04
EPm	kg N eq	2.2E-03	1.1E-04	1.6E-06	1.2E-05	3.1E-06	3.5E-05	-5.7E-03
EPt	mol N eq	2.4E-02	1.2E-03	1.8E-05	1.3E-04	3.4E-05	1.9E-04	-6.4E-02
POCP	kg NMVOC eq	1.0E-02	4.7E-04	5.3E-06	5.2E-05	1.0E-05	7.4E-05	-1.9E-02
ODP	kg CFC11 eq	5.0E-07	2.5E-09	5.7E-12	2.8E-10	2.0E-11	1.4E-10	-1.3E-08
ADPe*	kg Sb eq	5.9E-06	2.8E-09	1.3E-11	3.2E-10	6.8E-11	1.4E-09	4.0E-07
ADPf*	MJ	5.7E+01	1.4E+00	4.9E-03	1.6E-01	2.5E-02	1.3E-01	-5.0E+01
WDP*	m^3 depriv.	1.2E+00	4.7E-04	3.7E-06	5.3E-05	1.6E-04	0.0E+00	1.1E-01

**The results of this environmental impact indicator shall be used with care as the uncertainties of the results are high and as there is limited experience with the indicator.*

GWP, t: Global Warming Potential - total
GWP,f: Global Warming Potential - fossil
GWP,b: Global Warming Potential - biogenic
GWP,luluc: Global Warming Potential – land use and land use change
GWP,GHG: Global Warming Potential - irreversible

ODP: Ozone Depletion
AP: Acidification
EPf: Eutrophication - freshwater
EPm: Eutrophication - marine
EPt: Eutrophication - terrestrial
POCP: Photochemical Ozone Creation Potential
ADPe: Abiotic Depletion Potential - non-fossil

ADPf: Abiotic Depletion Potential - fossil
WDP: Water Deprivation Potential
PERE: Renewable Primary Energy excluding Primary Energy used as raw material
PERM: Renewable Primary Energy used as raw material

ENVIRONMENTAL PERFORMANCE

Resource use indicators according to EN 15804

IMPACT CATEGORY	UNIT	A1-3	A4	C1	C2	C3	C4	D
PERE	MJ	9.6E+00	3.6E-03	1.1E-05	4.0E-04	3.7E-03	1.2E-03	-4.3E-01
PERM	MJ	3.4E-01	0.0E+00	0.0E+00	0.0E+00	0.0E+00	0.0E+00	0.0E+00
PERT	MJ	9.9E+00	3.6E-03	1.1E-05	4.0E-04	3.7E-03	1.2E-03	-4.3E-01
PENRE	MJ	4.5E+01	1.4E+00	4.9E-03	1.6E-01	2.5E-02	1.3E-01	-5.0E+01
PENRM	MJ	1.3E+01	0.0E+00	0.0E+00	0.0E+00	0.0E+00	0.0E+00	0.0E+00
PENRT	MJ	5.7E+01	1.4E+00	4.9E-03	1.6E-01	2.5E-02	1.3E-01	-5.0E+01
SM	kg	2.1E-01	0.0E+00	0.0E+00	0.0E+00	0.0E+00	0.0E+00	2.5E-01
RSF	MJ	0.0E+00	0.0E+00	0.0E+00	0.0E+00	0.0E+00	0.0E+00	0.0E+00
NRSF	MJ	0.0E+00	0.0E+00	0.0E+00	0.0E+00	0.0E+00	0.0E+00	0.0E+00
FW	m^3	4.0E-02	2.8E-05	1.5E-07	3.2E-06	1.0E-05	0.0E+00	1.3E-03

Method B reported in Annex 3 of the PCR is adopted for calculation of energy use indicators.

Waste and output flows indicators according to EN 15804

IMPACT CATEGORY	UNIT	A1-3	A4	C1	C2	C3	C4	D
HWD	kg	1.9E-01	2.6E-05	2.8E-07	2.9E-06	1.2E-05	7.0E-04	-8.6E-01
NHWD	kg	2.3E+00	2.1E-03	4.8E-06	2.3E-04	7.7E-05	2.0E+00	-3.0E-01
RWD	kg	2.4E-05	8.7E-08	2.3E-10	9.8E-09	1.2E-07	2.1E-08	-6.5E-05
CRU	kg	0.0E+00	0.0E+00	0.0E+00	0.0E+00	0.0E+00	0.0E+00	0.0E+00
MFR	kg	1.0E-01	0.0E+00	0.0E+00	0.0E+00	4.4E-01	0.0E+00	1.4E-02
MER	kg	0.0E+00	0.0E+00	0.0E+00	0.0E+00	0.0E+00	0.0E+00	0.0E+00
EE	MJ	0.0E+00	0.0E+00	0.0E+00	0.0E+00	0.0E+00	2.1E-01	0.0E+00

PERT: Total use of Renewable Primary Energy
PENRE: Non-renewable Primary Energy excluding Primary Energy used as raw material
PENRM: Non-renewable Primary Energy used as raw material
PENRT: Total use of Non-renewable Primary Energy
SM: Use of secondary raw materials
RSF: Use of renewable secondary fuels
NRSF: Use of non-renewable secondary fuels
FW: Net use of fresh water
HWD: Hazardous waste disposed
NHWD: Non-hazardous waste disposed

RWD: Radioactive waste disposed
CRU: Components for re-use
MFR: Materials for recycling
MER: Materials for energy recovery
EE: Exported energy

ADDITIONAL ENVIRONMENTAL INFORMATION

In accordance with the reference PCR, if the declared end-of-life scenarios correspond to a mix of end-of-life options, it is necessary to also report the results for the corresponding 100% scenarios. The results for modules C1–C4 related to environmental impact indicators are shown in the two tables below, for both the 100% recycling scenario, where aluminium is fully recycled, and the 100% landfill scenario. In the 100% recycling scenario, module C4 still includes an impact contribution due to the incineration without energy recovery of the paint, as it melts together with the aluminium during the recycling process and the PVC bar sent to landfill, since no recycling scenario was considered.

100% Landfill scenario

IMPACT CATEGORY	UNIT	C1	C2	C3	C4
GWP,t	kg CO_2 eq	3.7E-04	1.2E-02	0.0E+00	5.6E-02
GWP,f	kg CO_2 eq	3.7E-04	1.2E-02	0.0E+00	5.6E-02
GWP,b	kg CO_2 eq	1.7E-08	3.9E-07	0.0E+00	2.8E-05
GWP,luluc	kg CO_2 eq	1.5E-08	1.9E-07	0.0E+00	9.6E-06
GWP - GHG	kg CO_2 eq	3.7E-04	1.2E-02	0.0E+00	5.6E-02
AP	kg CFC-11 eq	3.5E-06	3.2E-05	0.0E+00	8.2E-05
EPf	mol H+ eq	3.5E-10	7.6E-09	0.0E+00	1.2E-07
EPm	kg P eq	1.6E-06	1.2E-05	0.0E+00	5.1E-05
EPt	kg N eq	1.8E-05	1.3E-04	0.0E+00	3.4E-04
POCP	mol N eq	5.3E-06	5.2E-05	0.0E+00	1.3E-04
ODP	kg NMVOC eq	5.7E-12	2.8E-10	0.0E+00	2.8E-10
ADPe	kg Sb eq	1.3E-11	3.2E-10	0.0E+00	2.5E-09
ADPf	MJ	4.9E-03	1.6E-01	0.0E+00	2.6E-01
WDP	m^3 depriv.	3.7E-06	5.3E-05	0.0E+00	0.0E+00

100% Recycling scenario

IMPACT CATEGORY	UNIT	C1	C2	C3	C4
GWP,t	kg CO_2 eq	3.7E-04	1.2E-02	1.3E-03	9.5E-02
GWP,f	kg CO_2 eq	3.7E-04	1.2E-02	1.3E-03	9.5E-02
GWP,b	kg CO_2 eq	1.7E-08	3.9E-07	1.5E-06	1.4E-05
GWP,luluc	kg CO_2 eq	1.5E-08	1.9E-07	2.2E-06	2.7E-06
GWP - GHG	kg CO_2 eq	3.7E-04	1.2E-02	1.3E-03	9.5E-02
AP	kg CFC-11 eq	3.5E-06	3.2E-05	9.1E-06	4.2E-05
EPf	mol H+ eq	3.5E-10	7.6E-09	7.1E-08	4.2E-08
EPm	kg P eq	1.6E-06	1.2E-05	3.1E-06	3.4E-05
EPt	kg N eq	1.8E-05	1.3E-04	3.4E-05	1.8E-04
POCP	mol N eq	5.3E-06	5.2E-05	1.0E-05	7.1E-05
ODP	kg NMVOC eq	5.7E-12	2.8E-10	2.0E-11	1.4E-10
ADPe	kg Sb eq	1.3E-11	3.2E-10	6.8E-11	1.4E-09
ADPf	MJ	4.9E-03	1.6E-01	2.5E-02	1.2E-01
WDP	m^3 depriv.	3.7E-06	5.3E-05	1.6E-04	0.0E+00

Abbreviations

STAGES / MODULES	
A1	Raw material supply
A2	Transport
A3	Manufacturing
A4	Transport to site
A5	Construction/Installation
B1	Use
B2	Maintenance
B3	Repair
B4	Replacement
B5	Refurbishment
B6	Operational energy use
B7	Operational water use
C1	Deconstruction/Demolition
C2	Transport to waste processing
C3	Waste processing
C4	Disposal
D	Reuse-Recovery-Recycling potential

OTHER RELEVANT TERMS	
SVHC	Substances of Very High Concern
EC No.	European Community Number
CAS No.	Chemical Abstracts Service Number
MJ	Megajoule
kg	Kilogram
m^3	Cubic Meter
NMVOC	Non-Methane Volatile Organic Compounds
Sb eq.	Antimony Equivalents
P eq.	Phosphorus Equivalents
N eq.	Nitrogen Equivalents
CFC-11 eq.	Chlorofluorocarbon-11 Equivalents
CO_2 eq.	Carbon Dioxide Equivalents
kg C	Kilograms of Carbon
kg CO_2eq.	Kilograms of Carbon Dioxide Equivalent

REFERENCES

- General Programme Instructions of the International EPD® System. Version 5.0.1.
- Product Category Rules PCR 2019:14 Construction products, version 2.0.1. Published on 2025.04.07 valid until: 2030.04.07, based on the European standard UNI-EN 15804:2012+A2:2020.
- UNI-EN ISO 14040:2006 Amd 1:2020 – Environmental management – Life Cycle Assessment – Principles and framework.
- UNI-EN ISO 14044:2006 Amd 1:2017/2:2020 – Environmental management – Life Cycle Assessment – Requirements.
- UNI-EN ISO 14025:2006- Labels and environmental declarations.
- EN 15804:2012+A2: Sustainability in construction. Product environmental statements. Commodity category rules for construction products.
- EN 17213 'Windows and doors – Environmental Product Declarations – Product category rules for windows and pedestrian doorsets' (March 2020)
- LCA Report for aluminium profiles, Everest, 2025
- UNI EN 15941:2024 "Construction Sustainability – Data Quality for the Environmental Assessment of Products and Construction Works – Data Selection and Use"

Version History

Original version of the EPD, 2025-10-08



EVEREST

Bulevardi Blu 544, Kamëz, Tirana 1030, AL
info@everest.al

www.everest.al