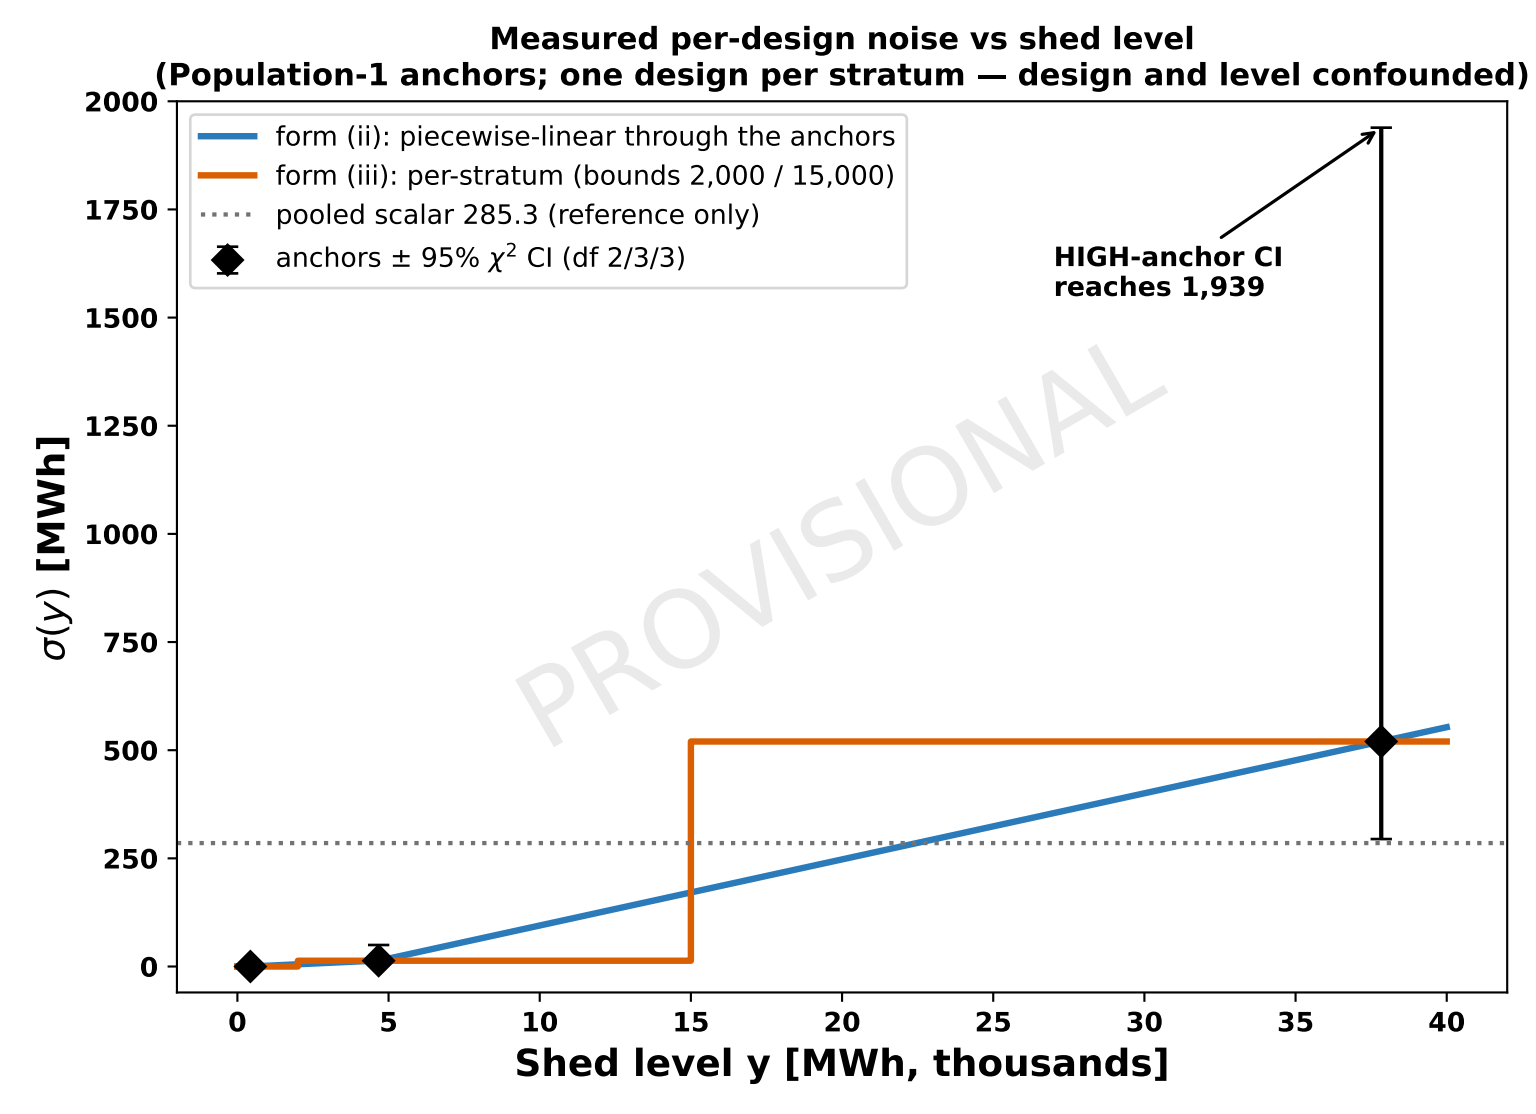
Measured per-design noise vs shed level
(Population-1 anchors; one design per stratum — design and level confounded)
form (ii): piecewise-linear through the anchors
form (iii): per-stratum (bounds 2,000 / 15,000)
pooled scalar 285.3 (reference only)
anchors ± 95% χ² CI (df 2/3/3)
HIGH-anchor CI
reaches 1,939
PROVISIONAL
σ(y) [MWh]
Shed level y [MWh, thousands]
0
250
500
750
1000
1250
1500
1750
2000
0
5
10
15
20
25
30
35
40