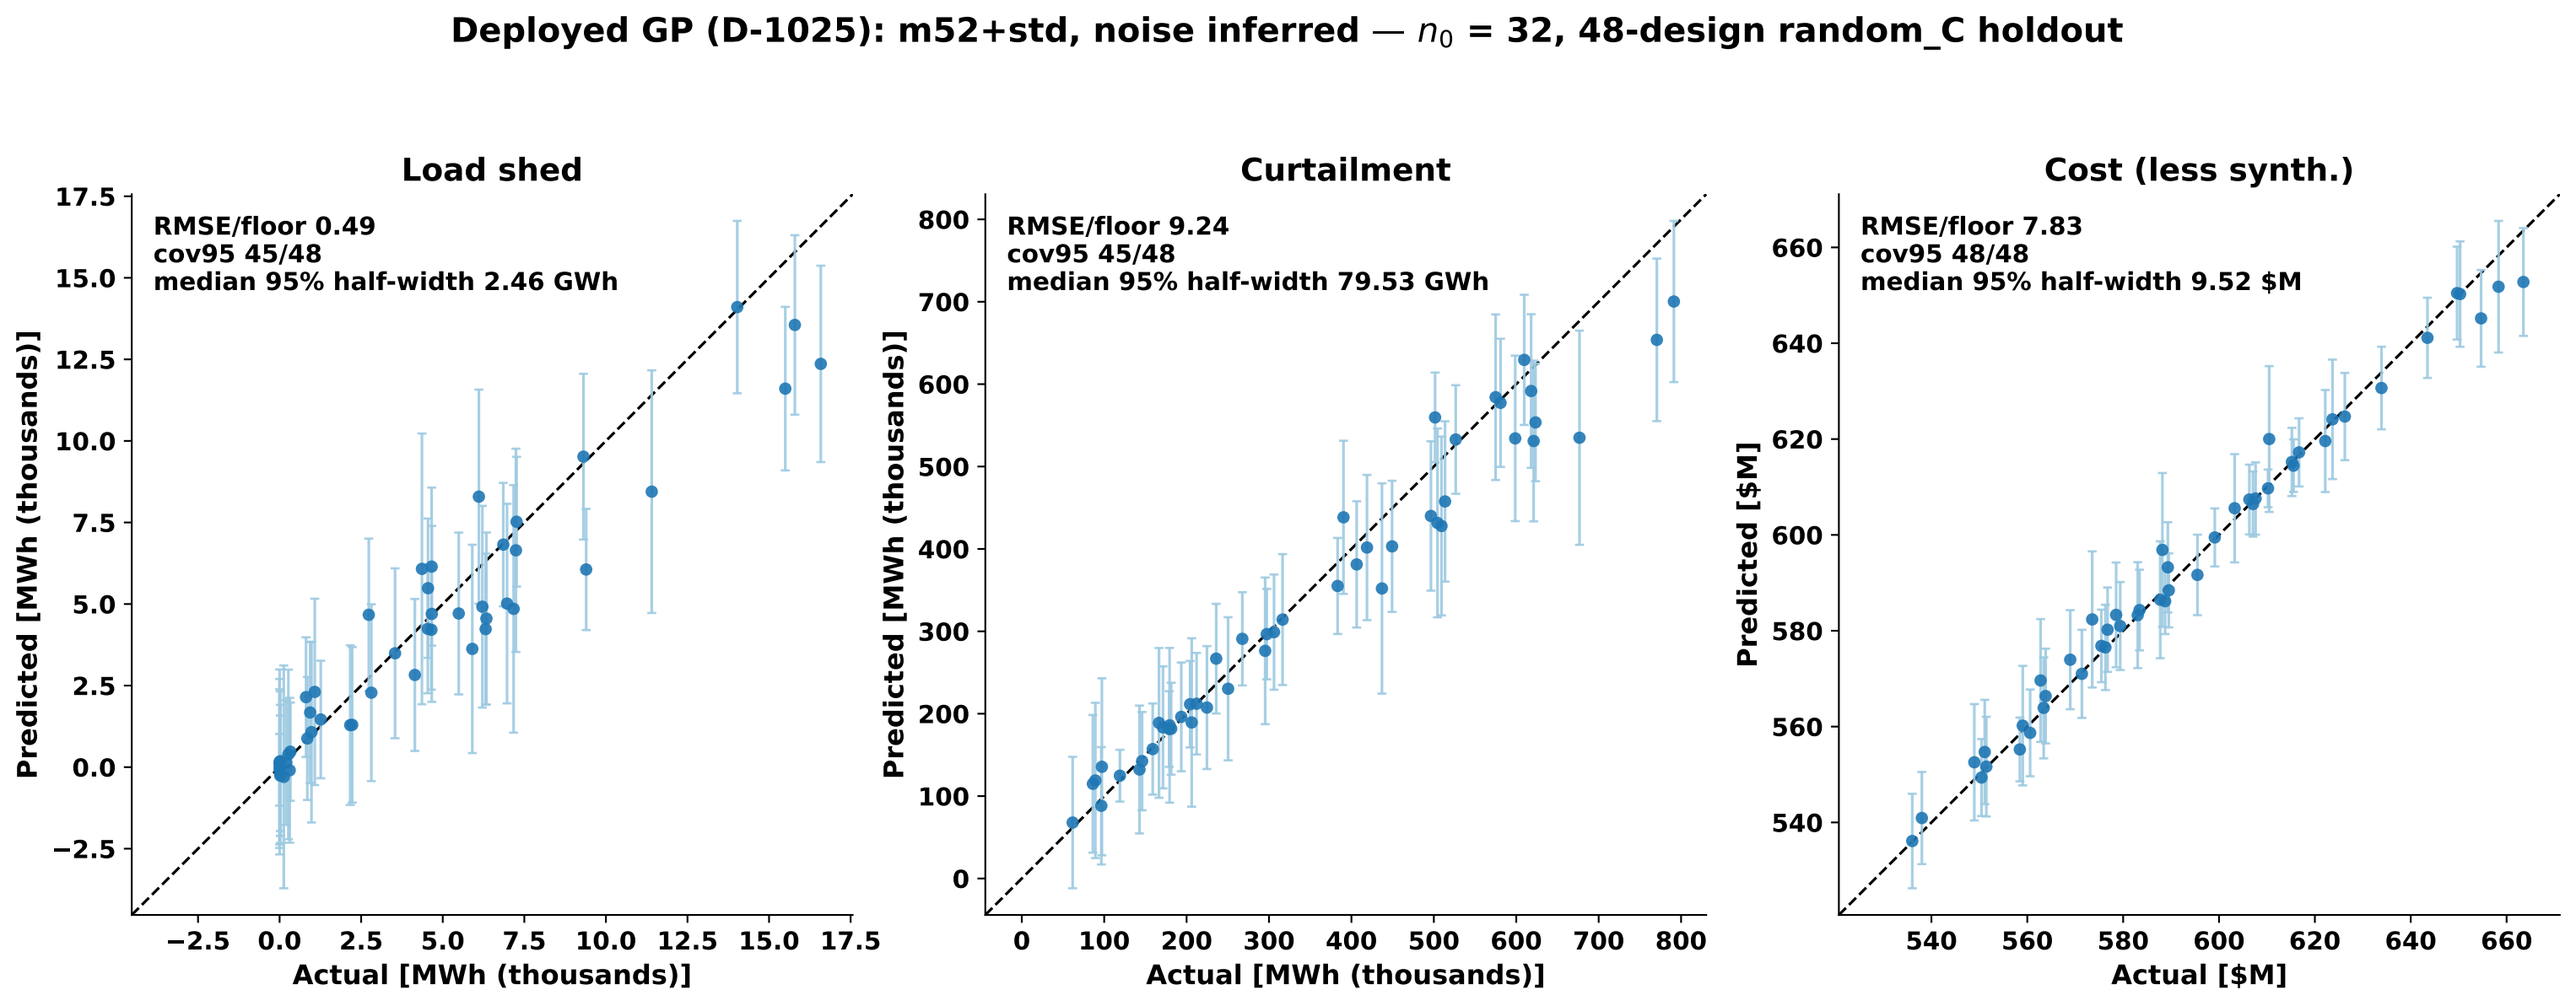
Deployed GP (D-1025): m52+std, noise inferred — n_0 = 32, 48-design random_C holdout
Load shed
RMSE/floor 0.49
cov95 45/48
median 95% half-width 2.46 GWh
Predicted [MWh (thousands)]
Actual [MWh (thousands)]
Curtailment
RMSE/floor 9.24
cov95 45/48
median 95% half-width 79.53 GWh
Predicted [MWh (thousands)]
Actual [MWh (thousands)]
Cost (less synth.)
RMSE/floor 7.83
cov95 48/48
median 95% half-width 9.52 $M
Predicted [$M]
Actual [$M]