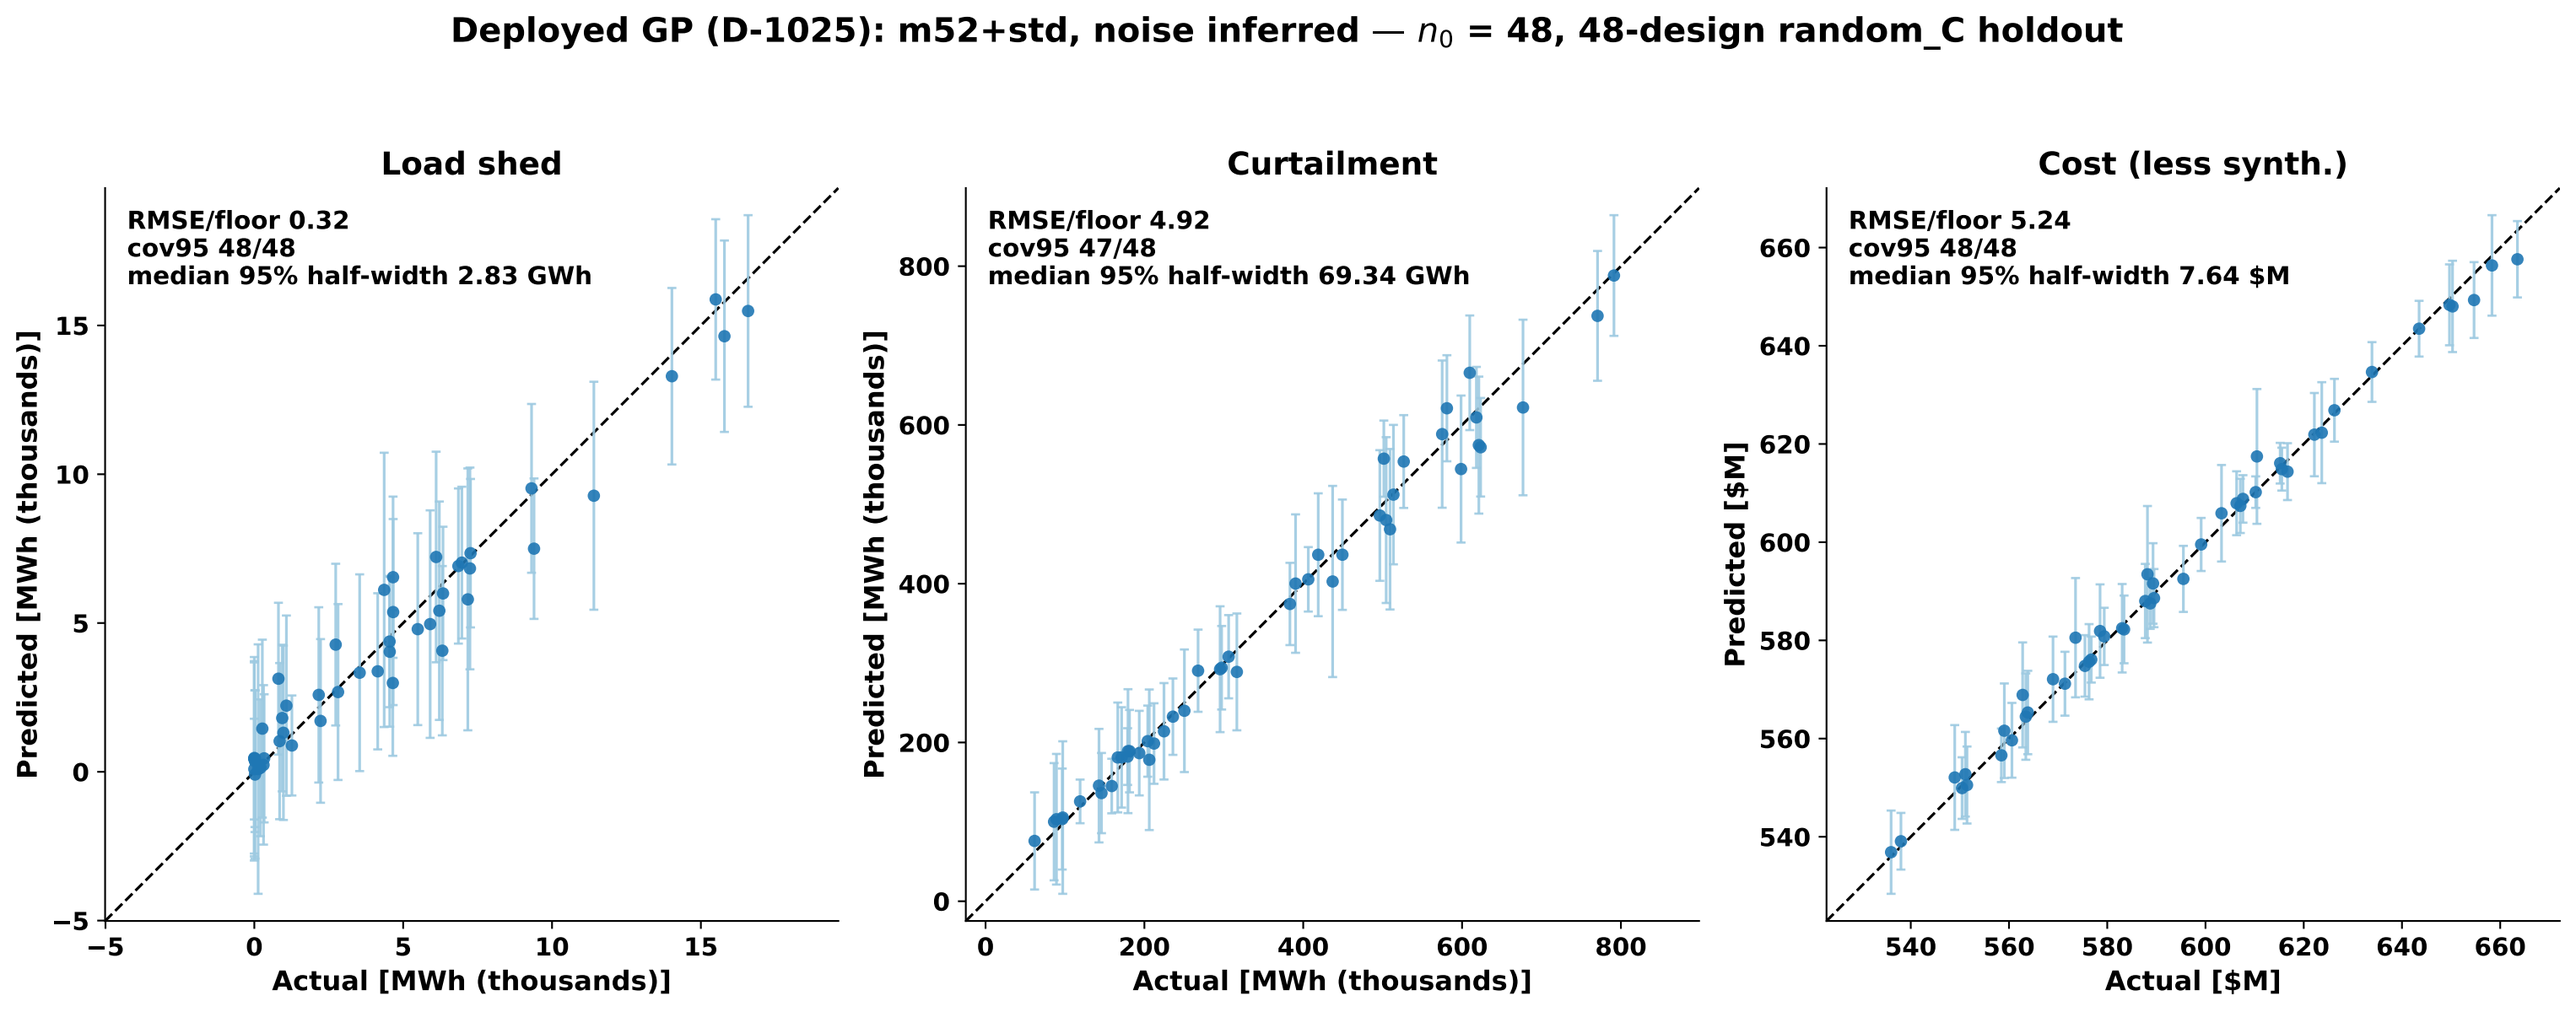
Deployed GP (D-1025): m52+std, noise inferred — n_0 = 48, 48-design random_C holdout
Load shed
RMSE/floor 0.32
cov95 48/48
median 95% half-width 2.83 GWh
Predicted [MWh (thousands)]
Actual [MWh (thousands)]
Curtailment
RMSE/floor 4.92
cov95 47/48
median 95% half-width 69.34 GWh
Predicted [MWh (thousands)]
Actual [MWh (thousands)]
Cost (less synth.)
RMSE/floor 5.24
cov95 48/48
median 95% half-width 7.64 $M
Predicted [$M]
Actual [$M]