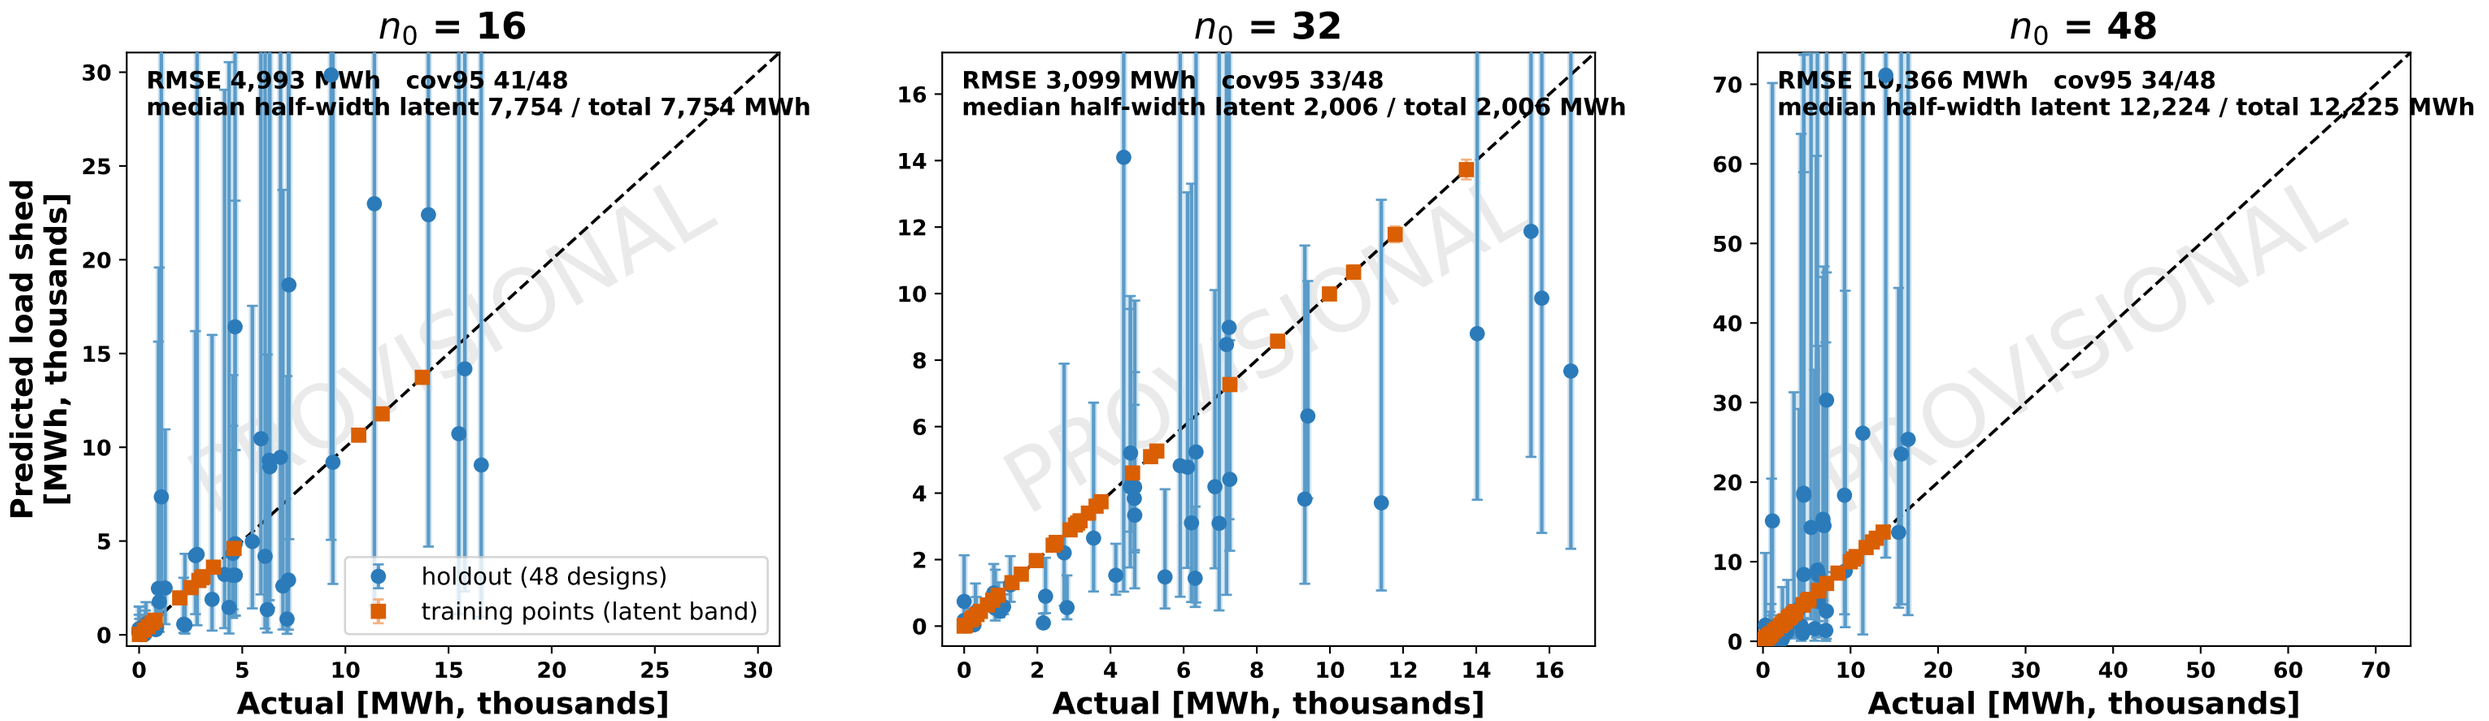
Phase-B PRIMARY rbf+log1p+ii: holdout parity, LATENT band (dark) inside TOTAL band (pale), measured per-point noise
n_0 = 16
RMSE 4,993 MWh cov95 41/48
median half-width latent 7,754 / total 7,754 MWh
n_0 = 32
RMSE 3,099 MWh cov95 33/48
median half-width latent 2,006 / total 2,006 MWh
n_0 = 48
RMSE 10,366 MWh cov95 34/48
median half-width latent 12,224 / total 12,225 MWh
Predicted load shed [MWh, thousands]
Actual [MWh, thousands]
holdout (48 designs)
training points (latent band)
PROVISIONAL
Dark = latent (model-only) band; pale = total (noise-inclusive) band. cov95 attaches to the TOTAL band only. Bars clipped at the frame. Axes match fig1/fig1c per n0.