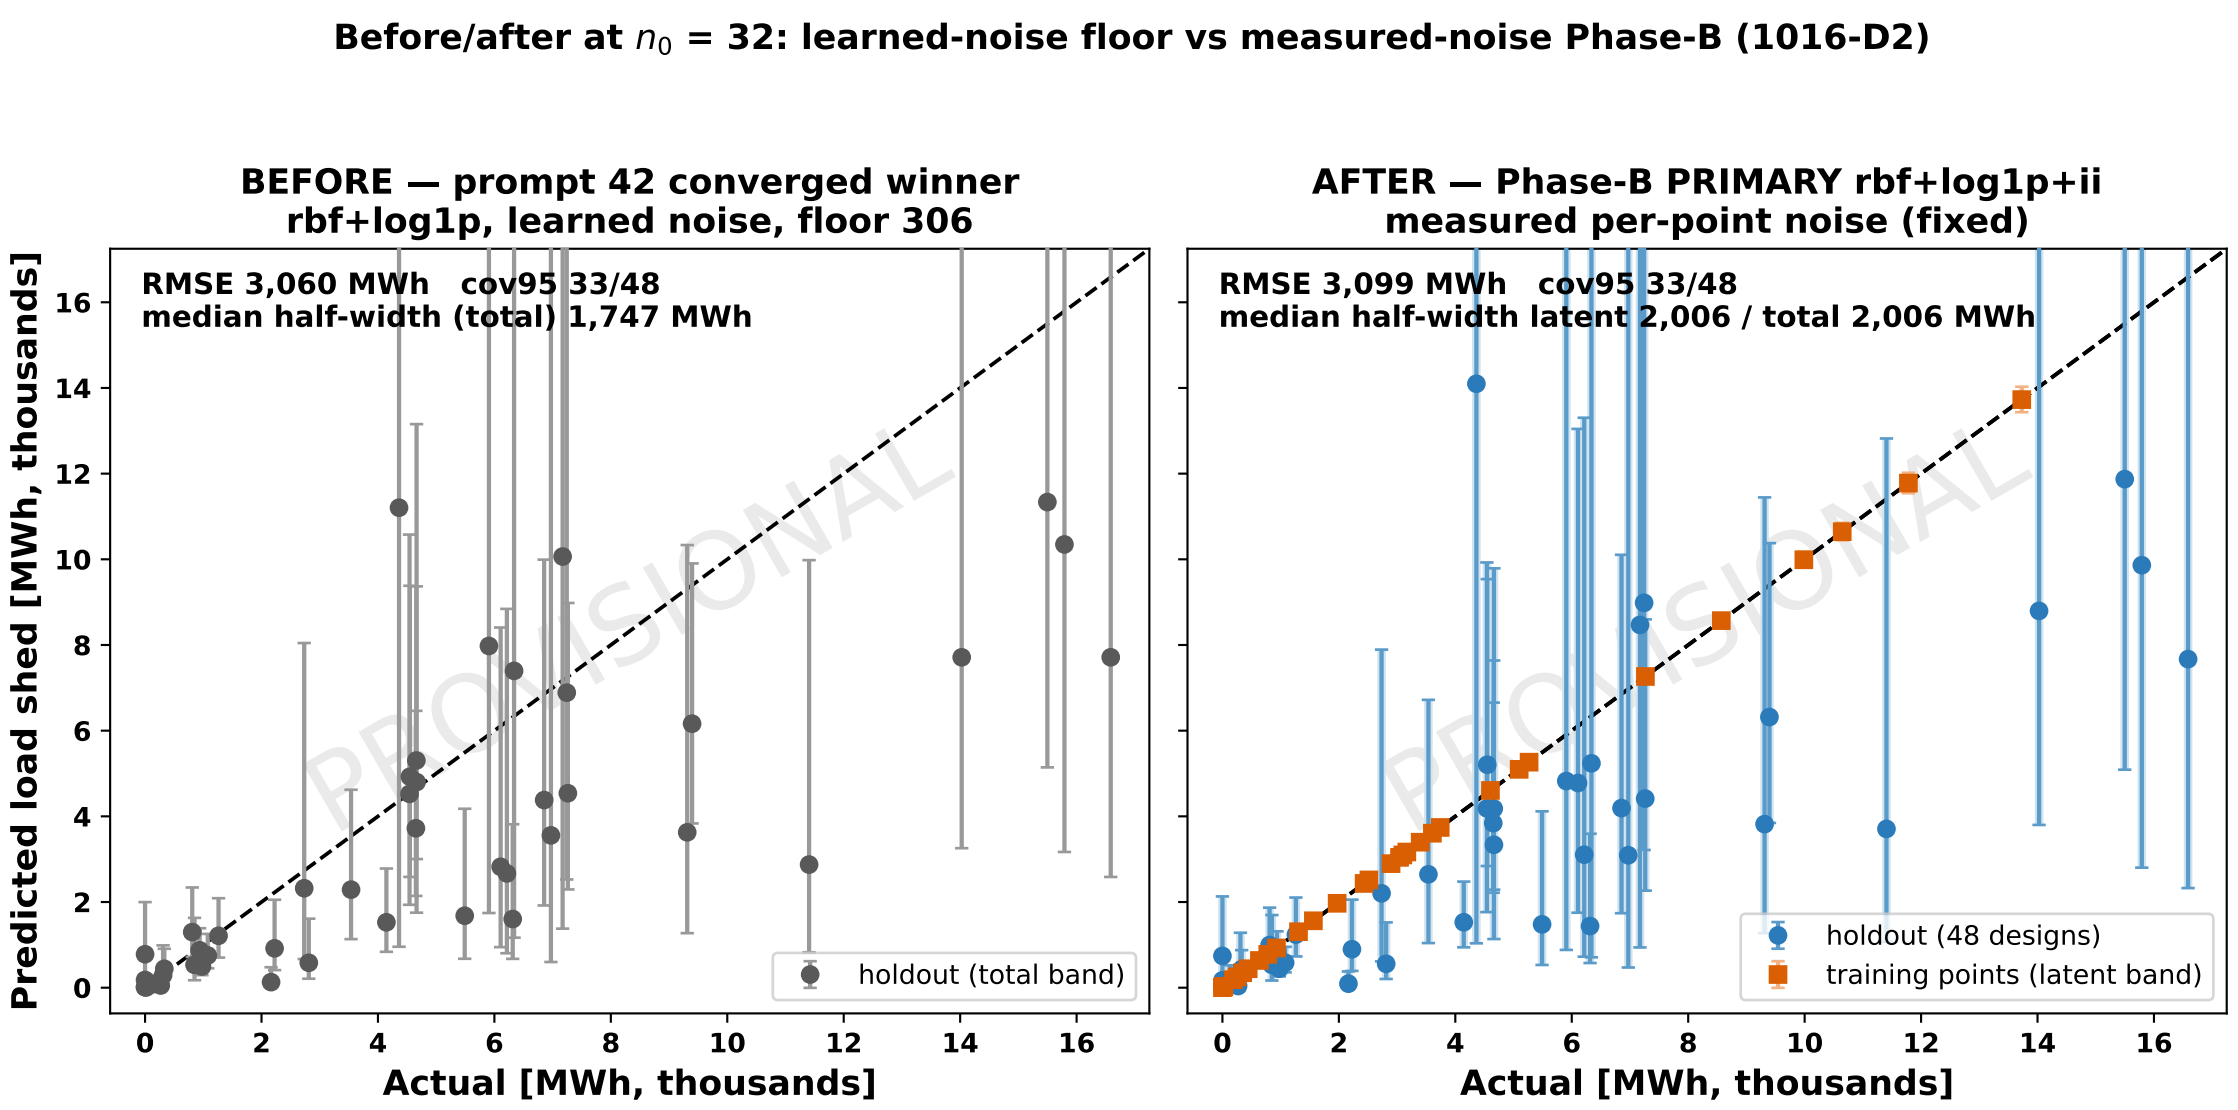
Before/after at n_0 = 32: learned-noise floor vs measured-noise Phase-B (1016-D2)
BEFORE — prompt 42 converged winner
rbf+log1p, learned noise, floor 306
RMSE 3,060 MWh cov95 33/48
median half-width (total) 1,747 MWh
holdout (total band)
AFTER — Phase-B PRIMARY rbf+log1p+ii
measured per-point noise (fixed)
RMSE 3,099 MWh cov95 33/48
median half-width latent 2,006 / total 2,006 MWh
holdout (48 designs)
training points (latent band)
PROVISIONAL
Predicted load shed [MWh, thousands]
Actual [MWh, thousands]
0
2
4
6
8
10
12
14
16