ASM2464PDX Schematics

Revision 0.3

TITLE	SHEET
COVER SHEET	1
BLOCK DIAGRAM	2
ASM2464PDX	3
Power	4
PDC TI TPS65988DK	5


ASMEDIA TECHNOLOGY INC


Title: COVER SHEET		
Size: C	Document Number: <Doc>	Rev: 0.3
Date: Friday, June 30, 2023	Sheet 1 of 7	



asmedia
ASMEDIA TECHNOLOGY INC

Title: BLOCK DIAGRAM		
Size: C	Document Number: <Doc>	Rev: 0.3
Date: Friday, June 30, 2023	Sheet 2 of 7	

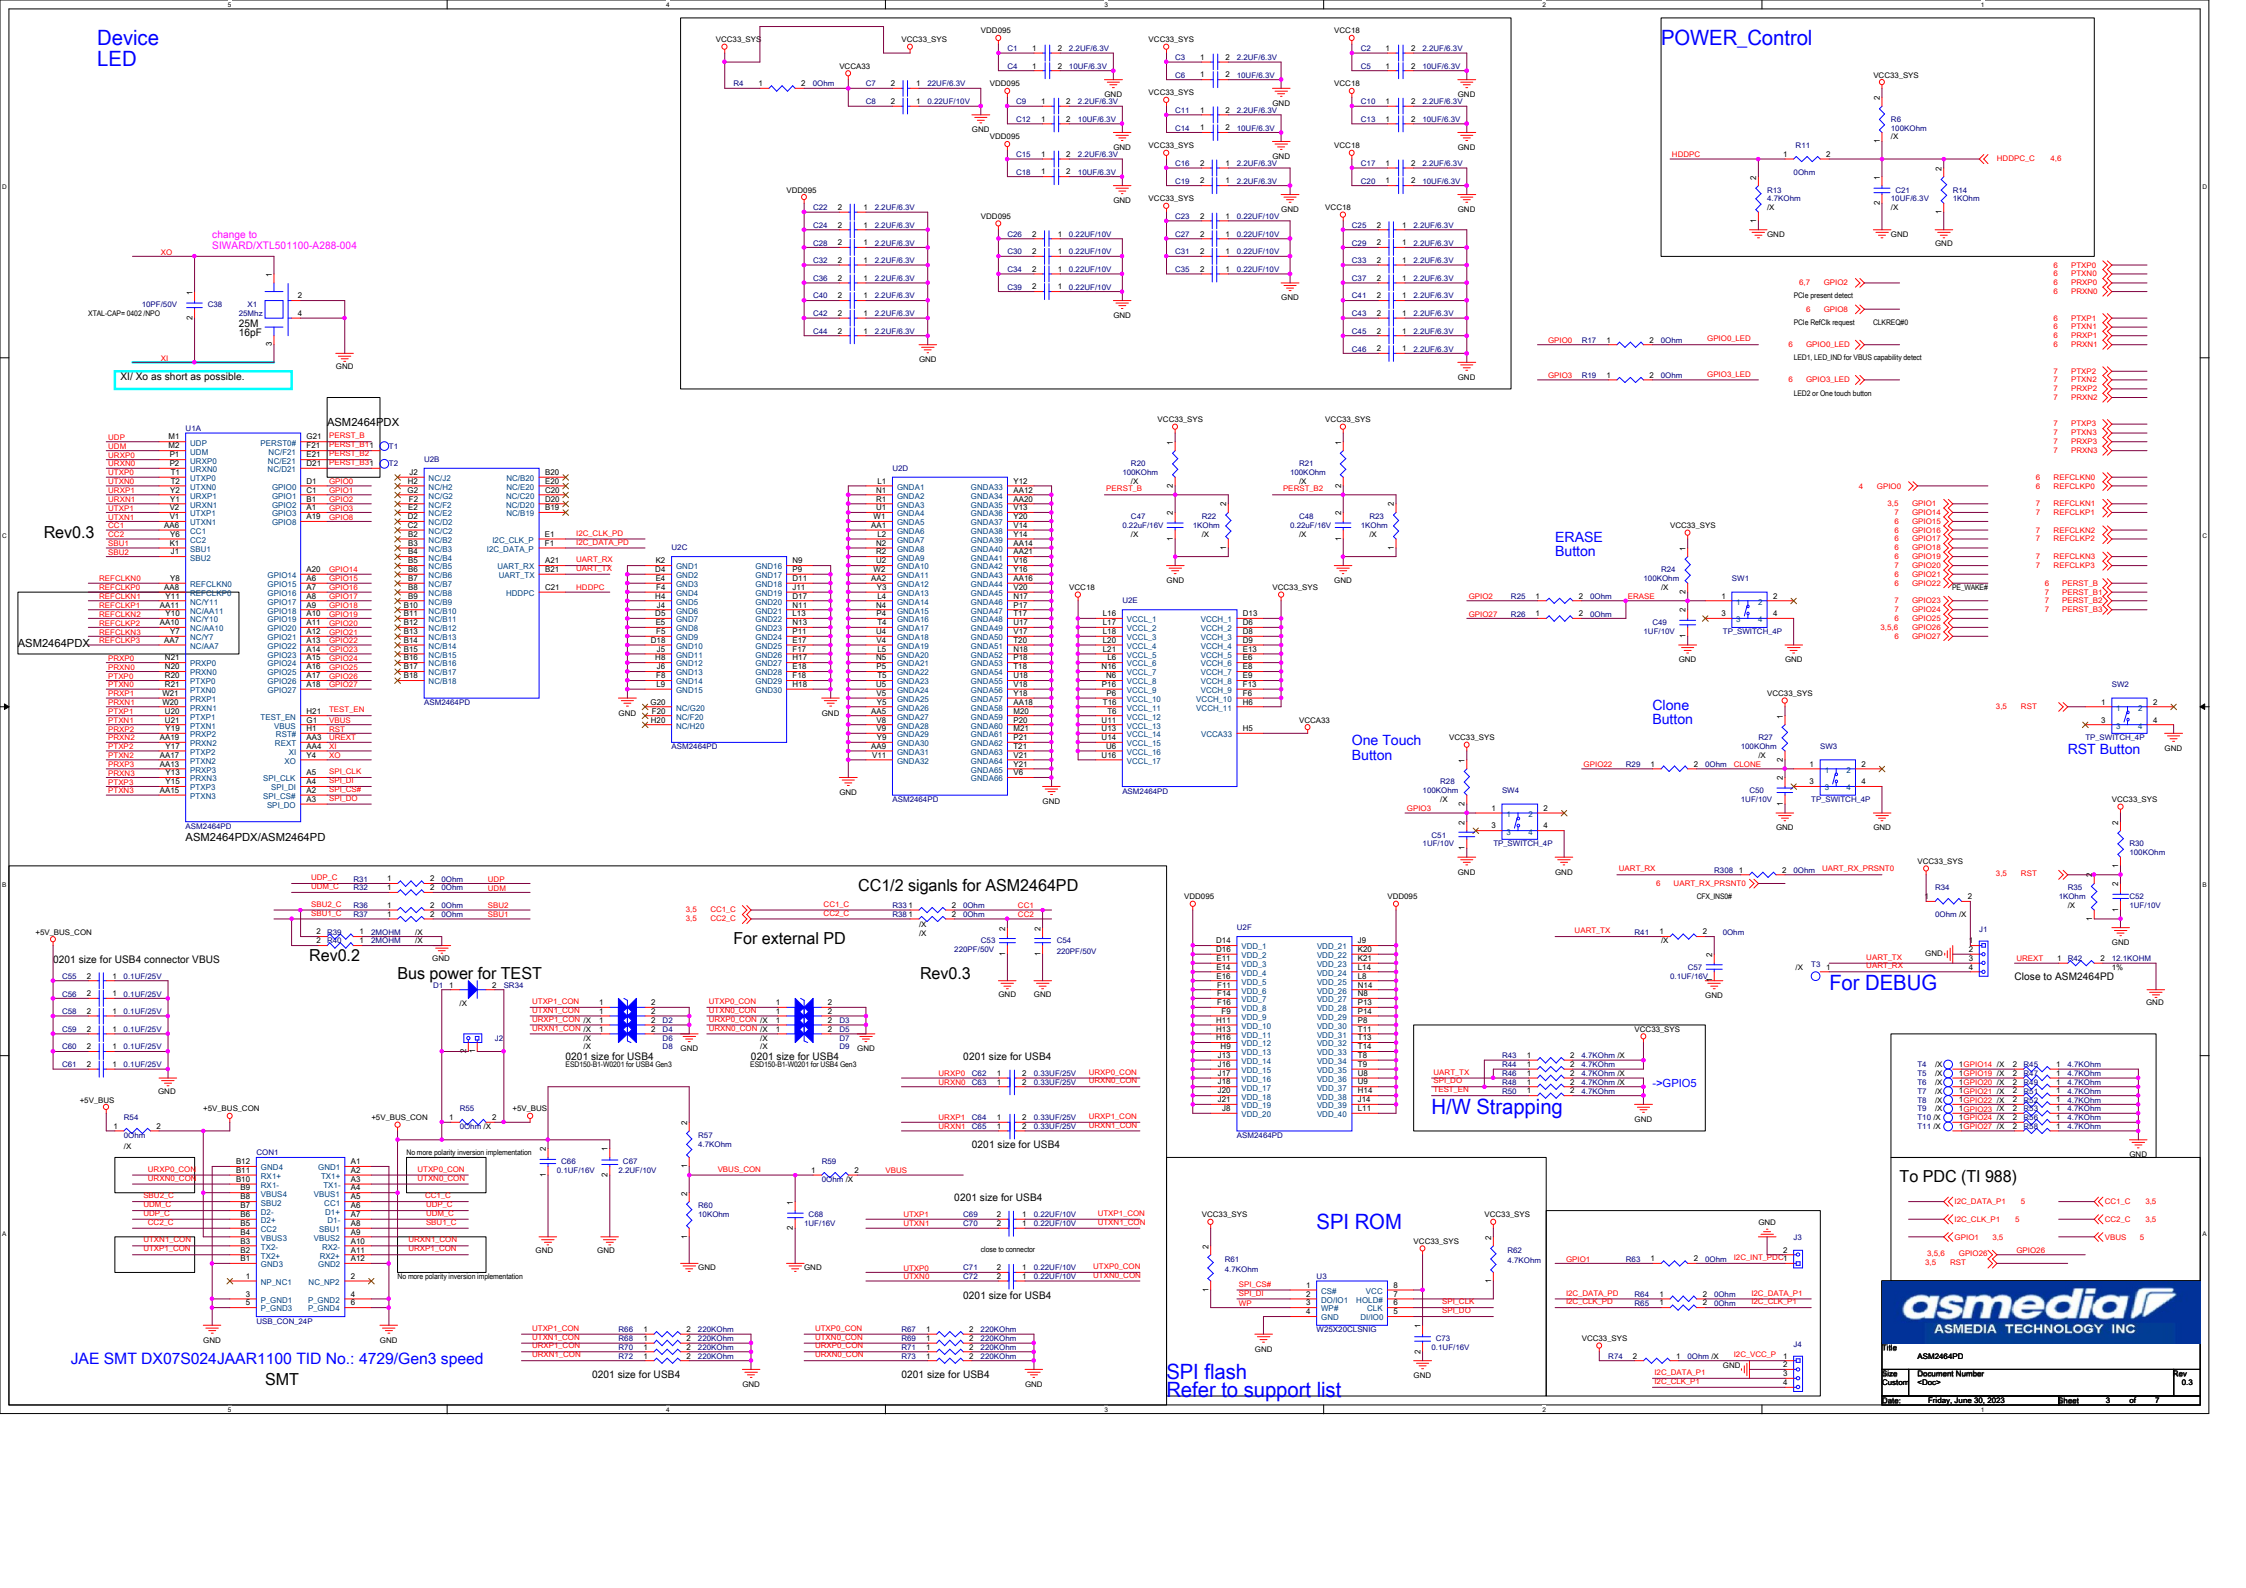

Device
LED
change to
SIWARD/XTL501100-A288-004
XO
XI
10PF/50V
XTAL-CAP=0402/NPO
C38
X1
25Mhz
25M
16pF
XI/ Xo as short as possible.
ASM2464PDX
Rev0.3
ASM2464PDX/ASM2464PD
Rev0.2
Bus power for TEST
For external PD
CC1/2 siganls for ASM2464PD
Rev0.3
0201 size for USB4 connector VBUS
JAE SMT DX07S024JAAR1100 TID No.: 4729/Gen3 speed
SMT
POWER_Control
ERASE
Button
Clone
Button
One Touch
Button
RST Button
For DEBUG
H/W Strapping
SPI ROM
SPI flash
Refer to support list
To PDC (TI 988)
asmedia
ASMEDIA TECHNOLOGY INC
Title
ASM2464PD
Size
Custom
Document Number
<Doc>
Rev
0.3
Date:
Friday, June 30, 2023
Sheet
3
of
7

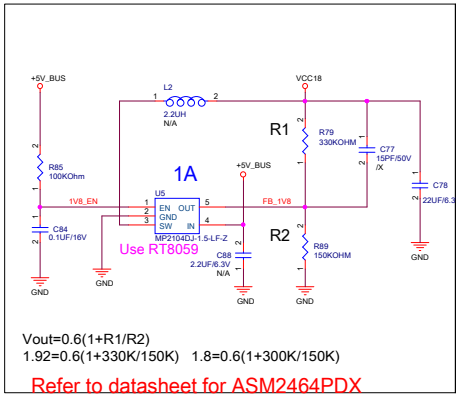

Vout=0.6(1+R1/R2)

1.92=0.6(1+330K/150K) 1.8=0.6(1+300K/150K)

Refer to datasheet for ASM2464PDX

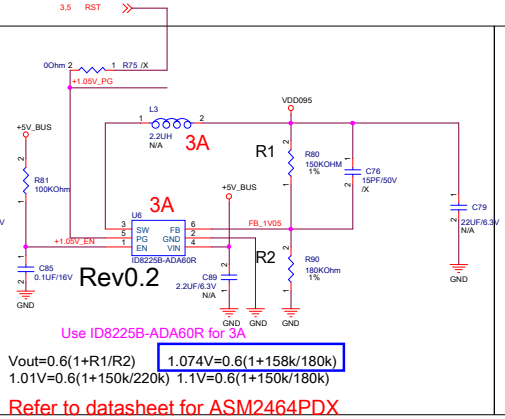


Vout=0.6(1+R1/R2) 1.074V=0.6(1+158k/180k)


1.01V=0.6(1+150k/220k) 1.1V=0.6(1+150k/180k)

Refer to datasheet for ASM2464PDX

Power 3.3V for ASM2464PDX and TI PDC 8mA (GS1117AXF)

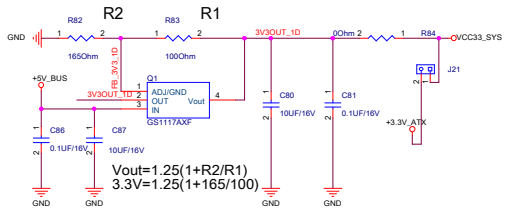

For PCIe device

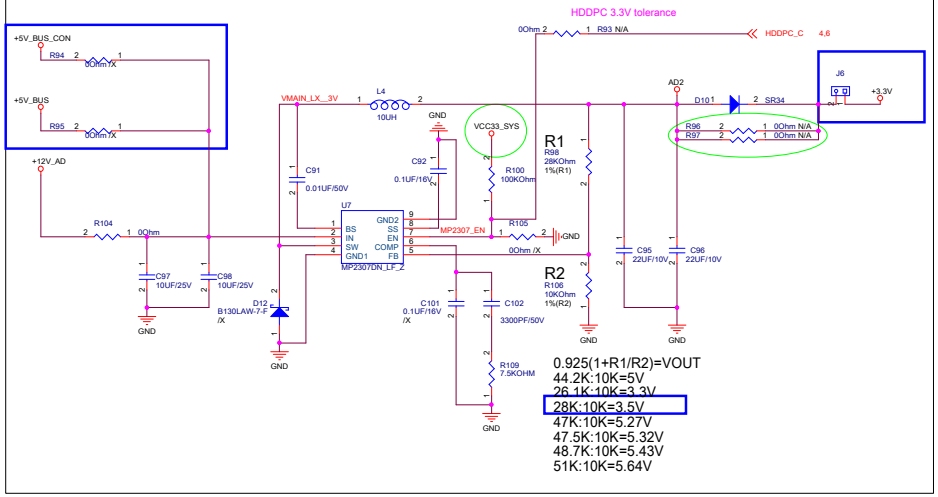

0.925(1+R1/R2)=VOUT

44.2K:10K=5V

26.1K:10K=3.3V

28K:10K=3.5V


47K:10K=5.27V

47.5K:10K=5.32V

48.7K:10K=5.43V


51K:10K=5.64V

ATX_POWER

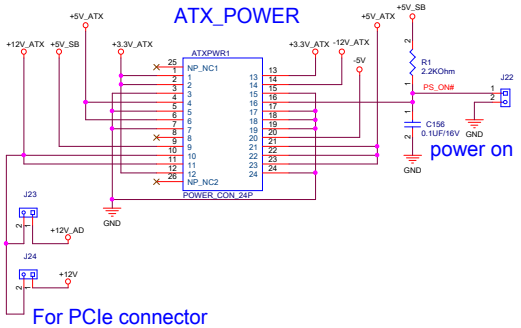


power on

12VDC_POWER_JACK

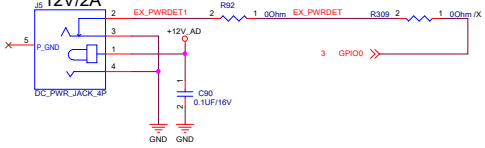

For PCIe connector

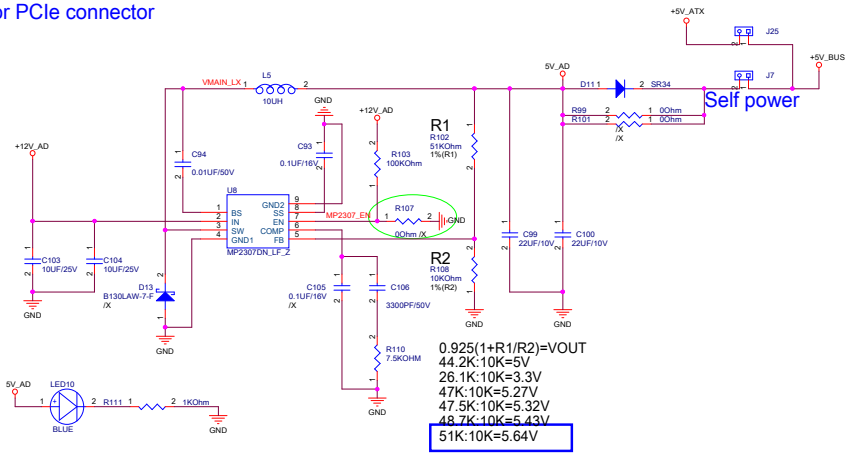

0.925(1+R1/R2)=VOUT

44.2K:10K=5V

26.1K:10K=3.3V

47K:10K=5.27V

47.5K:10K=5.32V


48.7K:10K=5.43V


51K:10K=5.64V


asmedia


ASMEDIA TECHNOLOGY INC

Title	Power	
Size: Custom	Document Number: <Doc>	Rev: 0.3
Date: Friday, June 30, 2023	Sheet 4 of 7	

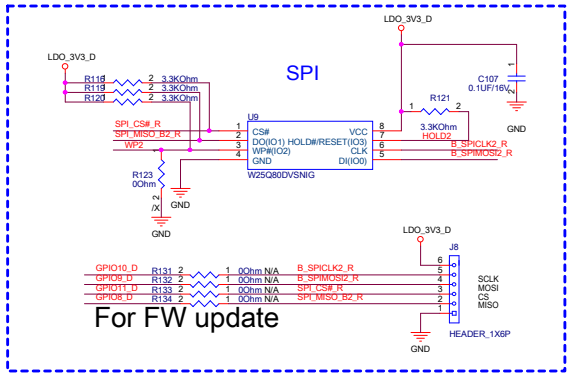

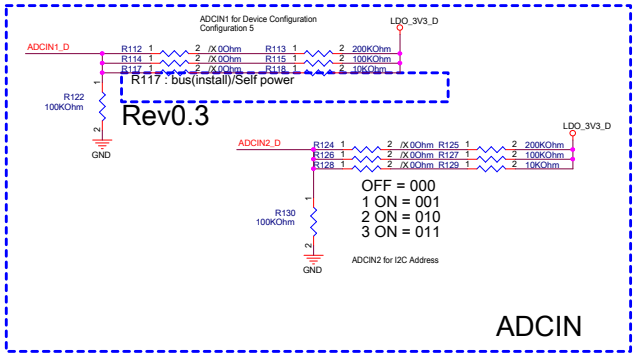


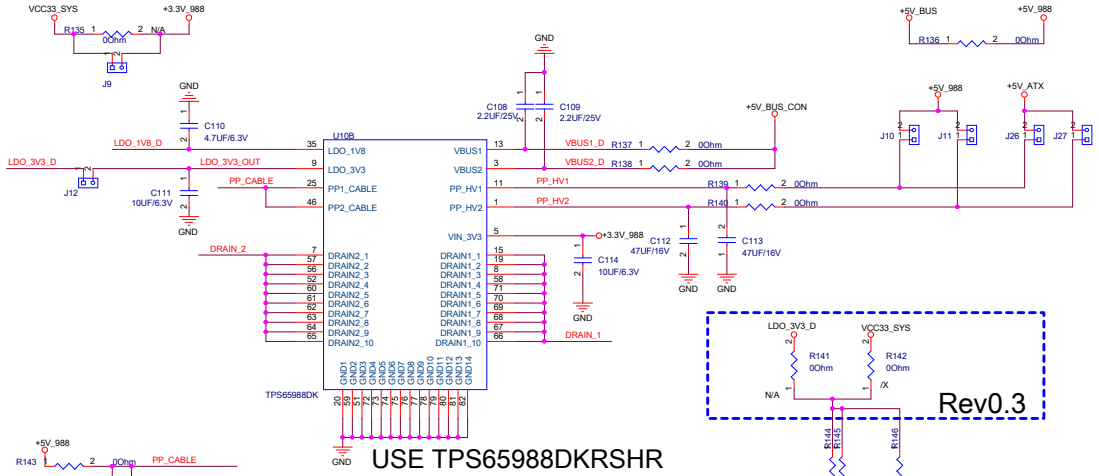


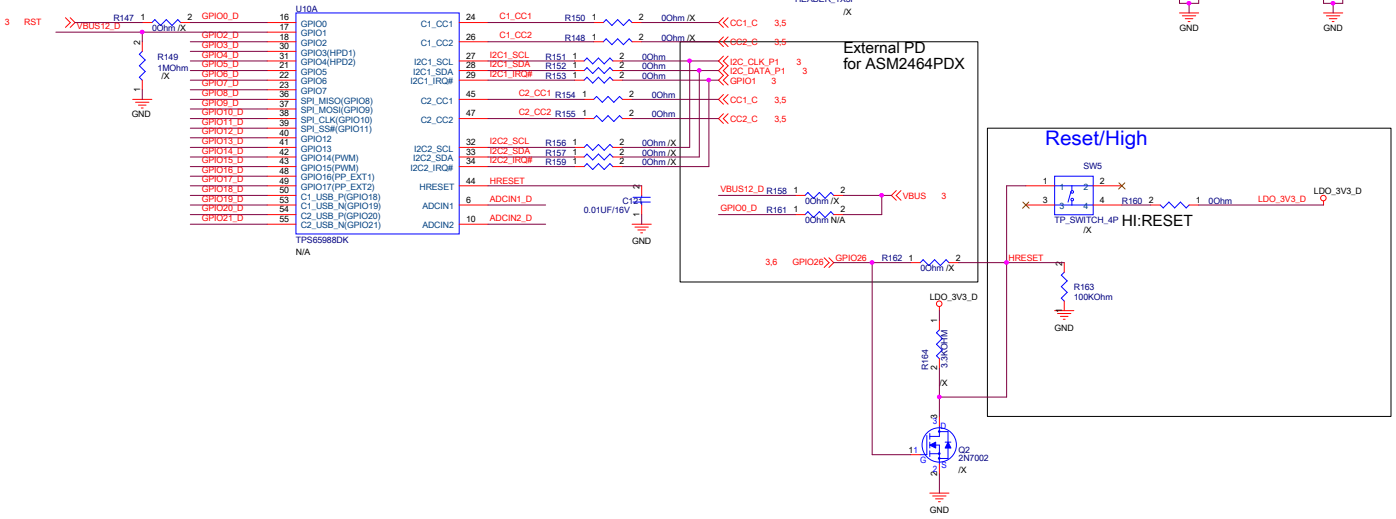

asmedia
ASMEDIA TECHNOLOGY INC

Title: PDC		
Size: A2	Document Number: <Doc>	Rev: 0.3
Date: Friday, June 30, 2023	Sheet: 5 of 7	

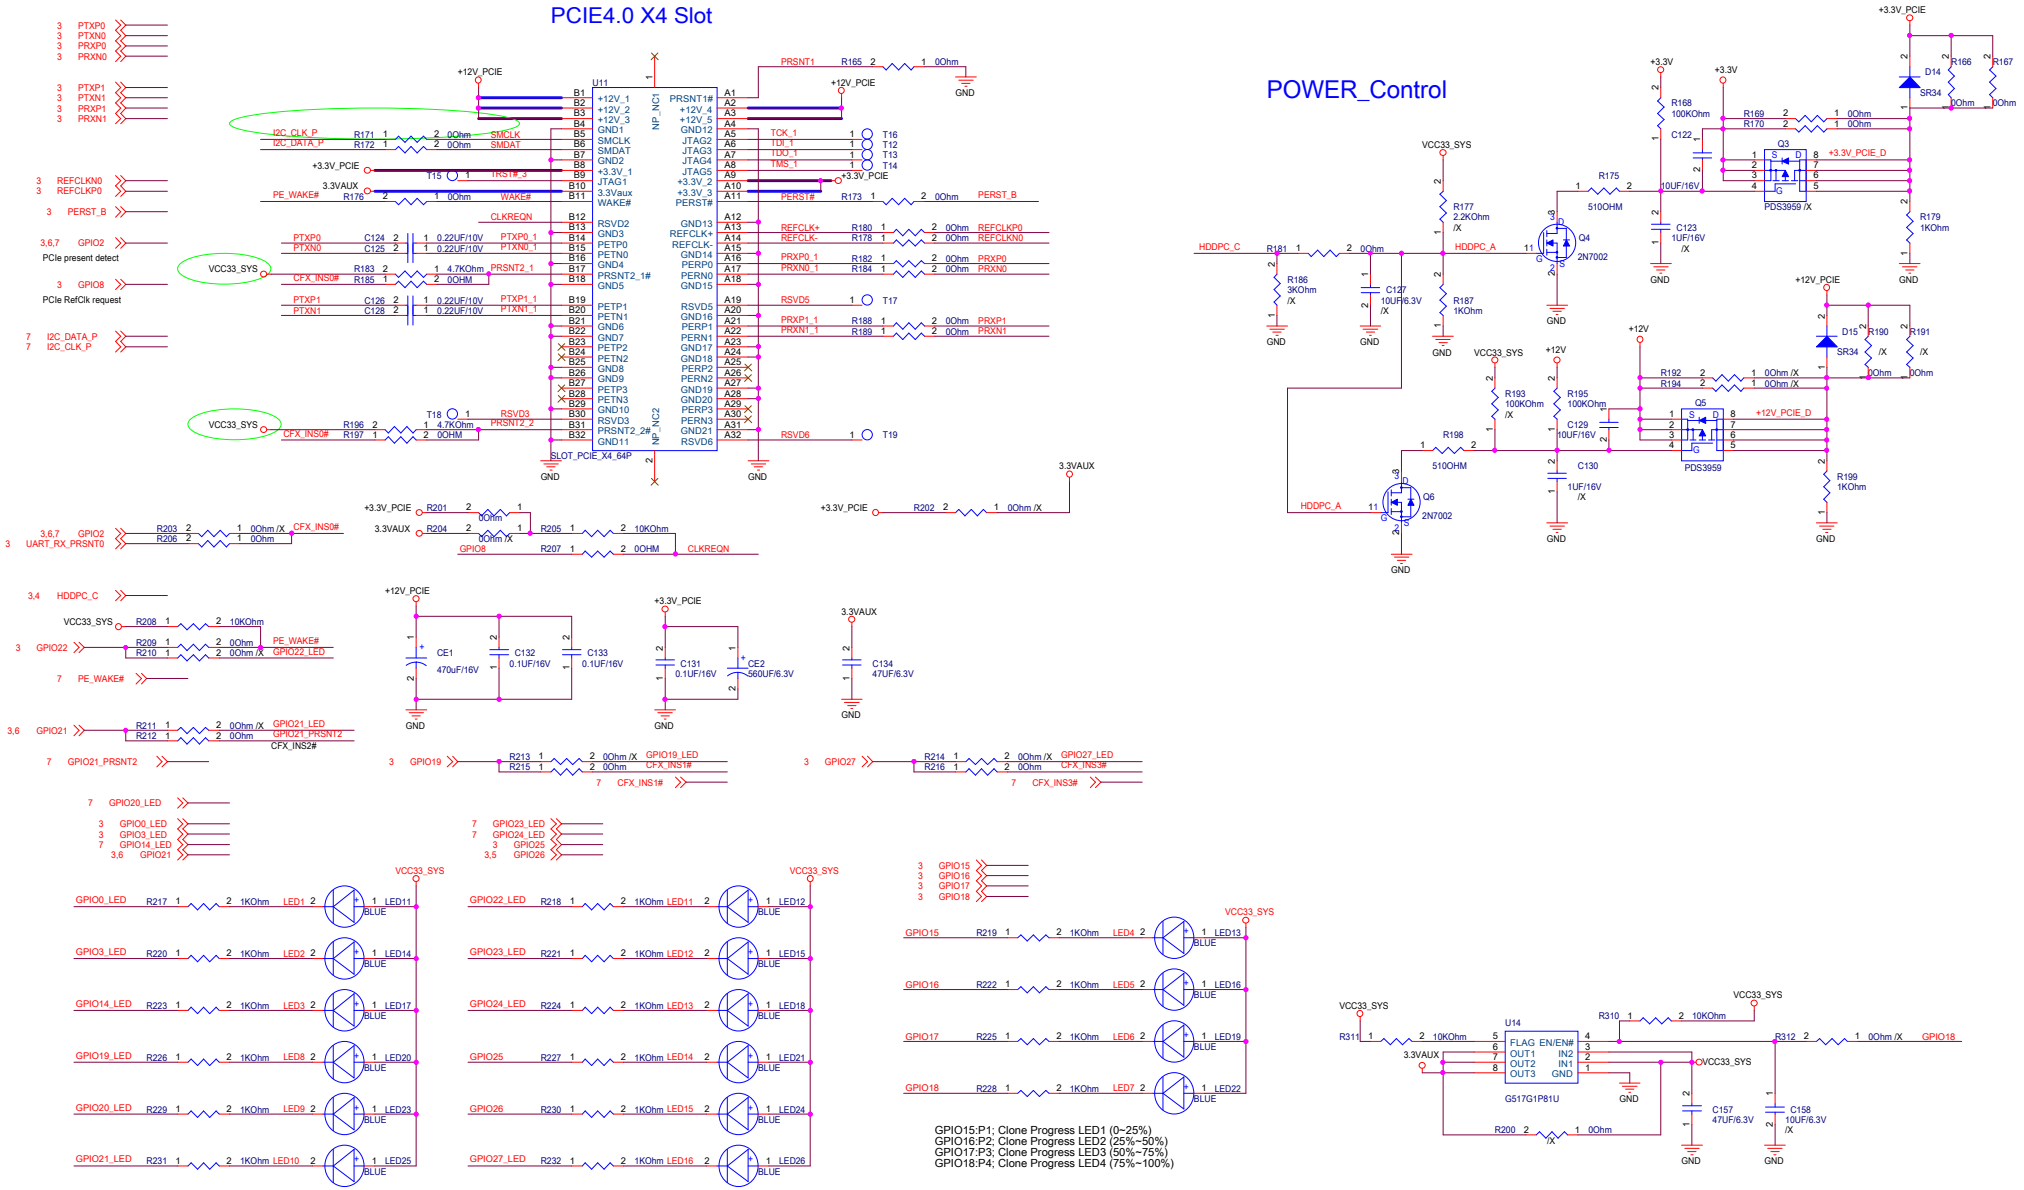
PCIE4.0 X4 Slot
POWER_Control
SLOT_PCIE_X4_64P
GPIO15:P1; Clone Progress LED1 (0~25%)
GPIO16:P2; Clone Progress LED2 (25%~50%)
GPIO17:P3; Clone Progress LED3 (50%~75%)
GPIO18:P4; Clone Progress LED4 (75%~100%)
asmedia
ASMEDIA TECHNOLOGY INC
Title: PCIEx2_SLOT&LED
Size: C
Document Number: AT2094
Rev: 1.0
Date: Friday, June 30, 2023
Sheet 6 of 7

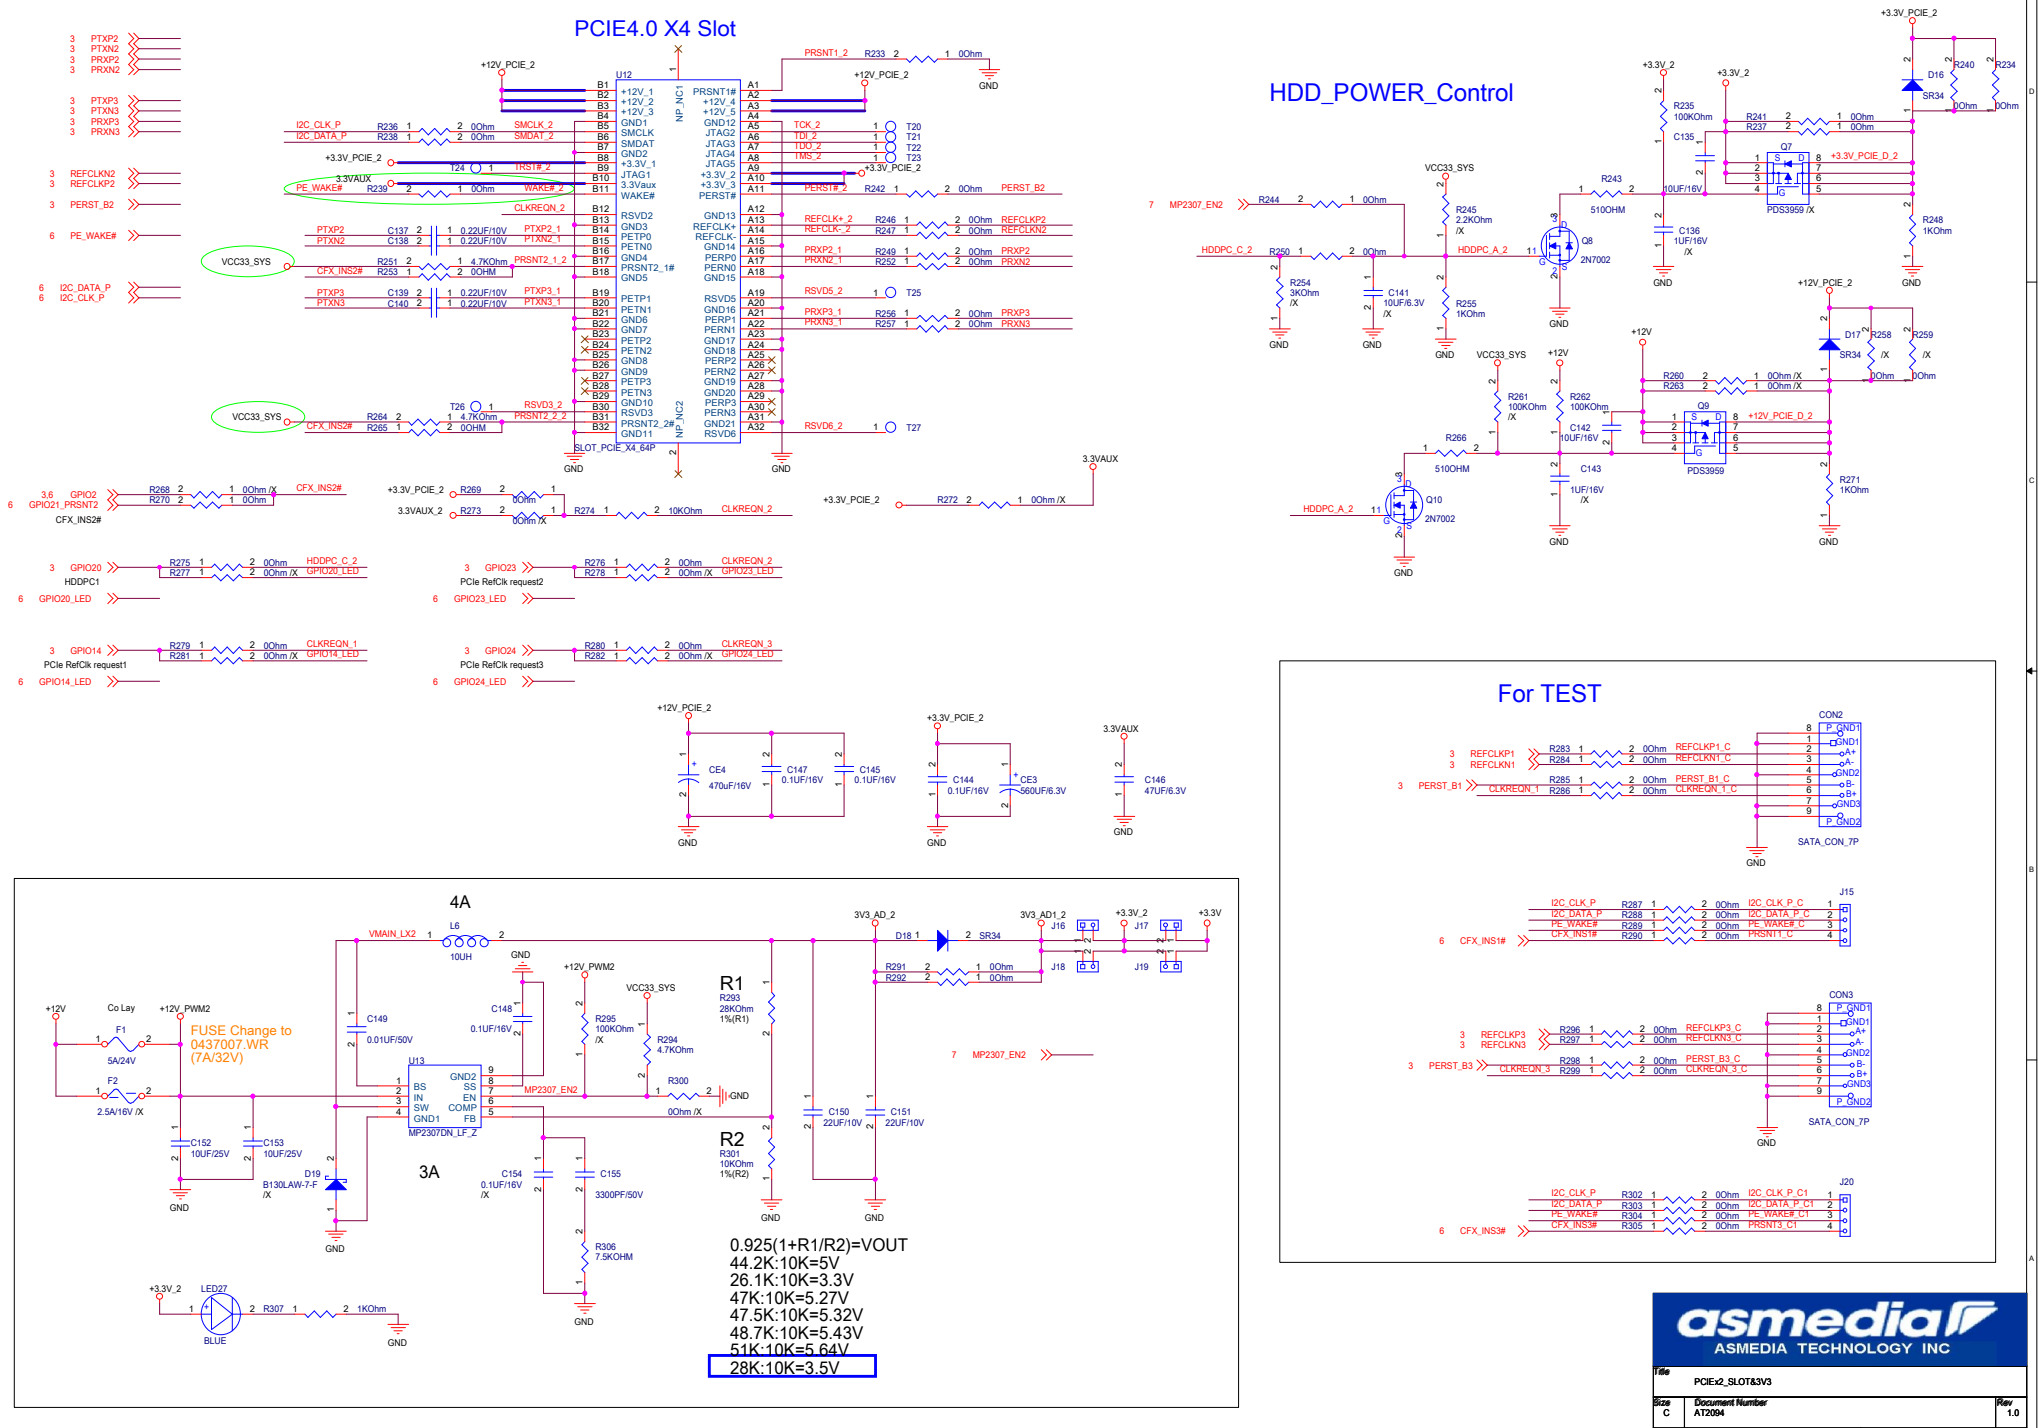
PCIE4.0 X4 Slot
HDD_POWER_Control
For TEST
4A
3A
FUSE Change to 0437007.WR (7A/32V)
0.925(1+R1/R2)=VOUT
44.2K:10K=5V
26.1K:10K=3.3V
47K:10K=5.27V
47.5K:10K=5.32V
48.7K:10K=5.43V
51K:10K=5.64V
28K:10K=3.5V
asmedia
ASMEDIA TECHNOLOGY INC
PCIEx2_SLOT&3V3
Document Number AT2094
Rev 1.0
Friday, June 30, 2023
Sheet 7 of 7