


Auxiliary PCB

Main PCB

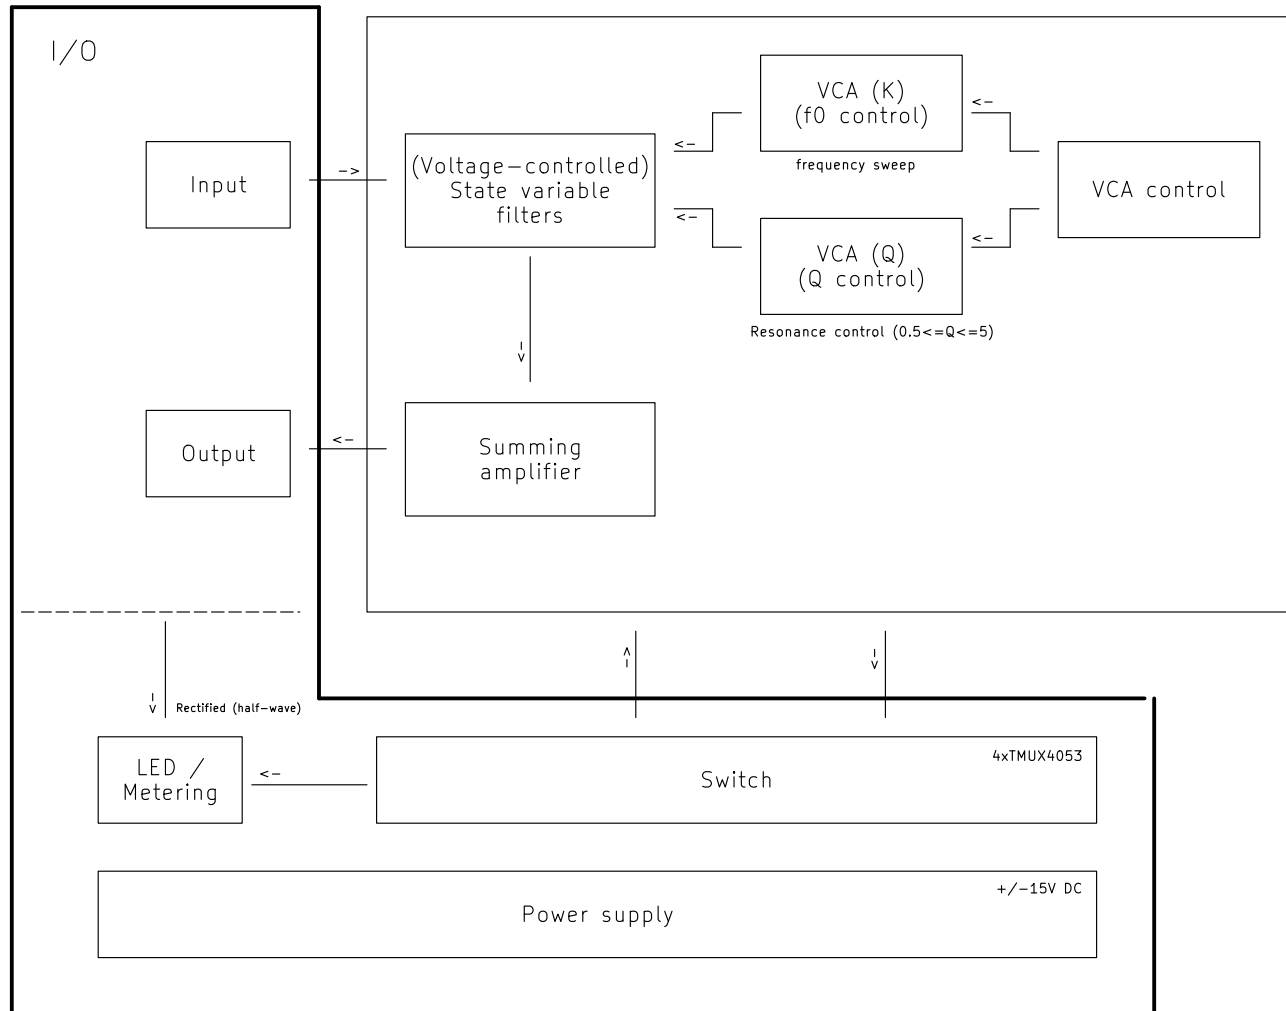





Sheet: /Front page/
File: aux-dj-filter-fx.kicad_sch

Title: DJ filter FX – Block diagram

Size: USLetter Date: 2026-08-16
KiCad E.D.A. 10.0.5

Rev: Rev B.2
Id: 1/6

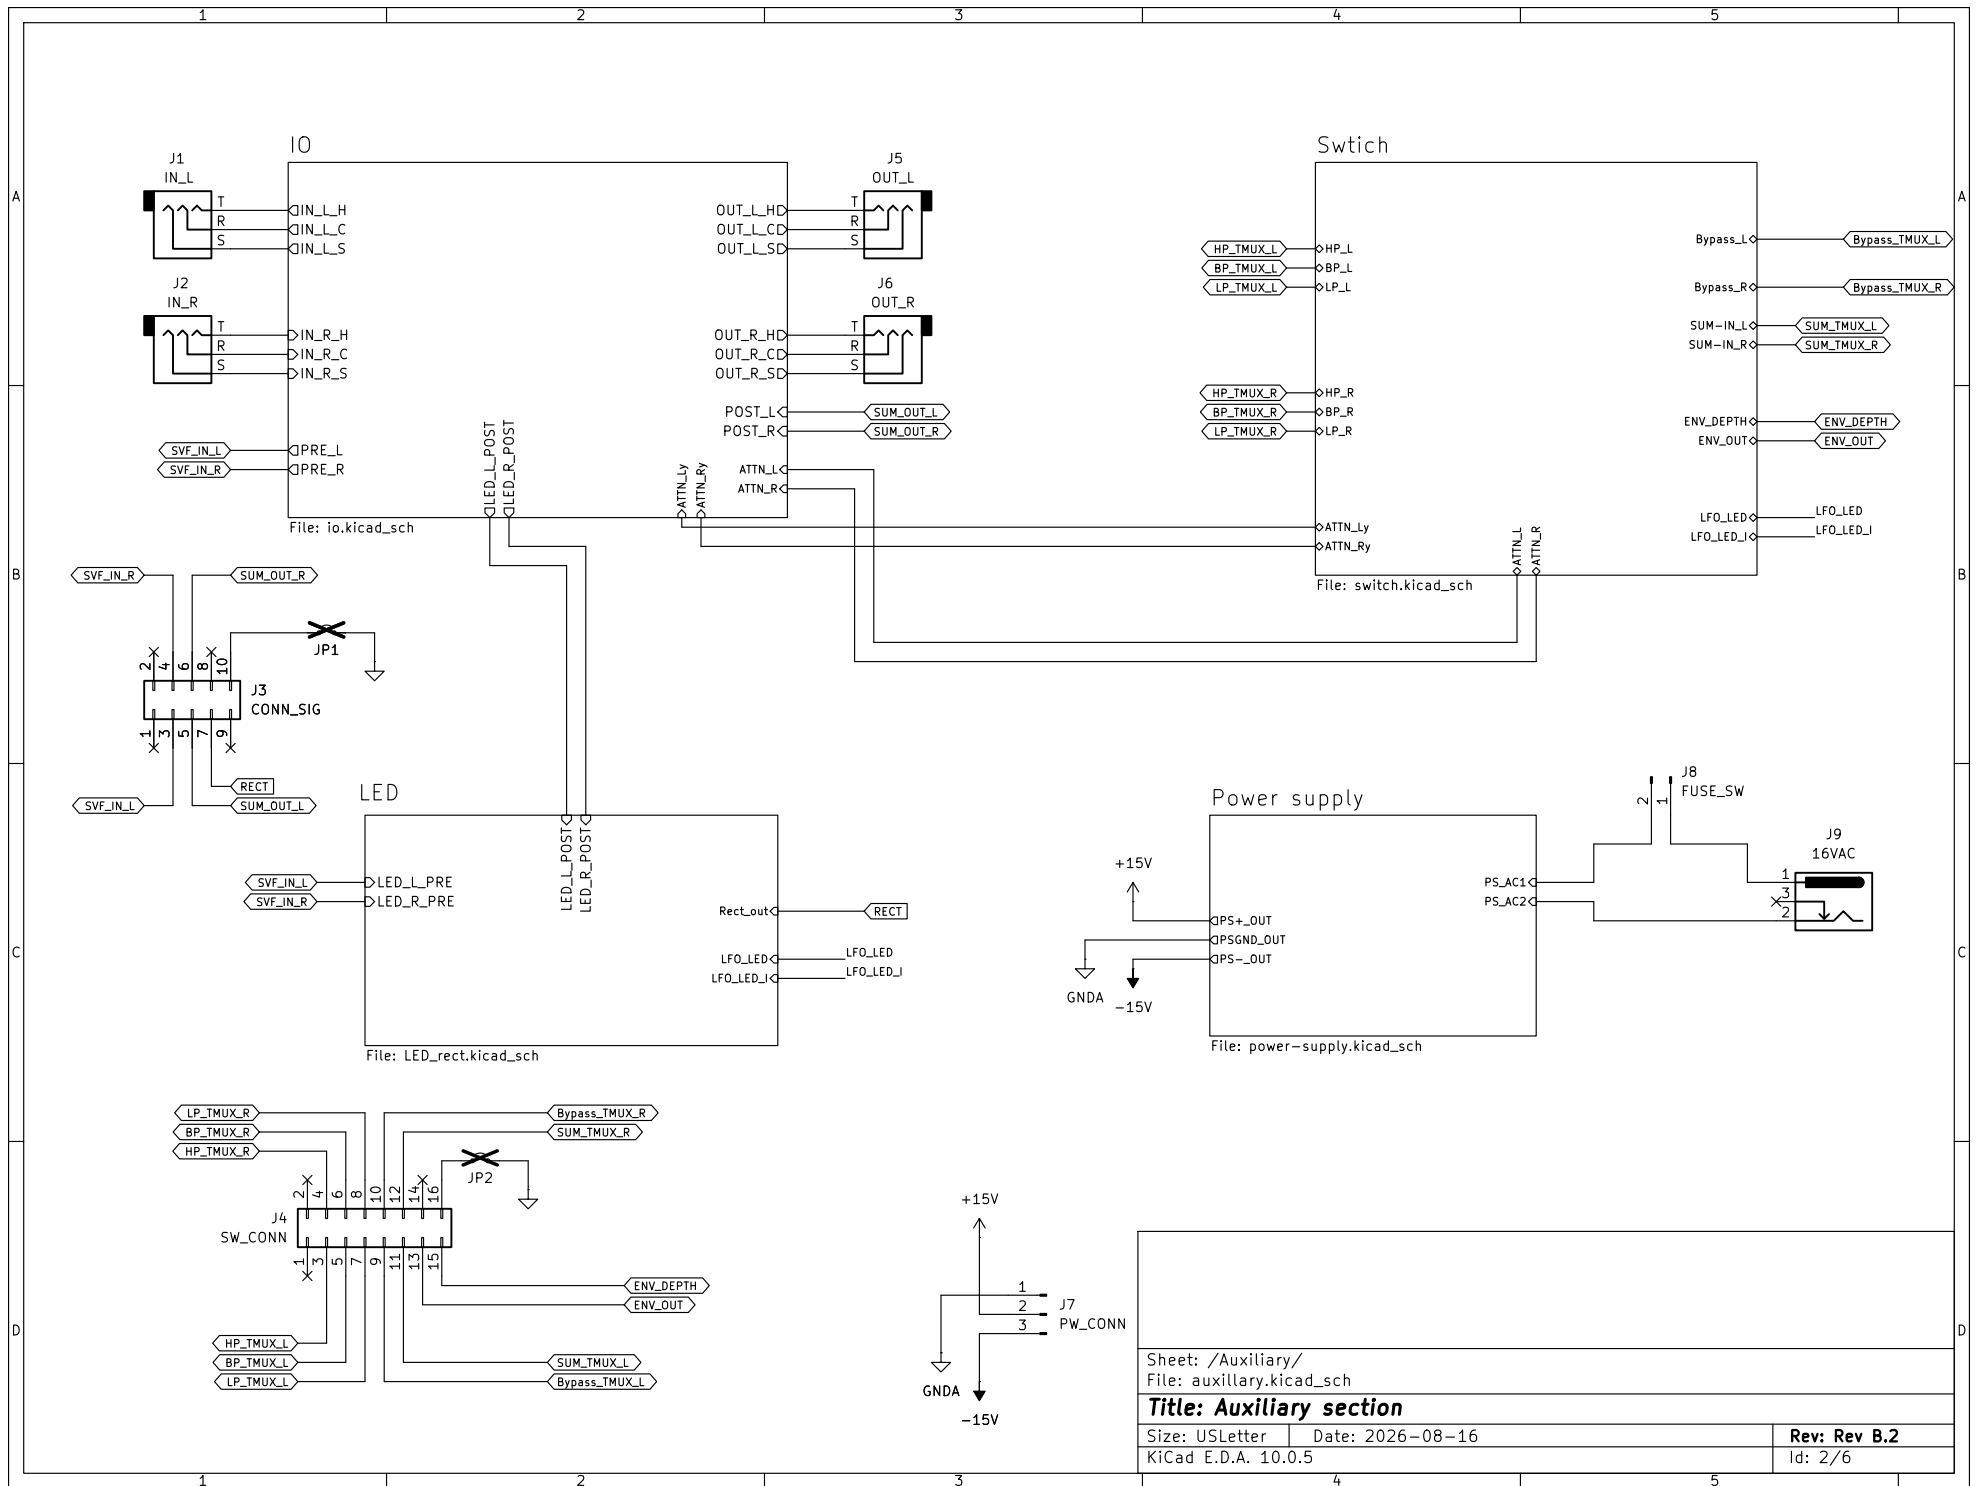

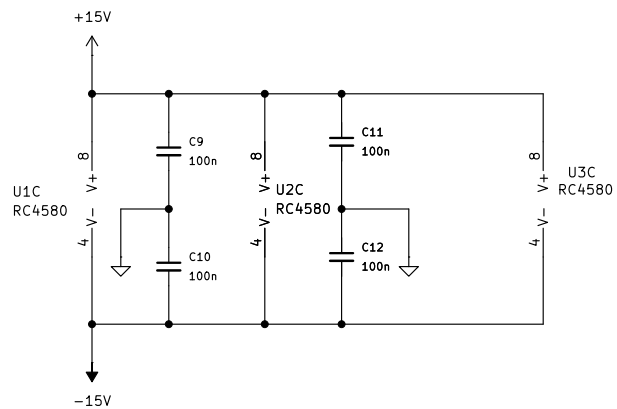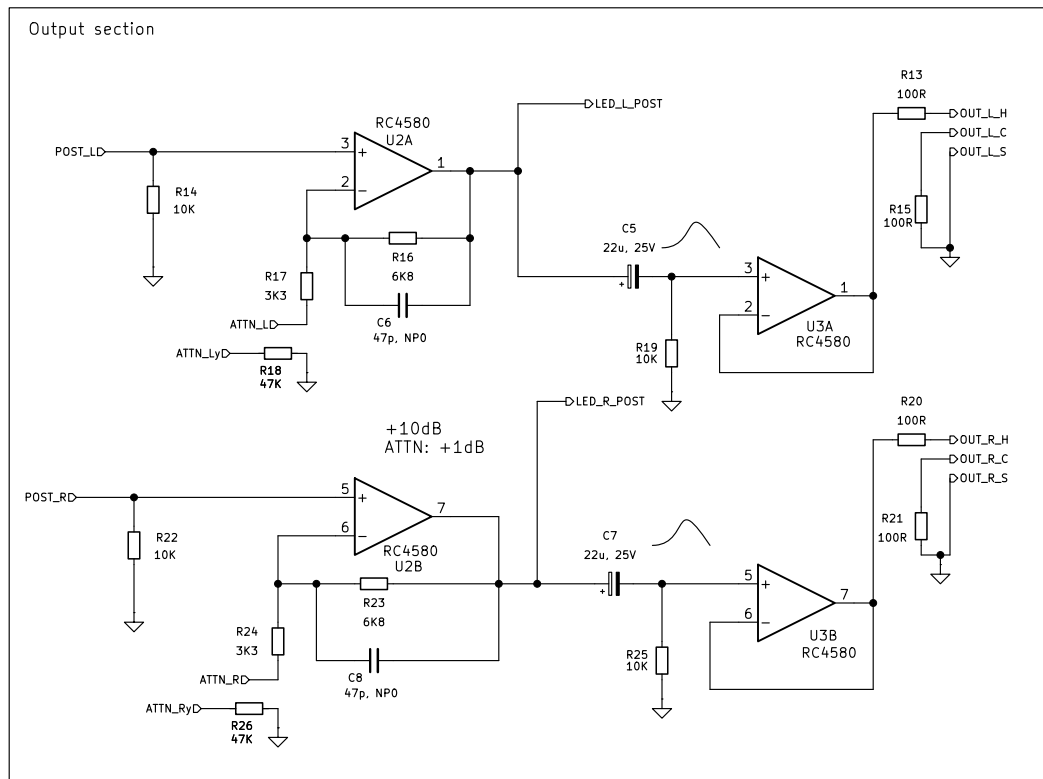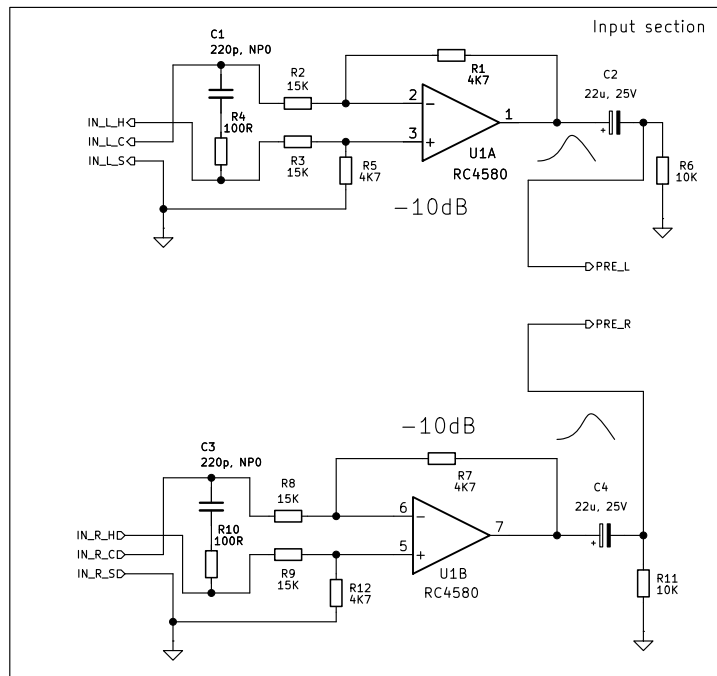


Sheet: /Auxiliary/10/
File: io.kicad_sch

Title: Input and output

Size: USLetter Date: 2026-08-16
KiCad E.D.A. 10.0.5

Rev: Rev B.2
Id: 9/6

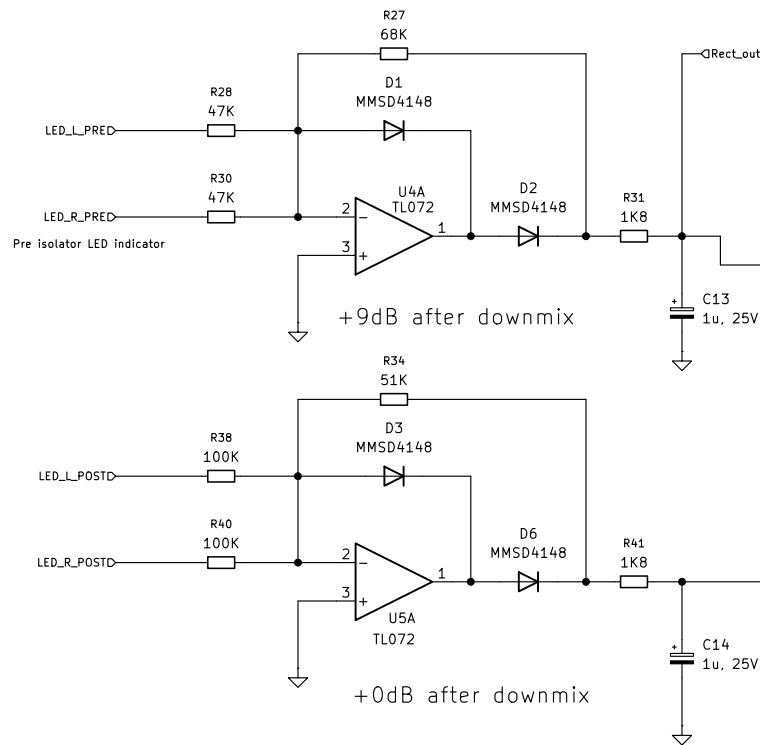


Green on @ -18dBV at input (approx.)
Red on @ +18dBu at output (approx.)



Note: one can think of using
a variety of TL431 or zener, here

Sheet: /Auxiliary/LED/ File: LED_rect.kicad_sch	
Title: LED and rectifier	
Size: USLetter	Date: 2026-08-16
KiCad E.D.A. 10.0.5	Rev: Rev B.2 Id: 10/6


Filter TMUX SW

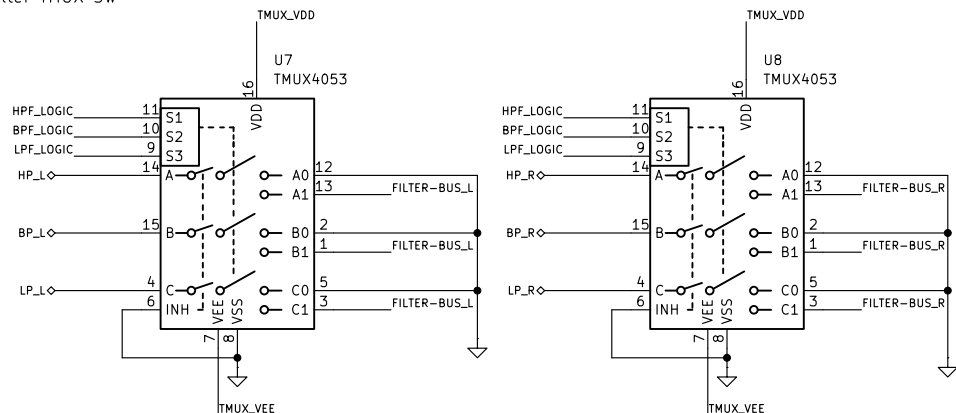


Other TMUX SW

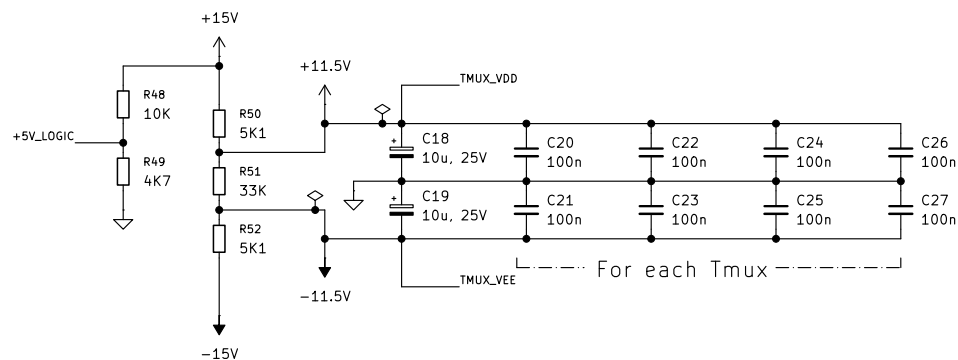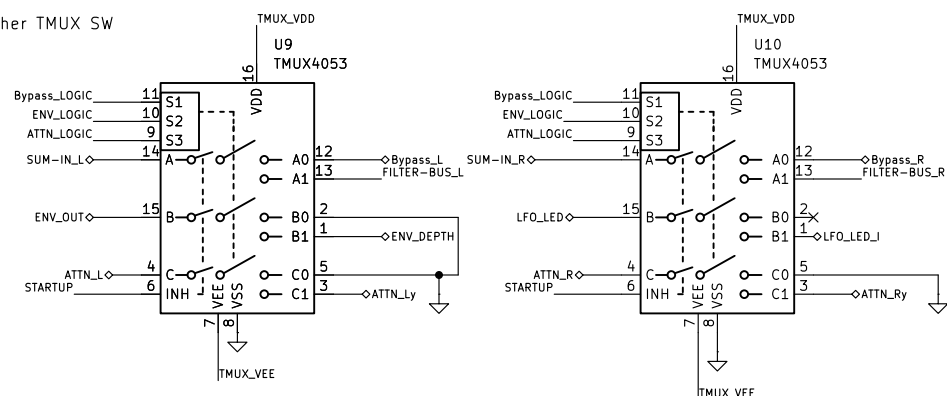

Physical SW configuration

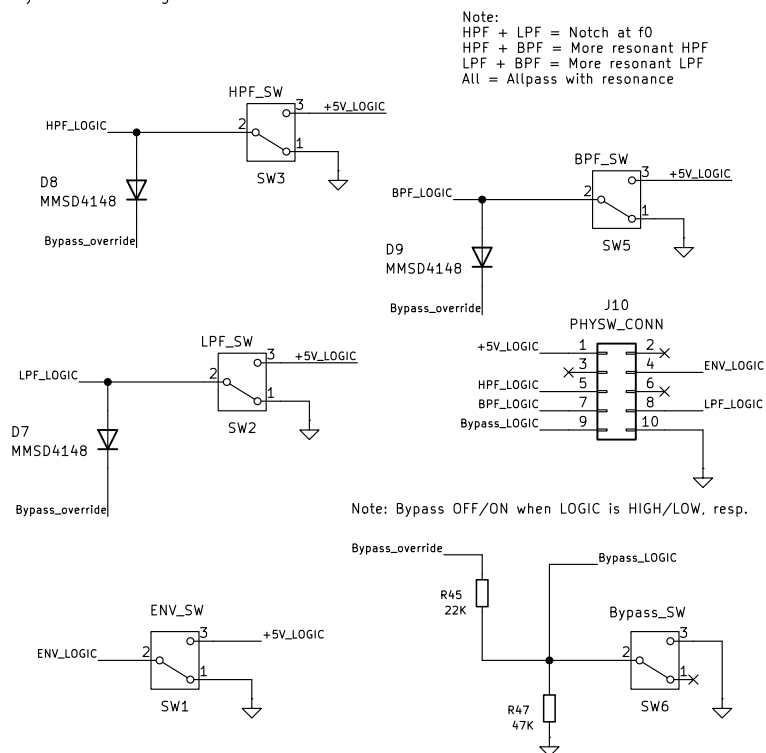

Note: Different to CD4053, TMUX4053 INH pin has weak internal pull up.

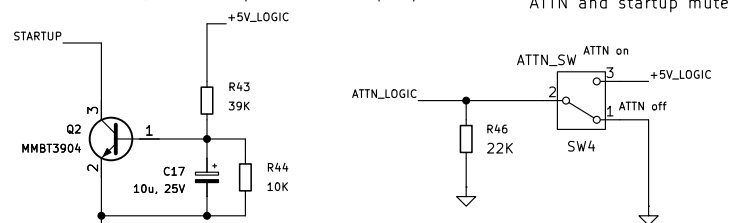

Sheet: /Auxiliary/Switch/
File: switch.kicad_sch

Title: Switch

Size: USLetter Date: 2026-08-16
KiCad E.D.A. 10.0.5

Rev: Rev B.2
Id: 11/6

