



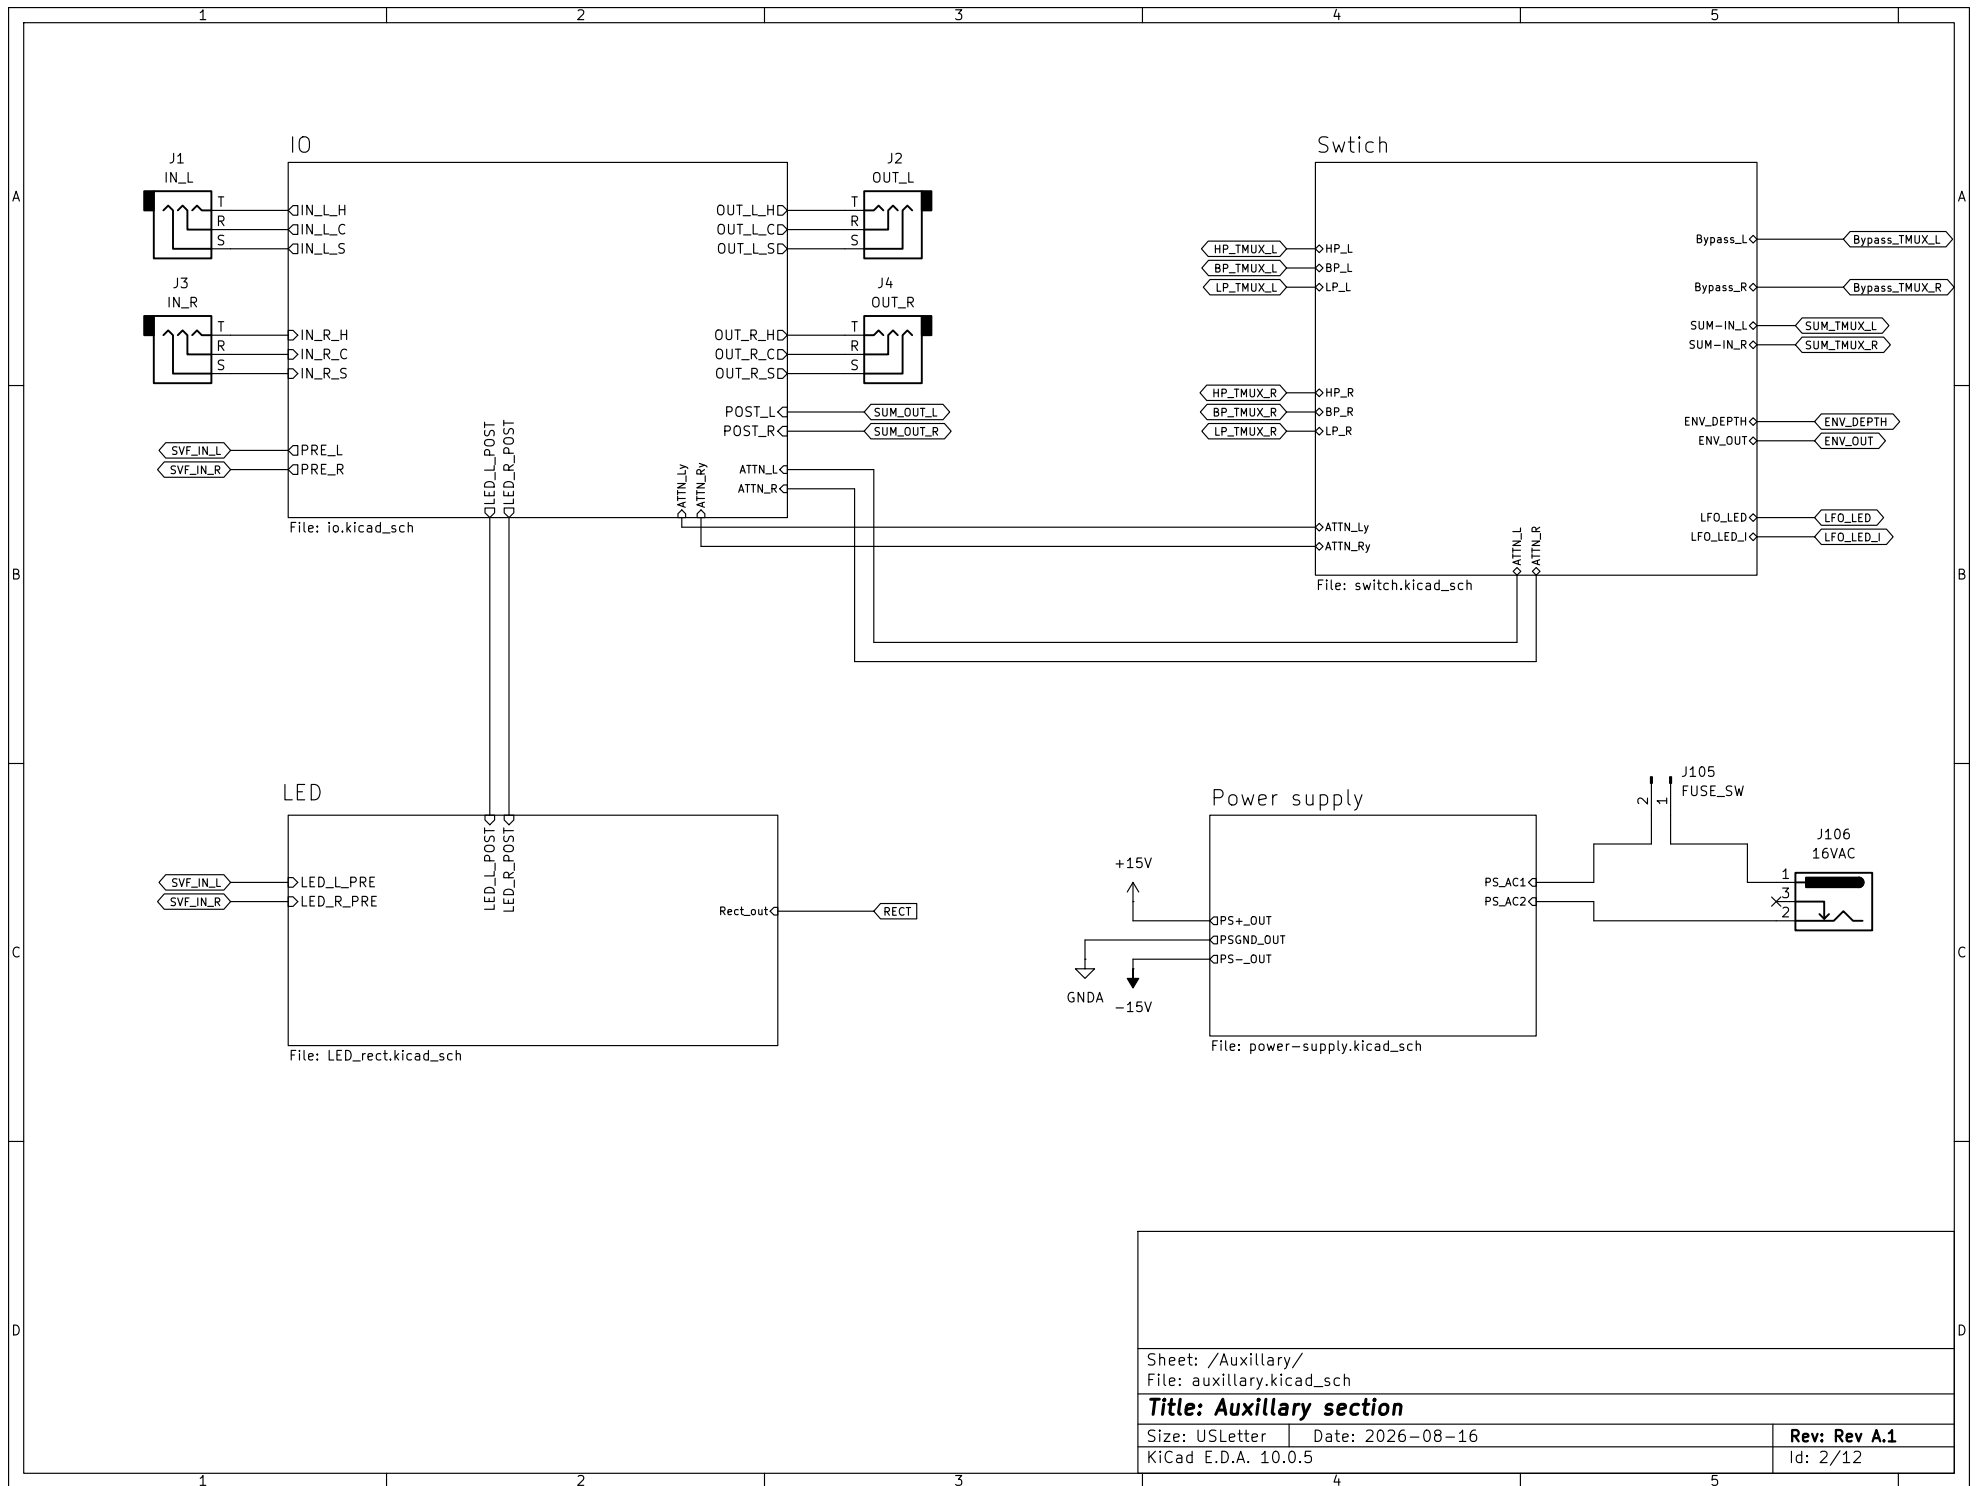



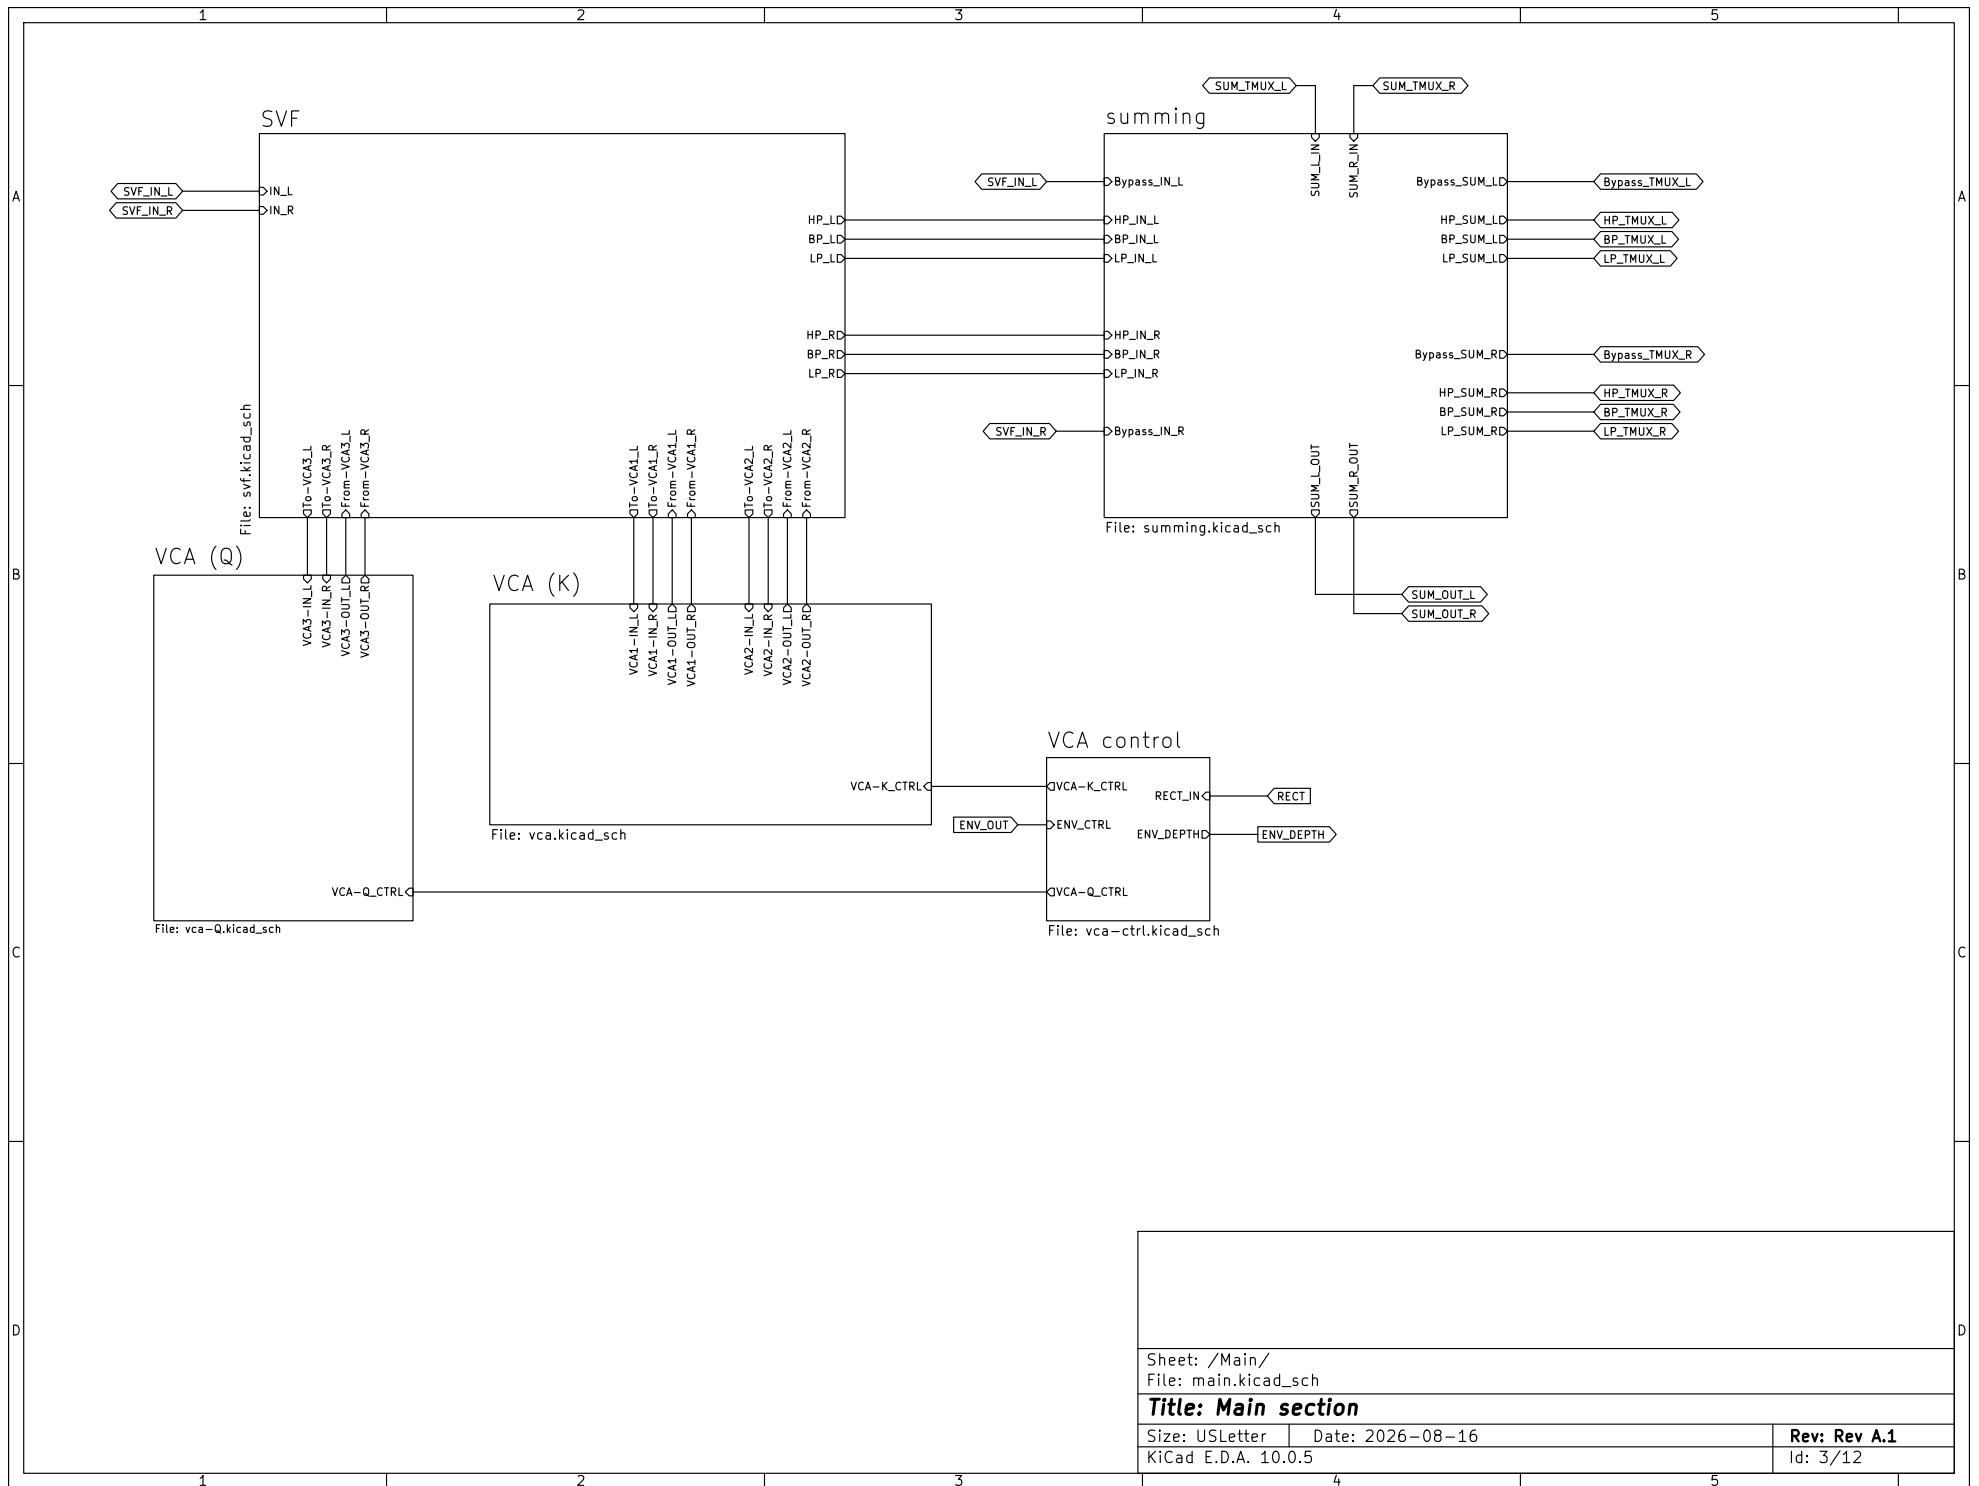


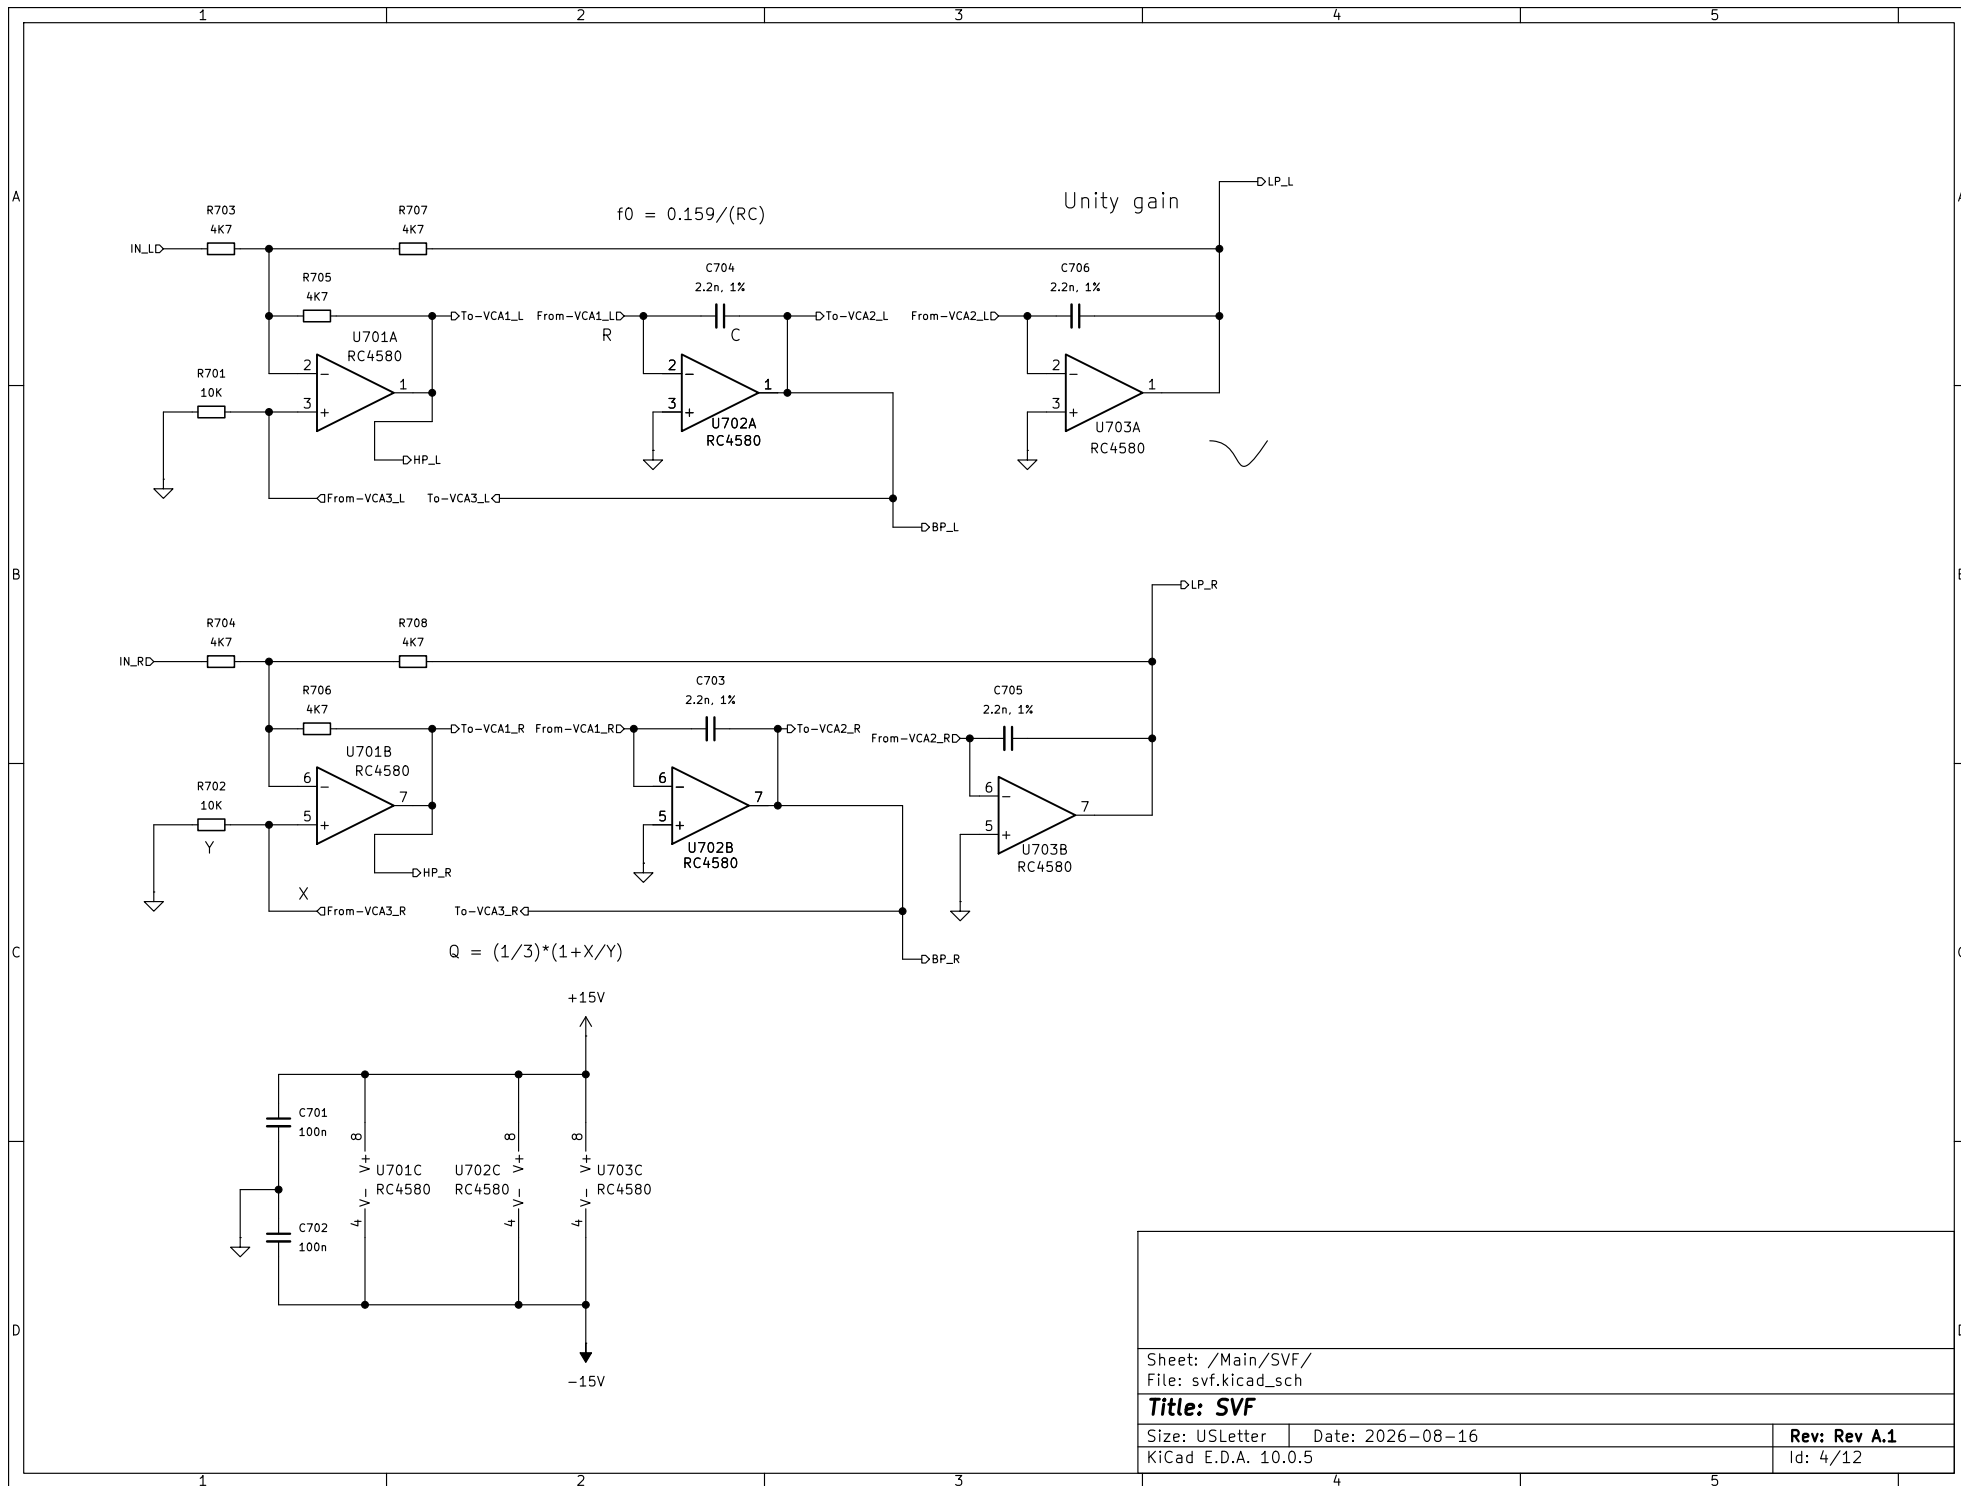

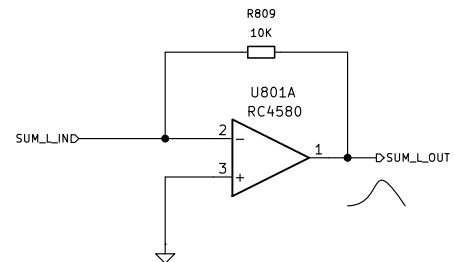


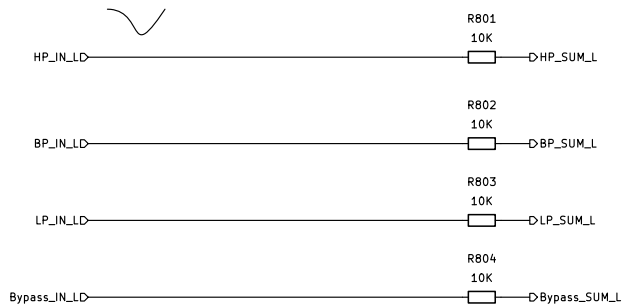

Unity gain

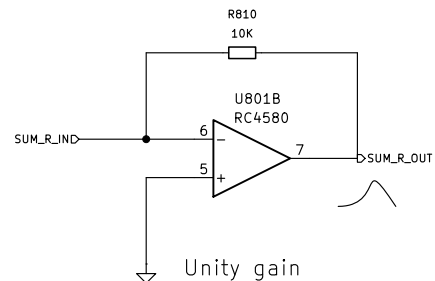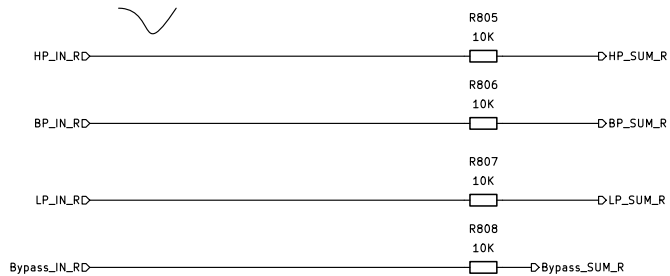

Unity gain

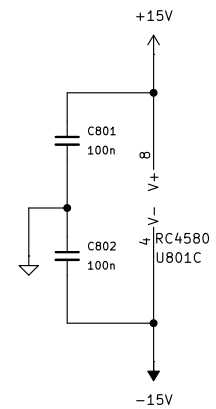



Sheet: /Main/summing/
File: summing.kicad_sch


Title: Summing amplifier




Size: USLetter Date: 2026-08-16
KiCad E.D.A. 10.0.5

Rev: Rev A.1
Id: 5/12

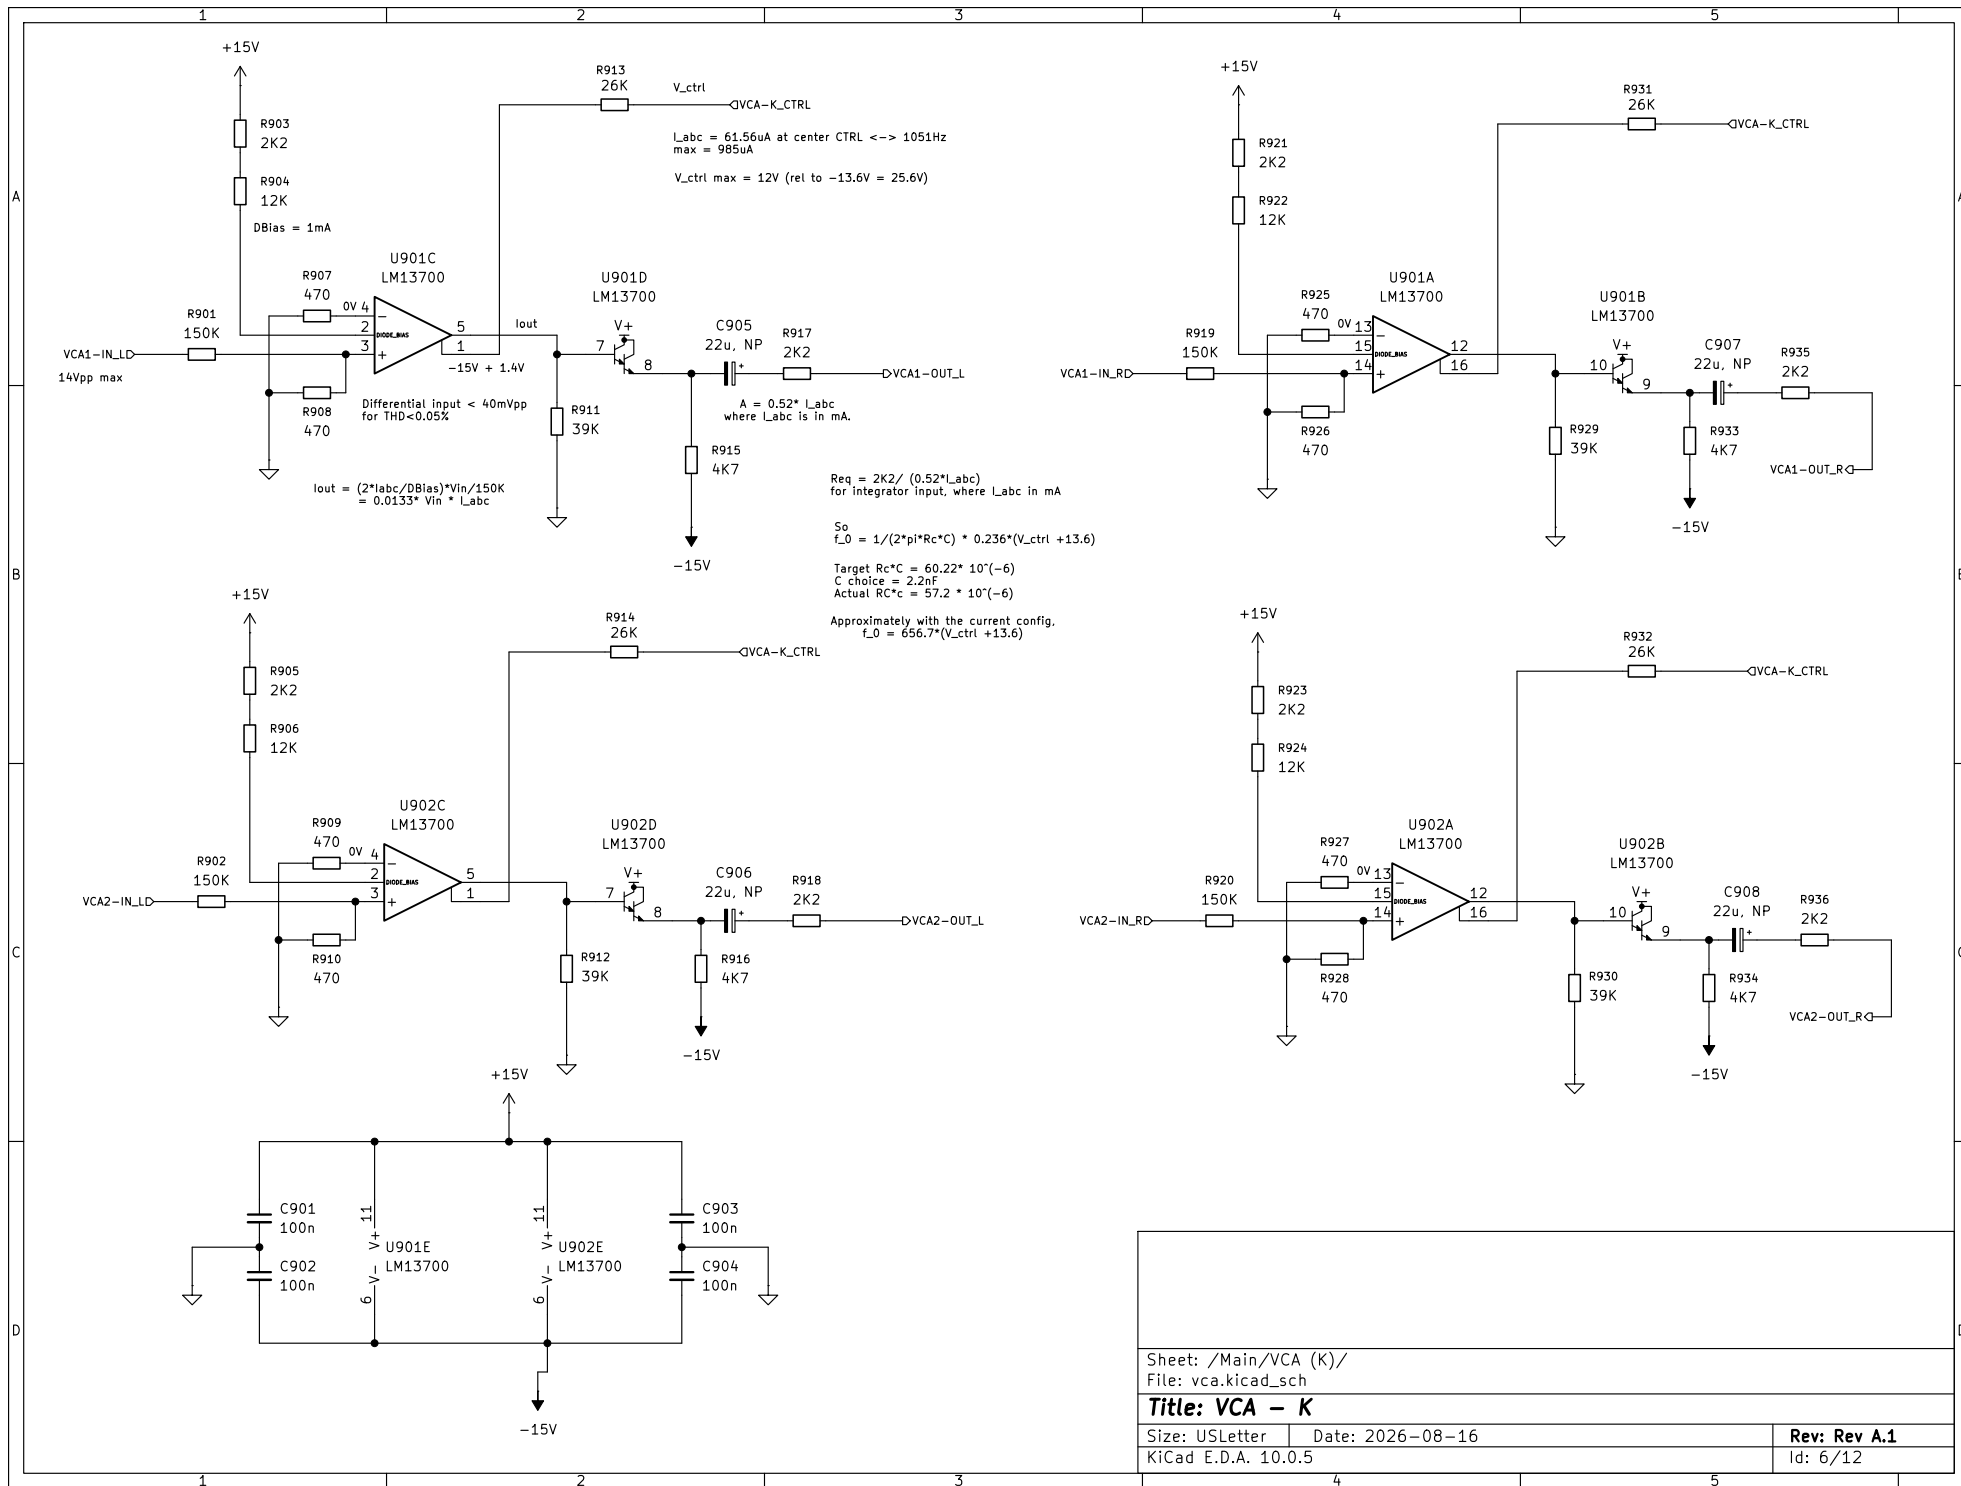

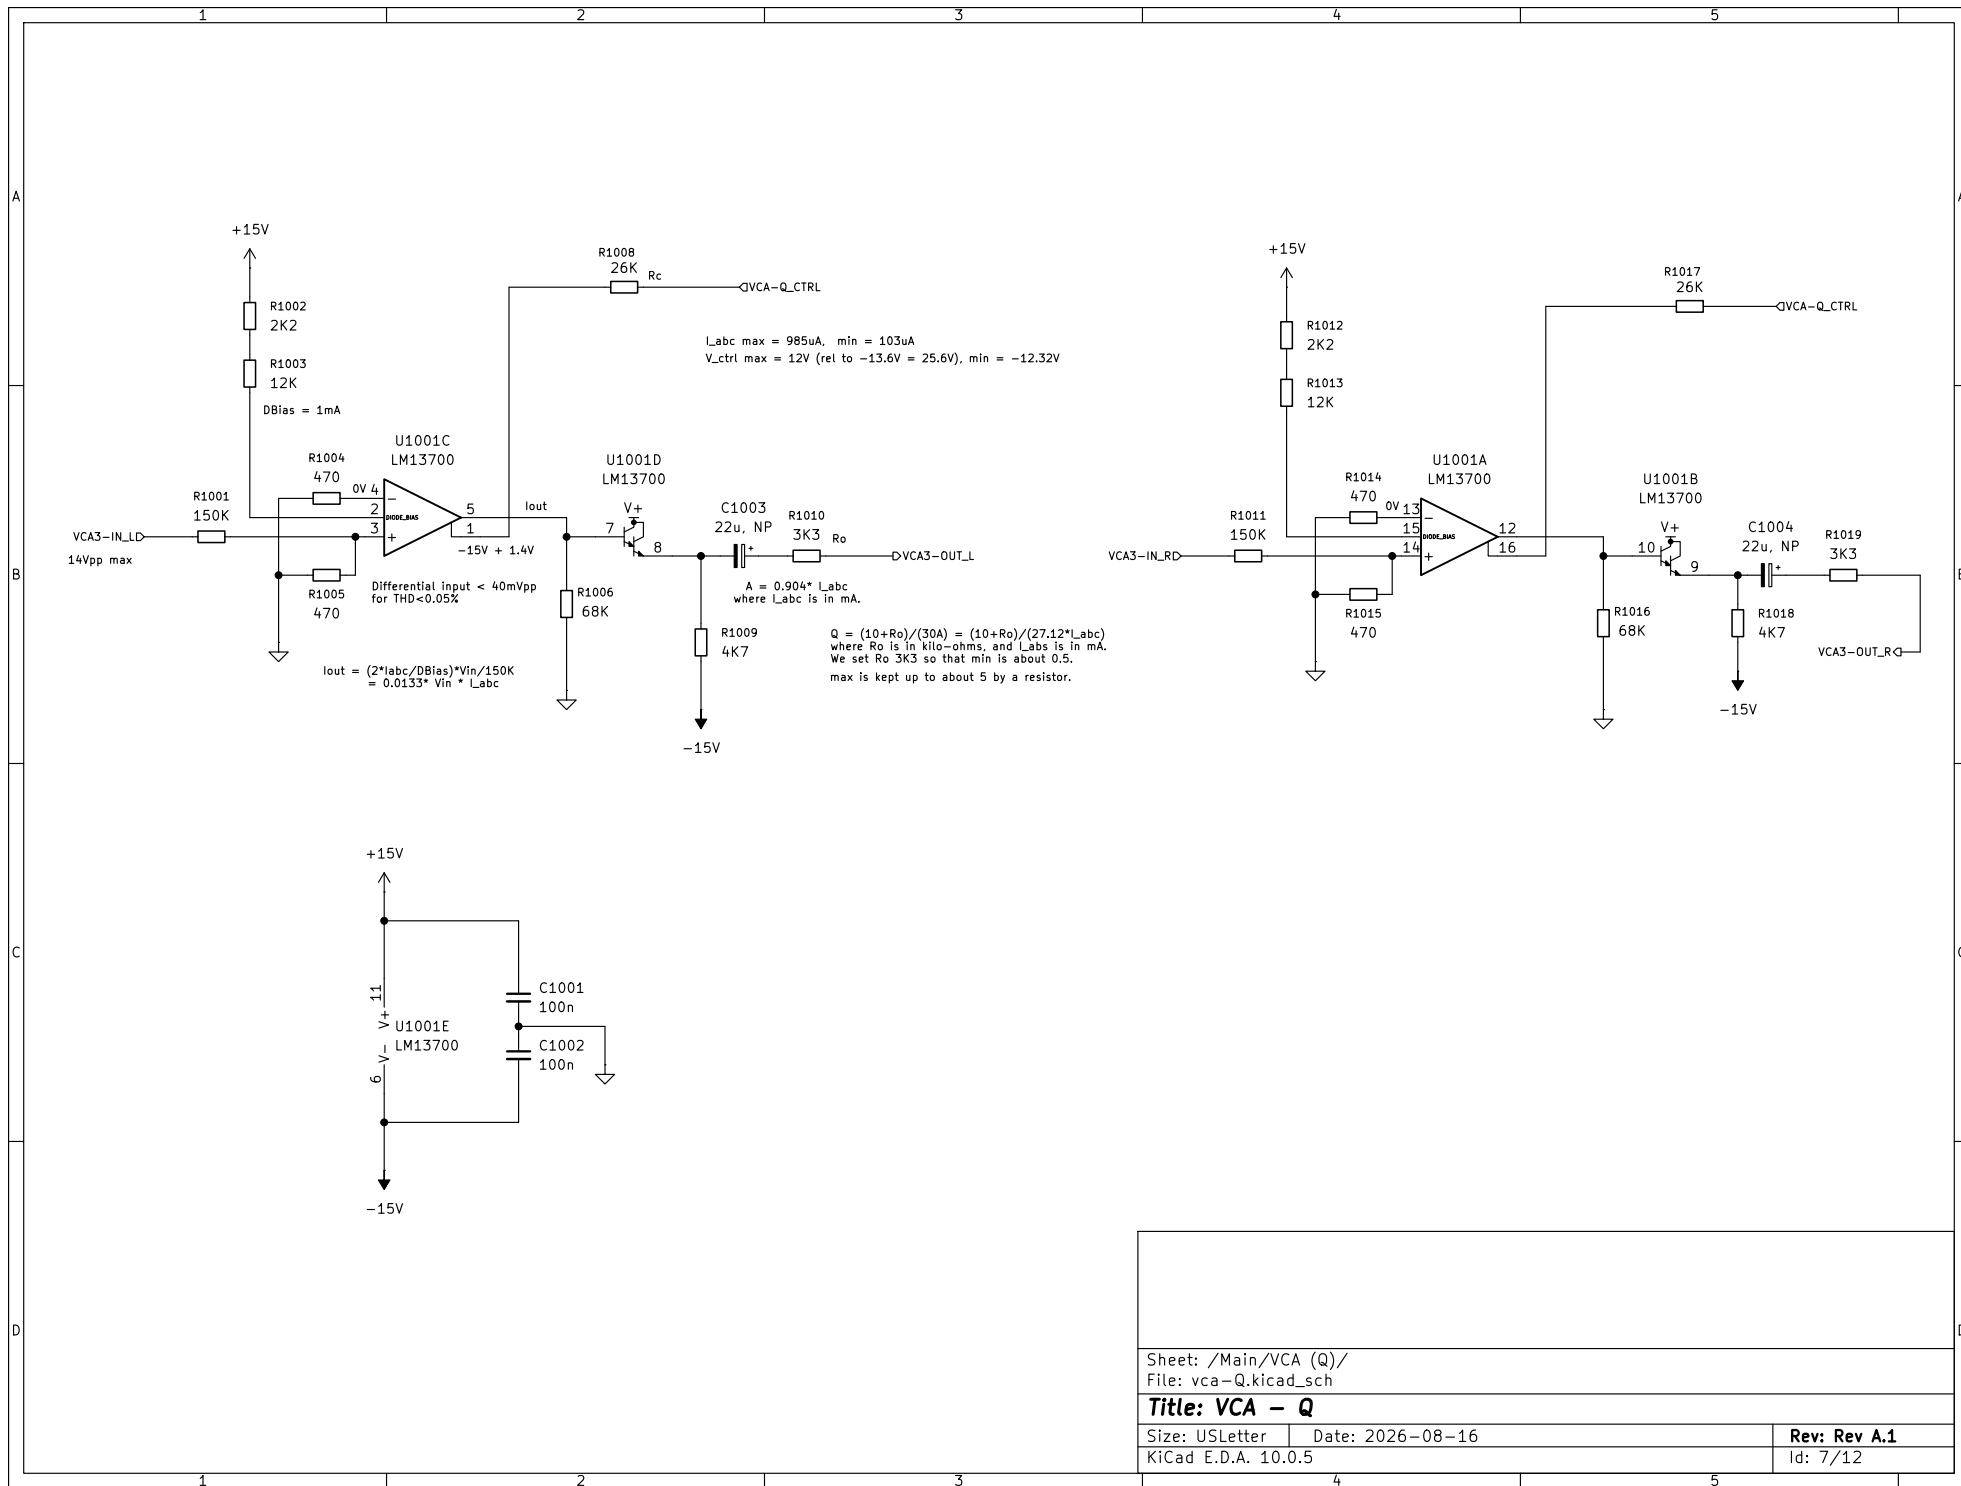

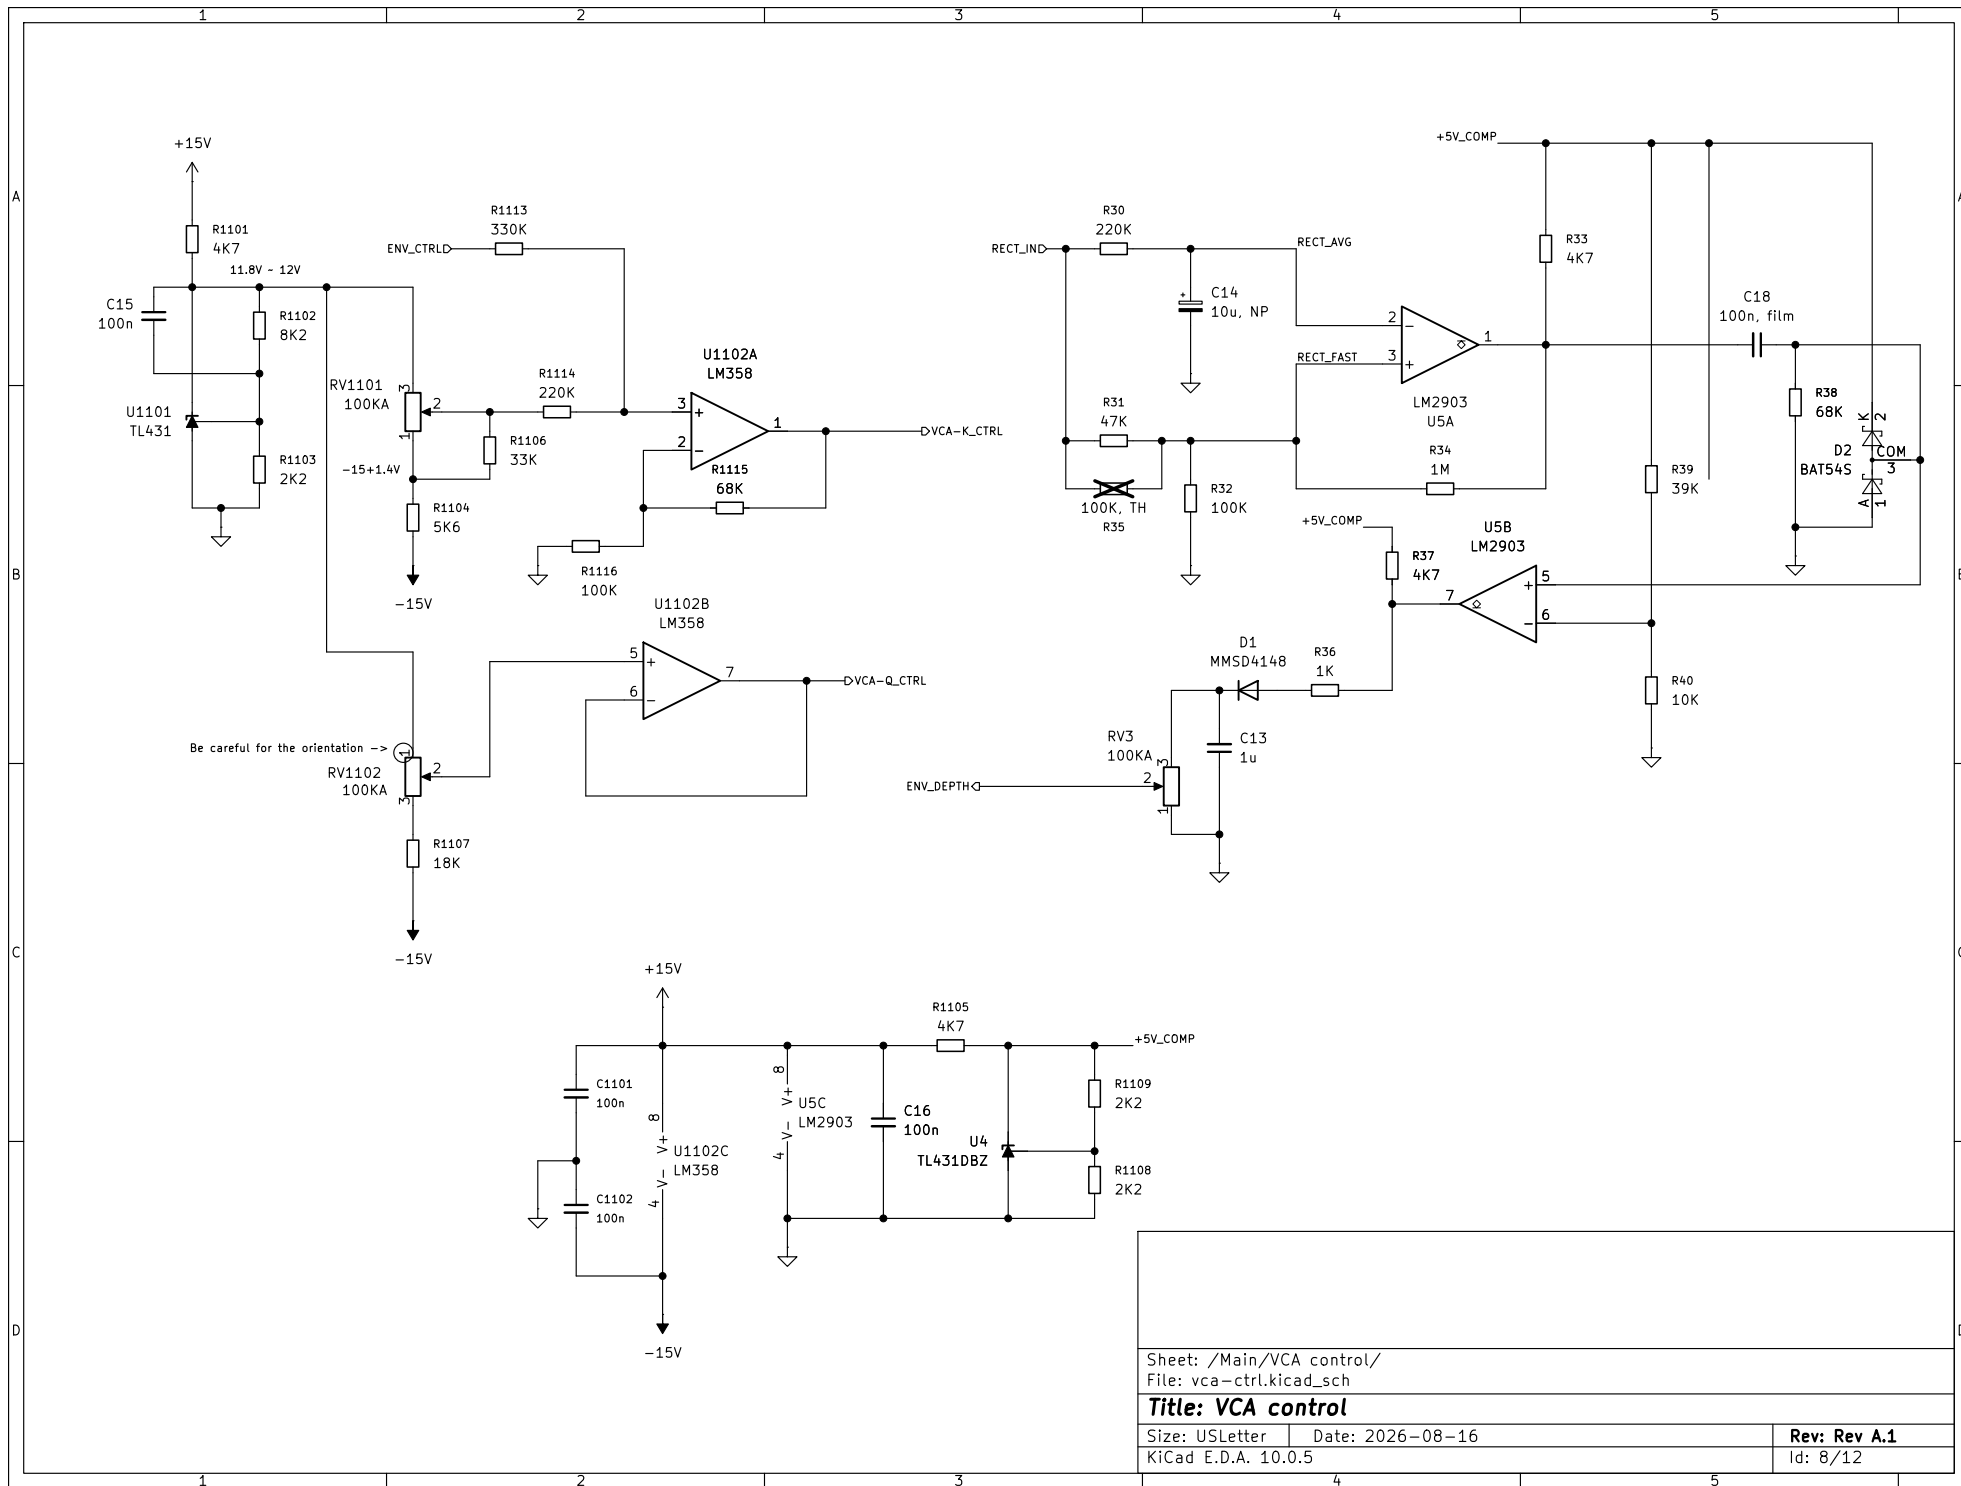

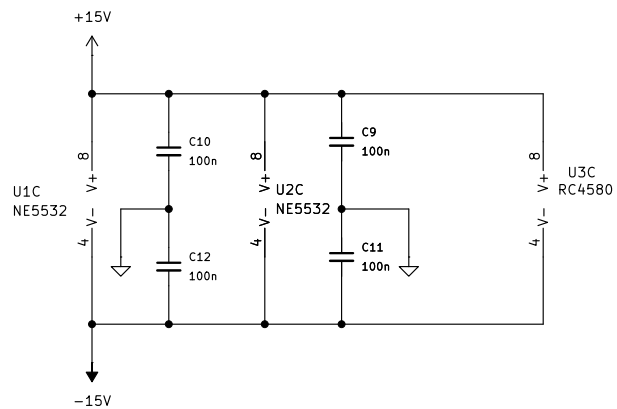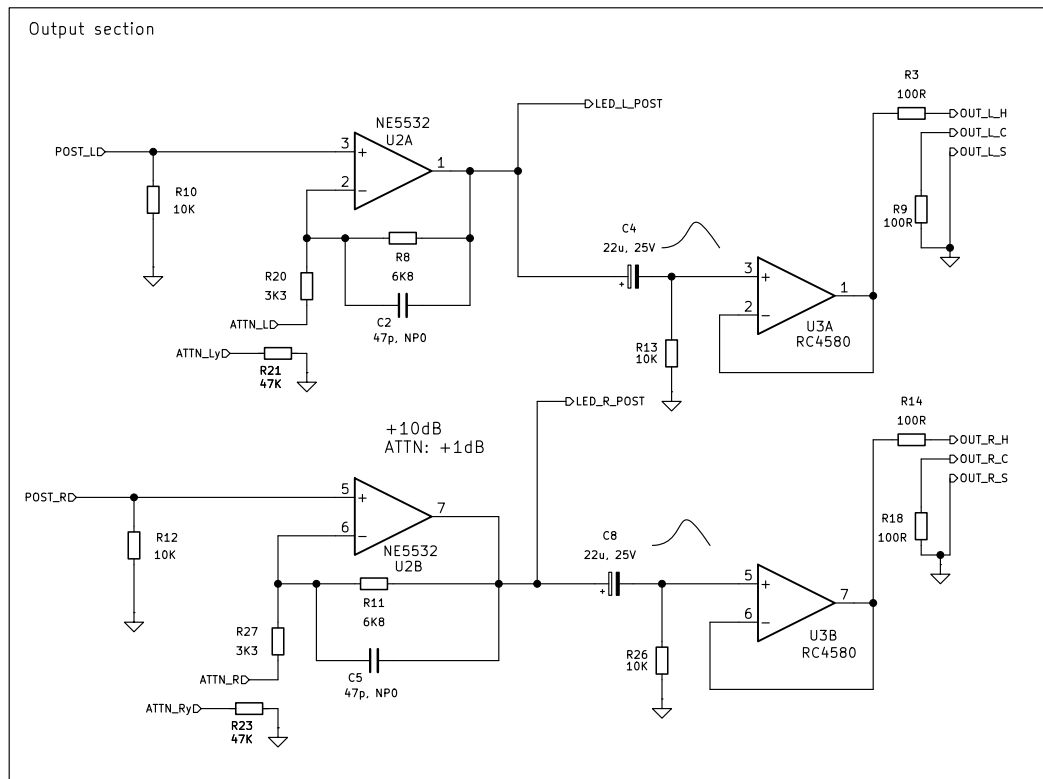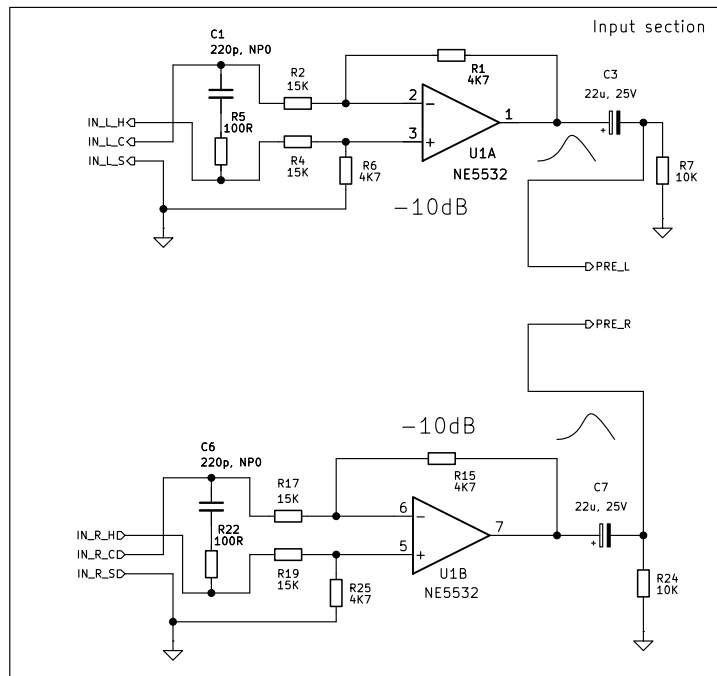


Sheet: /Auxillary/10/
File: io.kicad_sch

Title: Input and output

Size: USLetter Date: 2026-08-16
KiCad E.D.A. 10.0.5

Rev: Rev A.1
Id: 9/12

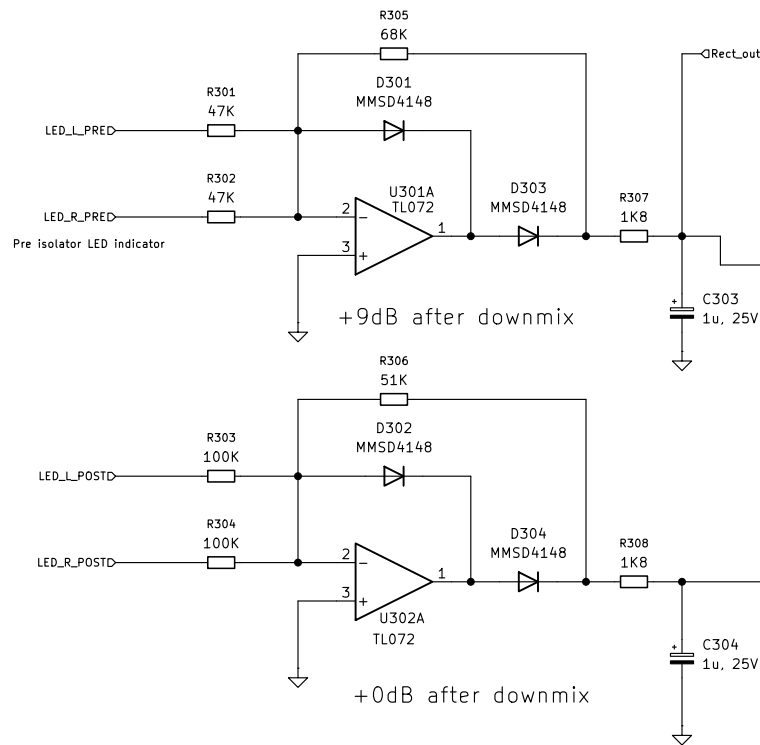

Green on @ -18dBV at input (approx.)
Red on @ +18dBu at output (approx.)

Note: one can think of using
a variety of TL431 or zener, here



Sheet: /Auxillary/LED/
File: LED_rect.kicad_sch

Title: LED and rectifier




Size: USLetter Date: 2026-08-16
KiCad E.D.A. 10.0.5

Rev: Rev A.1
Id: 10/12


Filter TMUX SW

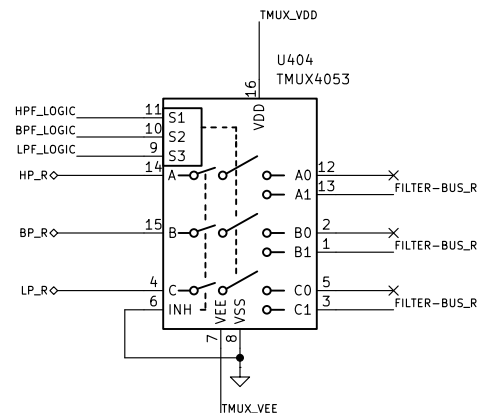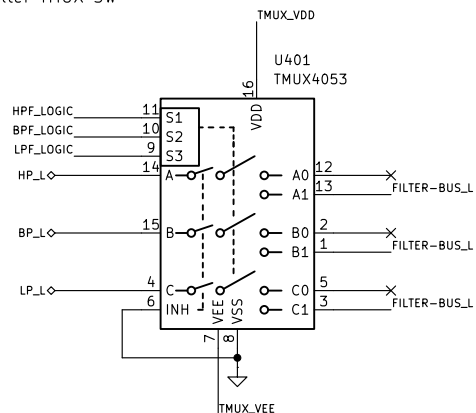


Other TMUX SW

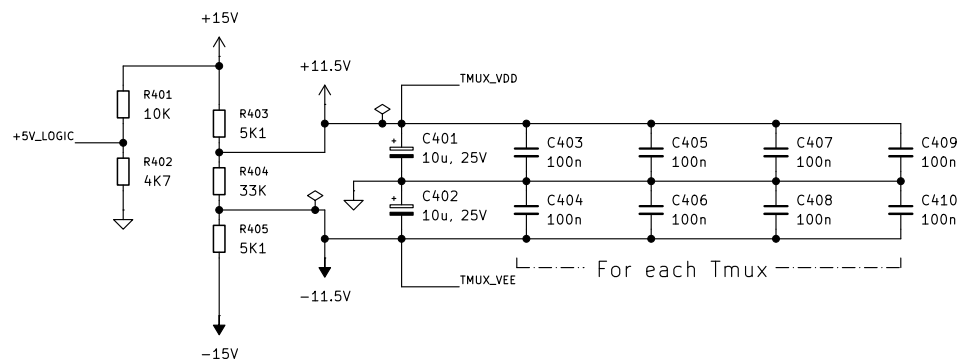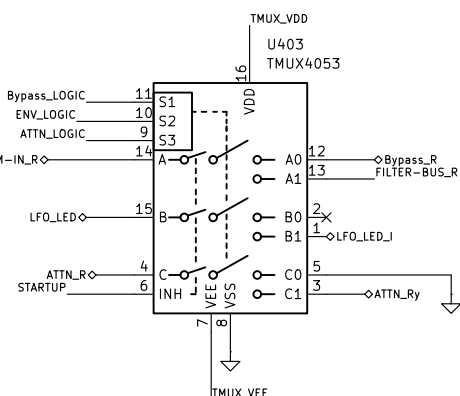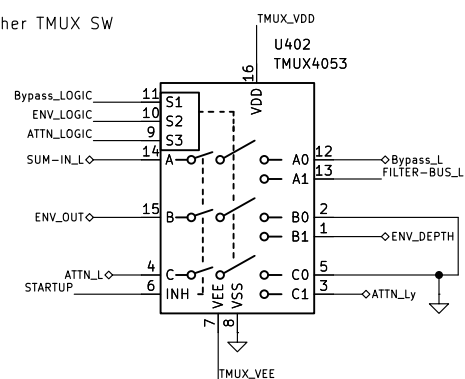

Physical SW configuration

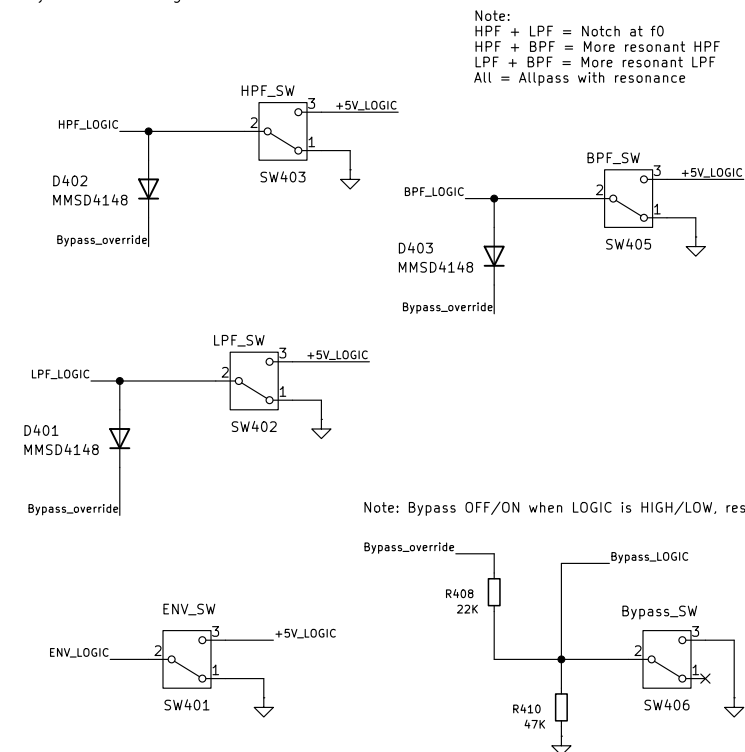

ATTN and startup mute

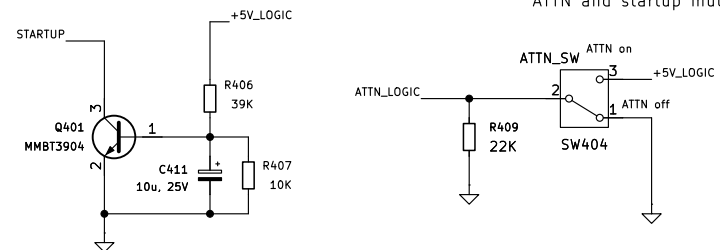

Sheet: /Auxillary/Switch/
File: switch.kicad_sch

Title: Switch

Size: USLetter Date: 2026-08-16
KiCad E.D.A. 10.0.5

Rev: Rev A.1
Id: 11/12

