Pine Counters

Refrigerated Counters



Pine Counters





Common Features

- Energy Classification under EU directives
- **With natural refrigerant R290** (Zero ODP/GWP=3)
- 1 shelf per door
- Hygienically designed interior
- **Material AISI 304** 18/8-10
- Self-closing door at 90°
- Evaporator protection against corrosion
- Forced air circulation technology
- Clip-On Guides for fast & easy cleaning
- Embedded controller for easy operation and cleaning
- Removable magnetic door gasket
- **2 years Warranty on mechanical and electrical parts**
- **Over extension telescopic slides on drawers**
- Automatic evaporation of condensate water
- Injected polyurethane foam insulation, density 42 kg/m³, HFC Free (Zero ODP, Low GWP)
- Automatic defrost
- Height adjustable stainless-steel legs
- GN 1/1 Internal dimensions
- **3 alternative drawer arrangements available** (2×GN 1/2, 3×GN 1/3, GN 2/3 +1/3)
- Ambient temperature +43°C

Special Features

- **Material AISI 304** 18/8-10
- **New style Condenser** with low maintenance requirements
- **Drawer Slides**
- Models Available with **GN 1/1 internal Dimensions**

Options

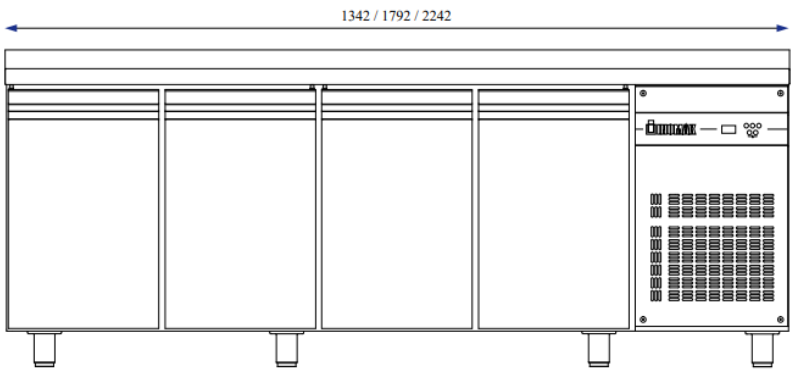
- Wheels
- **Wifi**
- Choice of Colors (RAL Palette)
- **Without Refrigeration Mechanism** (Ramnus Series - Remote Unit)
- **With Glass doors** (Prunus Series)
- **With Compact dimensions** (Clover Series)
- **With Refrigeration Mechanism on the left side**
- **With an Upstand**
- **Without Worktop**
- **With Worktop 80 cm deep**
- **Drawer slides with soft close**
- **Sink bowl fitting** option
- **2nd evaporator** models with dimensions 224 cm
  Recommended for heavy duty & especially for products with many drawers.

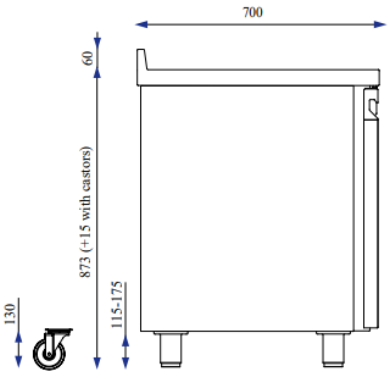
	PNRP99	PNRP22	PNRP33	PNRP42
Capacity (lt)	189	154	114	152
Dimensions (mm)	1342x700x873	1342x700x873	1342x700x873	1342x700x873
Weight Net/Gross (kg)	108/ 121	120/ 132	137/ 150	127/ 140
Packaged Volume (m3)	0,95	0,95	0,95	0,95
Shelves (pcs)	2	-	-	-
Operating Temperature (°C)	0/ +10	0/ +10	0/ +10	0/ +10
Voltage (V)	230	230	230	230
Frequency (Hz)	50	50	50	50
Rated current (A)	2,8	2,8	2,8	2,8
Electrical Power (W)	345	345	345	345
Defrost	Ventilated	Ventilated	Ventilated	Ventilated
Energy Class	B	B	B	B
Climate Class	5	5	5	5
Refrigerant	R290	R290	R290	R290
Refrigerant Quantity (gr)	70	70	70	70
KWh/year	657	657	657	657
Compressor Model	SECOP KLF4.8CND	SECOP KLF4.8CND	SECOP KLF4.8CND	SECOP KLF4.8CND

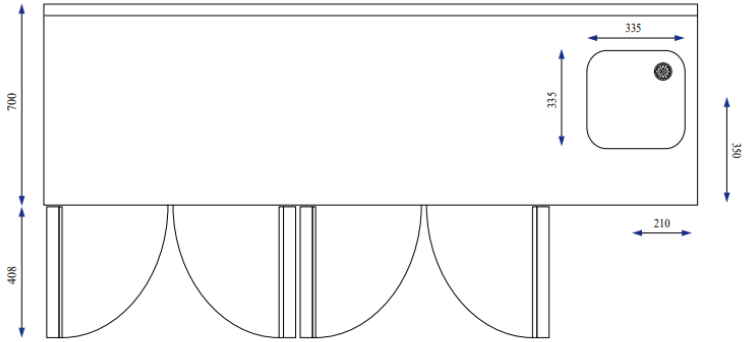
	PNRP999	PNRP222	PNRP333	PNRP234	PNRP923
Capacity (lt)	283	231	171	209	229
Dimensions (mm)	1792x700x873	1792x700x873	1792x700x873	1792x700x873	1792x700x873
Weight Net/Gross (kg)	135/ 150	164/ 179	179/ 194	169/ 184	159/ 174
Packaged Volume (m3)	1,27	1,27	1,27	1,27	1,27
Shelves (pcs)	3	-	-	-	1
Operating Temperature (°C)	0/ +10	0/ +10	0/ +10	0/ +10	0/ +10
Voltage (V)	230	230	230	230	230
Frequency (Hz)	50	50	50	50	50
Rated current (A)	2,8	2,8	2,8	2,8	2,8
Electrical Power (W)	345	345	345	345	345
Defrost	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Energy Class	B	B	B	B	B
Climate class	5	5	5	5	5
Refrigerant	R290	R290	R290	R290	R290
Refrigerant Quantity (gr)	70	70	70	70	70
KWh/year	803	803	803	803	803
Compressor Model	SECOP KLF4.8CND	SECOP KLF4.8CND	SECOP KLF4.8CND	SECOP KLF4.8CND	SECOP KLF4.8CND

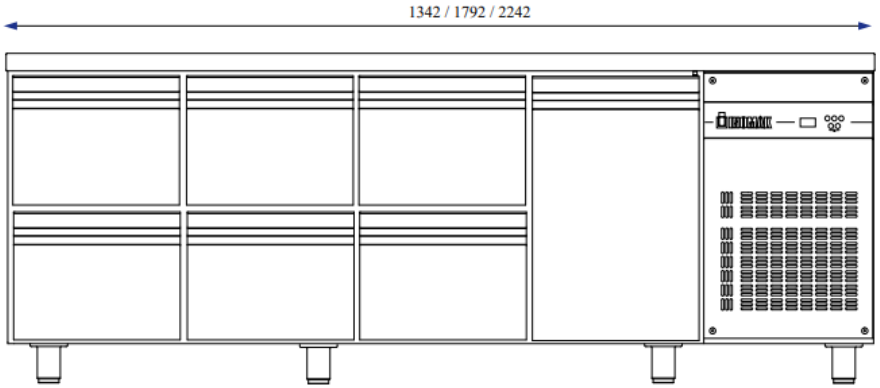
	PNRP9999	PNRP2222	PNRP3333	PNRP3244	PNRP3922
Capacity (lt)	378	308	228	284	306
Dimensions (mm)	2242x700x873	2242x700x873	2242x700x873	2242x700x873	2242x700x873
Weight Net/Gross (kg)	164/ 180	202/ 218	222/ 238	208/ 224	198/ 214
Packaged Volume (m3)	1,59	1,59	1,59	1,59	1,59
Shelves (pcs)	4	-	-	-	1
Operating Temperature (°C)	0/ +10	0/ +10	0/ +10	0/ +10	0/ +10
Voltage (V)	230	230	230	230	230
Frequency (Hz)	50	50	50	50	50
Rated current (A)	3,8	3,8	3,8	3,8	3,8
Electrical Power (W)	448	448	448	448	448
Defrost	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Energy Class	B	B	B	B	B
Climate class	5	5	5	5	5
Refrigerant	R290	R290	R290	R290	R290
Refrigerant Quantity (gr)	80	80	80	80	80
KWh/year	949	949	949	949	949
Compressor Model	SECOP KLF5.6CND	SECOP KLF5.6CND	SECOP KLF5.6CND	SECOP KLF5.6CND	SECOP KLF5.6CND

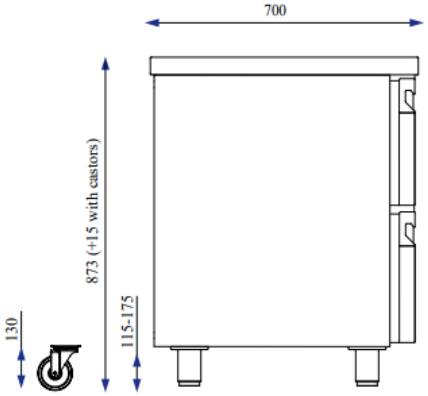
Blueprints

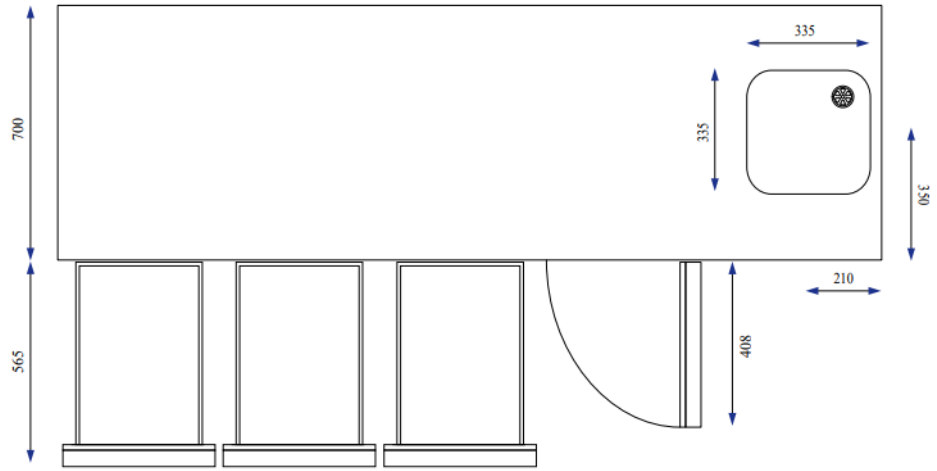

1342 / 1792 / 2242

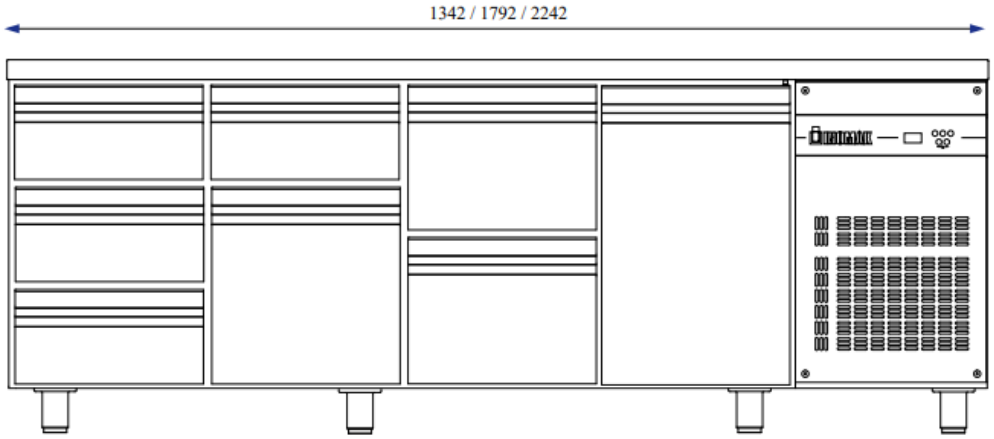

700
60
873 (+15 with castors)
115-175
130

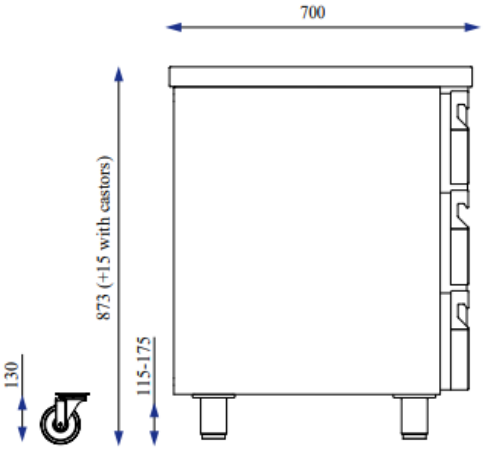

335
335
390
700
408
210

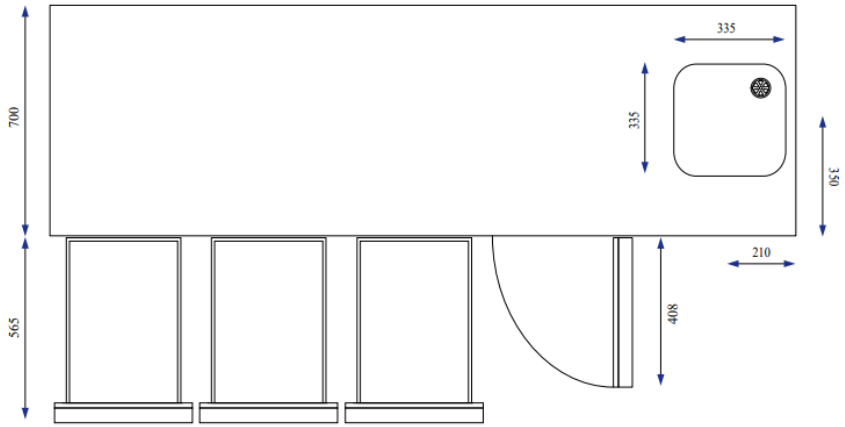

1342 / 1792 / 2242


700
873 (+15 with castors)
130
115-175


335
335
700
350
210
565
408


1342 / 1792 / 2242


700
873 (+15 with castors)
130
115-175


335
335
700
390
210
565
408