



HIGH PRESSURE WASHER PUMP

SPECIFICATION :-

MODEL :- LXHPW - 100

POWER :- 1800 WATT

VOLTAGE / FREQUENCY :- 220A / 50HZ

WORKING PRESSURE :- 100 BAR

MAXIMUM PRESSURE :- 130 BAR

FLOW :- 10 LPM

SELF SUCTION , AUTO STOP

INDUCTION MOTOR TYPE

EASY REPAIRABLE

HIGH PRESSURE WASHER PUMP

SPECIFICATION :-

MODEL :- LXHPW - 120

POWER :- 2200 WATT

VOLTAGE / FREQUENCY :- 220A / 50HZ

WORKING PRESSURE :- 120 BAR

MAXIMUM PRESSURE :- 150 BAR

FLOW :- 10 LPM

SELF SUCTION , AUTO STOP

INDUCTION MOTOR TYPE

EASY REPAIRABLE

HIGH PRESSURE WASHER PUMP

SPECIFICATION :-

MODEL :- LXHPW - 140

POWER :- 2300 WATT

VOLTAGE / FREQUENCY :- 220A / 50HZ

WORKING PRESSURE :- 130 BAR

MAXIMUM PRESSURE :- 150 BAR

FLOW :- 10 LPM

SELF SUCTION , AUTO STOP

INDUCTION MOTOR TYPE

PRESSURE ADJUSTABLE



HIGH PRESSURE WASHER PUMP

SPECIFICATION :-

MODEL :- LXHPW - 150

POWER :- 2200 WATT

VOLTAGE / FREQUENCY :- 220V

MAX. PRESSURE :- 180 BAR

INDUCTION MOTOR :- 2.5 HP

FLOW :- 10 LPM

SELF SUCTION , AUTO STOP

INDUCTION MOTOR TYPE

EASY REPAIRABLE



LXHPW - 150

HIGH PRESSURE WASHER PUMP

SPECIFICATION :-

MODEL :- LXHPW - 160

POWER :- 2200 WATT

VOLTAGE / FREQUENCY :- 220A / 50HZ

MAX. PRESSURE :- 160 BAR

INDUCTION MOTOR :- 3 HP

FLOW :- 13 LPM

SELF SUCTION , AUTO STOP

INDUCTION MOTOR TYPE

EASY REPAIRABLE



LXHPW - 160

HIGH PRESSURE WASHER PUMP

SPECIFICATION :-

MODEL :- LXHPW - 180

POWER :- 3000 WATT

VOLTAGE / FREQUENCY :- 220A / 50HZ

MAX. PRESSURE :- 180 BAR

INDUCTION MOTOR :- 4 HP

FLOW :- 14 LPM

SELF SUCTION , AUTO STOP

INDUCTION MOTOR TYPE

PRESSURE ADJUSTABLE



LXHPW - 180

BATTERY OPERATED WASHER PUMPS

FEATURES :-

MODEL :- LXBOP

BODY MATERIAL :- PVC BODY

PHASE :- SINGLE PHASE

BATTERY :- 24V / 48V

USAGE/APPLICATION :- HOME USE ,
CAR ,BIKE WASHER PUMP ,ETC



LXBOP

AGRICULTURAL POWER SPRAYER PUMPS

SPECIFICATION :-

MODEL :- LXHTP-22/30/50

PLUNGER SIZE :- 22/30/50

VOLTAGE :- 220/50 (V/HZ)

PRESSURE :- 10 - 40 KG/CM2

MOTOR :- 2HP /3HP

SUCTION VOLUME :- 60 - 70 L/MIN

REMOVES STUBBORN DIRT UNDER
TOUGH WORKING CONDITION
RESULTS IN EFFICIENT CLEANING



LXHTP - 30

AGRICULTURAL POWER SPRAYER PUMPS

SPECIFICATION :-

MODEL :- LXHTP SET

PLUNGER SIZE :- 22/30/50


VOLTAGE :- 220A / 50 (V/HZ)

PRESSURE :- 10 - 40 KG/CM2

MOTOR :- 2HP / 3HP

SUCTION VOLUME :- 60 - 70 L/MIN

REMOVES STUBBORN DIRT UNDER
TOUGH WORKING CONDITIN
RESULTS IN EFFICIENT CLEANING

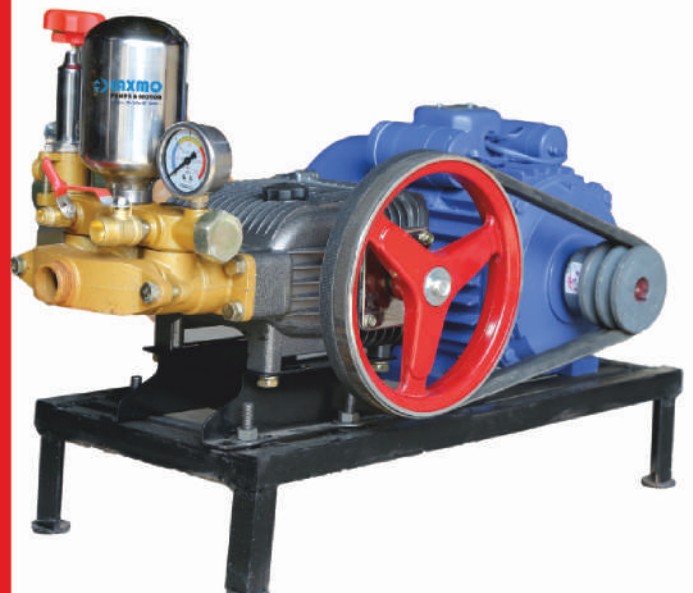

LXHTP SET

WET & DRY VACUUM CLEANER

MODEL NO	POWER	AIR FLOW	VACUUM SUCTION
Lxvc :- 25 Ltr	1600 W	53L/s	200MBar
Lxvc :- 35 Ltr	1800 W	53L/s	200MBar
Lxvc :- 50 Ltr	1800 W	53L/s	200MBar
Lxvc :- 80 Ltr	3600 W	106L/s	220MBar



GASOLINE ENGINE AND WATER PUMP

SPECIFICATION :-

MODEL NO	HP	SIZE
LXWP	6.5	Bair Engine
LXWP :- 20	6.5	2 Inch
LXWP :- 30	6.5	3 Inch



Agricultural Machinery (Direct/Belt),
Rice And Wheat Threshing Machines,
Road Cutting Machines,
Polishing Machines,
Transport Vehicles Vibration Pumps,
Various Water Pumps,

AGRICULTURE HOSE PIPE

SPECIFICATION :-

MODEL NO	SIZE	Suction
Agriculture Hose Pipe	8.5Mm 10 Layer	B.p. 220 Bar



MONOBLOCK TYPE AIRCOMPRESSOR

SPECIFICATION :-

MODEL NO	POWER	SPEED	TANK	PRESSURE
Lxmb :- 30	2/1.5 W	2850	30L	8/115 Bar
Lxmb :- 60	3/2.2W	2850	60L	8/115 Bar

Oil Type, Easy Storage

High Speed, Easy Movable

Auto Stop

Function

SILENT OIL FREE AIRCOMPRESSOR

SPECIFICATION :-

TANK CAPACITY	HEAD WATT	POWER	FLOW
10L	550 Watt	1 Hp	70 Lpm
30L	750 Watt	1.5 Hp	70 Lpm
50L	550 Watt	1 Hp	110 Lpm
50L	750 Watt	1.5 Hp	140 Lpm
50L	2 Block (750*2)	2 Hp	140 Lpm
70L	3 Block (550*3)	3 HP	180 Lpm
70L	3 Block (750*3)	3 HP	210 Lpm

550 Watt / 750 Watt Head

FEATURES :-

OIL FREE TYPE

EASY STORAGE

LOW NOISE

COMPACT DESIGN

EASY MOVABLE

AUTO STOP FUNCTION



AUTOMATIC PUMPS CONTROLLER

SPECIFICATION :-

MODEL :- LXPC - 13

RATED VOLTAGE :- 220 - 240V / 110 -120V

FREQUENCY :- 50 / 60 HZ

POWER :- 10A - UPTO 1.1 LW/16 A-1.5 KW

PRESSURE :- 1.2 BAR, 1.5 BAR, 2.2 BAR

MAX WORKING PRESSURE :- 10 BAR

COMPACT AND SILENT ,BUILT IN RESET BUTTON

PROTECTION AGAINST DRY RUNNING

OVER HEAT PROTECTION ,FORCED START



LXPC - 13

AUTOMATIC PUMPS CONTROLLER

SPECIFICATION :-

MODEL :- LXPC - 10

RATED VOLTAGE :- 220 - 240V / 110 -120V

FREQUENCY :- 50 / 60 HZ

POWER :- 10A - UPTO 1.1 LW/16 A-1.5 KW

PRESSURE :- 1.2 BAR, 1.5 BAR, 2.2 BAR

MAX WORKING PRESSURE :- 10 BAR

COMPACT AND SILENT ,BUILT IN RESET BUTTON

PROTECTION AGAINST DRY RUNNING

OVER HEAT PROTECTION ,FORCED START



LXPC - 10

AUTOMATIC WATER LEVEL CONTROLLER

SPECIFICATION :-

CABLE LENGTH :- 2M,3M,5M & 10M

RATED VOLTAGE :- 220/230/240V

RATED CURRENT :- 10A/16A

FREQUENCY :- 50/60 HZ

PROTECTION RATING MAX :- IP67

WORKING TEMPERATURE :- 55C



FLOAT SWITCH

AUTOMATIC CIRCULATION PUMP

SPECIFICATION :-

MODEL :- LXCP :- 20/9

MAX.POWER :- 120 W

VOLTAGE / FREQUENCY :- 220V / 50HZ

SPEED :- 2280

MAX HEAD :- 10 M

MAX.CAPACITY :- 23 L/MIN

AUTOMATIC , SILENT

NO LEAKAGE , COMPACT DESIGN

SPACE SAVING



LXCP - 20/9

HOT & COLD CIRCULATION PUMPS

SPECIFICATION :-

MODEL :- LXHCP :- 10

POWER :- 90 W

VOLTAGE / FREQUENCY :- 220V / 50HZ

SPEED :- 2900

MAX HEAD :- 10M

MAX.CAPACITY :- 20 L/MIN

AUTOMATIC , SILENT

NO LEAKAGE , COMPACT DESIGN

SPACE SAVING



LXHCP - 10

PERMENENT MAGNET VARIABLE BOOSTER PUMP

SPECIFICATION :-

MODEL :- LXMBP - 100I

POWER :- 1 HP

RATED FLOW (M3/H) :- 2

MAX. HEAD (3):- 30

MAX .FLOW (M3/H):- 5

MAX . HEAD (M) :- 42

Hotel And High Buildings.

Is Small Water Supply System.

Boosting Household Tap Water.



LXMBP - 100I

AUTOMATIC PRESSURE BOOSTER PUMP

SPECIFICATION :-

MODEL NO	POWER	HP	H.MAX
LXAP :- 1	120 W	0.25	20 M
LXAP :- 3	370 W	0.5	36 M
LXAP :- 4	750 W	1	55 M

CAST IRON PUMP BODY AND SUPPORT

BRASS IMPELLER

PREMIUM QUALITY PRESSURE TANK

STAINLESS STEEL JET PUMP

SPECIFICATION :-

MODEL NO	POWER	HP	H.MAX
LXJET :- 100	750 W	1	42 M
LXJET :- 150	1100 W	1.5	60 M

Residential , Irrigation

Small Farms

Pressure boosting units

Industrial Water Supply

Food Processing Industries

washing Systems

HIGH PRESSURE PUMP /R.O PUMPS

SPECIFICATION :-

MODEL NO	HP	HEAD	DISCHARGE
LXRO - 100	1	UP TO 100 MTR	800 LPH

Stainless Steel Rotating Parts

Low Power Consumption

Thermal Overload Protected



LXAP



LXJET



LXRO

MULTISTAGE PRESSURE PUMP WITH SET

SPECIFICATION :-

HP	STAGE	TANK SIZE	HEAD MTR	DISCHARGE IN LPH	SUITABLE BATHROOM
0.5	3	24	25	4400	2
1	4	24	35	4600	3
1	4	35	35	4600	4
1.5	5	24	40	4800	4
1.5	5	35	40	4800	5
1.5	5	60	40	4800	6
2	6	35	50	6200	6
2	6	60	50	6200	7
2	6	100	50	6200	8

Stainless Steel Shaft

Ss 304 diffusers & Impellers

Compact & Space Saving

Thermal Overload Protected

Noiseless

100 % Copper Winding

INVERTER TYPE MULTISTAGE PUMP

SPECIFICATION :-

MODEL NO	POWER	MAX. FLOW	MAX. HEAD
LXMP :- 100I	1 HP	5.0	45
LXMP :- 150I	1.5 HP	7.0	37

Automatic Operation

Automatic Start & Stop

Self Cleaning To Prevent Blockage

Easy Display Timing




ACCESSORIES



LAXMO
PUMPS & MOTOR
We Know The Value Of Water...



SELFPRIMING NRV PUMPS

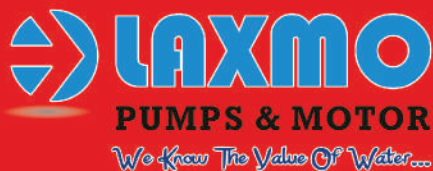

MODEL NO	MOTOR RATING		PIPE SIZE		Discharge in LPH	HEAD IN METER								
	KW	HP	SUC.	DEL.5		6	9	12	15	18	21	24	28	30
NRV :- 50	0.37	0.5	25	25		2150	1850	1600	1300	1100	900	700	400	-
NRV :- 100	0.75	0.1	25	25		2800	2 600	2400	2100	1900	1700	1400	1150	1000

SELFPRIMING SUCTION PUMPS



MODEL NO	MOTOR RATING		PIPE SIZE		Discharge in LPH	HEAD IN METER								
	KW	HP	SUC.	DEL.5		6	12	15	21	24	27	30	33	36
SUPER :- 50	0.37	0.5	15	15		1800	1550	1250	950	700	500	-	-	-
SUPER :- 100	0.75	0.1	25	25		2700	1950	1800	1450	1100	1100	950	850	600

SELFPRIMING PUMPS 1440 RPM



MODEL NO	MOTOR RATING		PIPE SIZE		Discharge in LPH	HEAD IN METER								
	KW	HP	SUC.	DEL.5		6	12	15	21	24	27	30	33	36
LXMS :- 3	0.75	1	25	25		3250	2650	2300	1700	1500	1300	600	-	-
LXMS :- 30	0.75	1	25	25		4100	3700	3400	2900	2650	2400	2100	1900	1700

OPENWELL SUBMERSIBLE PUMPS



MODEL NO	MOTOR RATING		PIPE SIZE		Discharge in LPH	HEAD IN METER								
	KW	HP	SUC.	DEL.5		9	12	15	18	21	24	28	30	32
LXOP :- 0.5	0.37	0.5	25	25		150	130	105	70	-	-	-	-	-
LXOP :- 100	0.75	1	32	25		-	-	180	165	140	110	50	-	-
LXOP :- 100H	0.75	1	32	25		-	-	195	180	155	135	90	70	40
LXOP :- 150	1.10	1.5	40	40		-	-	280	250	215	175	110	-	-
LXOP :- 200	1.50	2	50	50		-	-	-	290	250	235	160	110	-

SUBMERSIBLE BORWELL PUMPS

SPECIFICATION :-

HP :- 0.5 HP TO 7.5 HP

HEAD :- 20 METERS TO 200 METERS

POWER :- 220 V TO 380 V

PHASE :- SINGLE / THREE

MAX.FLOW :- UP TO 200LPM

TYPE :- OIL FIELD AND WATER FIELD



SUBMERSIBLE BORWELL PUMPS

SPECIFICATION :-

HP :- 3.0 HP TO 20.0 HP

HEAD :- 20 METERS TO 250 METERS

POWER :- 380V

MAX.FLOW :- UP TO 700 LPM

TYPE :- MIX FLOW / REDIAL FLOW

HEAD :- UP TO 50 FEET (REDIAL FLOW)



SUBMERSIBLE SEWAGE PUMPS

SPECIFICATION :-

HP :- 0.5 HP TO 10 HP

VOLTAGE :- 220/50(V/HZ)

HEAD :- 10 MTR TO 50 MTR

MAX FLOW :- 600 LPM

SPEED :- 2800 RPM

DRY RUN PROTECTION

EASY TO HANDLE

COMPACT DESIGN

AUTO STOP FUNCTION



INDUCTION MOTOR

SPECIFICATION :-

MODEL :- LXIM

HP :- 0.5 TO 10

PHASE :- SINGLE / THREE

RPM :- 1400 / 2800

BODY :- CASTING BODY

FOOT MOUNTING

COPPER WINDING



LXIM

ROTARY GEAR PUMPS

SPECIFICATION :-

AVAILABLE IN NINE SIZE FROM 1/2 TO 3

CAPACITY FROM 5 TO 500 LPM

MAXIMUM WORKING PRESSURE 12KG /CM²

NORMAL WORKING TEMPERATURE - 90°C

VISCOSITY UP TO 10,000 CST

MODIFIED VERSION FOR HIGH TEMP. UP TO 250°C



INLINE VERTICLE PUMPS

SPECIFICATION :-

MODEL :- LXVP

HP :- 1.5 HP TO 15HP

PHASE :- SINGLE / THREE

HEAD :- 25 METERS TO 250 METERS

FLOW :- 50 LPM TO 400 LPM

COMMERCIAL FIRE PROTECTION

DRINKING WATER TREATMENT

INDUSTRIAL COOLING

INDUSTRIAL PROESS WATER TREATMENT



LXVP