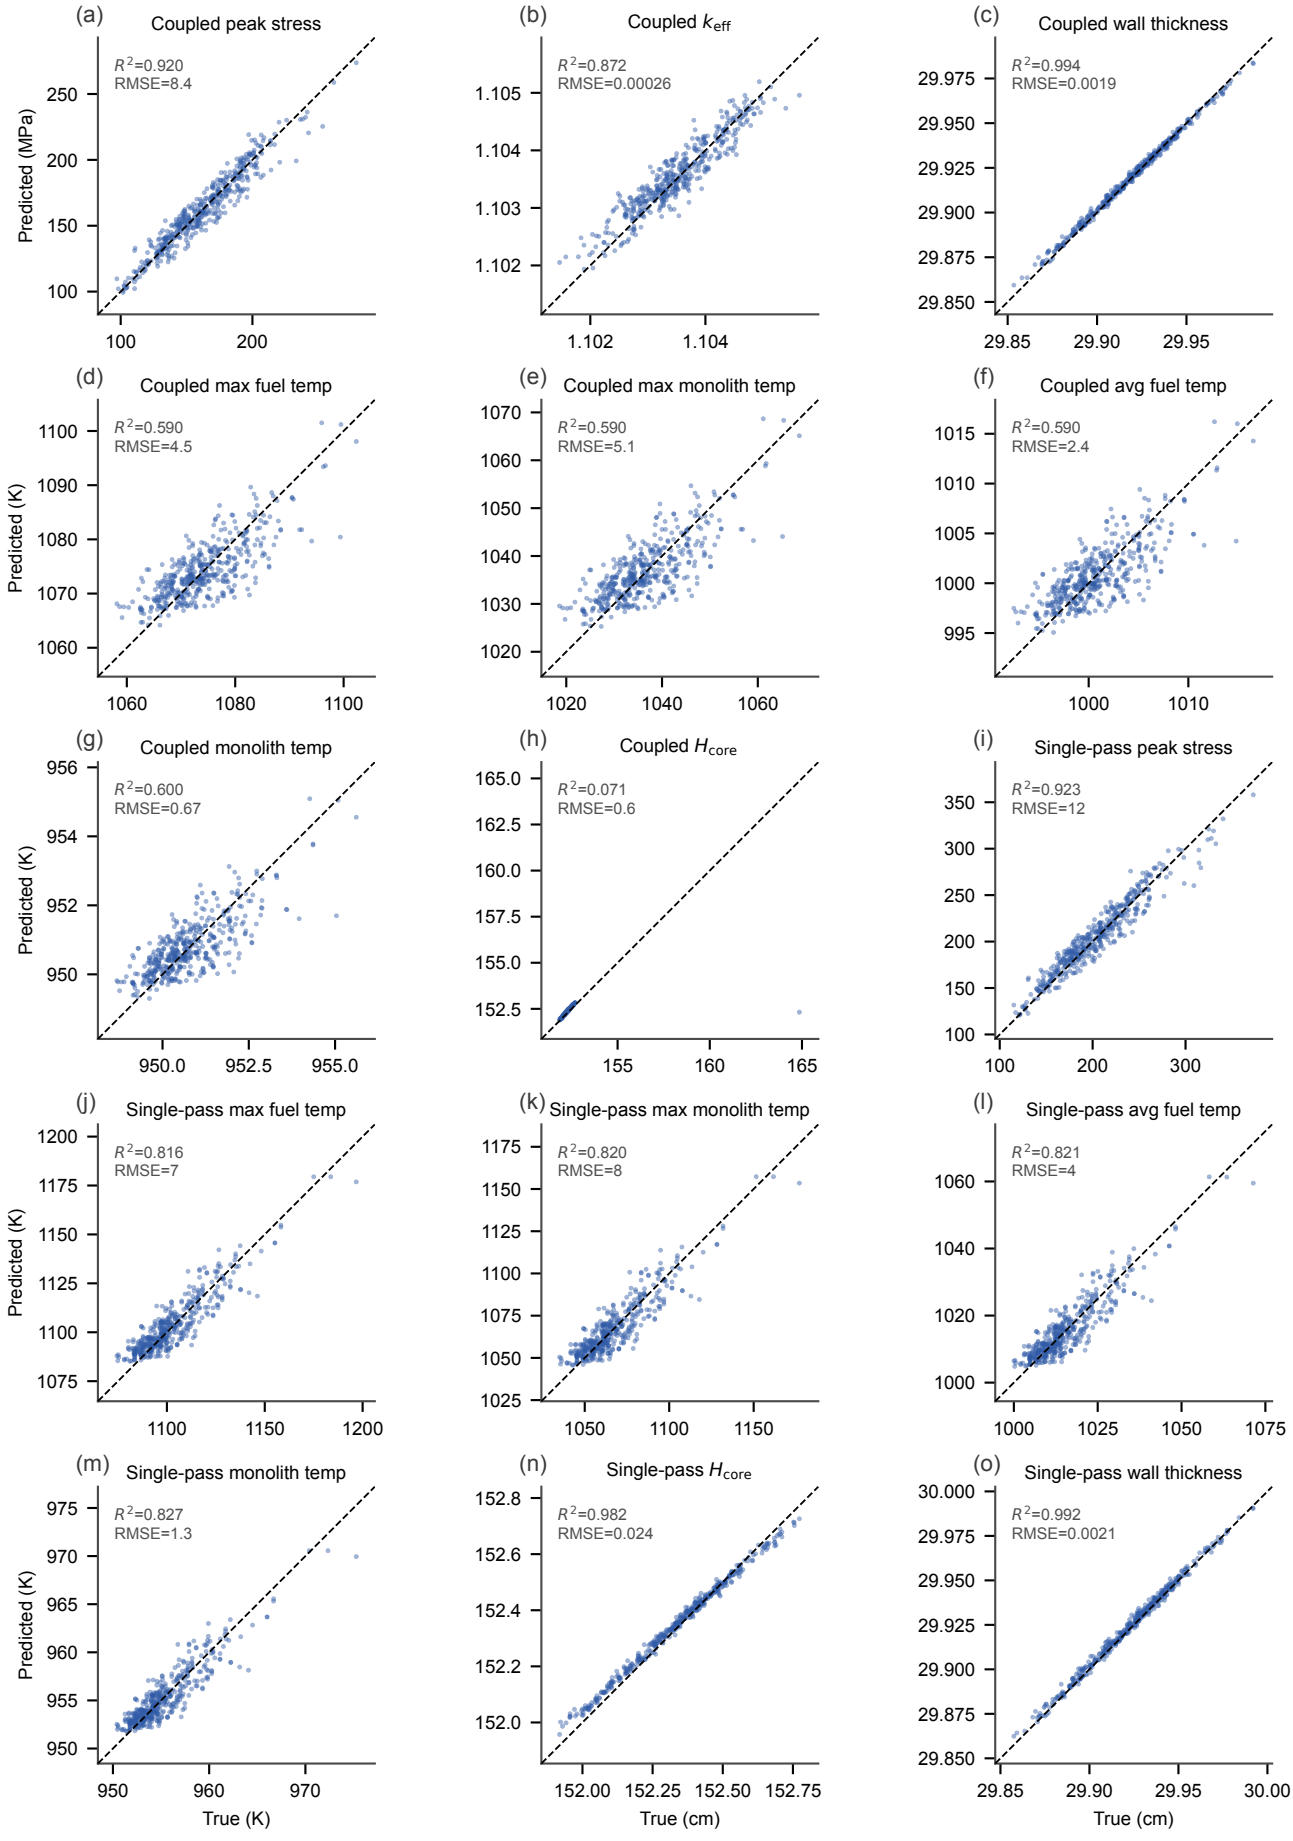
(a)
Coupled peak stress
R^2=0.920
RMSE=8.4
Predicted (MPa)
(b)
Coupled k_{eff}
R^2=0.872
RMSE=0.00026
(c)
Coupled wall thickness
R^2=0.994
RMSE=0.0019
(d)
Coupled max fuel temp
R^2=0.590
RMSE=4.5
Predicted (K)
(e)
Coupled max monolith temp
R^2=0.590
RMSE=5.1
(f)
Coupled avg fuel temp
R^2=0.590
RMSE=2.4
(g)
Coupled monolith temp
R^2=0.600
RMSE=0.67
Predicted (K)
(h)
Coupled H_{core}
R^2=0.071
RMSE=0.6
(i)
Single-pass peak stress
R^2=0.923
RMSE=12
(j)
Single-pass max fuel temp
R^2=0.816
RMSE=7
Predicted (K)
(k)
Single-pass max monolith temp
R^2=0.820
RMSE=8
(l)
Single-pass avg fuel temp
R^2=0.821
RMSE=4
(m)
Single-pass monolith temp
R^2=0.827
RMSE=1.3
Predicted (K)
True (K)
(n)
Single-pass H_{core}
R^2=0.982
RMSE=0.024
True (cm)
(o)
Single-pass wall thickness
R^2=0.992
RMSE=0.0021
True (cm)