
2024 V1

LEAPTON SOLAR

Monofacial | Bifacial

# LP210*210-M-66-NB N-Type TOPCon Dual Glass

## Rated Power 690-720W

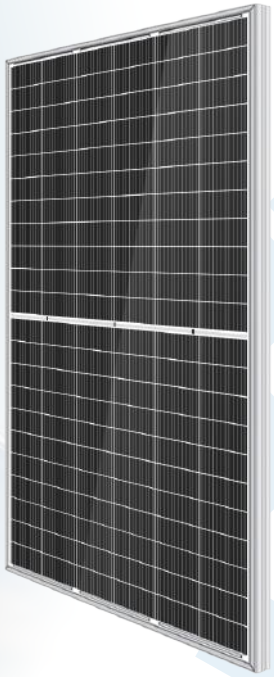

TIER 1 Bloomberg NEW ENERGY FINANCE

### N-Type MBB Cell
New circuit design N-type cells, can increase the output power of 10W~20W


### Low Light Features
Higher performance under low light environment.

### Bifacial with dual glass
Module adopts 210*210mm half cells, bifacial module provide an additional 5%~25% output.

### PID Protection
Ensure the attenuation probability caused by PID phenomenon is minimized.

### Harsh Environmental Adaptability
Strict salt spray and ammonia corrosion test by TUV Nord.

### Load Capacity
Mechanical load tests including wind load 2400 Pa and snow load 5400 Pa done by TUV Nord.

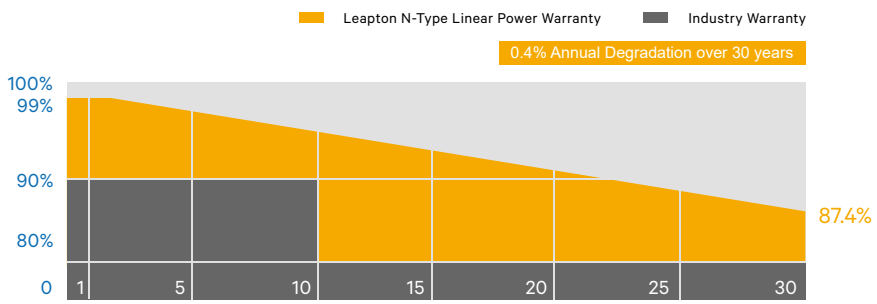




Headquarter : Leapton Energy Co., Ltd.
Tosei Bldg. 6F, 1-2-1 Aioi-cho, Chuo-ku Kobe-shi, Hyogo, 650-0025, Japan
+81-78-382-3182
www.leaptonenergy.jp

Manufacturer : Leapton Solar (Changshu) Co., Ltd.
No.9, Sunshine Avenue, Changshu City, Jiangsu, China
+86-512-88800068
info@leaptonenergy.com
www.leaptonpv.com



Leapton Energy Co., Ltd.

2024 V1


## MECHANICAL DIAGRAMS

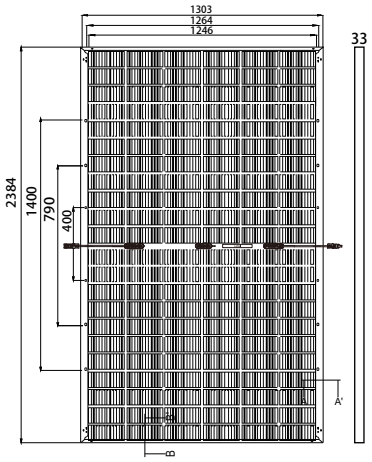


Frame Cross Section A-A




Frame Cross Section B-B




## SPECIFICATIONS

| | |
|---|---|
| Weight | 37.5kg |
| Dimensions | 2384mm*1303mm*33mm |
| Cell Dimensions | 210*210mm |
| Cell Amount | 66*2 pcs |
| Maximum System Voltage | 1500V |
| Junction Box | IP68 |
| Front glass | 2.0mm, Anti-Reflection Coating |
| Back galss | 2.0mm, Heat Strengthened Glass |
| Frame | Aluminum Alloy |
| Cable | 4mm², N 1400mm/P 1400mm for Horizontal installation<br>4mm², N 320mm/P 320mm for Vertical installation |
| Connector | MC4 compatible |
| Bifaciality | 80±5% |

## ELECTRICAL PARAMETERS AT STC

| Power | 690W | 695W | 700W | 705W | 710W | 715W | 720W |
|---|---|---|---|---|---|---|---|
| Open Circuit Voltage | 47.80V | 48.00V | 48.20V | 48.40V | 48.60V | 48.80V | 49.00V |
| Short Circuit Current | 18.30A | 18.40A | 18.48A | 18.52A | 18.57A | 18.61A | 18.65A |
| Maximun Power Voltage | 39.80V | 40.00V | 40.20V | 40.40V | 40.60V | 40.80V | 41.00V |
| Maximum Power Current | 17.34A | 17.38A | 17.41A | 17.45A | 17.49A | 17.52A | 17.56A |
| Module Efficiency | 22.21% | 22.37% | 22.53% | 22.70% | 22.86% | 23.12% | 23.18% |

* Under Standard Test Conditions (STC) of irradiance of 1000 W/m2, spectrum AM 1.5 and cell temperature of 25°C.

## ELECTRICAL PARAMETERS AT NMOT

| Power | 526W | 530W | 534W | 538W | 541W | 545W | 549W |
|---|---|---|---|---|---|---|---|
| Open Circuit Voltage | 45.35V | 45.55V | 45.75V | 45.95V | 46.15V | 46.35V | 46.55V |
| Short Circuit Current | 14.70A | 14.78A | 14.82A | 14.86A | 14.91A | 14.94A | 14.97A |
| Maximun Power Voltage | 37.60V | 37.80V | 38.00V | 38.20V | 38.35V | 38.55V | 38.75V |
| Maximum Power Current | 13.99A | 14.02A | 14.05A | 14.08A | 14.11A | 14.14A | 14.17A |

* Under Nominal Module Operating Temperature (NMOT), irradiance of 800 W/m2, spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s.

## ELECTRICAL PARAMETERS ( AT 10% BIFACIAL POWER OUTPUT )

| Output Power | 759W | 765W | 770W | 776W | 781W | 787W | 792W |
|---|---|---|---|---|---|---|---|
| Open Circuit Voltage | 47.80V | 48.00V | 48.20V | 48.40V | 48.60V | 48.80V | 49.00V |
| Short Circuit Current | 20.17A | 20.21A | 20.27A | 20.33A | 20.37A | 20.43A | 20.47A |
| Maximun Power Voltage | 39.80V | 40.00V | 40.20V | 40.40V | 40.60V | 40.80V | 41.00V |
| Maximum Power Current | 19.07A | 19.13A | 19.15A | 19.21A | 19.24A | 19.29A | 19.32A |

## TEMPERATURE CHARACTERISTICS


| | | | |
|---|---|---|---|
| NMOT | 41±3°C | Temp Coefficient of ISC | +0.046%/°C |
| Temp Coefficient of VOC | -0.25%/°C | Temp Coefficient of Pmax | -0.30%/°C |

## PACKING CONFIGURATION


| | | | |
|---|---|---|---|
| Modules/Pallet | 34 Pieces | Modules/40'Container | 612 Pieces |
| Packing Description | 18 Pallets, Total=34x18=612 Pieces | | |

## CHARACTERISTICS

LP210*210-M-66-NB-710W

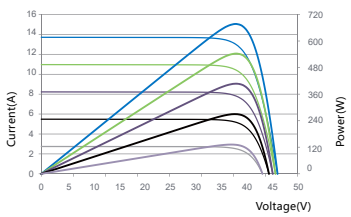


LP210*210-M-66-NB-710W




## MAXIMUM RATING

| | |
|---|---|
| Output Tolerance | 0~+5W |
| Operating Temperature | -40°C~+85°C |
| Wind Load/Snow Load | 2400pa/5400pa |
| Fuse Current | 30A |

25 YEARS Quality Warranty

30 YEARS Power Warranty


Headquarter : Leapton Energy Co., Ltd.
Tosei Bldg. 6F, 1-2-1 Aioi-cho, Chuo-ku Kobe-shi, Hyogo, 650-0025, Japan +81-78-382-3182 www.leaptonenergy.jp
Manufacturer : Leapton Solar (Changshu) Co., Ltd.
No.9, Sunshine Avenue, Changshu City, Jiangsu, China +86-512-88800068 info@leaptonenergy.com www.leaptonpv.com


Leapton Energy Co., Ltd.