



广东永裕光电有限公司

Guangdong Yongyu Optoelectronics Co., Ltd

Contents

目录

公司简介 Company Profile	● 发展历程 Development History ● 资质荣誉 Qualification and Certification ● 研发实力 R&D Strength ● 制造实力 Manufacturing Strength
Chip LED 产品 Chip LED Product	产品家族 Product Family: 0201,0402,0602 0603,0805,0807,1204,1206,1209,1615,1616
红外产品 IR LED	产品家族 Product Family: 0402,0603,0805,1204,1206
照明产品 Lighting LED	产品家族 Product Family 2016, 2835,3030,3014,3020,5050
光传感 Optical Sensor	Under development / 开发中

公司简介



永裕光电创立于 2008 年，公司专注于中小功率 LED 器件及半导体封装，为客户提供 LED 照明、指示、显示光源及红外、光传感等光电器件，是集研发、生产、销售为一体的创新型科技企业。目前公司 ChipLED 产品在供应规模上具有国际影响力，该产品广泛应用于家电、通讯、工控、医疗、车用、可穿戴、数码产品等领域。目前公司荣获国家级高新技术企业、广东省专精特新中小企业、、深圳市半导体产业发展促进会会员、华东电子协议会会员等诸多荣誉。

永裕光电生产基地分别设在广东汕头市及广西崇左市，集聚了 LED 封装从业的资深专业技术人员、培养了一支具有丰富实战管理经验的核心经营团队，两个生产基地总共拥有 80000 平方米厂房与 20000 平方米超级洁净、防静电的无尘车间，月产能超过 4000KK。为满足海内、外大品牌终端应用要求，生产设备基本全部采用业内知名品牌的封装设备及品质管理全面使用高精尖检测设备。所有产品满足 RoHS、REACH 等法律法规要求。公司通过多项国际体系认证，如 ISO9001、ISO14001、IATF16949、ISO45001、QC080000 等。

为不断满足市场需求，永裕光电不断加强上、下游战略合作伙伴关系、不断吸纳光电行业精英人才、持续改进客户服务水平，主动积极提升产品竞争力、不断追求创新、精益生产，做强做大 LED 封装主业，始终坚持“用优秀的产品赢得市场的认可与尊重”运营理念，使公司成为光电行业内具有国际影响力的技术创新企业之一，为光电行业作出更大的贡献。

企业愿景

在光的世界里，打造光电
器件智造世界级品牌。

企业使命

智造产品
追求卓越
超越客户期望

Company Profile



Yongyu Optoelectronics, founded in 2008, focuses on small and medium-sized power LED components and semiconductor packaging business to provide customers with all types of light sources for LED lighting, indication and display, as well as infrared LED, optical sensors, etc. Yongyu is an innovative technology enterprise, and integrate in product research and development, production, sales. At present, the company's ChipLED products, which are widely used in home appliances, communication, industrial, medical, automotive, wearable devices and other application fields, have a great international influence in the supply volume. By now, the company has won many honors such as state-level high-tech enterprises, specialized and small and medium-sized enterprises in Guangdong Province, member of Shenzhen Semiconductor Industry Development Promotion Association, member of East China Electronic Council, etc.

Yongyu Optoelectronics have two individual production bases, with a total of 80,000 square meters of workshop along with 20,000 square meters of super clean, anti-static dust-free workshop and with a monthly production capacity of over 4000KK, which are located in Shantou city in Guangdong Province and Chongzuo City in Guangxi Province, have lots of skilled professionals who have been working for ages in LED packaging industry and have a core management team with extensive experiences. In order to meet the global market requirements, the production facilities from best-known brands and sophisticated testing instruments for quality control management are used. All products meet RoHS, REACH and other laws and regulations. The company has passed a number of international system certifications, such as ISO9001, ISO14001, IATF16949, ISO45001, QC080000, and so on.

In order to continuously meet the market demand, Yongyu Optoelectronics continues to strengthen the upstream and downstream strategic partnership, constantly bring in the elite talents of the optoelectronics industry, continuously improve the level of customer service, actively enhance product competitiveness, constantly pursue innovation, lean production, strengthen and expand the main business of LED packaging. Adhering to the "with excellent products to win the recognition and respect of the market" business philosophy, expected that Yongyu brand will become one of the internationally influential technological innovation enterprises in the optoelectronic industry and will make greater contributions to the world of light.


Corporate Vision

To create a world-class brand of intelligent manufacturing in the world of light.


Corporate Mission

To intelligently produce products, to pursue excellence and to exceed customer's expectation


发展历程 Development History

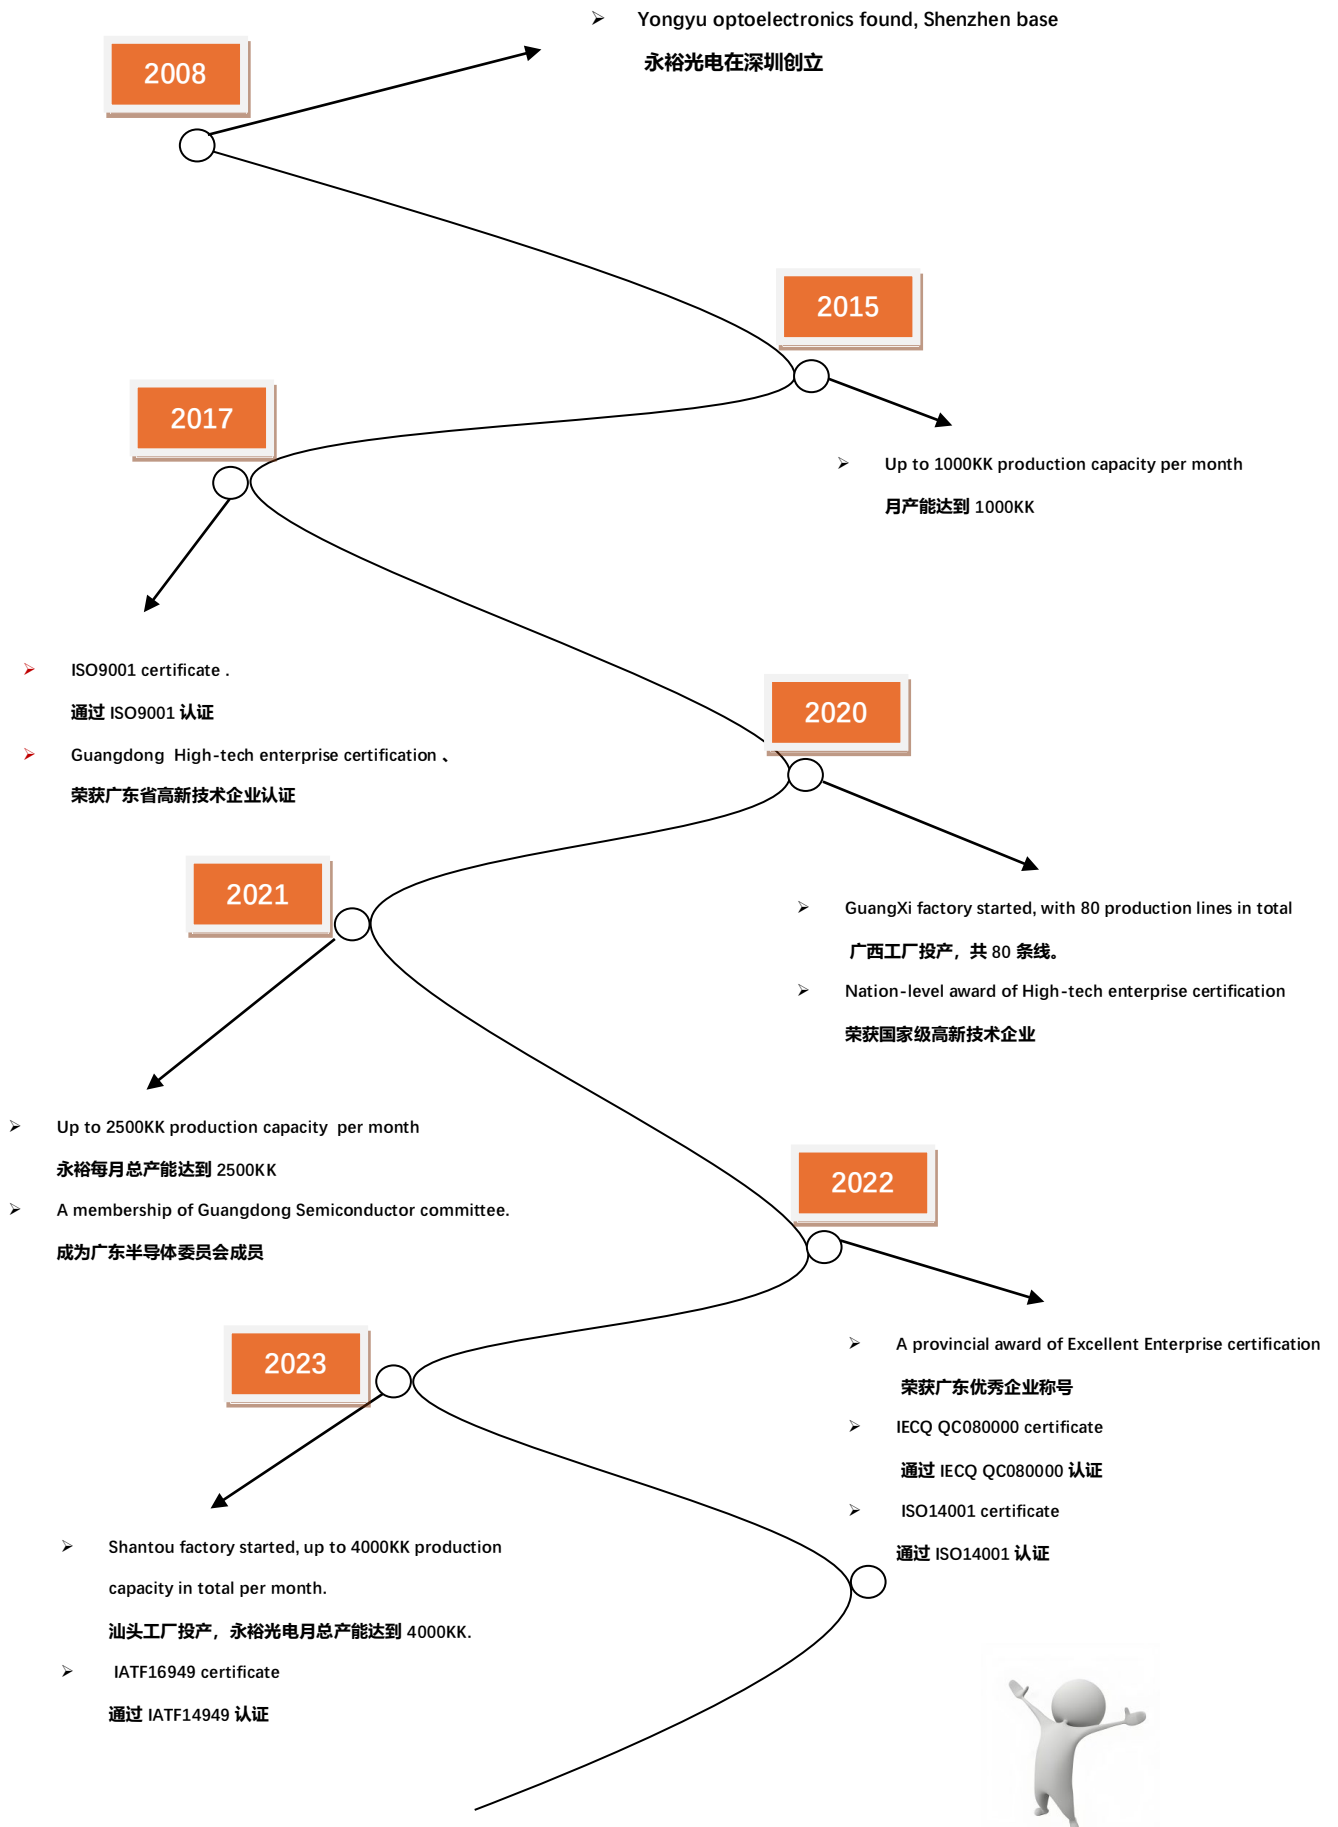

Productivity 生产规模

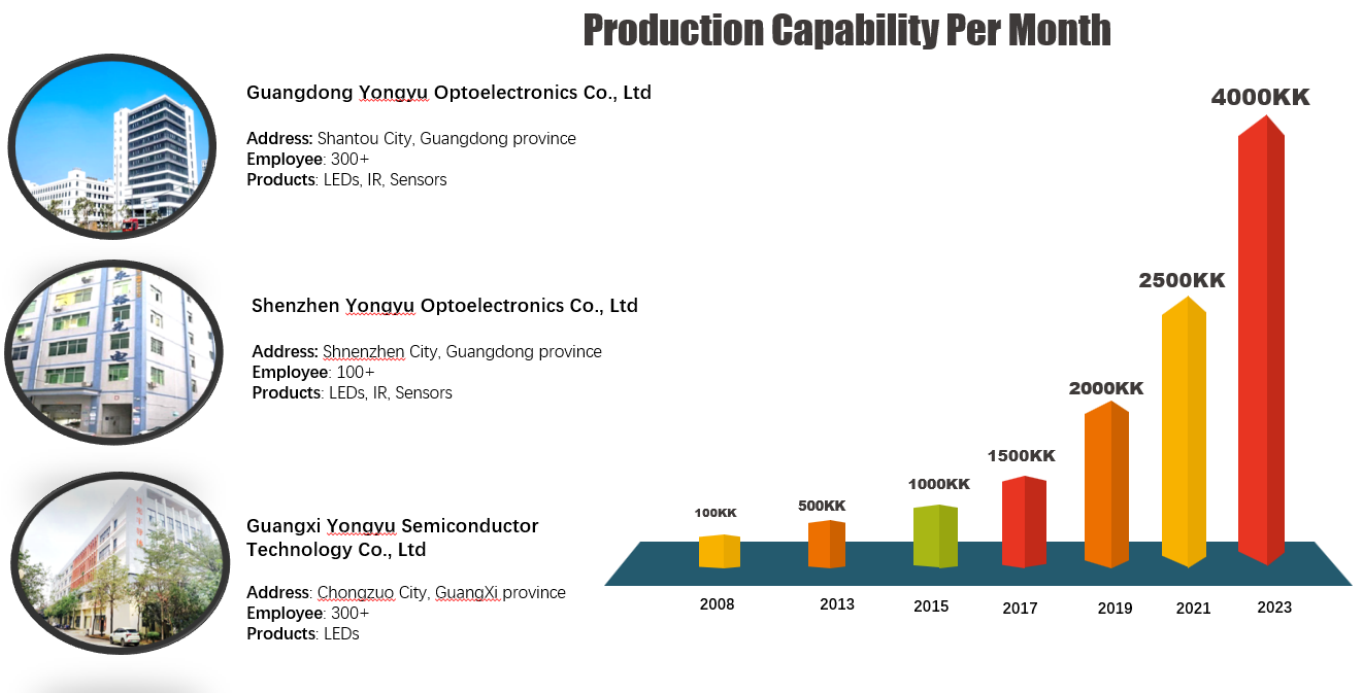

Organization 组织架构

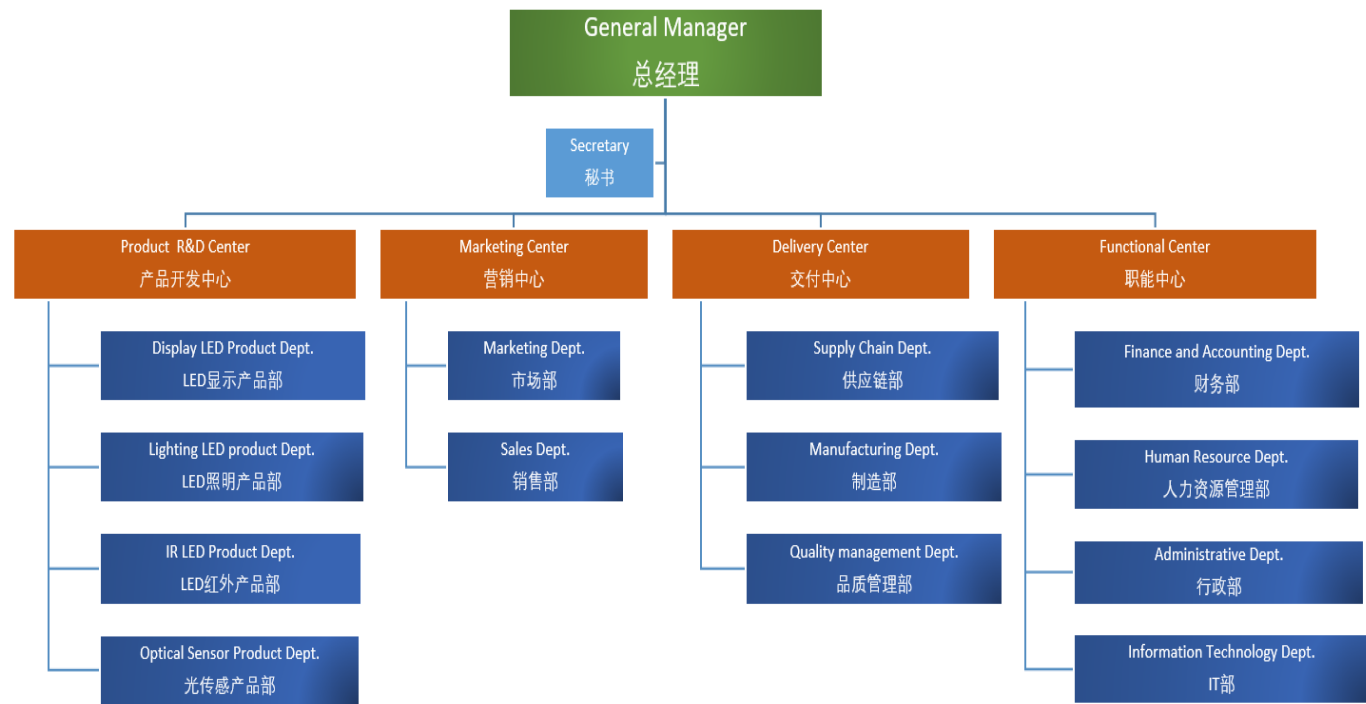

R&D and Manufacturing Strength 研发与制造实力

IATF 16949

IECQ QC080000

IEC27001

ISO9001

ISO14001

ISO17025

ISO45001

National high-tech enterprise certification

ISO 9001:2015

IATF 16949:2016

ISO 14001:2016

IECQ QC080000



Die attach



Wire bonding




Sorting and taping



AOI



Devices and equipments for quality control




Product applications 产品应用场景

Home Appliances 家电



Communication 通讯

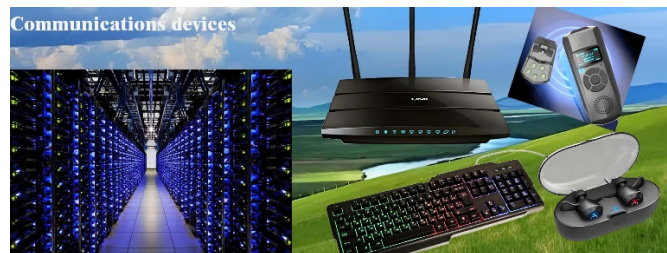

Lighting 室内、户外照明




Industrial 工业控制



Automotive 车用



Smart control 智能控制

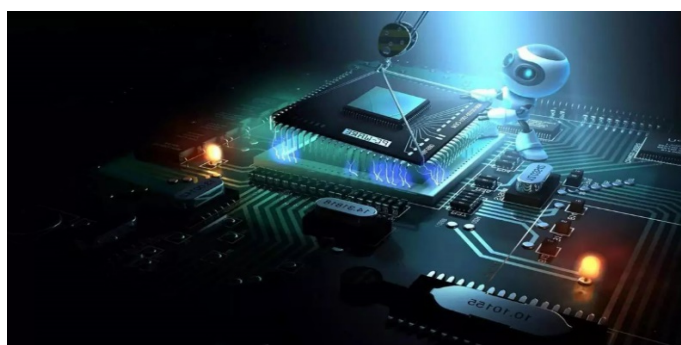

Overview of all products 产品概览

Chip LED family / Chip LED 家族产品

Color	1.0*0.5*25 1.0*0.5*0.4	1.7*0.6*1.1	1.6*0.8*0.25 1.6*0.8*0.4 1.6*0.8*0.7 1.6*0.8*0.9	2.0*1.25*0.7	2.0*1.8*0.8	1.0*1.0*0.25	1.6*1.5*0.8	1.6*1.6*0.7	3.2*1.0*1.5	3.2*1.2*0.8	3.2*1.6*0.7	3.2*2.7*0.8
Sender / Receiver												
White												
Multi-Color												
Dual Color												
Single color												
	0402	0602	0603	0805	0807(IC)	1010	1615	1616	1204	1205	1206	1209

Top LED family / TOP LED 家族产品

Color	1.0*1.0	1.6*0.8*0.6	1.8*0.8*0.9	2.2*1.4*1.3	2.8*3.5*0.7	3.0*1.4*1.1	3.0*2.0*1.3	3.5*2.8*1.9	5.0*5.0*1.6	4.0*1.4*0.6	7.0*2.0*0.7
Sender / Receiver											
White											
Multi-Color											
Single color											
	1010	1608	1808	2214	2835	3014	3020	3528	5050	4014	7020

Chip LED

Feature

- > High yield rate and excellent reliability 生产良率高，可靠性表现优秀
- > High ESD withstand 抗静电能力强
- > RoHS and REACH compliant 符合 RoHS 与 REACH 法规
- > Various package types available 各种封装形式都有

0201 series 0201 系列

Package dimension 封装尺寸：0.65(L)*0.35(W)*0.3(T) Unit: mm

Single color 单色光



white 白光



Single color 单色光

Part No.	Emission Color	Test Current	Forward Voltage (V)		Dominant Wavelength (nm)		Luminous Intensity(mcd)		Viewing angle
		mA	Min.	Max.	Min.	Max.	Min.	Max.	2θ1/2
YY-TRTABL	Blue	5	2.6	3.1	460	475	34	100	120
YY-TRTAPG	Green	5	2.5	3.1	522	534	210	620	120
YY-TRTAYL	Yellow	20	1.9	2.4	586	594	70	175	120
YY-TRTASO	Orange	20	1.8	2.2	600	608	100	210	120
YY-TRTAHR	Red	5	1.8	2.4	620	635	24	70	120
YY-TRTAHR		20	1.9	2.4	618	627	100	250	120

White 白光

Part No.	Test Current	Forward Voltage (V)		Chromaticity		CCT(K)		Luminous Intensity(mcd)		Viewing angle
	mA	Min.	Max.	Typical		Min.	Max.	Min.	Max.	2θ1/2
YY-TRCACDG	5	2.6	3.4			10000	30000	210	430	120

0402 series

Package dimension 封装尺寸： 1.1(L)*0.5(W)*0.4(T) Unit: mm

Single color 单色光



White 白光



Single color 单色光

Part No.	Emission Color	Test Current	Forward Voltage (V)		Dominant Wavelength (nm)		Luminous Intensity(mcd)		Viewing angle	Remark
		mA	Min.	Max.	Min.	Max.	Min.	Max.	2θ1/2	
YY-AHTABL	Blue	5	2.6	3.1	460	475	40	100	120	
YY-AHTABLJ03ASBF		20	2.9	3.3	460	475	120	300	120	
YY-AHTAPG	Green	5	2.4	3.1	516	534	210	520	120	
YY-AHTAYG	Yellow-green	5	1.7	2.3	568	574	7	24	120	
		20	1.8	2.4	568	574	28	70	120	
YY-AHTAYL	Yellow	5	1.7	2.3	586	594	20	48	120	
		20	1.8	2.4	584	594	70	175	120	
YY-AHTAYU	Yellow	20	1.8	2.4	588	594	250	620	120	Reverse polarity
YY-AHTASO	Orange	20	1.8	2.3	598	608	85	210	120	
YY-AHTAHR	Red	5	1.7	2.3	615	630	20	70	120	
		10	1.8	2.4	615	630	70	145	120	
		20	1.8	2.4	615	630	145	250	120	
YY-AHTASR	Red	20	1.8	2.4	627	636	58	145	120	
YY-AHTAYR		20	1.9	2.3	618	627	250	620	120	Reverse polarity

White 白光

Part No.	Test Current	Forward Voltage (V)		Chromaticity		CCT(K)		Luminous Intensity(mcd)		Viewing angle
	mA	Min.	Max.	Typical		Min.	Max.	Min.	Max.	2θ1/2
YY-AHCAXO	5	2.6	3.1	0.417	0.376	2750	3800	175	360	120
YY-AHCAUP	5	2.6	3.1	0.352	0.360	4143	5844	210	430	120
YY-AHCAQA	5	2.6	3.1	0.310	0.305	5500	9500	210	430	120
YY-AHCAPZ	5	2.6	3.1	0.245	0.230	15200		210	430	120

0602 series

Package dimension 封装尺寸： 1.6(L)*0.75(W)*1.1(T) Unit: mm



Single color

Part No.	Emission Color	Test Current	Forward Voltage (V)		Dominant Wavelength (nm)		Luminous Intensity(mcd)		Viewing angle	Remark
		mA	Min.	Max.	Min.	Max.	Min.	Max.	2θ1/2	
YY-BKTABL	Blue	5	2.6	3.1	460	475	34	100	120	
		20	2.9	3.4	460	472	100	300	120	
YY-BKTAPG	Green	5	2.5	3.1	516	534	175	430	120	
		20	2.9	3.3	513	525	430	1100	120	
YY-BKTAYG	Yellow-green	20	1.8	2.4	568	574	20	70	120	
YY-BKTAYL	Yellow	20	1.8	2.4	584	594	70	175	120	
YY-BKTAS	Orange	20	1.8	2.4	598	608	70	175	120	
YY-BKTAYO	Orange	20	1.8	2.4	600	608	300	620	120	revese polarity
YY-BKTAHR	Red	10	1.8	2.4	615	630	48	120	120	
		20	1.8	2.4	615	630	85	210	120	
		20	1.8	2.4	615	630	145	300	120	high brightness version
YY-BKTAUV	UV	5	2.8	3.6	390	410	3	5	120	
		20	2.8	3.6	390	410	10	24	120	

White 白光

Part No.	Test Current	Forward Voltage (V)		Chromaticity (CCx,CCy)		CCT(K)		Luminous Intensity(mcd)		Viewing angle
	mA	Min.	Max.	Typical		Min.	Max.	Min.	Max.	2θ1/2
YY-BKCAGF	5	2.6	3	0.5000	0.4300	2120	2472	85	210	120
YY-BKCALT	5	2.6	3.1	0.3000	0.2850	5884	12321	58	100	120
YY-BKCAGVJ01ASAI	5	2.6	3.1	0.2480	0.2200	10413	100000	145	360	120


0603 series

Package dimension 封装尺寸: 1.1(L)*0.5(W)*0.4\0.6\0.8(T) Unit: mm

Single color 单色光



White 白光



Single color 单色光

Part No.	Emission Color	Test Current	Forward Voltage (V)		Dominant Wavelength (nm)		Luminous Intensity(mcd)		Viewing angle	Remark
		mA	Min.	Max.	Min.	Max.	Min.	Max.	2θ1/2	
YY-CITABL	Blue	5	2.6	3.1	460	472	34	100	120	
		20	2.8	3.3	457	469	120	250	120	
YY-CITAPG	Green	5	2.5	3.1	519	534	175	360	120	
		5	2.3	2.7	522	534	300	620	120	
		5	2.4	3	522	534	210	430	120	with zener
		20	2.6	3.4	516	531	520	1900	120	
YY-CITAYG	Yellow-green	10	1.8	2.4	568	576	10	20	120	
		20	1.9	2.3	568	576	20	70	120	
YY-CITAYL	Yellow	5	1.8	2.3	586	594	20	34	120	
		20	1.8	2.4	586	594	85	130	120	
		20	1.8	2.4	588	596	100	210	120	with zener
YY-CITASO	Orange	20	1.8	2.4	598	608	70	210	120	
		20	1.8	2.4	598	608	145	300	120	
		20	1.8	2.4	598	608	210	520	120	Reverse polarity
YY-CITAHR	Red	5	1.8	2.4	615	630	24	70	120	
		10	1.8	2.4	615	630	58	145	120	
		20	1.8	2.4	615	630	120	300	120	
		20	1.9	2.3	618	627	145	300	120	with zener
YY-CITAYR	Red	5	1.8	2.3	618	627	145	210	120	Reverse polarity
		20	1.8	2.4	615	627	300	750	120	Reverse polarity

White 白光

Part No.	Test Current	Forward Voltage (V)		Chromaticity		CCT(K)		Luminous Intensity(mcd)		Viewing angle
	mA	Min.	Max.	Typical		Min.	Max.	Min.	Max.	2θ1/2
YY-CICAZC	5	2.6	3.1	0.517	0.415	1924	2121	175	430	120
YY-CICAZE	5	2.6	3.1	0.470	0.424	2390	2818	210	430	120
YY-CICAZG	5	2.6	3.1	0.310	0.320	5449	8554	210	520	120
YY-CICAZAJ	5	2.6	3.1	0.283	0.290	6750	13500	250	520	120
YY-CICAAYX	5	2.6	3.1	0.249	0.234	>14000		210	430	120

0805 Series

Package dimension 封装尺寸： 2.0(L)*1.25(W)*0.85(T) Unit: mm



Singe color 单色光

Part No.	Emission Color	Test Current	Forward Voltage (V)		Dominant Wavelength (nm)		Luminous Intensity(mcd)		Viewing angle	Remark
		mA	Min.	Max.	Min.	Max.	Min.	Max.	2θ1/2	
YY-DJTABL	Blue	5	2.6	3.1	457	472	34	145	120	Zener version available also
		20	2.8	3.3	460	472	175	300	120	Zener version available also
YY-DJTAPG	Green	5	2.4	3.1	516	534	175	430	120	
		5	2.4	3.1	519	534	250	620	120	higher brightness version
YY-DJTAYG	Yellow-green	20	1.8	2.4	568	576	28	85	120	
YY-DJTAYL	Yellow	20	1.8	2.4	584	596	70	210	120	
		20	1.8	2.4	584	596	210	519	120	with zener
YY-DJTASO	Orange	20	1.8	2.4	598	608	120	210	120	
		20	1.8	2.4	598	608	430	900	120	reverse polarity
YY-DJTAHR	Red	5	1.8	2.4	615	630	28	70	120	
		10	1.8	2.4	615	630	48	120	120	
		20	1.8	2.4	615	630	120	300	120	

White 白光

Part No.	Test Current	Forward Voltage (V)		Chromaticity		CCT(K)		Luminous Intensity(mcd)		Viewing angle
	mA	Min.	Max.	Typical		Min.	Max.	Min.	Max.	2θ1/2
YY-DJCABV	5	2.6	3.1	0.4492	0.4276	2750	3100	175	430	120
YY-DJCACL	5	2.6	3.1	0.5080	0.4471	2182	2417	145	360	120
YY-DJCAUI	5	2.6	3.1	0.4181	0.4061	3079	3645	210	520	120
YY-DJCAMG	5	2.6	3.1	0.3438	0.4141	4927	5577	210	520	120
YY-DJCASK	5	2.6	3.1	0.2944	0.3026	6682	11532	175	430	120
YY-DJCAPC	5	2.6	3.1	0.2609	0.2605	10249	44015	175	430	120

1204 series

Package dimension 封装尺寸： 3.2(L)*1.0(W)*1.5(T) Unit: mm

Single color 单色光



White 白光



Single color 单色光

Part No.	Emission Color	Test Current	Forward Voltage (V)		Dominant Wavelength (nm)		Luminous Intensity(mcd)		Viewing angle	Remark
		mA	Min.	Max.	Min.	Max.	Min.	Max.	2θ1/2	
YY-ELTABL	Blue	5	2.6	3.1	460	475	34	120	120	
		20	2.8	3.3	460	475	120	300	120	
YY-ELTAPG	Green	5	2.6	3.1	519	534	145	360	120	
		5	2.4	3.0	519	534	250	520	120	higher brightness version
YY-ELTAPG	Yellow-green	20	1.8	2.4	568	576	20	70	120	
YY-EPTAYL	Yellow	20	1.8	2.4	584	596	85	250	120	
YY-ELTASO	Orange	20	1.8	2.4	598	608	70	175	120	
		20	1.8	2.4	600	608	360	750	120	reverse polarity
YY-ELTAHR	Red	5	1.7	2.3	615	630	20	70	120	
		20	1.8	2.4	615	630	100	250	120	
		20	1.8	2.4	615	630	430	1100	120	reverse polarity

White 白光


Part No.	Test Current	Forward Voltage (V)		Chromaticity		CCT(K)		Luminous Intensity(mcd)		Viewing angle	Remark
	mA	Min.	Max.	Typical		Min.	Max.	Min.	Max.	2θ1/2	
YY-ELCANU	5	2.6	3.1	0.4400	0.4000	typ.2800K		100	210	120	
YY-ELCAAVD	5	2.6	3.1	0.2900	0.3064	6000	12000	175	360	120	
YY-ELCABBW	5	2.6	3.1	0.2920	0.2980	7400	10000	100	210	120	
YY-ELCAYK	5	2.6	3.1	0.2750	0.2800	8000	15000	120	360	120	
YY-ELCABUG	5	2.6	3.1	0.1950	0.0270	Typ.100000K		175	250	120	ice-blue

1206 series

Package dimension 封装尺寸: 3.2(L)*1.6(W)*0.9(T) Unit: mm

Single color 单色光

White 白光



Single color 单色光

Part No.	Emission Color	Test Current	Forward Voltage (V)		Dominant Wavelength (nm)		Luminous Intensity(mcd)		Viewing angle	Remark
		mA	Min.	Max.	Min.	Max.	Min.	Max.	2θ1/2	
YY-KMTABL	Blue	5	2.6	3.1	460	475	40	175	120	
		5	2.5	3.1	460	475	40	175	120	with zener
		20	2.8	3.4	460	472	120	300	120	
YY-KMTAPG	Green	5	2.4	3.1	516	531	175	620	120	
		5	2.4	3.1	516	531	300	620	120	with zener
YY-KMTAYG	Yellow-green	20	1.8	2.4	568	576	24	70	120	
YY-KMTAYL	Yellow	20	1.8	2.4	586	596	70	210	120	
		20	1.8	2.4	586	596	145	300	120	
		20	1.8	2.4	586	596	250	620	120	revere polarity
YY-KMTASO	Orange	20	1.8	2.4	598	608	70	175	120	
		20	1.8	2.4	598	608	300	750	120	revere polarity
YY-KMTAHR	Red	10	1.8	2.4	615	630	58	175	120	
		10	1.8	2.4	615	630	120	300	120	revere polarity
		20	1.8	2.4	615	630	145	300	120	
		20	1.8	2.4	615	630	175	430	120	revere polarity

White 白光

Part No.	Test Current	Forward Voltage (V)		Chromaticity		CCT(K)		Luminous Intensity(mcd)		Viewing angle	Remark
	mA	Min.	Max.	Typical		Min.	Max.	Min.	Max.	2θ1/2	
YY-KMCAIT	5	2.6	3.1	0.4900	0.4400	2350	3000	175	430	120	
YY-KMCAUS	5	2.6	3.1	0.3780	0.3980	3900	4779	250	520	120	
YY-KMCAAWX	5	2.6	3.1	0.3100	0.3000	5700	10500	250	520	120	
YY-KMCAASN	5	2.6	3.1	0.2460	0.2270	17000	100000	250	520	120	

1808 series

Package dimension 封装尺寸： 1.8(L)*0.8(W)*0.9/0.55(T) Unit: mm

Single color 单色光

White 白光



Single color 单色光

Part No.	Emission Color	Test Current	Forward Voltage (V)		Dominant Wavelength (nm)		Luminous Intensity(mcd)		Viewing angle
		mA	Min.	Max.	Min.	Max.	Min.	Max.	2θ1/2
YY-1808-3V-C06	Blue	5	2.5	2.9	462	466	99	132	120
YY-1808 C08 -BL45	Ice-blue	2	2.6	2.8	CCT>100000K	CCx=0.0900 CCy=0.3680	132	198	120
YY-1808 C12 1808	Green	5	2.4	2.8	525	530	660	750	120
YY-1808 C06	Orange	5	1.8	2.1	600	605	50	60	120
YY-1808 C08	Red	5	1.8	2.1	620	625	66	80	120

White 白光

Part No.	Test Current	Forward Voltage (V)		Chromaticity		CCT(K)		Luminous Intensity(mcd)		Viewing angle
	mA	Min.	Max.	Typical		Min.	Max.	Min.	Max.	2θ1/2
YY-1808 3V C09	5	2.6	3.1			3000	3300	570	660	120
YY-V1808AC10	20	2.8	3.4	0.3500	0.2400	5700	6400	570	660	120
YY1808AC08	2	2.6	2.8	0.2980	0.3230	7247	9738	264	330	120
YY-V1808AC15-1A	5	2.7	3.1	0.2700	0.2750	10080	15484	330	990	120

Dual color

0805 dual color series 0805 双色光系列

Package dimension 封装尺寸： 2.0(L)*1.25(W)*0.85(T) Unit: mm



Part No.	Emission Color	Test Current	Forward Voltage (V)		Dominant Wavelength (nm)		Luminous Intensity(mcd)		Viewing angle
		mA	Min.	Max.	Min.	Max.	Min.	Max.	2θ1/2
YY-DJT1HRBL	Blue	5	2.6	3	460	475	40	120	120
	Red	20	1.9	2.3	615	630	85	250	120
YY-DJT1PGYL	Green	5	2.6	3.2	515	530	175	360	120
	Yellow	20	1.8	2.4	586	596	58	145	120
YY-DJT1HRSO	Red	20	1.9	2.4	615	630	120	250	120
	Orange	20	1.9	2.4	600	610	85	210	120
YY-DJT1HRPG	Red	20	1.8	2.4	615	630	100	250	120
	Green	5	2.6	3.4	520	535	175	430	120

1204 dual color series 1204 双色光系列

Package dimension 封装尺寸： 3.2(L)*1.0(W)*1.5(T) Unit: mm



Part No.	Emission Color	Test Current	Forward Voltage (V)		Dominant Wavelength (nm)		Luminous Intensity(mcd)		Viewing angle
		mA	Min.	Max.	Min.	Max.	Min.	Max.	2θ1/2
YY-ELT6BLHR	Blue	5	2.6	3.2	460	475	34	100	120
	Red	20	1.8	2.4	615	630	145	250	120
YY-ELT1PGBL	Blue	5	2.6	3.2	460	475	58	120	120
	Green	5	2.6	3.2	520	535	210	520	120
YY-ELT1BLSO	Blue	5	2.6	3.2	460	475	40	85	120
	Orange	20	1.8	2.4	600	610	85	210	120
YY-ELT1SOPG	Green	5	2.6	3.2	515	531	145	360	120
	Orange	20	1.8	2.4	600	610	85	210	120
YY-ELT1SRPG	Red	20	1.8	2.4	630	636	58	100	120
	Green	5	2.6	3.2	518	530	210	360	120
YY-ELT9HRYL	Red	20	1.8	2.4	615	630	145	250	120
	Yellow	20	1.8	2.4	586	596	85	210	120

1206 dual color series 1206 双色光系列

Package dimension 封装尺寸： 3.2(L)*1.6(W)*0.9(T) Unit: mm



Part No.	Emission Color	Test Current	Forward Voltage (V)		Dominant Wavelength (nm)		Luminous Intensity(mcd)		Viewing angle
		mA	Min.	Max.	Min.	Max.	Min.	Max.	2θ1/2
YY-KMT1HRBL	Red	5	2.6	3.4	463	475	34	100	120
	Blue	20	1.8	2.4	615	625	120	300	120
YY-KMT1HRPG	Red	20	1.8	2.4	620	625	145	300	120
	Green	5	2.6	3.2	525	534	175	430	120
YY-KMT1HRSO	Red	20	1.9	2.4	615	630	100	210	120
	Orange	20	1.9	2.4	600	610	70	210	120

1209 dual color series 1209 双色光系列


Package dimension 封装尺寸： 2.7(L)*3.2(W)*0.9(T) Unit: mm



Part No.	Emission Color	Test Current	Forward Voltage (V)		Dominant Wavelength (nm)		Luminous Intensity(mcd)		Viewing angle
		mA	Min.	Max.	Min.	Max.	Min.	Max.	2θ1/2
YY-LMT1HRBL	Blue	5	2.6	3.2	460	475	34	100	120
	Red	20	1.8	2.4	615	630	100	250	120
YY-LMT1PGBL	Blue	5	2.6	3.2	466	472	40	120	120
	Green	5	2.6	3.2	515	532	175	430	120
YY-LMT1SOBL	Orange	20	1.8	2.4	600	610	70	145	120
	Blue	20	2.8	3.4	460	470	70	145	120
YY-LMT1YLPG	Green	5	2.6	3.2	515	530	120	360	120
	Orange	10	1.8	2.4	586	594	70	175	120
YY-LMT1HRPG	Red	20	1.8	2.4	621	626	175	295	120
	Green	5	2.4	2.8	523	529	430	560	120
YY-LMT1HRYL	Red	20	1.8	2.4	615	625	145	250	120
	Yellow	20	1.8	2.4	586	594	85	175	120

1615 dual color series 1615 双色光系列

Package dimension 封装尺寸: 1.6(L)*1.5(W)*0.6(T) Unit: mm

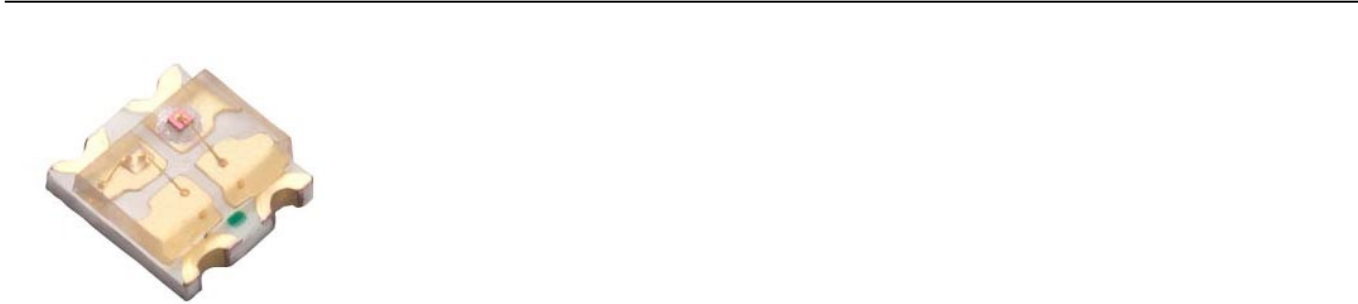

Part No.	Emission Color	Test Current	Forward Voltage (V)		Dominant Wavelength (nm)		Luminous Intensity(mcd)		Viewing angle	Remark
		mA	Min.	Max.	Min.	Max.	Min.	Max.	2θ1/2	
YY-GIT1YRPG	Red	20	1.9	2.3	620	625	430	602	120	
	Green	5	2.3	2.8	524	532	320	450	120	
YY-GIT1YLPG	Yellow	20	1.9	2.3	586	594	100	196	120	
	Green	5	2.7	3.1	524	530	250	350	120	
YY-GIT1YLBL	Yellow	20	1.9	2.3	590	594	85	210	120	
	Blue	5	2.7	3.1	466	474	34	100	120	
YY-GIT1SOPG	Orange	20	1.8	2.4	603	607	75	215	120	
	Green	5	2.7	3.1	523	532	170	475	120	
YY-GIT1SOBL	Orange	20	1.8	2.4	600	606	85	145	120	
	Blue	5	2.6	3.4	457	475	34	100	120	
YY-GIT1HRYL	Red	20	1.8	2.2	615	625	145	250	120	
	Yellow	20	1.8	2.2	586	594	85	210	120	
YY-GIT1HRSO	Red	20	1.9	2.4	620	625	120	250	120	
	Orange	20	1.9	2.4	600	608	85	210	120	

RGB series

0807 + IC

Package dimension 封装尺寸: 2.1(L)*1.7(W)*0.85(T) Unit: mm



Part No.	Emission color	Test Current (mA)	Vf (V)		Dominant Wavelength (nm)		Luminous Intensity(mcd)		Viewing Angle (°)	Remark
			Min.	Max.	Min.	Max.	Min.	Max.		
YY-0807BRGK26-07-FI	Red	5	1.8	2.4	615	630	28	70	120	with IC flashing lights
	Green	5	2.4	3.2	520	535	175	430	120	
	Blue	5	2.4	3.2	460	475	34	100	120	
YY-0807GRBJ26-02-BE	Red	20	1.8	2.4	615	630	145	360	120	with IC slow flashing lights
	Green	20	2.4	3.2	518	535	430	1100	120	
	Blue	20	2.4	3.2	457	475	85	210	120	
YY-0807RGBJ26-01-AG	Red	20	1.6	2.6	615	630	145	360	120	with IC quick flashing lights
	Green	20	2.6	3.6	515	535	430	1100	120	
	Blue	20	2.6	3.6	455	470	85	210	120	

1204 RGB

Package dimension 封装尺寸： 3.2(L)*1.0(W)*1.5(T) Unit: mm



Part No.	Emission color	Test Current (mA)	Vf (V)		Dominant Wavelength (nm)		Luminous Intensity(mcd)		Viewing Angle (°)	Remark
			Min.	Max.	Min.	Max.	Min.	Max.		
YY1204BRGJ06-07-FT	Red	5.5	1.7	2.1	615	630	34	145	120	with IC flashing lights
	Green	5.5	2.6	3.4	520	535	175	430	120	
	Blue	5.5	2.6	3.4	460	475	34	145	120	
YY-ELT4PGBLHR	Red	20	1.8	2.4	615	630	100	210	120	4-pin common anode
	Green	5	2.6	3.4	515	530	120	300	120	
	Blue	5	2.6	3.4	460	475	34	85	120	
YY-ELT8BLPGYR	Red	20	1.8	2.4	615	630	250	520	120	4-pin common cathode
	Green	5	2.4	3.2	520	535	175	430	120	
	Blue	5	2.4	3.2	460	475	34	100	120	

1206 RGB

Package dimension 封装尺寸： 3.2(L)*1.6(W)*0.9(T) Unit: mm



Part No.	Emission color	Test Current (mA)	Vf (V)		Dominant Wavelength (nm)		Luminous Intensity(mcd)		Viewing Angle (°)	Remark
			Min.	Max.	Min.	Max.	Min.	Max.		
YY-KMT4BLHRPG	Red	20	1.8	2.4	615	630	145	360	120	4-pin common anode
	Green	5	2.4	3.2	520	535	300	620	120	
	Blue	5	2.6	3.2	460	475	58	120	120	
YY-KMT8BLPGYR	Red	20	1.8	2.4	615	630	250	520	120	4-pin common cathode
	Green	5	2.4	3.2	520	535	210	360	120	
	Blue	5	2.6	3.2	460	475	40	120	120	

1615 RGB

Package dimension 封装尺寸: 1.6(L)*1.5(W)*0.6(T) Unit: mm



Part No.	Emission color	Test Current (mA)	Vf (V)		Dominant Wavelength (nm)		Luminous Intensity(mcd)		Viewing Angle (°)	Remark
			Min.	Max.	Min.	Max.	Min.	Max.		
YY-GIT8YRPGBL	Red	20	1.9	2.3	621	627	360	620	120	4-pin,common cathode
	Green	5	2.4	2.8	522	531	400	600	120	
	Blue	5	2.6	3	466	472	86	120	120	
YY-GIT1BLPGHR	Red	20	2.1	2.4	620	626	150	225	120	1-pin,common anode
	Green	5	2.6	3	525	531	240	475	120	
	Blue	5	2.7	3.1	466	472	45	90	120	
YY-GIT2BLHRPG	Red	20	1.8	2.4	615	630	145	250	120	2-pin,common anode
	Green	5	2.5	3.4	515	530	175	360	120	
	Blue	5	2.5	3.4	460	475	34	86	120	
YY-GIT3HRPGBL	Red	20	1.8	2.4	615	630	145	250	120	3-pin,common anode
	Green	5	2.4	3.4	515	530	175	360	120	
	Blue	5	2.4	3.4	460	475	34	85	120	
YY-GIT4HRPGBL	Red	20	1.9	2.3	620	625	130	280	120	4-pin,common anode
	Green	5	2.3	2.7	516	533	190	285	120	
	Blue	5	2.7	3.1	466	474	50	98	120	

1616 RGB

Package dimension 封装尺寸: 1.6(L)*1.6(W)*0.4/0.6(T) Unit: mm



Part No.	Emission color	Test Current (mA)	Vf (V)		Dominant Wavelength (nm)		Luminous Intensity(mcd)		Viewing Angle (°)	Remark
			Min.	Max.	Min.	Max.	Min.	Max.		
YY-NHTAPGYRBL	Red	20	1.8	2.4	620	625	250	620	120	
	Green	5	2.4	3.2	520	535	250	620	120	
	Blue	5	2.4	3.2	460	475	58	175	120	
YY-NITBBLHRPG	Red	5	1.8	2.4	619	625	42	60	120	
	Green	5	2.6	3.4	522	534	175	430	120	
	Blue	5	2.6	3.4	463	475	40	120	120	

1209 RGB

Package dimension 封装尺寸: 3.2(L)*2.7(W)*0.9(T) Unit: mm



Part No.	Emission color	Test Current (mA)	Vf (V)		Dominant Wavelength (nm)		Luminous Intensity(mcd)		Viewing Angle (°)	Remark
			Min.	Max.	Min.	Max.	Min.	Max.		
YY-LMT4HRPGBL	Red	20	1.8	2.4	620	625	145	250	120	4-pin common anode
	Green	5	2.4	3.4	520	534	175	520	120	
	Blue	5	2.4	3.4	460	475	34	100	120	
YY-LMT8PGBLYR	Red	20	1.8	2.4	615	630	210	520	120	4-pin common cathode
	Green	5	2.6	3.6	515	530	175	360	120	
	Blue	5	2.6	3.6	460	475	40	145	120	

IR Family products / 红外家族产品

0603 series


Package dimension 封装尺寸: 1.6(L)*0.8(W)*0.6(T) Unit: mm

0603 IR emitter / 0603 红外发射管



Part No.	Package Dimension	Test Current	Forward Voltage (V)		Peak Emission Wavelength (λp)	Radiant Intensity(mW/sr)		Viewing angle
		mA	Min.	Max.	Typ.	Min.	Max.	2θ1/2
YY-CITAIR	1.6*0.8*0.6 (mm)	20	1.2	1.5	850	1.25	4.25	120
		20	1.1	1.4	940	0.8	2	120

0603 receiver / 0603 接收管



Items	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Photo current	I _c (on)	0.76	--	3.14	mA	V _{ce} = 20V(E _e =1mW/cm ²)
Saturation Voltage	V _{ce} (Sat)	--	0.1	0.2	V	
Collector-Emitter Breakdown Voltage	B _{VCEO}	60	--	--	V	
Emitter-Collector Breakdown Voltage	B _{VECO}	5	--	--	V	I _{ECO} =100uA
Collector-Base Breakdown Voltage	B _{VCBO}	100	--	--	V	I _{CBO} =100uA
DC Current Amplification Factor	HFE	200	--	3000		V _{CE} =5V I _b =3uA
Peak sensing Wavelength	λp	--	940	--	nm	

0805 series


Package dimension 封装尺寸： 2.0(L)*1.25(W)*0.85(T) Unit: mm

0805 IR emitter / 0805 红外发射管



Part No.	Package Dimension	Test Current	Forward Voltage (V)		Peak Emission Wavelength (λ_p)	Radiant Intensity(mW/sr)		Viewing angle
		mA	Min.	Max.	Typ.	Min.	Max.	2 θ 1/2
YY-DJTAIR	2.0*1.25*0.85 (mm)	20	1.2	1.5	850	0.8	3	120
		20	1.2	1.6	940	0.9	2.5	120

0805 receiver / 0805 接收管



Items	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Dark Current	I_{CEO}	--	--	0.1	uA	$V_{ce} = 20V(E_e=1mW/cm^2)$
Saturation Voltage	$V_{ce}(Sat)$	--	0.1	0.2	V	$I_B=100uA$ $I_C=2mA$
Collector-Emitter Breakdown Voltage	$B_{V_{CEO}}$	60	--	--	V	$I_{CEO}=100uA$
Emitter-Collector Breakdown Voltage	$B_{V_{ECO}}$	5	--	--	V	$I_{ECO}=100uA$
Collector-Base Breakdown Voltage	$B_{V_{CBO}}$	100	--	--	V	$I_{CBO}=100uA$
DC Current Amplification Factor	HFE	200	--	3000		$V_{CE}=5V$ $I_b=3uA$
Peak sensing Wavelength	λ_p	--	940	--	nm	

1204 series

Package dimension 封装尺寸： 3.2(L)*1.0(W)*01.5(T) Unit: mm

1204 IR emitter / 1204 红外发射管



Part No.	Package Dimension	Test Current	Forward Voltage (V)		Peak Emission Wavelength (λp)	Radiant Intensity(mW/sr)		Viewing angle
		mA	Min.	Max.	Typ.	Min.	Max.	2θ1/2
YY-ELTAIR	3.2*1.0*1.5 (mm)	20	1.1	1.5	850	0.8	2.5	120
		20	1.2	1.5	940	0.8	2.5	120

1204 receiver / 1204 接收管



Items	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Photocurrent	I _c (on)	0.9	--	5.4	mA	V _{ce} = 20V(E _e =1mW/cm ²)
Saturation Voltage	V _{ce} (Sat)	--	0.1	0.2	V	I _b =100uA IC=2mA
Collector-Emitter Breakdown Voltage	B _V CEO	30	--	100	V	I _{CEO} =100uA,IB=0
Emitter-Collector Breakdown Voltage	B _V ECO	5	--	--	V	I _{ECO} =100uA
Collector-Base Breakdown Voltage	B _V CB0	100	--	--	V	I _{CB0} =100uA
DC Current Amplification Factor	HFE	200	--			V _{CE} =5V Ic=2mA
Peak sensing Wavelength	λp	--	940	--	nm	

1206 series

Package dimension 封装尺寸: 3.2(L)*1.0(W)*01.5(T) Unit: mm

1206 IR emitter / 1206 红外发射管



Part No.	Package Dimension	Test Current	Forward Voltage (V)		Peak Emission Wavelength (λ_p)	Radiant Intensity(mW/sr)		Viewing angle
		mA	Min.	Max.	Typ.	Min.	Max.	2 θ 1/2
YY-KMTAIR	3.2*1.6*0.9 (mm)	20	1.0	1.3	850	0.8	2.5	120
		20	1.2	1.5	940	0.9	2.5	120

1206 receiver / 1206 接收管



Items	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Dark Current	I_{CEO}	--	--	0.1	μA	$V_{ce} = 20V(E_e=1mW/cm^2)$
Saturation Voltage	$V_{ce}(Sat)$	--	0.1	0.2	V	$I_b=100\mu A$ $I_C=2mA$
Collector-Emitter Breakdown Voltage	$B_{V_{CEO}}$	60	--	--	V	$I_{CEO}=100\mu A$
Emitter-Collector Breakdown Voltage	$B_{V_{ECO}}$	5	--	--	V	$I_{ECO}=100\mu A$
Collector-Base Breakdown Voltage	$B_{V_{CBO}}$	100	--	--	V	$I_{CBO}=100\mu A$
DC Current Amplification Factor	HFE	200	--	3000		$V_{CE}=5V$ $I_b=3\mu A$
Peak sensing Wavelength	λ_p	700		1900	μA	
Photocurrent	$I_c(on)$	700		1900	μA	$I_f=2\mu A/20mA$

公司总部 | Headquarter

广东永裕光电有限公司

地址：广东汕头市金平区鮑莲街道学林路 31 号永裕工业园

电话：(+86) 0754-88662688

传真：(+86) 0754-88662688

邮箱：sales@yongyuled.com

Guangdong Yongyu Optoelectronics Co., Ltd

Address: Yongyu Industrial Park, No.31 Xuelin Road, Tuolian Street, JinPing District, Shantou, 515061, Guangdong, China

Tel: (+86) 0754-88662688

Fax: (+86) 0754-88662688

E-mail: sales@yongyuled.com

子公司 | Subsidiary

深圳市永裕光电有限公司

地址：深圳市龙岗区坂田街道上雪科技园东区 9 号 D 栋

电话：(+86) 0755-89202226

传真：(+86) 0755-89202227

邮箱：sales01@yongyuled.com

Shenzhen Yongyu Optoelectronics Co., Ltd

Address: Building D, No. 9, East District, Shangxue Science and Technology Park, Bantian Street, Longgang District, Shenzhen City, Guangdong Province, China

Tel: (+86) 0755-89202226

Fax: (+86) 0755-89202227

E-mail: sales01@yongyuled.com

广西永裕半导体科技有限公司

地址：广西壮族自治区崇左市扶绥县新宁镇空港大道 46 号

Guangxi Yongyu Semiconductor Technology Co., Ltd

Address: #46 Konggang road, Fusui Town, Chongzuo city, Guangdong province, China

永裕光电



www.yongyuled.com