

产品参数表 (Product Datasheet)

产品型号 (Product Type) : 202-AMT040-0404 (AMT Tweeter气动式高音)

技术规格 (SPECIFICATIONS)

Nominal impedance Zn 4.0 Ω $\pm 15\%$
Dc resistance Re 3.2 Ω $\pm 10\%$
Resonance Frequency fs 3.5 KHz
Sensitivity spl 90.0 dB ± 3 dB
Frequency Range 3.5KHz ~ 40kHz

功率 (Power handling)



100 h RMS noise test (IEC) 15.0 W
Longterm Max System Power (IEC) 30.0 W
EC 268-5 noise signal is used for the powertest
Lowest Recommend Crossover ≥ 4.5 KHz

产品材料 (Product Material)

Front Panel Material ALumium Black
Diaphragm Material KAPTON
Conductive Line Material Alumium foil
Magnet Material Neodymium

Net Weight 105.0 g/pc

产品图片 (Product Photoes)

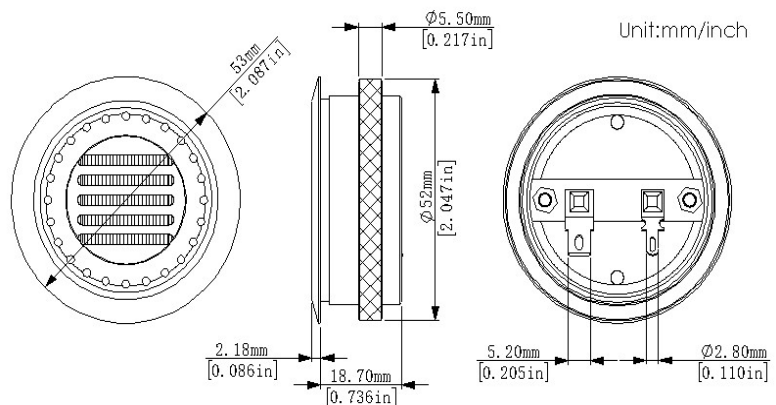

产品曲线 (Product curve)

