Experiment No. 6: Arduino to 16×2 LCD Display Using Proteus

1. AIM


To write and execute an Embedded C program to interface a 16×2 LCD display with Arduino UNO and simulate it using Proteus.

2. SOFTWARE REQUIRED

1. Proteus 8 Professional
2. Arduino IDE

3. PROCEDURE

1. Open Proteus and create a new schematic.
2. Place Arduino UNO and a 16×2 LCD display.
3. Connect the LCD data pins and control pins to the appropriate Arduino pins.
4. Write the LCD interfacing program in Arduino IDE.
5. Compile the program and export the HEX file.
6. Load the HEX file into the Arduino UNO component in Proteus.
7. Run the simulation and observe the message displayed on the LCD.

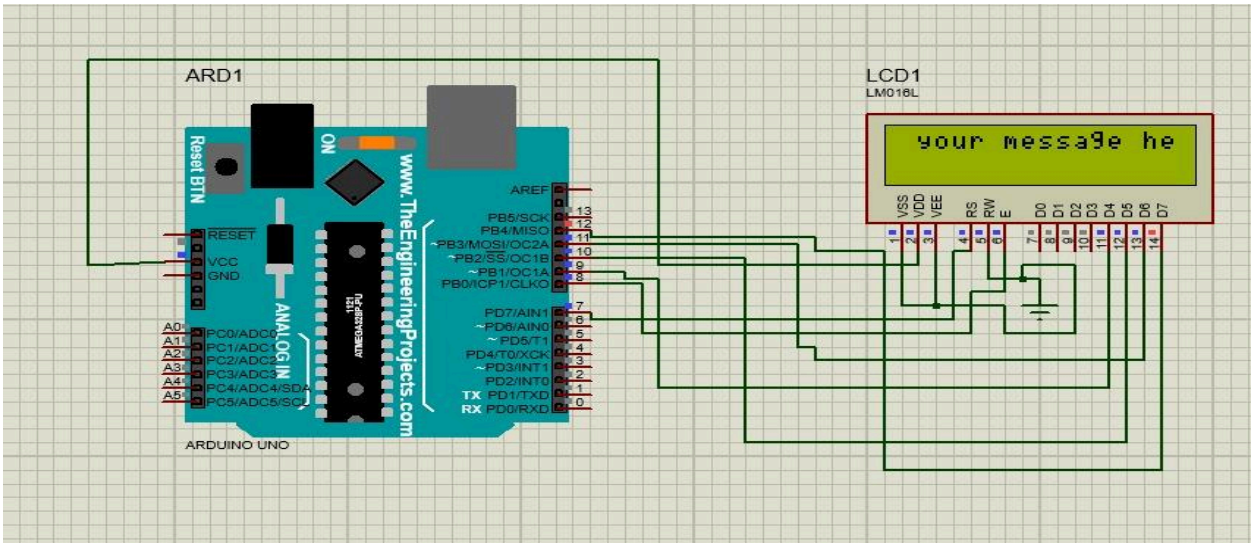

4. RESULT

The 16×2 LCD was successfully interfaced with Arduino UNO and simulated in Proteus. The programmed message was displayed on the LCD.