


Binding process flow

- Release version: Australia
-
- Updated March 12, 2026
-
- ⌚ 1 minute to read

Learn the process of binding Configuration Items (CIs) to alerts. This includes handling event arrival, binding alerts using available fields when no node is present, and searching the CMDB for matching hosts. It also explains linking alerts to CIs based on host and CI type detection.

CI binding to alerts: Flow diagram

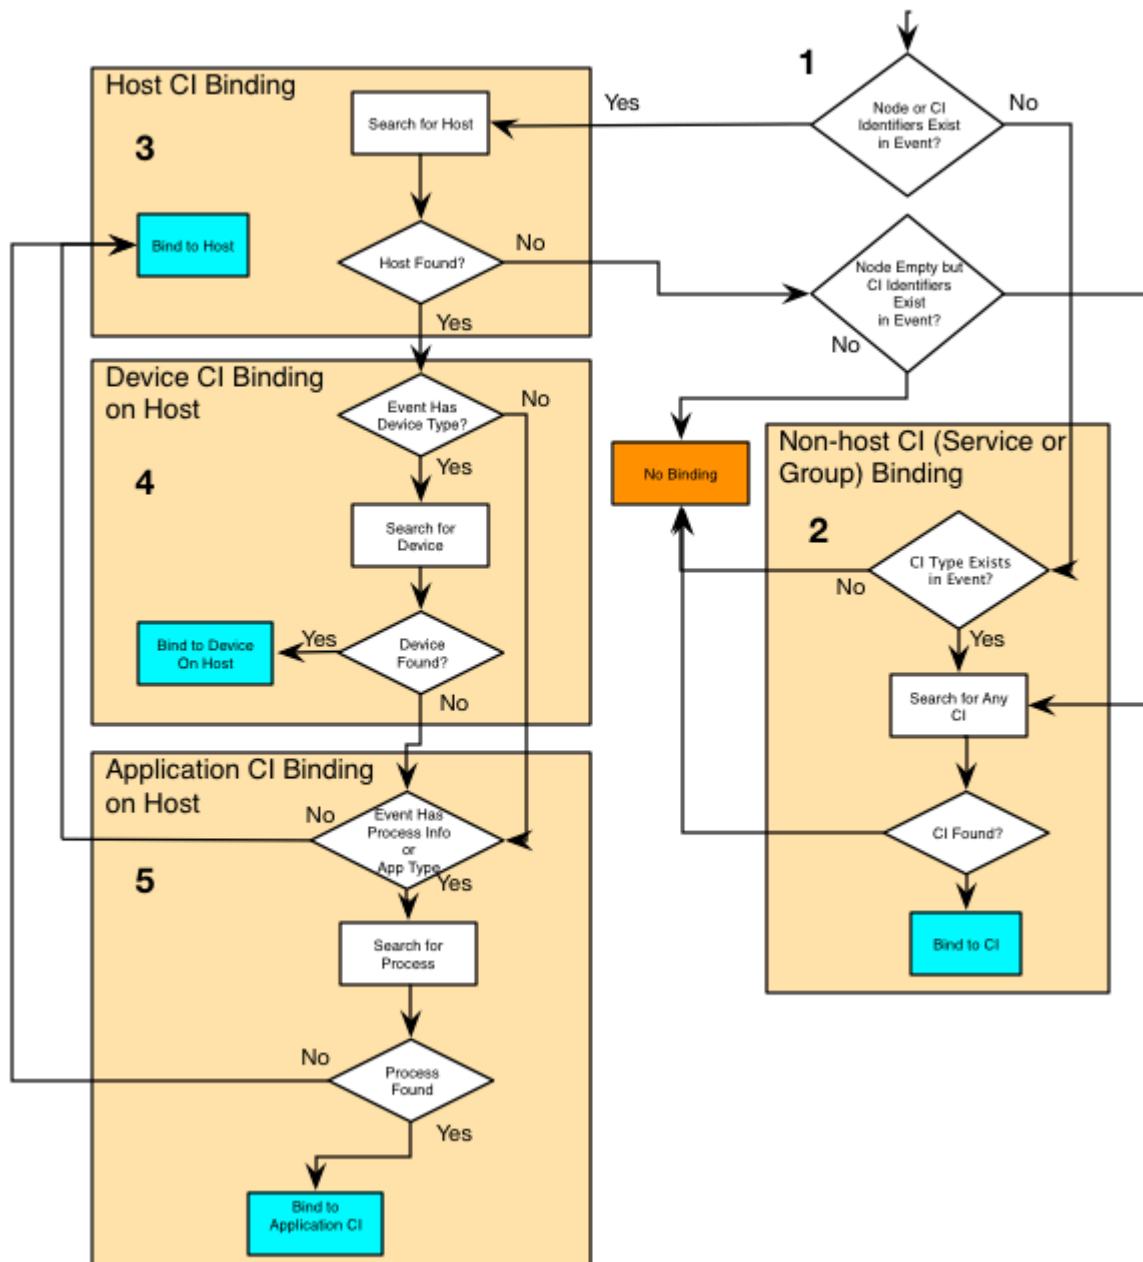

Process of linking CIs to alerts

1. Event Arrival: When an event is received, Event Management checks for node or CI identifiers.
2. Is Node Value Present?
 - Yes: If a node value is provided, Event Management searches the CMDB for a matching host.
 - No: If no node is found, the system attempts to bind the alert using other available details, such as:
 - Alert Type
 - Additional Information
 - CI Identifier
3. Host and CI Type Detection:

- Both Found: If both a host and CI type are identified, the alert is linked to the corresponding device CI.
- Host Only Found: If only a host is identified, the system links the alert to an application CI.

Additional Considerations

- Event Processing Notes: The event can include the binding process flow in its Processing Notes field, providing insights into the binding actions.
- Binding to Retired CIs: By default, events do not bind to CIs with a Retired status. To enable binding to these CIs, set the `evt_mgmt.ignore_retired_cis_in_binding` property to `false`.
- Specifying CI Statuses for Binding: You can configure the `evt_mgmt.install_status_list_to_ignore_in_binding` property by specifying CI status numbers to control which CIs are considered for binding. For example:

Table 1. CI Statuses

Status Number	Status
1	Installed
2	OnOrder
3	InMaintenance
4	PendingInstall
5	PendingRepair
6	InStock
7	Retired
8	Stolen
100	Absent

Note:

To specify multiple statuses, separate each status number with a comma.