Failures Handling for Multi-path TCP in Data Centers

Yongsen Ma

January 9, 2013

Multi-path TCP in Data Centers

Trade-off between reliability and utilization

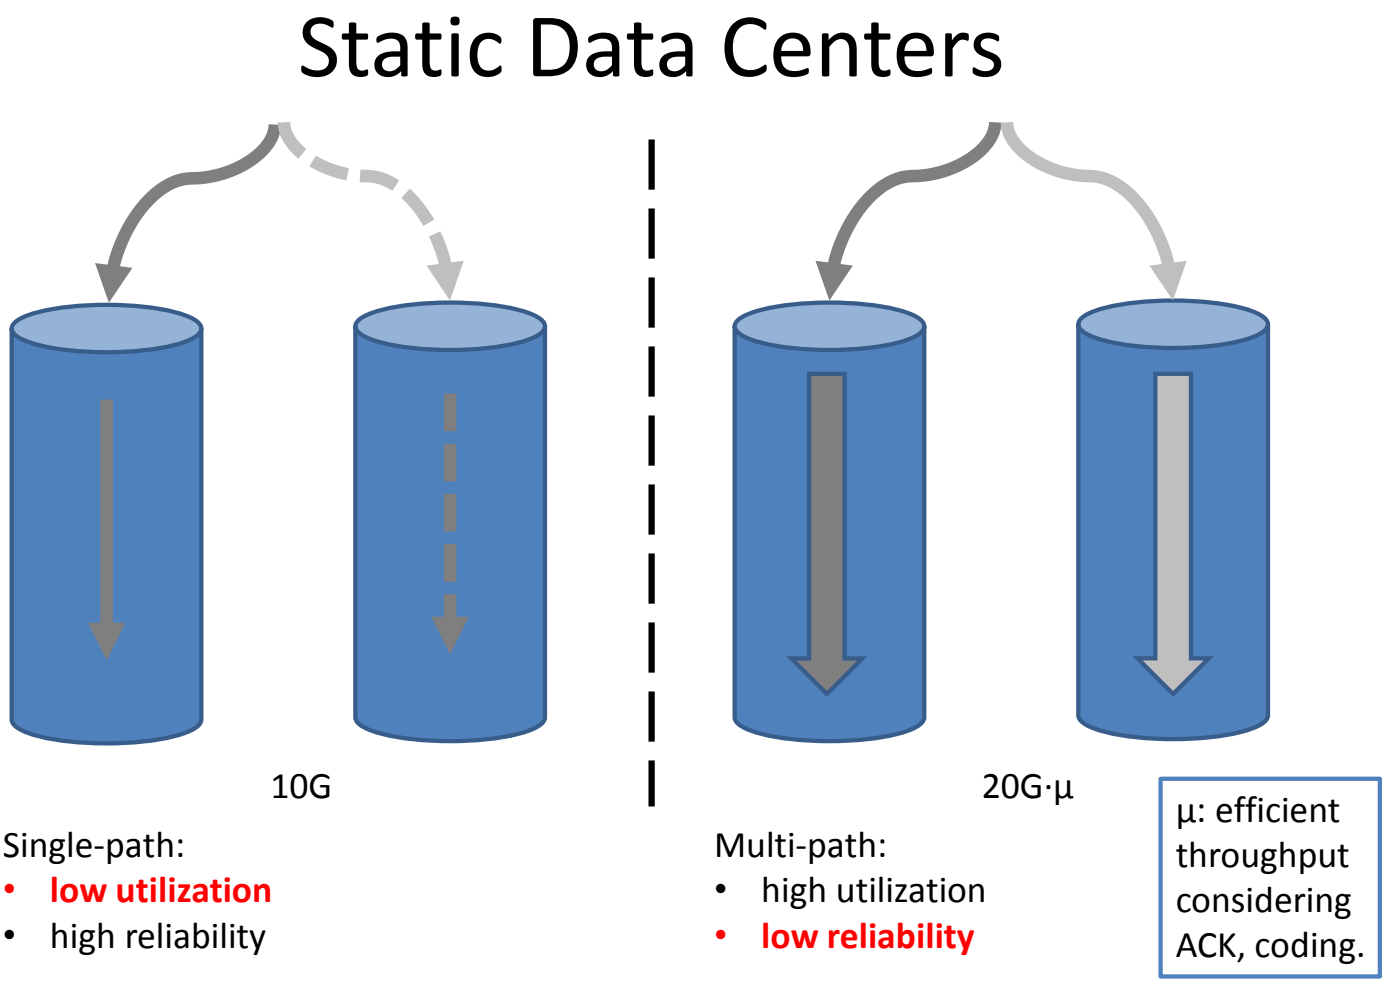

Multi-path TCP in Data Centers

Low reliability due to drops and retransmission

Static Data Centers

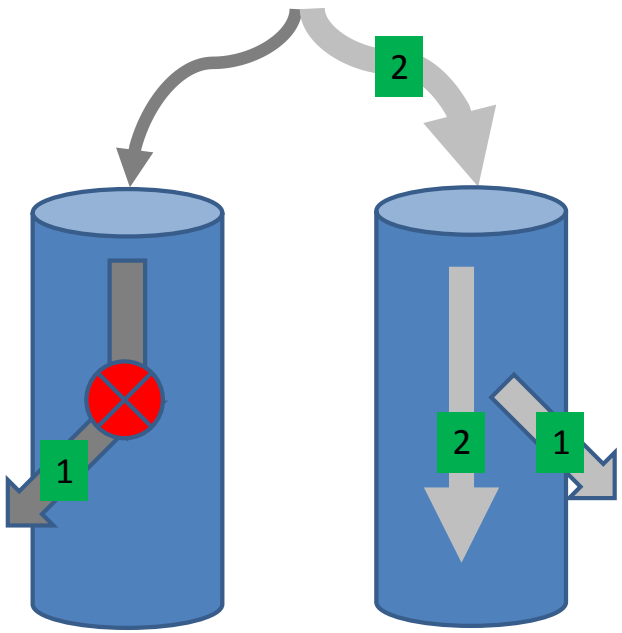

10G·μ-T(2,2)

Multi-path failures:

1. Drop two subflows;
2. Retransmit initial flow.

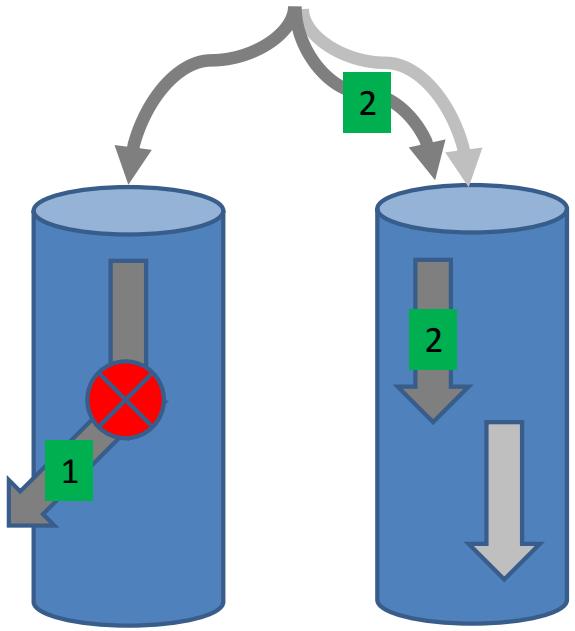

10G·μ-T(2,2)

Multi-path failures:

1. Drop two subflows;
2. Retransmit two subflows;
3. Decoding after transmit.

T(d,r): extra overhead of drops and retransmit.

Multi-path TCP in Data Centers

High reliability through flows backup

Static Data Centers

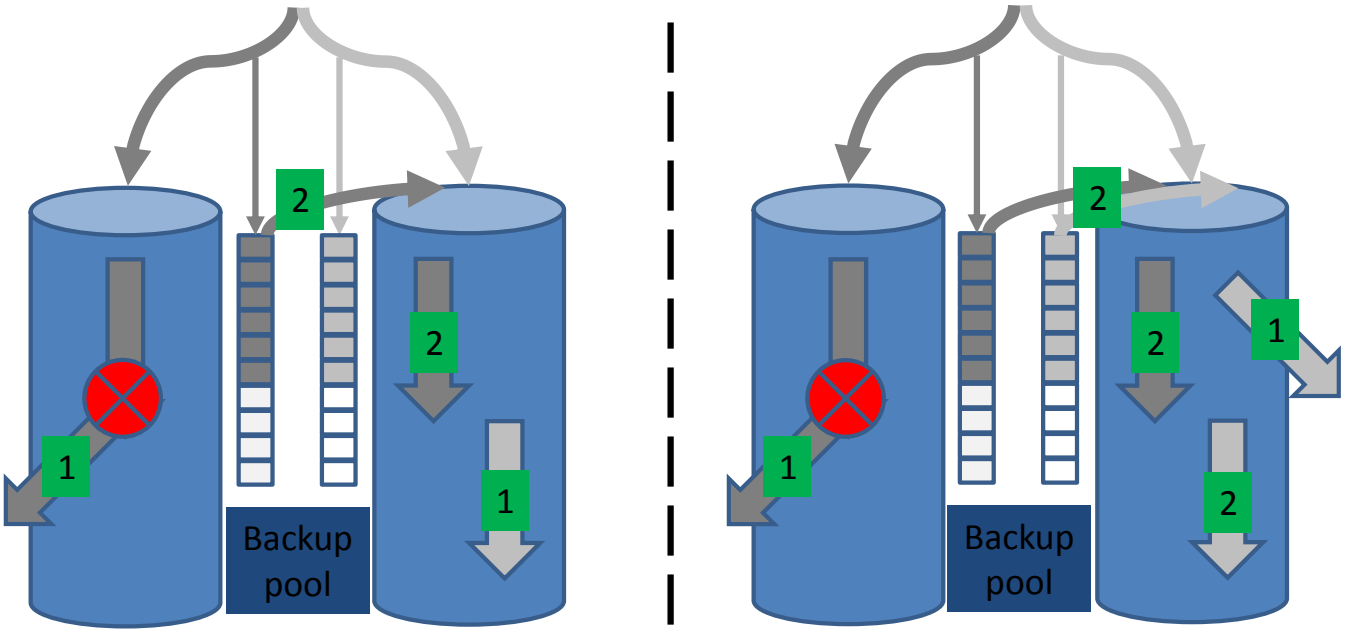

10G·μ-T(1,1)

Multi-path failures by backup:

1. Drop one subflow;
2. Retransmit one subflow;
3. Decoding after transmit.

10G·μ-T(2,2)

Multi-path failures by backup:

1. Drop two subflows;
2. Retransmit two subflows;
3. Decoding **as transmitting**.

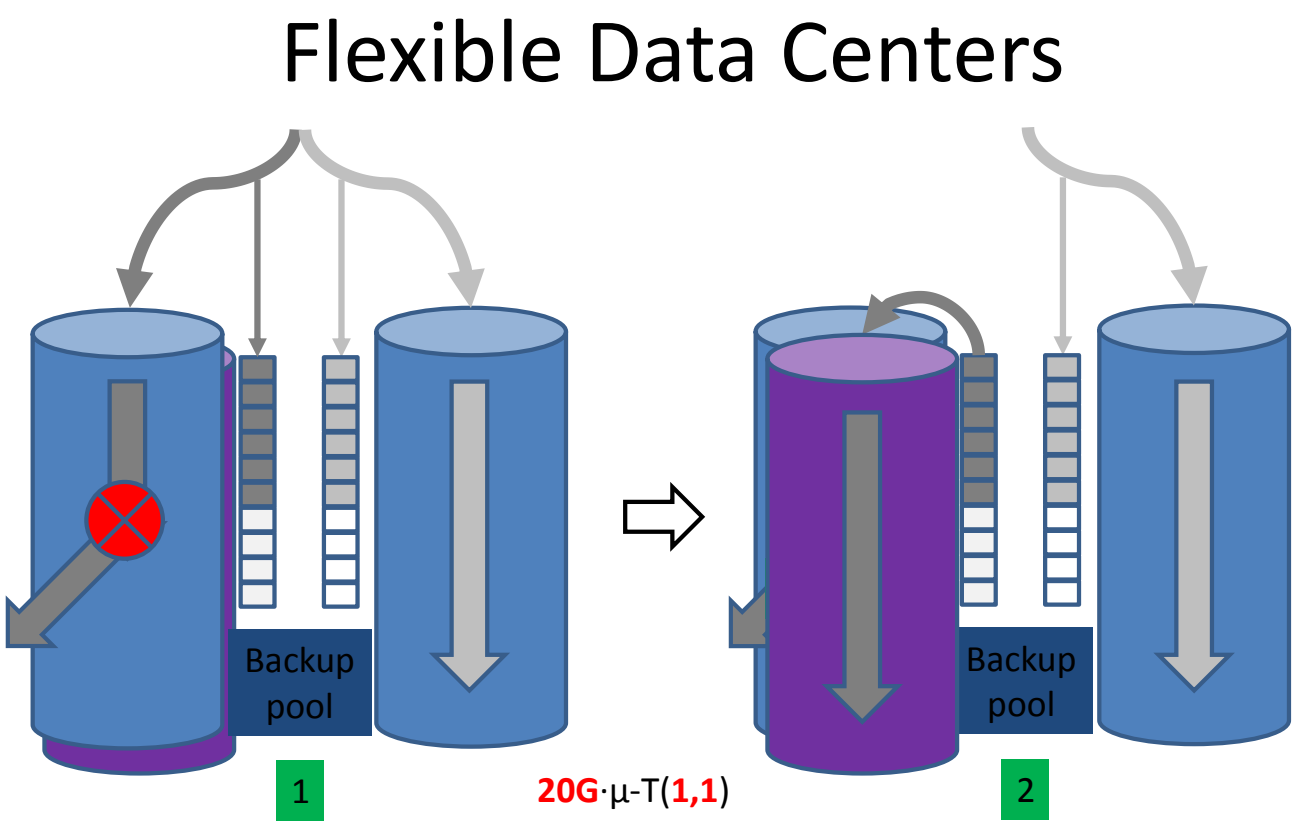

Multi-path failures by backup:

1. Drop **one subflow**;
2. Retransmit **one subflow**;
3. Decoding **as transmitting**.

MtIti-path TCP in Data Centers

Failures handling technics

- Flow backup: T(2,2) $\rightarrow$ T(1,1)
- Flexible switching: 10G $\rightarrow$ 20G
- Block ACK: congestion control