

FlexRay Bus Communication: A Comprehensive Overview and Analysis

Neaz Mahmud
Electronics Engineering
Hochschule Hamm-Lippstadt
Lippstadt, Germany
Neaz.mahmud@stud.hshl.de

2nd Thanas Dushku
Electronics Engineering
Hochschule Hamm-Lippstadt
Lippstadt, Germany
thanas.dushku@stud.hshl.de

3rd Younsuk Choi
Electronics Engineering
Hochschule Hamm-Lippstadt
Lippstadt, Germany
younsuk.choi@stud.hshl.de

Abstract—

This seminar paper explores the FlexRay communication protocol and its applications in modern automotive systems. The paper provides a comprehensive analysis of FlexRay, encompassing its principles, architecture, network topology, and Time Division Multiple Access (TDMA) communication cycle. The practical implementation of Adaptive Cruise Control (ACC) exemplifies how FlexRay meets the communication requirements in automotive applications. The evaluation of FlexRay's advantages, including high bandwidth and deterministic communication, is balanced with an examination of its limitations and challenges. This paper underscores the significance of FlexRay in enhancing communication efficiency and integration within automotive systems. By enabling seamless data exchange and integration of electronic components, FlexRay plays a vital role in supporting the growing complexity of modern vehicles. The insights gained from this paper contribute to the ongoing research and development of communication protocols, facilitating advancements in automotive systems and paving the way for future innovations.

I. INTRODUCTION

Modern automotive systems implement complex distributed system technology, and communication protocols play a vital role in networking of different electronic components and systems within the automotive system in order to enable the exchange of data. Nowadays, communication protocols have grown more important. Due to the growing complexity of modern cars, the number of ECUs embedded in modern cars can be nearly 100 and it is expected to increase more in the future. [2] Also, it is predicted that the global market for Automotive ECU would grow at a 4.7 Compound Annual Growth Rate. Moreover, due to the ever increasing volume of data required to be transmitted, communication protocol for higher bandwidth is required. One of the recent communication protocols designed to meet today's and future requirements is FlexRay and various aspects of FlexRay, including an application example of this protocol, is discussed in this paper.

FlexRay is a relatively recent proposal for the automotive industry that the FlexRay Consortium, which includes automotive and equipment manufacturers, proposed from 2000 until 2010. After an exhaustive technical analysis of existing networks like CAN, TTCAN, TCN, TTP/C, and Byteflight, it was determined that they did not fully satisfy all of the technical and application requirements in the automotive industry. To be more specific, the objective was to create a communication system that can manage applications at four different levels—high throughput for digital transmission, implementing "X-by-Wire" type solutions, providing redundancy, and handling all future electronic functions in motor vehicles. FlexRay allows for both synchronous and asynchronous transmission, numerous synchronous part sending slots for a single node, and node behaviour on single, dual, or mixed channels. To recapitulate, the features required for a FlexRay system were to meet communication, topology, security, and application needs and fast error detection and signalling, predictable data transmission, and high throughput are necessary for communication. FlexRay must be able to manage redundant communication for security purposes, prevent collisions for bus access, and keep communication going for as long as possible. [2]

This new application must have complete control over all security and network availability choices made, as well as system communication. Different operating modes, including a specific degraded mode, must be offered by FlexRay. Communication with high pass bands, deterministic communication with high pass bands, and redundant, deterministic communication with high pass bands are three groups of applications that are not addressed by CAN or other existing protocols. These requirements allow us to anticipate the deployment of new network hierarchies in embedded FlexRay applications. [2]

II. HOW FLEXRAY WORKS

A. Architecture

A FlexRay communication system is also known as a FlexRay cluster, a cluster is a collection of electronic control units (ECUs) or nodes connected by a single FlexRay bus. The nodes of a FlexRay cluster communicate with one another

via the FlexRay protocol, which enables them to plan their activities and share information.

The nodes of a FlexRay cluster contain components such as engine control units, transmission control units, brake control units, and other equipment. Each node in the vehicle is in charge of a certain duty, and by exchanging information, they may cooperate to carry out a variety of activities.

FlexRay employs a time-triggered and event-triggered communication strategy to make sure that communication between nodes in a cluster is dependable and effective. This enables the transmission of information between nodes at specified intervals and in reaction to particular occurrences, such as when a sensor detects an obstruction in the route of a moving vehicle.

FlexRay clusters give different parts of a vehicle a method to interact and cooperate to carry out challenging tasks. FlexRay contributes to the safe, effective, and dependable operation of contemporary vehicles by providing fast, predictable, and fault-tolerant communication between nodes. [5]

B. Network Topology

FlexRay allows communications that are implemented using topology of different categories in order to give flexibility in vehicle design as FlexRay communication is not constrained to any particular physical architecture. Passive and active stars, numerous stars with the potential for sub-buses, single channel, dual channels, bus, bus with stubs, and combinations of all of them. Point-to-point connections are just as practical as active star topologies, passive star topologies, and line topologies.




Fig. 1. Passive bus, dual channel [2]

In Fig. 1, a passive dual channel configuration is presented, where the nodes are connected in different ways, either to both channels or to only one, depending on the use case of the node.

FlexRay offers a redundant configuration for the communication channel to reduce the possibility of failure. A data rate of up to 10 Mbit/s may be used for each of the two communication channels. However, it is also possible to use this redundant channel to boost the data rate to 20 Mbit/s. Each communication using FlexRay has the option to select either higher transmission rate or fault tolerance.

There are many other hybrid topologies that might exist; Fig.2 illustrates one form of hybrid topology. In this illustration, a few nodes (nodes A, B, C, and D) are linked to an active star via point-to-point connections. A bus topology is used to connect nodes E, F, and G to one another. Nodes E, F, and G may communicate with one another thanks to the bus' connection to an active star.

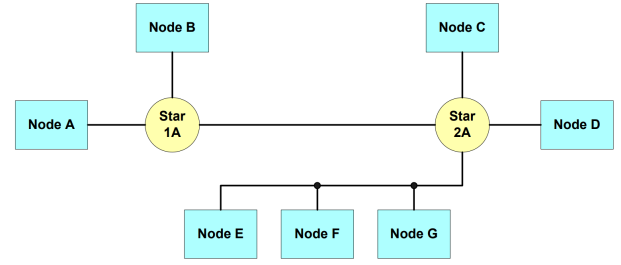


Fig. 2. Active star with passive bus, hybrid topology [2]

C. Frame format

A frame in FlexRay is a unit of data that is sent from one FlexRay bus node to another. Frames, which can include a range of various forms of data, such as sensor readings, control commands, or status updates, are used to transmit information from one node to another.

In order to make sure that communication between nodes is dependable and predictable, each frame in a FlexRay communication cycle is given a specified time slot in which it is broadcast and received. Based on their priority and the scheduling needs of the various system components, the frames are broadcast in a precise order.

FlexRay divides each frame into a hierarchy of static and dynamic pieces that are sent out at various points during the communication cycle. While messages with a more flexible transmission schedule are transmitted using the dynamic segment, messages with a fixed transmission schedule are transmitted using the static segment.

Additionally, FlexRay frames are made to be very flexible, supporting a variety of data types, transmission rates, and priority levels. FlexRay may be employed in a wide range of applications because to its versatility, including industrial automation, safety-critical automotive systems, and more.

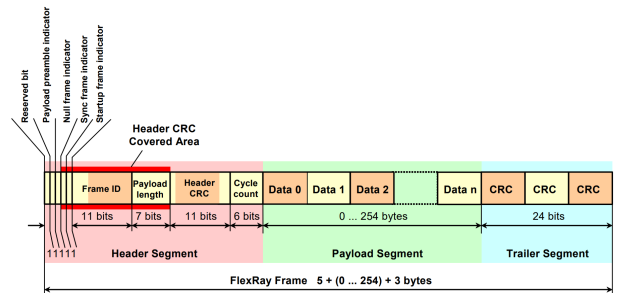


Fig. 3. Frame format [2]

The FlexRay header segment consists of 5 bytes. These bytes contain the reserved bit, the payload preamble indicator, the null frame indicator, the sync frame indicator, the startup frame indicator, the frame ID, the payload length, the header Cyclic Redundancy Code (CRC), and the cycle count. [2]

D. Timing and Synchronization

Every node in a distributed communication system has an own clock. Even though all internal time bases are initially synchronized, over a short period of time the internal time bases of the individual nodes drift due to temperature variations, voltage variations, and manufacture tolerances of the timing source (an oscillator).

The core principle of a time-triggered system is that each node in the cluster approximates the same global view of time, which serves as the foundation for the timing of each node's communications. "Approximately the same" in this context refers to the notion that any two nodes' views of the global time must be within a given tolerance range. The accuracy is the largest value of this difference. By carefully analyzing the time of sync frames provided by other nodes, the FlexRay protocol utilizes a distributed clock synchronization technique in which each node independently synchronizes itself to the cluster. The method is fault-tolerant. [2]

E. Communication Cycle and Time Division Multiple Access(TDMA)

As briefly discussed earlier, one of the key characteristics of Flexray which differentiate itself from other protocols is that it exhibits hybrid nature in terms of media access scheme by handling both time-triggered data and event-triggered data. To be more specific, Flexray employs Time Division Multiple Access (TDMA) technique to manage data transmission from multiple nodes(i.e. ECUs). TDMA includes two distinct segments within a communication cycle. The static segment handles the time-triggered data whereas the dynamic segment is dedicated for the event-triggered data. This feature of TDMA guarantees that only one node writes data to the Flexray bus at a time, and therefore, it guarantees the deterministic nature of Flexray as well as data collision avoidance on the bus. Flexray communication cycle consists of 4 different parts as shown in figure 4. The static segment

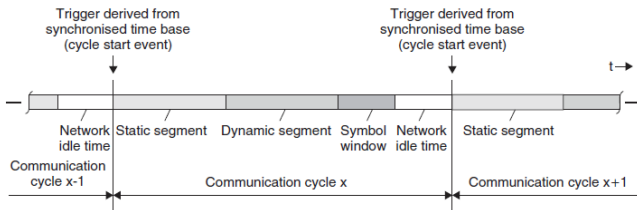


Fig. 4. Flexray Communication Cycle [2]

serves high-performance deterministic communication. This segment is subdivided into slots with the pre-defined same time duration. In every communication cycle, the number of slots is fixed and each slot has a distinct slot number. Only one node can be allocated to a slot while a node can have a maximum of 16 slots. The initialization of a slot is governed by Global Time of the network as all the other nodes are

synchronized to it. Also, the maximum bandwidth of a slot is known.

The dynamic segment serves for less-critical and event-triggered slower message communication and it is similar to the arbitration scheme in CAN. This segment is subdivided into minislot and each minislot is usually for one macrotick. Each node may own exclusively one or more minislots per cycle. Also, to prioritize data transmission in the dynamic segment, minislots are pre-assigned to each data frame while each frame in this segment may have different lengths.

The symbol window and the network idle time are part of a communication cycle. The symbol window supports maintenance and identification of special cycles such as cold start cycle and the network idle time stays idle, while providing room to make any adjustment in network synchronization. [2]

III. EXAMPLE APPLICATION (ADAPTIVE CRUISE CONTROL)

A. Adaptive Cruise Control

Adaptive Cruise Control (ACC) is an important component of modern Advanced Driver Assistance Systems (ADAS) in vehicles. It is designed to maintain a safe distance between the vehicle and the vehicle in front by automatically adjusting the speed of the vehicle. To enable this functionality, ACC relies on accurate and timely communication between different components of the system. In this section, we will discuss in detail how FlexRay communication is used in ACC.

FlexRay is a communication protocol that was developed specifically for high-speed communication in modern automotive systems. FlexRay provides an expedient platform for the design of automotive control systems due to its high bandwidth and deterministic temporal behavior [7]. In ACC, FlexRay is used to enable communication between different components of the system, including the ACC sensor, ACC controller, and the vehicle's Electronic Control Unit (ECU). The ACC

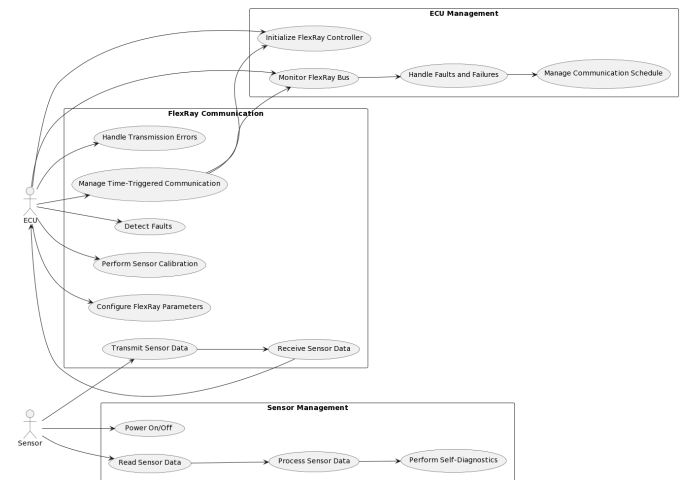


Fig. 5. Use Case

sensor is responsible for detecting the distance and speed of the vehicle in front, and transmitting this information to the ACC

controller. The ACC controller uses this information to determine the appropriate speed to maintain a safe distance from the vehicle in front, and sends commands to the vehicle's ECU to adjust the speed accordingly. To enable this communication, the ACC sensor and the ACC controller are connected via a FlexRay bus [7]. The FlexRay bus allows the ACC sensor and

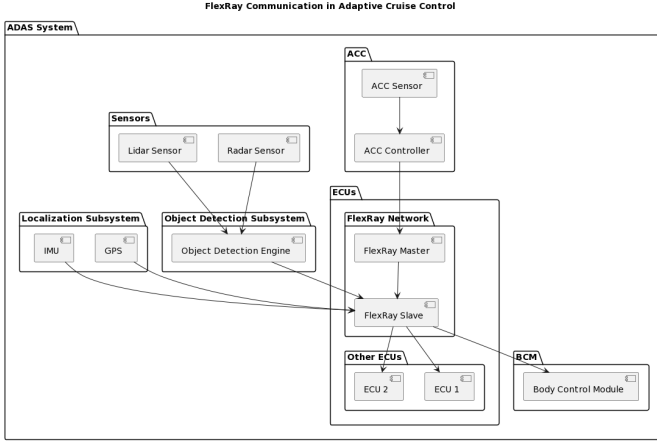


Fig. 6. Block Diagram

the ACC controller to exchange information in a timely and deterministic manner. This is critical for ensuring that the ACC system can respond quickly to changes in the environment and adjust the speed of the vehicle accordingly. Additionally, in order to handle significantly larger bandwidths, which is important for ensuring that the ACC system can accurately detect and respond to different types of obstacles; automotive manufacturers now strive for Ethernet-based systems. However, although Ethernet is cheap, well-known and comes along with many security solutions, it is a generic protocol that does not inherently incorporate the safety features of existing automotive protocols, such as FlexRay. [6] In addition to enabling communication between the ACC sensor and the ACC controller, FlexRay is also used to enable communication between the ACC controller and the vehicle's ECU. The ACC controller sends commands to the ECU to adjust the speed of the vehicle, and receives feedback from the ECU regarding the current speed of the vehicle. This feedback is used to ensure that the ACC system is maintaining the appropriate speed and distance from the vehicle in front. Overall, the use of FlexRay communication in ACC is critical for enabling the accurate and timely exchange of information between different components of the system. It allows the ACC system to respond quickly to changes in the environment and adjust the speed of the vehicle accordingly, which is important for ensuring the safety of the driver and other road users.

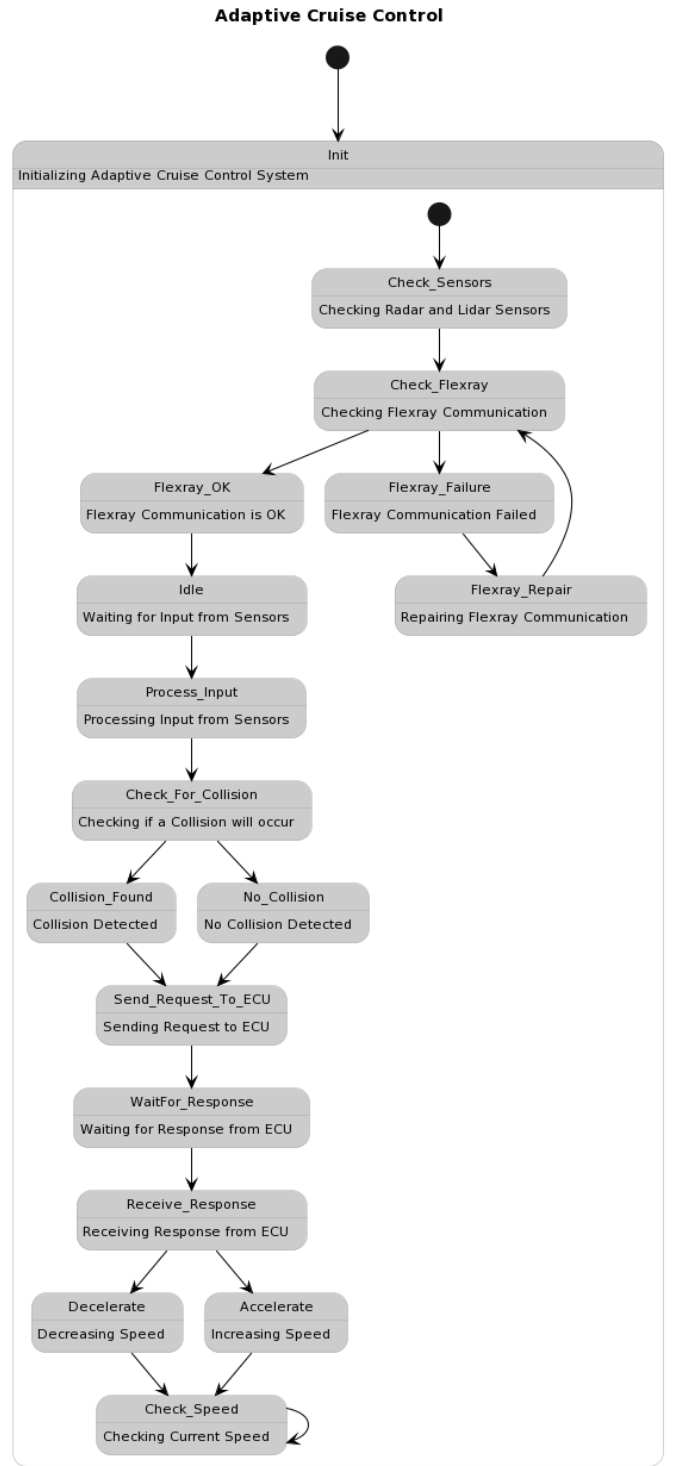


Fig. 7. State Machine

B. Requirements for Communication in the Example Application

1) **Functional Requirements:** When considering the communication requirements for ACC, it is important to consider both functional and non-functional requirements. Functional

requirements include the need for reliable and efficient communication between the various sensors and control units involved in the system, as well as the ability to handle large amounts of data in real-time. Non-functional requirements include safety, security, and robustness of the communication system.

One of the primary functional requirements for ACC communication is real-time performance. The system must be able to receive and process data from various sensors and actuators in real-time to ensure safe and effective operation. This requires a communication protocol that is capable of high-speed data transfer and low-latency communication. FlexRay is a time-triggered protocol that is specifically designed for real-time applications, offering deterministic and reliable communication through multiple bus access schemes to support both priority-based volume data transfer and deterministic data transfer, thereby addressing the requirements of determinism, bandwidth and reliability. [8]

Another important functional requirement for ACC communication is fault tolerance. The system must be able to detect and handle communication errors or failures in a timely and effective manner to ensure safe operation. FlexRay architecture provides a scalable fault tolerance in terms of dual channel redundancy as well as bus guardian adoption. The bus guardian operates independently from the communication controller, and if a failure occurs in the latter (e.g., an attempt to transmit data in a time slot reserved to another node), it denies the bus access by disabling the bus driver. This way, the communication channel is protected against faulty nodes on the bus. [1]

2) Non-Functional Requirements: In addition to these functional requirements, there are also a number of non-functional requirements that must be considered when designing the communication system for ACC. Safety is of paramount importance, and the communication protocol must be designed to ensure that the system can operate safely in all conditions. This includes the ability to detect and respond to potential hazards such as obstacles or other vehicles on the road. FlexRay is dedicated to safety and time-critical environments appropriate timing analysis techniques are required to support the safe system design process [4]

Another important non-functional requirement is security. The communication protocol must be designed to prevent unauthorized access or tampering with the system, which could potentially compromise its safety or performance. FlexRay provides a number of security features such as message authentication and encryption, which can help to protect the system against these kinds of threats

Finally, the communication system must be robust and reliable, able to operate effectively in a wide range of environmental conditions and in the presence of various types of interference. FlexRay's robustness is due in part to its use of differential signaling and advanced error detection and correction mechanisms.

IV. PROS AND CONS OF FLEXRAY BUS COMMUNICATION

The FlexRay protocol is a high-speed communication bus standard used in the automotive industry, offering several advantages over other protocols. Consider the figure 8, where it compares CAN and FlexRay.

Specifications	CAN	FlexRay
Baud Rate	1Mbps	10Mbps
Physical Layer/Channels	Dual wire/ single channel only.	Dual wire/ options between single and dual channels.
Topologies	Bus type only.	Bus, Star and Hybrid.
ID	11/29 Bits	11 Bits
Data length Code	8 Bytes	254 Bytes
Communication	Event triggered	Time/event triggered.
Architecture	Multi-master (10-30 nodes)	Multi-master (up to 64 nodes)
Transmission type	Asynchronous	Asynchronous and Synchronous
Access Control	CSMA/CA	TDMA
Latency	Load dependent	Constant
Applications	Powertrain (Engine, Transmission, ABS)	High-Performance Powertrain, Safety (Drive-by-wire, active suspension, adaptive cruise control)

Fig. 8. Comparison between CAN and FlexRay [3]

First of all, FlexRay has a bandwidth of 10Mbps which is far greater than CAN protocol. FlexRay does not use bit arbitration as CAN does and this leads to higher bandwidth, regardless of the length of the network. This feature makes FlexRay ideal for advanced automotive applications.

Another advantage FlexRay has is that it can have hybrid topologies unlike CAN. Bus, star, or hybrid topology can be implemented with FlexRay and it opens up a wider chance of structuring the network. FlexRay is scalable, supporting various network topologies, making it adaptable to different vehicle architectures.

One of the main differences between FlexRay and CAN is that the communication type of FlexRay is both time-triggered and event-triggered. As discussed earlier, the method of access control of FlexRay uses is Time Division Multiple Access. Each FlexRay communication cycle has both a static segment for time-triggered data transfer and a dynamic segment for event-triggered data transfer. This feature enables deterministic behavior and flexibility in data exchange, allowing precise message scheduling, particularly crucial for safety-critical systems.

Lastly, thanks to the deterministic characteristics, with the help of Cyclic Redundancy Check in the frame, it has capability of error detection. Thus the protocol incorporates fault-tolerant features for reliable communications.

This explains why FlexRay is effectively implemented for an in-vehicle network of powertrain, chassis control, or adaptive cruise control, which are time-critical.

A disadvantage to mention is that FlexRay is more expensive than CAN or TTP. This is indeed very important for manufacturers who have to take the cost into account when designing an automotive system. [2]

V. CONCLUSION

To recapitulate, this paper addressed various aspects of FlexRay protocol, including the invention of FlexRay, the FlexRay mechanism, a use case of FlexRay, and advantages of FlexRay. With this paper, it is shown clearly that FlexRay is a valuable and useful asset, due to its high-speed communication and reliability. Although, for bandwidth intensive or non-safety critical applications, other communication protocols, such as Ethernet, can replace FlexRay in the future, FlexRay still has great potential and is forecasted to be being used in the near future.

VI. REFERENCES

REFERENCES

- [1] Federico Baronti, Esa Petri, Sergio Saponara, Luca Fanucci, Roberto Roncella, Roberto Saletti, Paolo D'Abramo, and Riccardo Serventi. Design and verification of hardware building blocks for high-speed and fault-tolerant in-vehicle networks. *IEEE Transactions on Industrial Electronics*, 58(3):793, 2009.
- [2] FlexRay Consortium et al. Flexray communications system protocol specification. *Version*, 2(1):198–207, 2005.
- [3] Influx Big Data Solutions Pvt Ltd. FlexRay - The Next-Generation Automotive Communication Protocol. Influx Technology India, 2002.
- [4] Moritz Neukirchner, Mircea Negrean, Rolf Ernst, and Torsten T Bone. Response-time analysis of the flexray dynamic segment under consideration of slot-multiplexing. In *7th IEEE International Symposium on Industrial Embedded Systems (SIES'12)*, page 21. IEEE, 2012.
- [5] Dominique Paret. *FlexRay and its applications: real time multiplexed network*. Wiley Online Library, 2012.
- [6] Dominik Püllen, Nikolaos Athanasios Anagnostopoulos, Tolga Arul, and Stefan Katzenbeisser. Security and safety co-engineering of the flexray bus in vehicular networks. In *Proceedings of the international conference on omni-layer intelligent systems*, pages 31–37, 2019.
- [7] Reinhard Schneider, Dip Goswami, Sohaib Zafar, Martin Lukasiewicz, and Samarjit Chakraborty. Constraint-driven synthesis and tool-support for flexray-based automotive control systems. In *Proceedings of the seventh IEEE/ACM/IFIP international conference on Hardware/software codesign and system synthesis*, page 139, 2011.
- [8] Shanker Shreejith, Suhaib A Fahmy, and Martin Lukasiewicz. Re-configurable computing in next-generation automotive networks. *IEEE embedded systems letters*, 5(1):12, 2013.