

Date: 08/20/2026

Name of Intern: Youssef Khaled Omar Mahmoud

NU ID: N/A

School: Engineering

Program: IoT

Company/Organization offering Internship: Nanoelectronics Integrated Systems Center (NISC)

Address: Juhayna Square, 26th of July Corridor, Sheikh Zayed, Giza Phone: +20238541700

Name of Supervisor: Ahmed Soltan

Title: Professor and Director of Nanoelectronics Integrated Systems Center (NISC)

Supervisor Phone: N/A

Supervisor e-mail : ASoltan@nu.edu.eg

Internship Duration: From: 07/15/2026 To: 09/01/2026

Job Responsibilities:

1. IoT Summer Research Intern (NISC-2026-01)

Expected Outcomes:

1. Fundamental of IoT
2. Research Paper Process
3. Presentation Skills

Student Signature

Supervisor Signature

Program/Center Director Signature



Embedded Linux and Real-Time Operating System Development for Internet of Things Applications

Youssef Khaled Omar Mahmoud

Department of Electrical, Electronic and Communication Engineering

Faculty of Engineering, Cairo University

Giza, Egypt

youefkh05@gmail.com

ORCID: 0009-0005-5807-4381

Abstract—This paper presents the work completed during the IoT Summer Research Internship 2026 at the Nanoelectronics Integrated Systems Center (NISC), Nile University. The internship focused on embedded systems, Internet of Things (IoT), and real-time operating systems through a series of hands-on tasks. The developed solutions demonstrated communication between embedded devices and cloud services while providing practical experience in embedded software development, cloud technologies, wireless communication, and system integration.

Index Terms—Internet of Things (IoT), Embedded Systems, Raspberry Pi, Embedded Linux, RTOS, MQTT, HTTP, InfluxDB, Grafana, UART, Bluetooth, Zigbee.

I. INTRODUCTION

The Nile University Summer Research Internship 2026 provided an opportunity to gain practical experience in embedded systems, Internet of Things (IoT), and real-time software development through a series of hands-on engineering tasks. The internship emphasized applying theoretical knowledge to real-world embedded applications while introducing modern software and communication technologies widely used in industry.

Throughout the internship, three major technical areas were explored. The first focused on Embedded Linux development using the Raspberry Pi, where Python was employed to interface with hardware peripherals and implement different GPIO control techniques. The second addressed the design of an end-to-end IoT system by transmitting sensor measurements from edge devices to cloud services using both HTTP and MQTT communication protocols. The collected data were stored in a time-series database and visualized through a real-time monitoring dashboard. Finally, the internship introduced real-time embedded software development using TI-RTOS on the Texas Instruments CC1352P1 LaunchPad, where multiple concurrent tasks including LED control, Bluetooth communication, Zigbee communication, and UART-based communication with the Raspberry Pi were implemented.

In addition to software implementation, the internship emphasized understanding the design trade-offs between different communication protocols and software architectures. The progression from basic hardware interfacing to cloud connectivity and finally to multitasking embedded systems provided a comprehensive view of modern IoT system development.

This report summarizes the assigned tasks, describes the methodologies followed during implementation, presents the achieved results, and discusses the technical knowledge and practical skills acquired throughout the internship.

II. ASSIGNED TASKS

The internship activities were organized progressively over several weeks, with each stage building upon the knowledge and skills acquired in the previous one. [1]

Week 1: Embedded Linux and Raspberry Pi

- Raspberry Pi development using Embedded Linux.
- Python programming for hardware interfacing.
- GPIO programming and sensor interfacing.

Weeks 2–3: Internet of Things (IoT)

- Cloud communication using HTTP.
- Cloud communication using MQTT.
- Data storage using InfluxDB.
- Data visualization using Grafana.

Weeks 3–4: Real-Time Operating Systems (RTOS)

- Real-Time Operating System (RTOS) programming.
- Bluetooth communication.
- Zigbee communication.
- UART-over-USB communication.
- Integration between the RTOS microcontroller and the Raspberry Pi.

Weeks 4–5: Integration and System-Level Development

- Communication between the Raspberry Pi and the RTOS microcontroller.
- Making the RTOS microcontroller publish sensor measurements to the MQTT broker.

III. BRIEF DESCRIPTION OF ASSIGNED TASKS

The internship was organized into three major technical tasks that progressively introduced embedded systems, Internet of Things (IoT), and real-time operating systems (RTOS). Each task combined theoretical concepts with practical implementation, allowing the development of complete embedded applications and their integration into an end-to-end IoT system. [1]

A. Raspberry Pi Development

1) *Objective:* The objective of this task was to develop a solid foundation in software development on Embedded Linux while learning the fundamentals of hardware interfacing using the Raspberry Pi. The work progressed from C programming exercises to GPIO-based control applications, providing practical experience in software design, Linux development, and interaction with external hardware peripherals.

2) *Task 2.1 – C Programming Fundamentals:* The first stage focused on strengthening programming skills using the C language within the Raspberry Pi Linux environment. The implemented application solved the Emirp Number problem, where prime numbers whose digit-reversed values are also prime were identified within a user-defined range.

The program was developed using a modular design by separating the functionality into helper functions responsible for primality testing and digit reversal. Dynamic memory allocation was employed to store the resulting Emirp pairs, while structures were used to organize the associated data, including the prime number, its inverse, and the numerical difference between them. Input validation was also incorporated to detect invalid ranges and incorrect user entries before executing the algorithm.

This task provided practical experience with:

- Programming in C under Embedded Linux.
- Modular software development using functions.
- Structure-based data organization.
- Dynamic memory allocation using `malloc()`.
- Input validation and error handling.
- Compilation and execution using the GNU Compiler Collection (GCC).

The overall workflow of the developed Emirp application is illustrated in Figure 1. The program begins by validating the user inputs, allocates memory dynamically for storing valid Emirp pairs, iterates through the specified range to identify qualifying numbers, and finally computes statistical information before displaying the results. Example executions are presented in Figure 2, while representative input-output cases are summarized in Table I.

TABLE I: Representative execution scenarios of the Emirp number application. [1]

Input Range	Observed Result
11 – 100	Emirp pairs successfully identified and summarized.
101 – 500	Larger set of Emirp numbers processed correctly.
50 – 10	Invalid range detected and an appropriate error message displayed.
Negative or even inputs	Input validation rejected invalid values before execution.

Table I summarizes representative execution scenarios of the developed application.

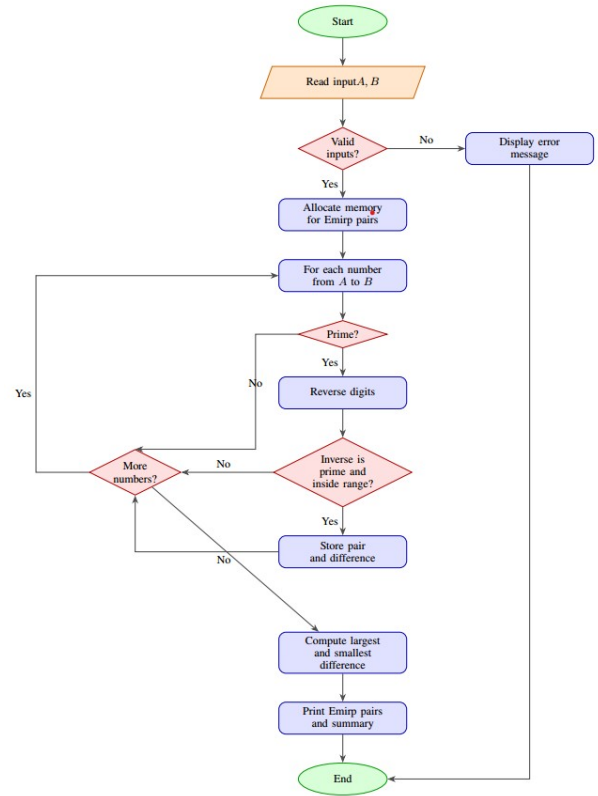


Fig. 1: Flowchart of the implemented Emirp number detection algorithm. [1]

While Figure 2 presents sample terminal outputs obtained during testing.

```

Intern@Intern:~/tasks $ ./task1
Enter A and B
1
99

Emirp numbers from 1 to 99:
13, 31 (diff = 18)
17, 71 (diff = 54)
31, 13 (diff = 18)
37, 73 (diff = 36)
71, 17 (diff = 54)
73, 37 (diff = 36)
79, 97 (diff = 18)
97, 79 (diff = 18)

Summary:
Total emirps found: 8
Largest difference: 54 (achieved by 17,71)
Smallest difference: 18 (achieved by 13,31,79,97)
  
```

(a) Typical execution.

```

Intern@Intern:~/tasks $ ./task1
Enter A and B
1
9

Emirp numbers from 1 to 9:
None found.
  
```

(b) Small range.

```

Intern@Intern:~/tasks $ ./task1
Enter A and B
1
501

Emirp numbers from 1 to 501:
13, 31 (diff = 18)
17, 71 (diff = 54)
31, 13 (diff = 18)
37, 73 (diff = 36)
71, 17 (diff = 54)
73, 37 (diff = 36)
79, 97 (diff = 18)
97, 79 (diff = 18)
113, 311 (diff = 198)
311, 113 (diff = 198)

Summary:
Total emirps found: 10
Largest difference: 198 (achieved by 113,311)
Smallest difference: 18 (achieved by 13,31,79,97)
  
```

(c) Large range.

```

Intern@Intern:~/tasks $ ./task1
Enter A and B
7
5
[Error] A is larger than B
Intern@Intern:~/tasks $
  
```

(d) Invalid input.

Fig. 2: Terminal outputs demonstrating successful execution and input validation of the Emirp number application. [1]

3) *Task 2.2 – Embedded Linux and GPIO Programming:* The second stage introduced hardware interfacing using the Raspberry Pi GPIO pins. Python was used to control LEDs

and read the state of a push button through the GPIO interface provided by the Linux operating system.

Three different software approaches were implemented for LED control:

- **Delay-based control**, where software delay loops generated the blinking period.
- **Timer-based control**, where timing mechanisms were used to improve execution accuracy.
- **Interrupt-based control**, where GPIO interrupts enabled immediate response to button presses without continuous polling.

These implementations demonstrated how different software architectures influence processor utilization, timing accuracy, and system responsiveness while using identical hardware.

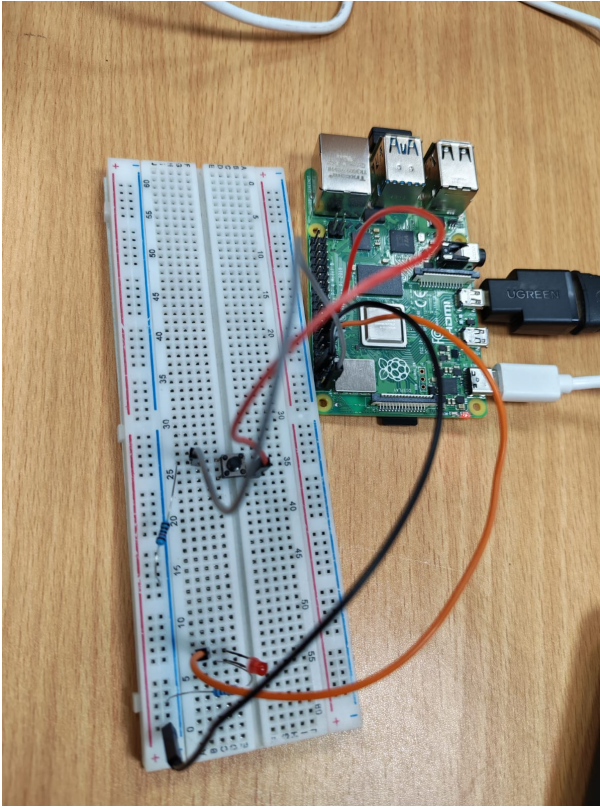


Fig. 3: GPIO-based LED control implemented on the Raspberry Pi. [2]

4) *Outcomes*: Example executions of the developed C application are presented in Figure 2, while Figure 3 illustrates the GPIO-based LED control implemented on the Raspberry Pi.

The Raspberry Pi tasks successfully demonstrated both software development and embedded hardware interfacing. The C programming exercise reinforced fundamental programming concepts, including modular design, dynamic memory management, and algorithm implementation. The GPIO applications provided practical experience in controlling external peripherals, implementing event-driven programming techniques,

and comparing different software control methodologies. Figure 3 illustrates the implemented GPIO-based LED control setup.

B. Internet of Things (IoT)

1) *Objective*: The objective of this task was to develop a complete Internet of Things (IoT) data acquisition system capable of collecting sensor measurements, transmitting them to cloud platforms, storing them in a time-series database, and visualizing the acquired data in real time. Throughout the internship, two communication approaches were investigated. The initial implementation utilized HTTP requests with the Adafruit IO platform, while the final system adopted the MQTT publish/subscribe protocol together with InfluxDB and Grafana to improve communication efficiency and enable scalable real-time monitoring.

2) *Work Performed*: The implemented IoT system consisted of multiple software components working together to provide end-to-end data acquisition and visualization. Sensor measurements were collected by the Raspberry Pi using Python, after which the measured values were transmitted to cloud services. During the first implementation, the Raspberry Pi periodically uploaded sensor readings to Adafruit IO using the HTTP protocol. Although functional, this approach required continuous polling and repeated request generation.

The second implementation migrated the communication layer to MQTT. The Raspberry Pi published sensor measurements to an MQTT broker whenever new data became available. The broker forwarded the received messages to InfluxDB for permanent storage, while Grafana retrieved the stored measurements directly from the database to generate live dashboards and historical plots.

Figure 4 illustrates the complete IoT architecture implemented during the internship.


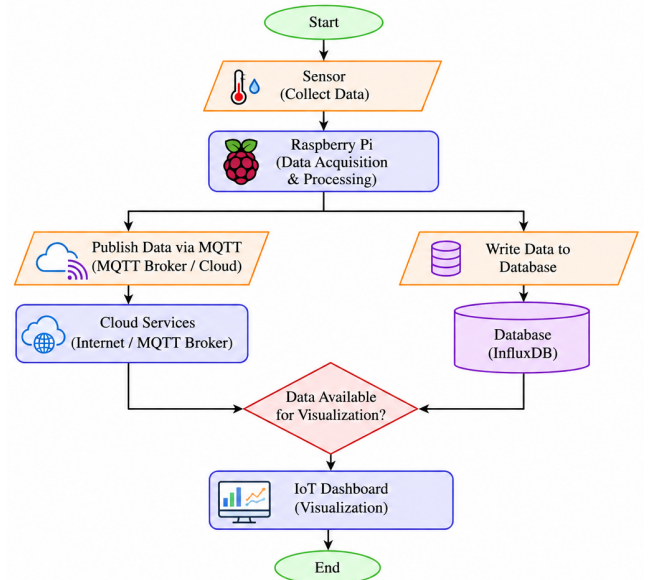


Fig. 4: Overall IoT architecture implemented during the internship. [1]

3) *Database Integration*: To enable persistent storage and historical analysis of sensor measurements, the received MQTT messages were stored in an InfluxDB time-series database. Unlike conventional relational databases, InfluxDB is specifically designed for timestamped data, making it well suited for Internet of Things (IoT) applications where measurements are continuously generated over time. Each sensor reading was recorded together with its corresponding timestamp, allowing efficient querying, filtering, and long-term storage of collected data. This database served as the primary data source for the Grafana visualization platform, enabling both live monitoring and analysis of previously recorded measurements.

Figure 5 shows a sample of the stored measurements within the InfluxDB database.

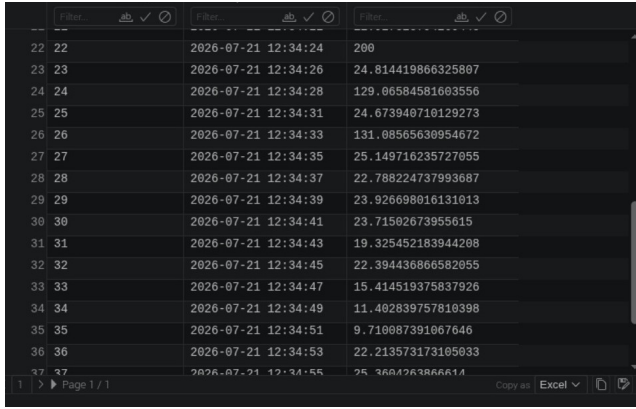

Time	Value	Measurement
2026-07-21 12:34:24	280	
2026-07-21 12:34:26	24.814419866325807	
2026-07-21 12:34:28	129.06584581683556	
2026-07-21 12:34:31	24.673940710129273	
2026-07-21 12:34:33	131.08565630954672	
2026-07-21 12:34:35	25.149716235727055	
2026-07-21 12:34:37	22.788224737993687	
2026-07-21 12:34:39	23.926698016131013	
2026-07-21 12:34:41	23.71502673955615	
2026-07-21 12:34:43	19.325452183944208	
2026-07-21 12:34:45	22.394436866582055	
2026-07-21 12:34:47	15.414519375837926	
2026-07-21 12:34:49	11.402839757810398	
2026-07-21 12:34:51	9.710087391067646	
2026-07-21 12:34:53	22.213573173105033	
2026-07-21 12:34:55	25.3604263866611	

Fig. 5: Example of sensor measurements stored in the InfluxDB time-series database. [1]

4) *Methodology*: Two communication protocols were implemented and evaluated throughout the internship.

The first implementation employed the HTTP protocol, where the Raspberry Pi continuously transmitted sensor measurements to the cloud using periodic HTTP requests. Since the client must repeatedly request communication regardless of whether new data are available, this approach increases network traffic, processor activity, and power consumption.

The second implementation adopted the MQTT publish/subscribe communication model. Instead of continuously polling the server, the Raspberry Pi publishes sensor values only when new measurements become available. Subscribers automatically receive updates from the MQTT broker whenever new messages are published. Consequently, MQTT significantly reduces unnecessary network traffic while providing lower latency and improved scalability for IoT applications.


Table II summarizes the characteristics of both communication protocols.

TABLE II: Comparison between HTTP and MQTT communication protocols.

Feature	HTTP	MQTT
Communication Model	Request/Response	Publish/Subscribe
Data Transfer	Continuous polling	Only when new data are available
Bandwidth Usage	Higher	Lower
Power Consumption	Higher	Lower
Scalability	Moderate	High
Real-Time Updates	Limited by polling interval	Immediate event-driven updates
IoT Suitability	Good	Excellent

5) *Outcomes*: The developed IoT platform successfully demonstrated complete cloud connectivity and real-time monitoring capabilities. Sensor measurements were reliably transmitted from the Raspberry Pi to the MQTT broker, where published messages were successfully received and forwarded to the remaining components of the system. The acquired data were subsequently stored within an InfluxDB time-series database and visualized through interactive dashboards.

Figure 6 shows the MQTT broker successfully receiving and forwarding the published sensor measurements.

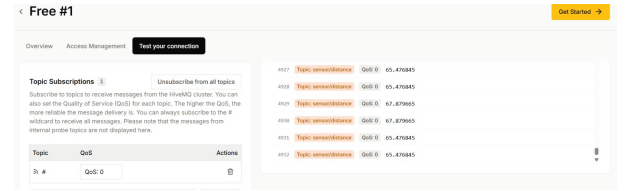


Topic	QoS	Actions
#	QoS: 0	

Topic	QoS	QoS: 0	QoS: 1	QoS: 2
topic: sensor/temperature	QoS: 0	65.470845		
topic: sensor/temperature	QoS: 0	65.470845		
topic: sensor/temperature	QoS: 0	67.870645		
topic: sensor/temperature	QoS: 0	67.870645		
topic: sensor/temperature	QoS: 0	65.470845		
topic: sensor/temperature	QoS: 0	65.470845		


Fig. 6: MQTT broker receiving published sensor measurements. [2]

The transition from HTTP to MQTT significantly improved communication efficiency by eliminating continuous polling and reducing unnecessary network traffic. In addition, the integration of InfluxDB and Grafana enabled persistent storage, historical data analysis, and live visualization, providing a scalable architecture suitable for future IoT deployments.

Example dashboards generated during the internship are presented in Figure 7.



(a) Adafruit IO dashboard.



(b) Grafana dashboard.

Fig. 7: Cloud dashboards used for monitoring sensor measurements. [3], [4]

C. Real-Time Operating System (RTOS)

1) *Objective*: The objective of this task was to gain practical experience in real-time embedded software development by implementing concurrent applications using a Real-Time Operating System (RTOS). The work focused on understanding task management, scheduling mechanisms, inter-task execution, and communication between embedded devices while developing a multitasking application on a wireless microcontroller platform.

2) *Work Performed*: The RTOS application was organized around a central kernel responsible for scheduling multiple independent tasks. Each task executed concurrently while sharing the processor according to the scheduling policy provided by the operating system. This architecture allowed different application functionalities to execute independently without blocking one another.

The implemented software consisted of several concurrent tasks responsible for hardware control, wireless communication, and external device interaction. Synchronization between these tasks was managed by the RTOS scheduler, ensuring deterministic execution and efficient processor utilization.

Figure 8 illustrates the overall RTOS architecture implemented during the internship.

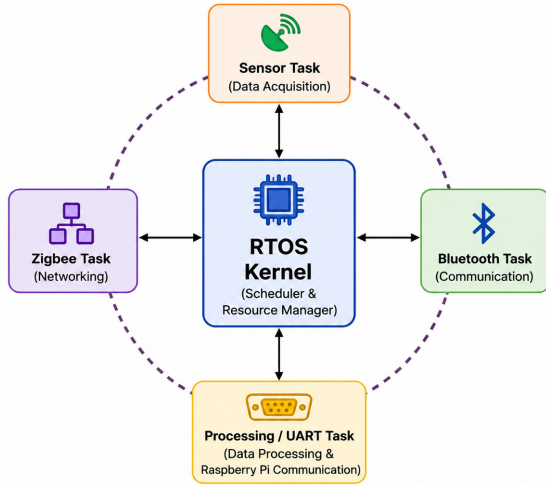


Fig. X: RTOS architecture showing the kernel managing multiple concurrent tasks.

Fig. 8: RTOS architecture showing the kernel managing multiple concurrent tasks. [1]

3) *Implemented Modules*: Four independent application tasks were developed during this stage:

- **LED Task**: Periodically controlled the onboard LED to demonstrate periodic task scheduling.
- **Bluetooth Task**: Implemented Bluetooth communication for wireless data exchange.
- **Zigbee Task**: Established Zigbee communication for low-power wireless networking.

- **UART-over-USB Task**: Enabled serial communication between the RTOS device and the Raspberry Pi for system integration.

Each task executed independently under the supervision of the RTOS kernel, demonstrating concurrent execution without interfering with the operation of other tasks.

4) *Outcomes*: The RTOS implementation successfully demonstrated multitasking capabilities through the concurrent execution of independent application tasks. The scheduler efficiently managed processor time among the implemented tasks while maintaining responsive system behavior.

Successful Bluetooth and Zigbee communication verified the operation of multiple wireless interfaces under the RTOS environment. In addition, UART-over-USB communication established reliable integration between the RTOS microcontroller and the Raspberry Pi, allowing both platforms to exchange data as part of a unified embedded system.

Representative experimental results obtained during the implementation are presented in Figure 9.

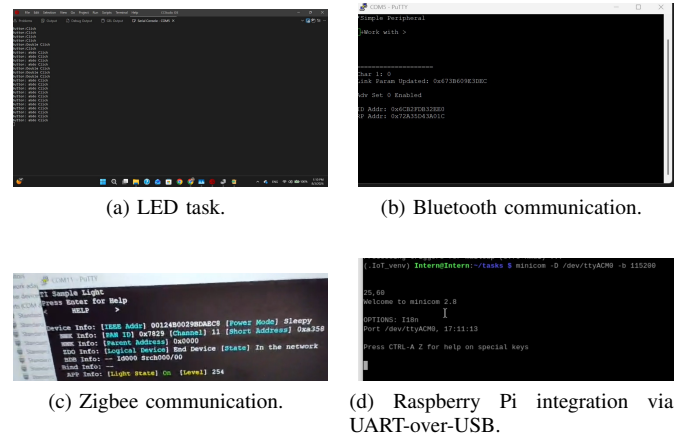


Fig. 9: Experimental results obtained from the RTOS implementation. [2]

IV. SUMMARY OF WORK ACCOMPLISHED & OUTCOMES

The IoT Summer Research Internship provided a progressive learning experience that combined embedded Linux, Internet of Things (IoT), and real-time embedded systems into a unified practical project. Beginning with software development on the Raspberry Pi, the internship gradually expanded toward cloud-based IoT communication and concluded with the implementation of real-time applications using an RTOS-enabled wireless microcontroller.

The work began with developing software applications under the Embedded Linux environment using the Raspberry Pi. Fundamental programming concepts were reinforced through C programming exercises, followed by Python-based GPIO interfacing to control LEDs and read push-button inputs using different software approaches, including delay-based, timer-based, and interrupt-driven techniques.

Building upon this foundation, the developed embedded applications were connected to cloud services to form a complete

IoT monitoring platform. Sensor measurements were transmitted using both HTTP and MQTT communication protocols, allowing their performance to be evaluated and compared. The collected data were then stored in an InfluxDB time-series database and visualized through Grafana dashboards, enabling live monitoring and historical data analysis.

The final stage focused on real-time embedded software development using an RTOS. Multiple concurrent tasks were implemented, including LED control, Bluetooth communication, Zigbee communication, and UART-over-USB communication with the Raspberry Pi. The RTOS scheduler successfully coordinated these independent tasks, demonstrating reliable multitasking and efficient processor utilization.

Overall, the internship resulted in a complete end-to-end embedded IoT system capable of acquiring sensor measurements, transmitting them through lightweight communication protocols, storing them within a scalable database, visualizing them in real time, and integrating embedded Linux with an RTOS-based microcontroller platform. Figure 10 summarizes the overall progression of the internship activities.

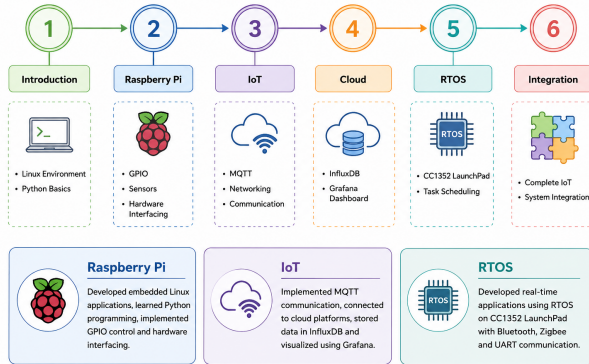


Fig. 10: Progressive workflow of the internship, illustrating the transition from Embedded Linux development to IoT communication, cloud services, RTOS development, and complete system integration. [1]

V. LEARNING OUTCOMES AND GAINED SKILLS

The internship provided valuable technical knowledge and practical experience in embedded systems, Internet of Things (IoT), and real-time software development. Through a sequence of progressively integrated tasks, the acquired knowledge and skills can be summarized as follows.

A. Learning Outcomes

By the end of the internship, the following learning outcomes were achieved:

- Understanding the fundamentals of Embedded Linux development.
- Learning the principles of embedded software design and hardware interfacing.
- Understanding IoT system architecture from sensing to cloud visualization.

- Comparing HTTP and MQTT communication protocols for IoT applications.
- Understanding time-series database concepts and real-time data visualization.
- Learning the fundamentals of Real-Time Operating Systems (RTOS), including task scheduling and synchronization.
- Understanding wireless communication technologies such as Bluetooth and Zigbee.
- Gaining insight into integrating multiple embedded platforms to develop complete IoT solutions.
- Becoming familiar with the research process, technical documentation, and engineering best practices.

B. Technical Skills

- Embedded Linux development on the Raspberry Pi.
- C and Python programming for embedded applications.
- GPIO programming and hardware interfacing.
- Sensor integration and data acquisition.
- Cloud communication using HTTP and MQTT protocols.
- Time-series database management using InfluxDB.
- Data visualization using Grafana dashboards.
- Real-Time Operating System (RTOS) development.
- Task scheduling and synchronization techniques.
- Bluetooth communication.
- Zigbee communication.
- UART-over-USB communication.
- Inter-device communication and system integration.
- End-to-end IoT system design and implementation.

C. Professional Skills

- Technical problem solving and debugging.
- Software testing and validation.
- Technical documentation and report writing.
- Research methodology and analytical thinking.
- Technical writing for engineering projects.
- Presentation and communication skills.
- Teamwork and collaboration in multidisciplinary environments.
- Time management and task prioritization.
- Independent learning and self-development.

VI. CONCLUSION AND FUTURE WORK

A. Conclusion

The IoT Summer Research Internship at the Nanoelectronics Integrated Systems Center (NISC), Nile University, successfully achieved its intended learning objectives by providing comprehensive practical experience in embedded systems, Internet of Things (IoT), and real-time software development.

Throughout the internship, progressively connected tasks were completed, beginning with Embedded Linux programming and Raspberry Pi hardware interfacing, followed by the development of a complete IoT monitoring system using cloud communication technologies, and concluding with Real-Time Operating System (RTOS) application development on an embedded microcontroller. These activities provided practical

experience in software development, wireless communication, cloud services, database management, and system integration.

Beyond the technical implementation, the internship strengthened problem-solving abilities, research methodology, technical documentation, teamwork, and presentation skills. The combination of theoretical concepts and hands-on experimentation provided valuable insight into the complete lifecycle of designing, implementing, testing, and integrating embedded IoT systems.

Overall, the internship established a strong foundation for future work in embedded systems, IoT, and real-time applications while providing practical engineering experience applicable to both academic research and industrial projects.

B. Future Work

Although the developed system successfully demonstrated end-to-end IoT communication and embedded software development, several enhancements can further improve its functionality and scalability. Future work may include:

- Integrating additional environmental and industrial sensors.
- Expanding the IoT platform to support a larger number of connected devices.
- Enhancing MQTT communication using authentication, encryption, and secure communication mechanisms.
- Deploying the developed applications on industrial-grade embedded hardware.
- Extending the RTOS application with additional concurrent tasks, synchronization mechanisms, and advanced scheduling techniques.
- Incorporating edge artificial intelligence (Edge AI) and local analytics to reduce cloud dependency and enable intelligent decision-making at the device level.

VII. ACKNOWLEDGMENT

The author would like to express sincere gratitude to the Nile University Research Office for offering the opportunity to participate in the 2026 IoT Summer Research Internship Program.

Special thanks are extended to Prof. Ahmed Soltan, Director of the Nanoelectronics Integrated Systems Center (NISC), for providing this valuable opportunity, his continuous support, and for taking the time to listen to and discuss our feedback throughout the internship.

The author also gratefully acknowledges the guidance and supervision of Eng. Salma, Eng. Omar, and Eng. Ahmed, whose technical support, constructive feedback, and mentorship were invaluable throughout the internship.

REFERENCES

- [1] Y. K. Omar, "NU-IoT-Research-Intern," GitHub repository, 2026. Available: <https://github.com/youefkh05/NU-IoT-Research-Intern>
- [2] Y. K. Omar, "NU IoT Research Internship Task Demonstrations," Google Drive, 2026. Available: Google Drive Link
- [3] Adafruit IO Dashboard, Available: <https://io.adafruit.com/youefkh05/dashboards/nu-iot-research>
- [4] Grafana Public Dashboard, Available: <https://broadpantry517.grafana.net/public-dashboards/eeee64a324cc4a5ea9bd651244ab6319>