

# CN580W

## 580Watt



### N-type Bifacial Double Glass High Efficiency Mono Module


IEC 61215, IEC 61730

ISO 9001: 2023 Quality management systems


ISO 14001: 2023 Environmental management systems

ISO 45001: 2023 Occupational health and safety management systems

- **N-type**  
Lower LID degradation and better low-light performance
- **Anti-PID**  
The decay rate is minimized
- **Double-sided power generation**  
Power generation gain on both sides increases with light exposure on the back
- **Multi-mainbar technology**  
Effectively enhances product power output and reliability

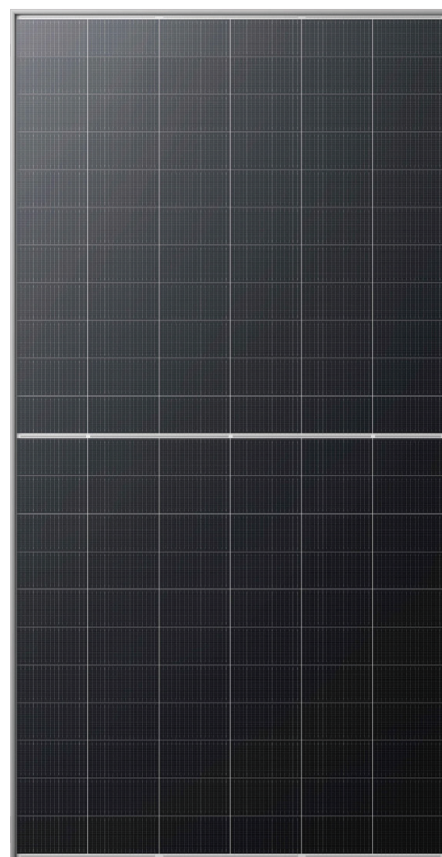


#### LINEAR PERFORMANCE WARRANTY

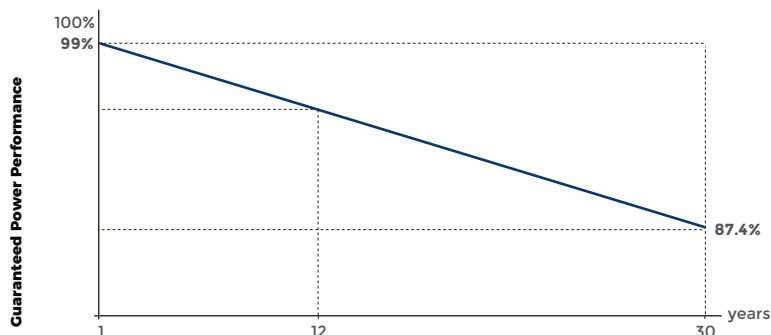

**25** Year Product Warranty

**30** Year Linear Power Warranty

## Engineering Drawings

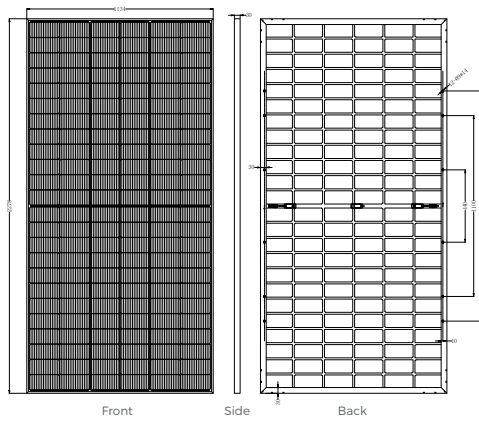

For detailed sizes and tolerance specification, please consult detailed module drawing

Length:  $\pm 2\text{mm}$   
Width:  $\pm 2\text{mm}$   
Height:  $\pm 1\text{mm}$

## Mechanical Characteristics


|                  |                                               |
|------------------|-----------------------------------------------|
| Cell Type        | N-type Mono-crystalline silicon, 182*91.875mm |
| No. of cells     | 144 pcs (6*12)*2                              |
| Dimensions       | 2278*1134*30 mm                               |
| Weight           | 31.42kg                                       |
| Front Glass      | 2.0 mm AR Coating Heat Strengthened Glass     |
| Back Glass       | 2.0 mm Heat Strengthened Glass                |
| Frame            | Anodized Aluminium Alloy                      |
| Junction Box     | IP68, 3 Bypass Diodes                         |
| Cable Length     | 300mm                                         |
| Fire Performance | Class C                                       |

## Packaging Configuration


|                                                   |
|---------------------------------------------------|
| 40'HQ                                             |
| 36pcs/pallets, 20pallets/cabinet, 720pcs/ cabinet |

## Electrical Performance & Temperature Dependence

Power-Voltage Curve

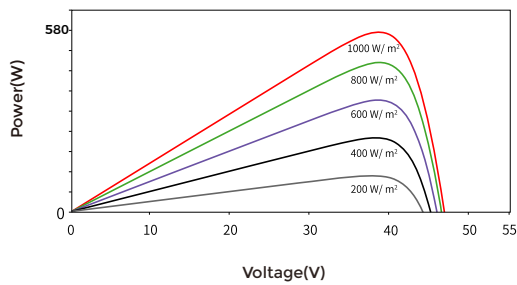

Current-Voltage Curve

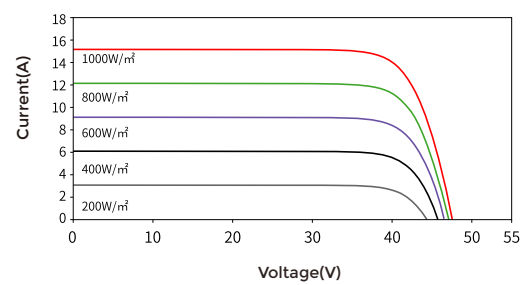

## SPECIFICATIONS

|                                           |            |
|-------------------------------------------|------------|
| Module Type                               | CN580W     |
|                                           | STC        |
| Maximum Power (Pmax)                      | 580W       |
| Maximum Power Voltage (Vmp)               | 43.88V     |
| Maximum Power Current (Imp)               | 13.22A     |
| Open-circuit Voltage (Voc)                | 52.50V     |
| Short-circuit Current (Isc)               | 13.95A     |
| Module Efficiency STC (%)                 | 22.45%     |
| Operating Temperature(°C)                 | -40~+85    |
| Maximum system voltage                    | 1500V DC   |
| Maximum series fuse rating                | 30A        |
| Power tolerance                           | 0~±5W      |
| Temperature coefficients of Pmax          | -0.35%/°C  |
| Temperature coefficients of Voc           | -0.275%/°C |
| Temperature coefficients of Isc           | +0.045%/°C |
| Nominal operating cell temperature (NOCT) | 42°C±2°C   |
| First-Year Degradation                    | 1%         |
| Bifaciality Factor                        | 80% ± 5%   |

\*STC: Irradiance 1000W/m<sup>2</sup> Cell Temperature 25°C AM=1.5

Specifications included in this datasheet are subject to change without notice.