

CN720W

720Watt



N-type Bifacial Double Glass High Efficiency Mono Module


IEC 61215, IEC 61730

ISO 9001: 2023 Quality management systems


ISO 14001: 2023 Environmental management systems

ISO 45001: 2023 Occupational health and safety management systems

- **N-type**
Lower LID degradation and better low-light performance
- **Anti-PID**
The decay rate is minimized
- **Double-sided power generation**
Power generation gain on both sides increases with light exposure on the back
- **Multi-mainbar technology**
Effectively enhances product power output and reliability

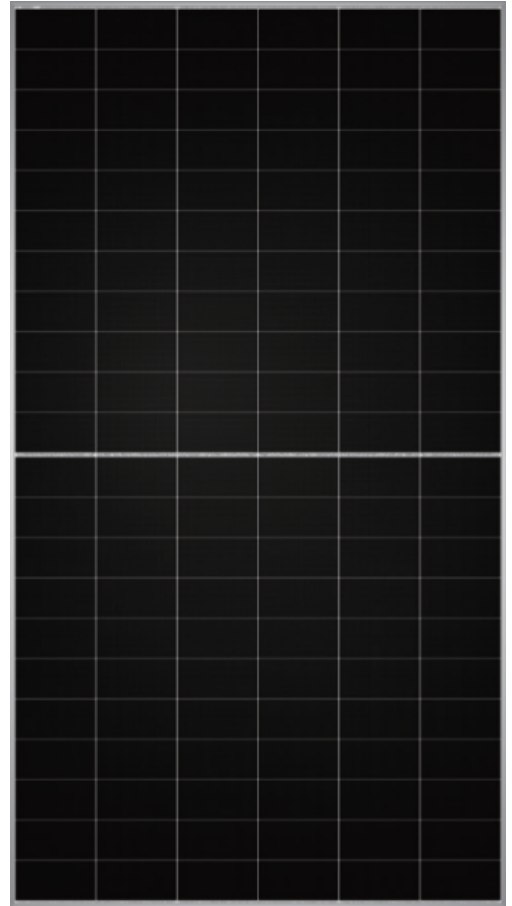


LINEAR PERFORMANCE WARRANTY

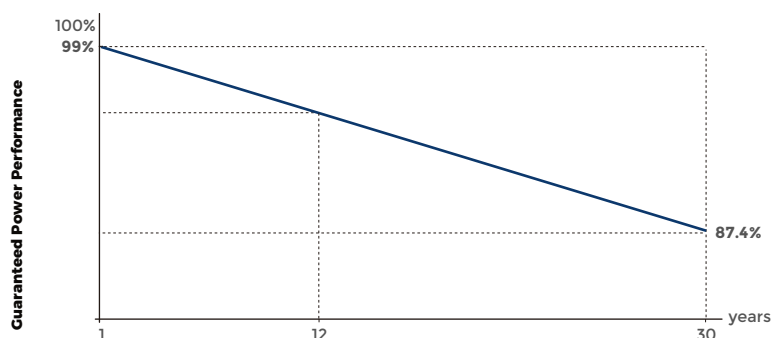

25 Year Product Warranty

30 Year Linear Power Warranty

Engineering Drawings

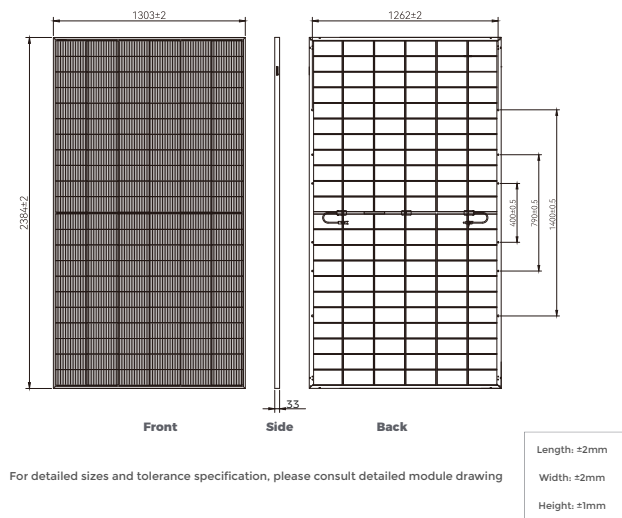



Mechanical Characteristics

Cell Type	N-type Mono-crystalline silicon, 210*105mm
No. of cells	132 pcs(6*11)*2
Dimensions	2384*1303*33 mm
Weight	38.3kg
Front Glass	2.0 mm AR Coating Heat Strengthened Glass
Back Glass	2.0 mm Heat Strengthened Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68, 3 Bypass Diodes
Cable Length	300mm
Fire Performance	Class C

Packaging Configuration

40HQ
33PCS/pallets, 18pallets, 594PCS/cabinet

Electrical Performance & Temperature Dependence

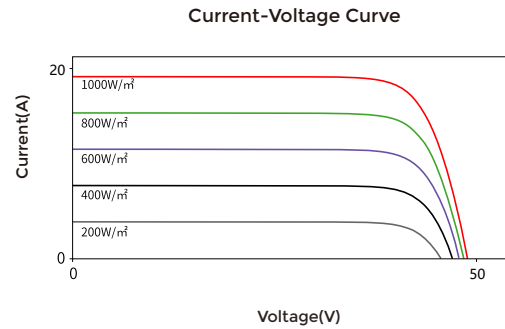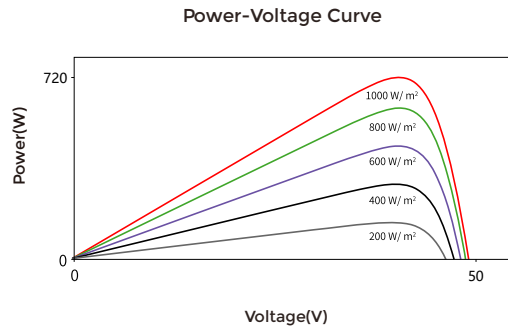

SPECIFICATIONS

Module Type	CN720W
	STC
Maximum Power (Pmax)	720W
Maximum Power Voltage (Vmp)	41.30V
Maximum Power Current (Imp)	17.44A
Open-circuit Voltage (Voc)	49.40V
Short-circuit Current (Isc)	18.49A
Module Efficiency STC (%)	23.18%
Operating Temperature(°C)	-40~+85
Maximum system voltage	1500
Maximum series fuse rating	35A
Power tolerance	0~±3%
Temperature coefficients of Pmax	-0.35%/°C
Temperature coefficients of Voc	-0.275%/°C
Temperature coefficients of Isc	+0.045%/°C
Nominal operating cell temperature (NOCT)	45°C±2°C
First-Year Degradation	1%
Bifaciality Factor	80% ± 5%

* STC: Irradiance 1000W/m² Cell Temperature 25°C AM=1.5

Specifications included in this datasheet are subject to change without notice.