

CN580W

580Watt



N-type Bifacial Double Glass High Efficiency Mono Module


IEC 61215, IEC 61730

ISO 9001: 2023 Quality management systems


ISO 14001: 2023 Environmental management systems

ISO 45001: 2023 Occupational health and safety management systems

- **N-type**
Lower LID degradation and better low-light performance
- **Anti-PID**
The decay rate is minimized
- **Double-sided power generation**
Power generation gain on both sides increases with light exposure on the back
- **Multi-mainbar technology**
Effectively enhances product power output and reliability

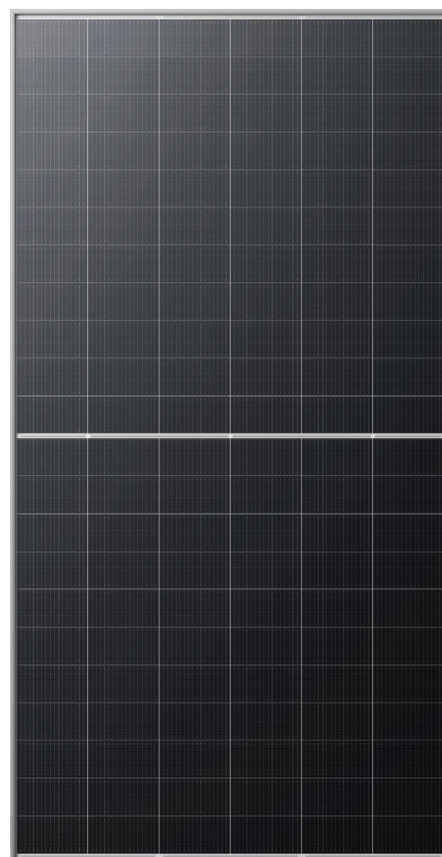


LINEAR PERFORMANCE WARRANTY

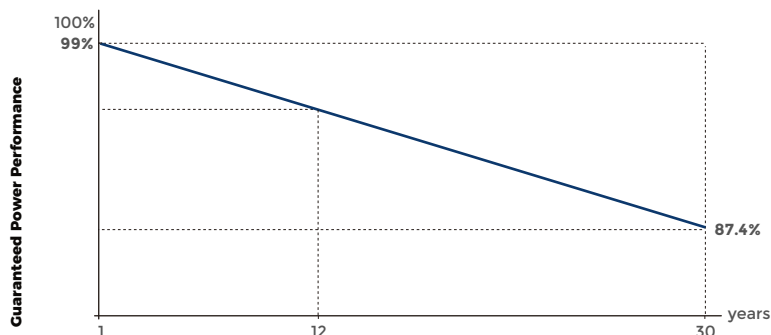

25 Year Product Warranty

30 Year Linear Power Warranty

Engineering Drawings

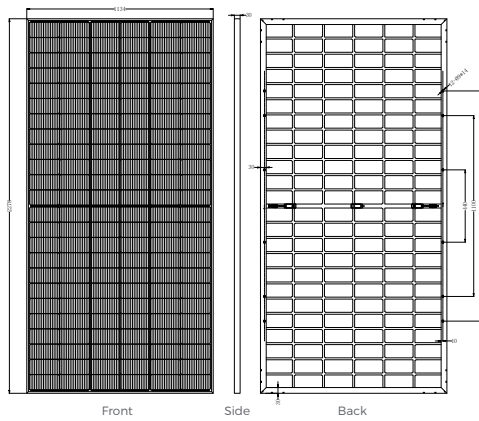

For detailed sizes and tolerance specification, please consult detailed module drawing

Length: $\pm 2\text{mm}$
Width: $\pm 2\text{mm}$
Height: $\pm 1\text{mm}$

Mechanical Characteristics


Cell Type	N-type Mono-crystalline silicon, 182*183.75mm
No. of cells	144 pcs (6*12*2)
Dimensions	2278*1134*30 mm
Weight	30kg
Glass	2.0*2mm Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68, 3 Bypass Diodes
Cable Length	300mm
Fire Performance	Class C

Packaging Configuration


40'HQ
36pcs/pallets, 20pallets/cabinet, 720pcs/ cabinet

Electrical Performance & Temperature Dependence

Power-Voltage Curve

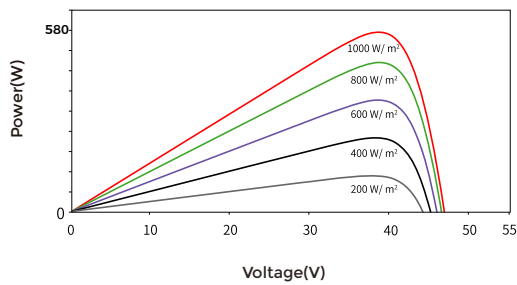

Current-Voltage Curve

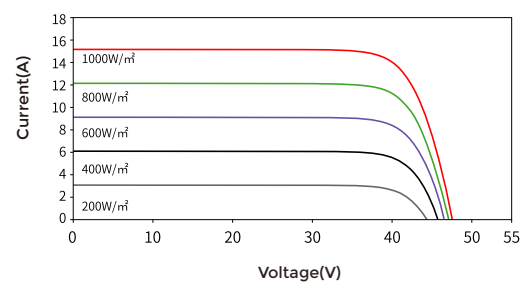

SPECIFICATIONS

Module Type	CN580W
	STC
Maximum Power (Pmax)	580W
Maximum Power Voltage (Vmp)	42.60V
Maximum Power Current (Imp)	13.62A
Open-circuit Voltage (Voc)	51.47V
Short-circuit Current (Isc)	14.37A
Module Efficiency STC (%)	22.45%
Operating Temperature(°C)	-40~+85
Maximum system voltage	1500V DC
Maximum series fuse rating	25A
Power tolerance	0~±5W
Temperature coefficients of Pmax	-0.35%/°C
Temperature coefficients of Voc	-0.275%/°C
Temperature coefficients of Isc	+0.045%/°C
Nominal operating cell temperature (NOCT)	42°C±2°C
First-Year Degradation	1%
Bifaciality Factor	80% ± 5%

*STC: Irradiance 1000W/m² Cell Temperature 25°C AM=1.5

NOCT: Irradiance 800W/m² Ambient Temperature 20°C AM=1.5 Wind Speed 1m/s

Specifications included in this datasheet are subject to change without notice.