

CN450W

450Watt



N-type Bifacial Double Glass High Efficiency Mono Module


IEC 61215, IEC 61730

ISO 9001: 2023 Quality management systems


ISO 14001: 2023 Environmental management systems

ISO 45001: 2023 Occupational health and safety management systems

- **N-type**
Lower LID degradation and better low-light performance
- **Anti-PID**
The decay rate is minimized
- **Double-sided power generation**
Power generation gain on both sides increases with light exposure on the back
- **Multi-mainbar technology**
Effectively enhances product power output and reliability

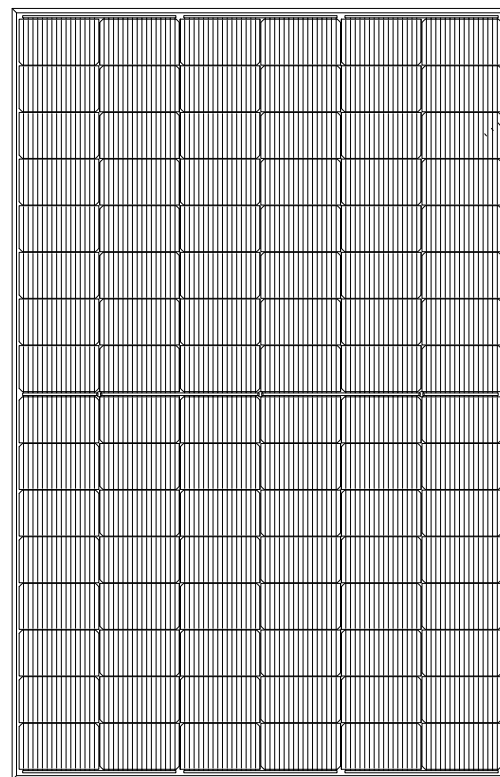


LINEAR PERFORMANCE WARRANTY

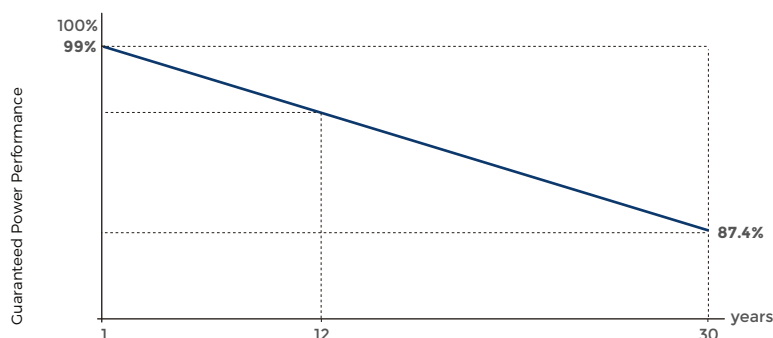

25 Year Product Warranty

30 Year Linear Power Warranty

Engineering Drawings

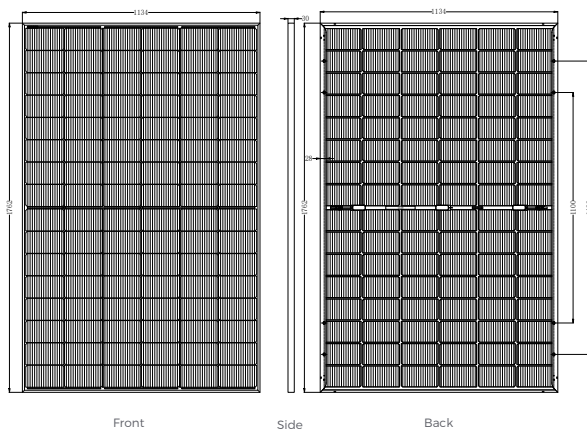

For detailed sizes and tolerance specification, please consult detailed module drawing

Length: ±2mm
Width: ±2mm
Height: ±1mm

Mechanical Characteristics


Cell Type	Mono,182*105mm
No. of cells	96 pcs(6*8)*2
Dimensions	1762*1134*30 mm
Weight	24.5kg
Glass	2.0+2.0mm Tempered Glass
Frame	Silver Anodized Aluminium Alloy
Junction Box	IP68
Cable Length	300mm

Packaging Configuration


40'HQ
36pcs/pallet , 26pallets/cabinet, 936pcs/ cabinet

Electrical Performance & Temperature Dependence

Power-Voltage Curve

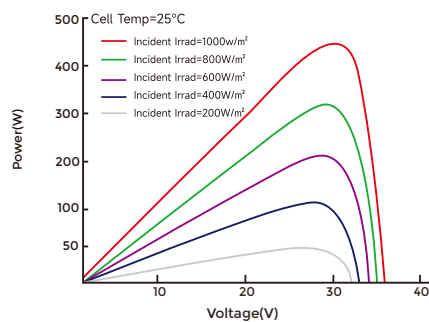

Current-Voltage Curve

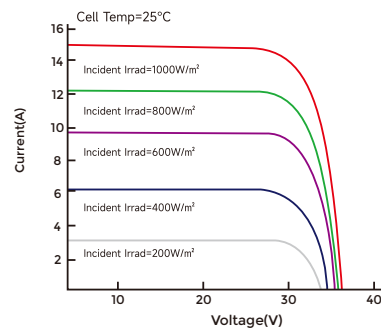

SPECIFICATIONS

Module Type	CN450W
	STC
Maximum Power (Pmax)	450W
Maximum Power Voltage (Vmp)	30.93V
Maximum Power Current (Imp)	14.55A
Open-circuit Voltage (Voc)	35.01V
Short-circuit Current (Isc)	15.47A
Module Efficiency STC (%)	23.04
Operating Temperature(°C)	-40~+85
Maximum system voltage	1500V
Maximum series fuse rating	30A
Power tolerance	0~±5W
Temperature coefficients of Pmax	-0.290%/°C
Temperature coefficients of Voc	-0.250%/°C
Temperature coefficients of Isc	+0.045%/°C
Nominal operating cell temperature (NOCT)	42°C±2°C
Protection Class:	II
Bifaciality:	80% ± 5%

* STC: Irradiance 1000W/m² Cell Temperature 25°C AM=1.5

Specifications included in this datasheet are subject to change without notice.