

LuxSpace Pro DN5XX G2 LED Downlight



450 lm
to 8170 lm



170 lm/W



75000 h L70



Class 1



650°C



IK03



IP65



Interact
ready

Commercial

PHILIPS




LuxSpace Pro continues the high-end positioning and reliable performance of the LuxSpace family. Its deep-recessed anti-glare design and unique crystalline faceted reflector deliver a perfect balance between energy efficiency and visual comfort. The vortex-shaped heat-sink fins ensure efficient heat dissipation. Available in Tunable White and Bio Up versions, the luminaire supports healthy lighting that enhances occupant well-being and maximizes WELL Building Standard scores.


Product Features

- System efficiency up to 170 lm/W.
- Crystalline faceted reflector reduces glare (UGR19), producing comfortable illumination.
- Supports Tunable White and Bio Up healthy lighting to regulate human circadian rhythms.
- Cut-out sizes from D75 to D200 mm, power range 4.2 W – 61.6 W.
- Supports fixed output, DALI, and Interact wireless control.


D75 Cut-out range Ø75–80mm

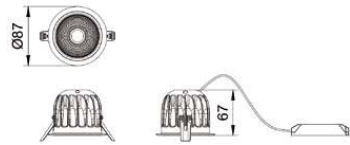


D100 Cut-out range Ø100–105mm

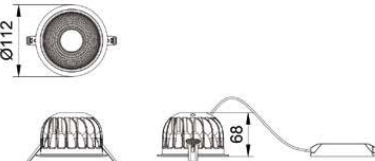



D125 Cut-out range Ø125–130mm

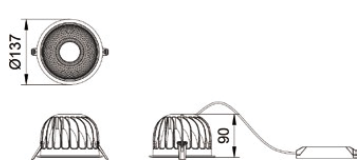

D150 Cut-out range Ø150–155mm

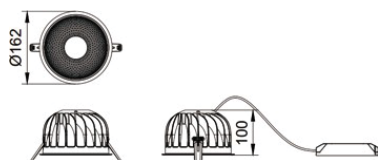

D200 Opening range Ø125–130mm

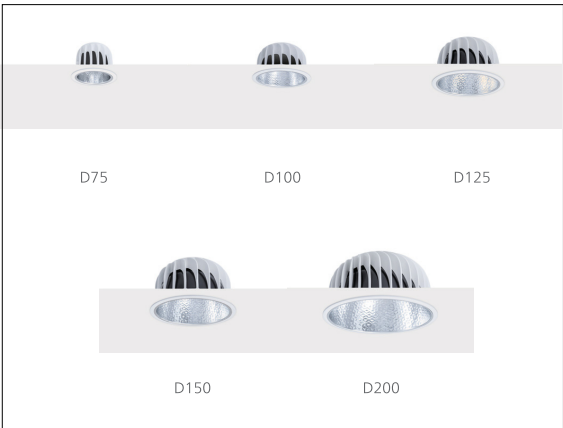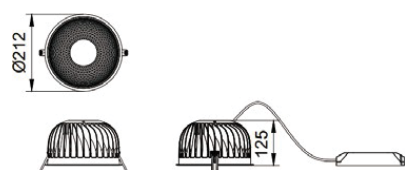

Configurable solution on
"Pioneer of light"

Primary Applications

- Retail
- Office
- Airports
- Hotels
- Education
- Healthcare



Commercial

Technical Specifications

Parameter	Specification
Lumen Output	450 lm – 8170 lm
System Power	4.2 W – 61.6 W
Typical Efficiency	Upto 170 lm/W
Lifetime	75,000 hrs @ L70B50; 50,000 hrs @ L80B10
CCT	2700K / 3000K / 3500K / 4000K
CRI	80 / 90
SDCM	≤ 3
Reflector Types	Faceted Aluminum / Matte Alu / Matte White
UGR	UGR16 / UGR19 / Others
Input Voltage	220–240 V
Frequency	50/60 Hz
Electrical Class	Class II
Power Factor	≥ 0.9
THD	≤ 20%
Control Methods	Switch / 1–10V / DALI 2.0 / WIA
Flicker	No visible flicker; MD ≤3.2%, PST ≤0.5, SVM ≤0.4
Mounting	Recessed
IP Rating	IP20 (overall), IP65 (light-emitting surface)
IK Rating	IK03
Cut-out Sizes	3"/4"/5"/6"/8"
Ambient Temp	25°C
Operating Temp	–20°C to 40°C
Housing Material	Die-cast Aluminum
Housing Color	White (Black & other ETO options available)
Certifications	CCC / CB / CE / EMC
Sustainability	RoHS / REACH
Packaging	Industrial pack (1 per carton)

Luminous Efficacy						
	Reflector Types	Luminous Flux(lm)	(lm/W)	Power(w)	UGR	Beam Angle
 D75	Aluminium Faceting	450	108	4.2	<16	57°
		990	117	8.5	<16	57°
		1510	111	13.6	<19	57°
		450	108	4.2	<9	36°
		990	117	8.5	<13	36°
		1510	111	13.6	<13	36°
		450	108	4.2	<9	24°
		990	117	8.5	<13	24°
		1510	111	13.6	<13	24°

	Reflector Types	Luminous Flux(lm)	Luminous Efficacy (lm/W)	Power(w)	UGR	Beam Angle
 D75	White Faceting	470	113	4.2	>25	61°
		1040	123	8.5	>25	61°
		1590	117	13.6	>25	61°
 D125	Aluminium Faceting/ Aluminium Matt	520	126	4.1	<16	60°
		870	134	6.5	<16	60°
		1120	136	8.3	<19	60°
		1740	131	13.3	<19	60°
		2220	130	17.1	<19	60°
		2640	125	21.2	<22	60°
 D125	White Faceting/ White Matt	530	129	4.1	<25	73°
		900	138	6.5	<25	73°
		1140	139	8.3	<25	73°
		1790	134	13.3	<25	73°
		2270	133	17.1	<25	73°
		2700	128	21.2	>25	73°
	Reflector Types	Luminous Flux(lm)	Luminous Efficacy (lm/W)	Power(w)	UGR	Beam Angle
 D100	Aluminium Faceted	500	121	4.1	<16	60°
		1070	128	8.4	<19	60°
		1650	122	13.5	<22	60°
 D100	White Faceted	530	127	4.1	<25	78°
		1130	135	8.4	>25	78°
		1740	129	13.5	>25	78°
	Reflector Types	Luminous Flux(lm)	Luminous Efficacy (lm/W)	Power(w)	UGR	Beam Angle
 D150	Aluminium Faceted	1160	114	8.2	<16	60°
		1790	137	13.1	<19	60°
		2260	134	16.8	<19	60°
		2700	130	20.8	<19	60°
 D150	White Faceted	1190	144	8.2	<25	77°
		1830	140	13.1	>25	77°
		2320	138	16.8	>25	77°
		2790	134	20.8	>25	77°

	Reflector Types	Luminous Efficacy		Power(w)	UGR	Beam Angle
		Luminous Flux(lm)	(lm/W)			
  D200	Aluminium Faceted/ Aluminium Matt	1920	150	12.8	<16	60°
		2940	146	20.1	<19	60°
		4220	142	29.7	<19	60°
		6120	134	45.5	<22	60°
		8000	130	61.6	<22	60°
  D200	White Faceted/ White Matt	1950	153	12.8	<25	80°
		3020	150	20.1	<25	80°
		4320	146	29.7	>25	80°
		6270	138	45.5	>25	80°
		8170	133	61.6	>25	80°

Product Information

Comprehensive selection of product codes available, contact Signify Middle East

Product Model	Product Model
Non-TNW and Bio Up	
DN589B LED10/940 P8PSU D75 MB G2	DN589B LED10/840 P8PSU D100 WB WP G2
DN589B LED10/930 P8PSU D75 MB G2	DN590B LED16/940 P14PSD D100 WB G2
DN588B LED5/940 P4PSU D75 MB G2	DN590B LED16/930 P14PSD D100 WB G2
DN588B LED5/930 P4PSU D75 MB G2	DN589B LED10/940 P8PSD D100 WB G2
DN590B LED15/940 P14PSU D75 MB G2	DN589B LED10/930 P8PSD D100 WB G2
DN590B LED15/930 P14PSU D75 MB G2	DN589B LED11/840 P8PSU D125 VWB-M G2
DN589B LED10/940 P8PSU D75 WB G2	DN589B LED11/830 P8PSU D125 VWB-M G2
DN589B LED10/930 P8PSU D75 WB G2	DN588B LED9/840 P6PSU D125 VWB-M G2
DN589B LED10/940 P8PSU D75 NB G2	DN588B LED9/830 P6PSU D125 VWB-M G2
DN589B LED10/930 P8PSU D75 NB G2	DN590B LED17/840 P13PSU D125 VWB-M G2
DN588B LED5/940 P4PSU D75 WB G2	DN590B LED17/830 P13PSU D125 VWB-M G2
DN588B LED5/930 P4PSU D75 WB G2	DN501RLED22/840 P17P5D125VWRMG
DN588B LED5/940 P4PSU D75 NB G2	DN591B LED22/830 P17P5U D125 VWB-M G2
DN588B LED5/930 P4PSU D75 NB G2	DN592B LED26/840 P21PSU D125 VWB-M G2
DN590B LED15/940 P14PSU D75 WB G2	DN592B LED26/830 P21PSU D125 VWB-M G2
DN590B LED15/930 P14PSU D75 WB G2	DN589B LED11/840 PBPSU D125 WB G2
DN590B LED15/940 P14PSU D75 NB G2	DN589B LED11/830 PBPSU D125 WB G2
DN590B LED15/930 P14PSU D75 NB G2	DN588B LED9/840 P6PSU D125 WB G2
DN590B LED15/940 P14PSD D75 MB G2	DN588B LED9/830 P6PSU D125 WB G2
DN590B LED15/930 P14PSD D75 MB G2	DN590B LED17/840 P13PSU D125 WB G2
DN590B LED15/940 P14PSD D75 WB G2	DN590B LED17/830 P13PSU D125 WB G2
DN590B LED15/930 P14PSD D75 WB G2	DN591B LED22/840 P17PSU D125 WB G2
DN590B LED15/940 P14PSD D75 NB G2	DN591B LED22/830 P17P5U D125 WB G2
DN590B LED15/930 P14PSD D75 NB G2	DN592B LED26/840 P21PSU D125 WB G2
DN589B LED10/940 P8PSU D100 WB G2	DN592B LED26/830 P21P5U D125 WB G2
DN589B LED10/930 P8PSU D100 WB G2	DN590B LED17/840 P13PSU D125 WB WP G2
DN588B LED5/940 P4PSU D100 WB G2	DN590B LED17/840 P14PSD D125 VWB-M G2
DN588B LED5/930 P4PSU D100 WB G2	DN590B LED17/830 P14PSDD125 VWB-M G2
DN590B LED16/940 P13PSU D100 WB G2	DN589B LED11/840 PBPSD D125 VWB-M G2
DN590B LED16/930 P13PSU D100 WB G2	DN589B LED11/830 P8PSD D125 VWB-M G2

Product Information

Product Model	Product Model
Non-TNW and Bio Up	
DN592B LED26/840 P22PSDD125 VW8-M G2	DN588B LED5/940 P4PSU D75 WB G2
DN592B LED26/830 P22PSDD125 VW8-M G2	DN588B LED5/930 P4PSU D75 WB G2
DN591B LED22/840 P18PSD D125 VW8-M G2	DN588B LED5/940 P4PSU D75 NB G2
DN591B LED22/830 P18PSD D125 VW8-M G2	DN588B LED5/930 P4PSU D75 NB G2
DN590B LED17/840 P14PSDD125 WB G2	DN590B LED15/940 P14PSU D75 WB G2
DN590B LED17/830 P14P5D D125 WB G2	DN590B LED15/930 P14PSU D75 WB G2
DN589B LED11/840 PBPSD D125 WB G2	DN590B LED15/940 P14PSU D75 NB G2
DN589B LED11/830 PBPSD D125 WB G2	DN590B LED15/930 P14PSU D75 NB G2
DN592B LED26/840 P22PSD D125 WB G2	DN590B LED15/940 P14PSD D75 MB G2
DN592B LED26/830 P22P5D D125 WB G2	DN5908 LED15/930 P14PSD D75 MB G2
DN591B LED22/840 P18PSD D125 WB G2	DN590B LED15/940 P14P5D D75 WB G2
DN5918 LED22/830 P18PSD D125 WB G2	DN590B LED15/930 P14PSD D75 WB G2
DN5898 LED12/840 PBPSU D150 WB G2	DN590B LED15/940 P14PSD D75 NB G2
DN589B LED12/830 PBPSU D150 WB G2	DN590B LED15/930 P14PSD D75 NB G2
DN590B LED18/840 P13PSU D150 WB G2	DN589B LED10/940 P8PSU D100 WB G2
DN590B LED18/830 P13PSU D150 WB G2	DN589B LED10/930 P8PSU D100 WB G2
DN591B LED23/840 P17PSU D150 WB G2	DN588B LED5/940 P4PSU D100 WB G2
DN591B LED23/830 P17P5U D150 WB G2	DN588B LED5/930 P4PSU D100 WB G2
DN592B LED27/840 P21PSU D150 WB G2	DN590B LED16/940 P13PSU D100 WB G2
DN592B LED27/830 P21P5U D150 WB G2	DN590B LED16/930 P13PSU D100 WB G2
DN591B LED23/840 P17PSU D150 WB WP G2	DN589B LED10/840 P8PSU D100 WB WP G2
DN590B LED18/840 P14P5D D150 WB G2	DN5908 LED16/940 P14PSD D100 WB G2
DN590B LED18/830 P14PSD D150 WB G2	DN590B LED16/930 P14PSD D100 WB G2
DN589B LED12/840 P8PSD D150 WB G2	DN589B LED10/940 P8PSD D100 WB G2
DN5898 LED12/830 PBPSD D150 WB G2	DN589B LED10/930 P8PSD D100 WB G2
DN592B LED27/840 P22PSD D150 WB G2	DN589B LED11/840 P8PSU D125 VWB-M G2
DN592B LED27/830 P22PSD D150 WB G2	DN589B LED11/830 P8PSU D125 VWB-M G2
DN591B LED23/840 P17PSD D150 WB G2	DN588B LED9/840 P6PSU D125 VWB-M G2
DN591B LED23/830 P17P5D D150 WB G2	DN588B LED9/830 P6PSU D125 VWB-M G2
DN591B LED19/840 P13PSU D200 VWB-M G2	DN590B LED17/840 P13PSU D125 VWB-M G2
DN591B LED19/830 P13PSU D200 VWB-M G2	DN590B LED17/830 P13PSU D125 VWB-M G2
DN593B LED29/840 P20PSU D200 VWB-M G2	DN591B LED22/840 P17P5D125VWRMG
DN593B LED29/830 P20PSU D200 VWB-M G2	DN591B LED22/830 P17P5U D125 VWB-M G2
DN594B LED42/840 P30PSU D200 VWB-M G2	DN592B LED26/840 P21PSU D125 VWB-M G2
DN594B LED42/830 P30PSU D200 VWB-M G2	DN592B LED26/830 P21PSU D125 VWB-M G2
DN591B LED19/840 P13PSU D200 WB G2	DN589B LED11/840 PBPSU D125 WB G2
DN591B LED19/830 P13PSU D200 WB G2	DN589B LED11/830 PBPSU D125 WB G2
DN593B LED29/840 P20PSU D200 WB G2	DN588B LED9/840 P6PSU D125 WB G2
DN593B LED29/830 P20PSU D200 WB G2	DN588B LED9/830 P6PSU D125 WB G2
DN595B LED61/840 P46PSU D200 VWB-M G2	DN590B LED17/840 P13PSU D125 WB G2
DN589B LED10/940 P8PSU D75 MB G2	DN590B LED17/830 P13PSU D125 WB G2
DN589B LED10/930 P8PSU D75 MB G2	DN591B LED22/840 P17PSU D125 WB G2
DN588B LED5/940 P4PSU D75 MB G2	DN591B LED22/830 P17P5U D125 WB G2
DN588B LED5/930 P4PSU D75 MB G2	DN592B LED26/840 P21PSU D125 WB G2
DN5908 LED15/940 P14PSU D75 MB G2	DN592B LED26/830 P21P5U D125 WB G2
DN590B LED15/930 P14PSU D75 MB G2	DN590B LED17/840 P13PSU D125 WB WP G2
DN589B LED10/940 P8PSU D75 WB G2	DN590B LED17/840 P14PSD D125 VWB-M G2
DN589B LED10/930 P8PSU D75 WB G2	DN590B LED17/830 P14PSDD125 VW8-M G2
DN589B LED10/940 P8PSU D75 NB G2	DN589B LED11/840 PBPSD D125 VWB-M G2
DN589B LED10/930 P8PSU D75 NB G2	DN589B LED11/830 P8PSD D125 VWB-M G2